FAS ROUTE NO.	COUNTY	SECTION	CONTRACT	SHEET NO.	TOTAL SHEETS
1254	PUTNAM	07-00020-00-RS	**89413**	4	4

MAIL BOX TURN-OUT

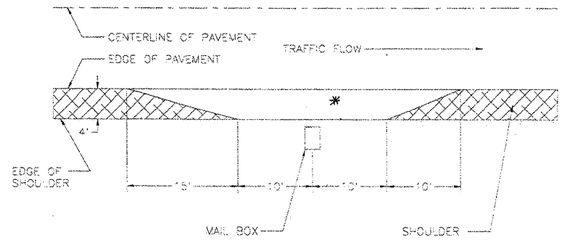

*CONSISTS OF 1½" HOT-MIX ASPHALT SURFACE COURSE MIX "C" N 50

MAILBOX TURNOUTS

	STATION	SQ YDS	TONS MIXT. REQUIRED
RT	4+21	14.4	1.21
LT	37+94	14.4	1.21
		28.8 SQ YD	2.42 TON

ENTRANCE DETAIL
NO SCALE

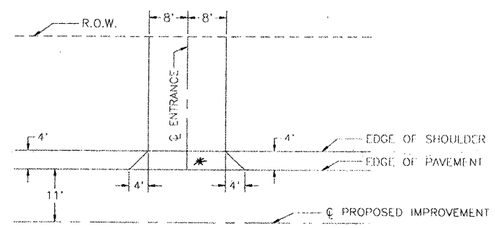

*CONSISTS OF 1½" HOT-MIX ASPHALT SURFACE COURSE MIX "C" N 50

SCHEDULE OF NO PASSING ZONES

	STATION	FOOT
RT	0+63 - 6+15	552'
LT	0+63 - 13+00	1237'
RT	23+00 - 26+12	312'
LT	30+75 - 34+25	350'
RT	49+25 - 51+75	250'
LT	56+50 - 59+25	275'
RT	95+00 - 104+00	900'
LT	99+00 - 104+00	500'
	TOTAL	4376'

SCHEDULE OF ENTRANCES

	STATION	WIDTH	SQ YDS	TONS MIXT. REQUIRED
RT	4+21	22'	11.6	0.97
RT	7+27	22	11.6	0.97
LT	11+52	22'	11.6	0.97
LT	13+37	22'	11.6	0.97
LT	14+17	22'	11.6	0.97
RT	15+18	22'	11.6	0.97
RT	18+25	22'	11.6	0.97
LT	18+25	22'	11.6	0.97
LT	37+94	22'	11.6	0.97
RT	39+82	22'	11.6	0.97
LT	58+57	22'	11.6	0.97
LT	59+37	22'	11.6	0.97
RT	59+72	22'	11.6	0.97
RT	61+40	22'	11.6	0.97
RT	65+02	22	11.6	0.97
LT	72+29	22'	11.6	0.97
RT	83+55	22'	11.6	0.97
RT	86+00	22'	11.6	0.97
LT	92+45	22'	11.6	0.97
RT	92+45	22'	11.6	0.97
LT	93+10	22'	11.6	0.97
RT	93+10	22'	11.6	0.97
RT	100+75	22'	11.6	0.97
		TOTAL	266.80 SQ YD	22.31 TON