



99' AND UNDER

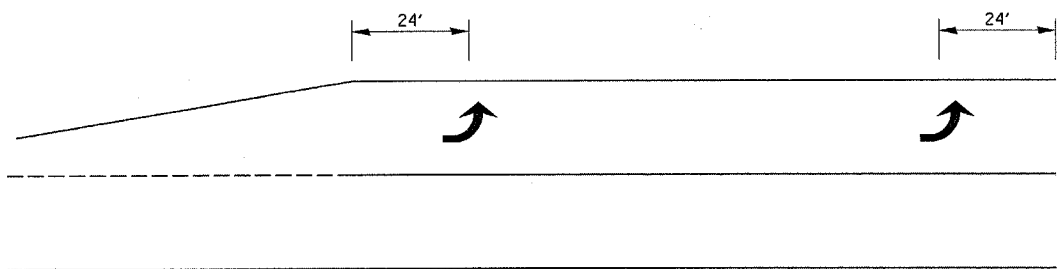


100' TO 149'

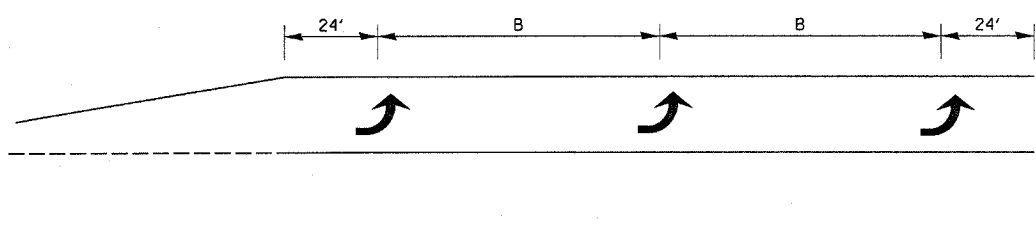


150' AND LONGER

**TYPICAL PLACEMENT OF ARROWS
IN TURN LANES**

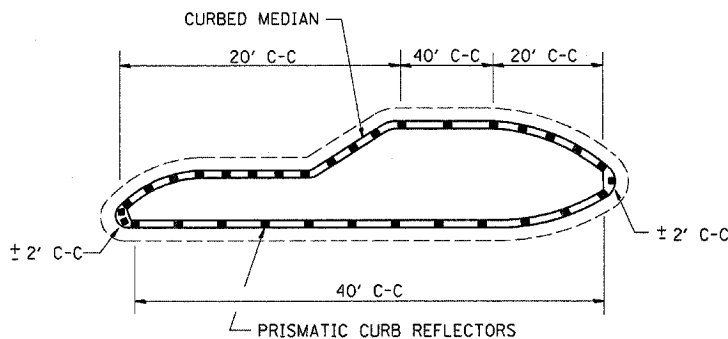


1. PRISMATIC REFLECTORS SHALL BE BI-DIRECTIONAL.
2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
3. PRISMATIC REFLECTORS SHALL BE AMBER IN COLOR.


**PRISMATIC CURB REFLECTORS
AT CURB MEDIANS**

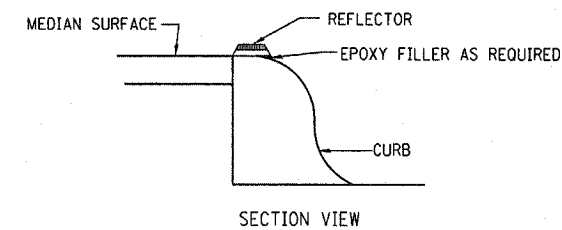


SECTION VIEW

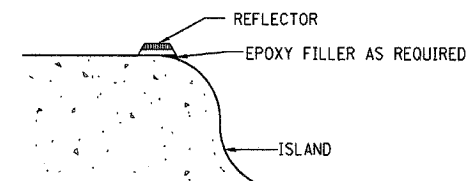


SECTION VIEW

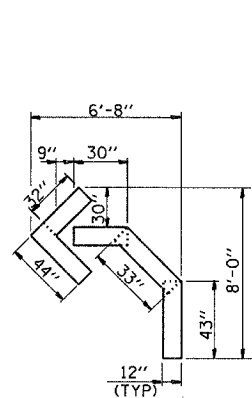

QUANTITY
12" LINE = 16 LIN. FT.
OR 4" LINE = 48 LIN. FT.

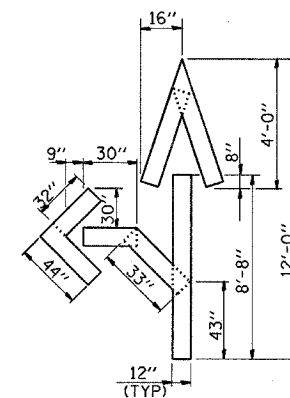

QUANTITY
12" LINE = 29 LIN. FT.
OR 4" LINE = 87 LIN. FT.

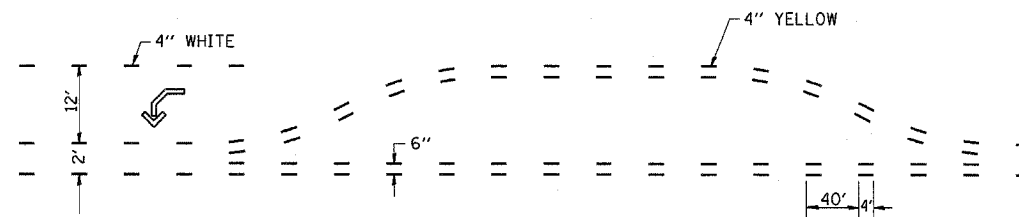

FILE NAME =	USER NAME = carpenterdj	DESIGNED -	REVISED -
es:\projects\1366805\1366805-shit-details.dgn		DRAWN -	REVISED -
	PLOT SCALE = 20.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = Mar 24, 2008 - 07:42:25 AM	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DETAILS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
623/790	(30,30X1,2)RS-3&(E)RS-1	LASALLE	24	24
CONTRACT NO. 66805				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				