





TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS

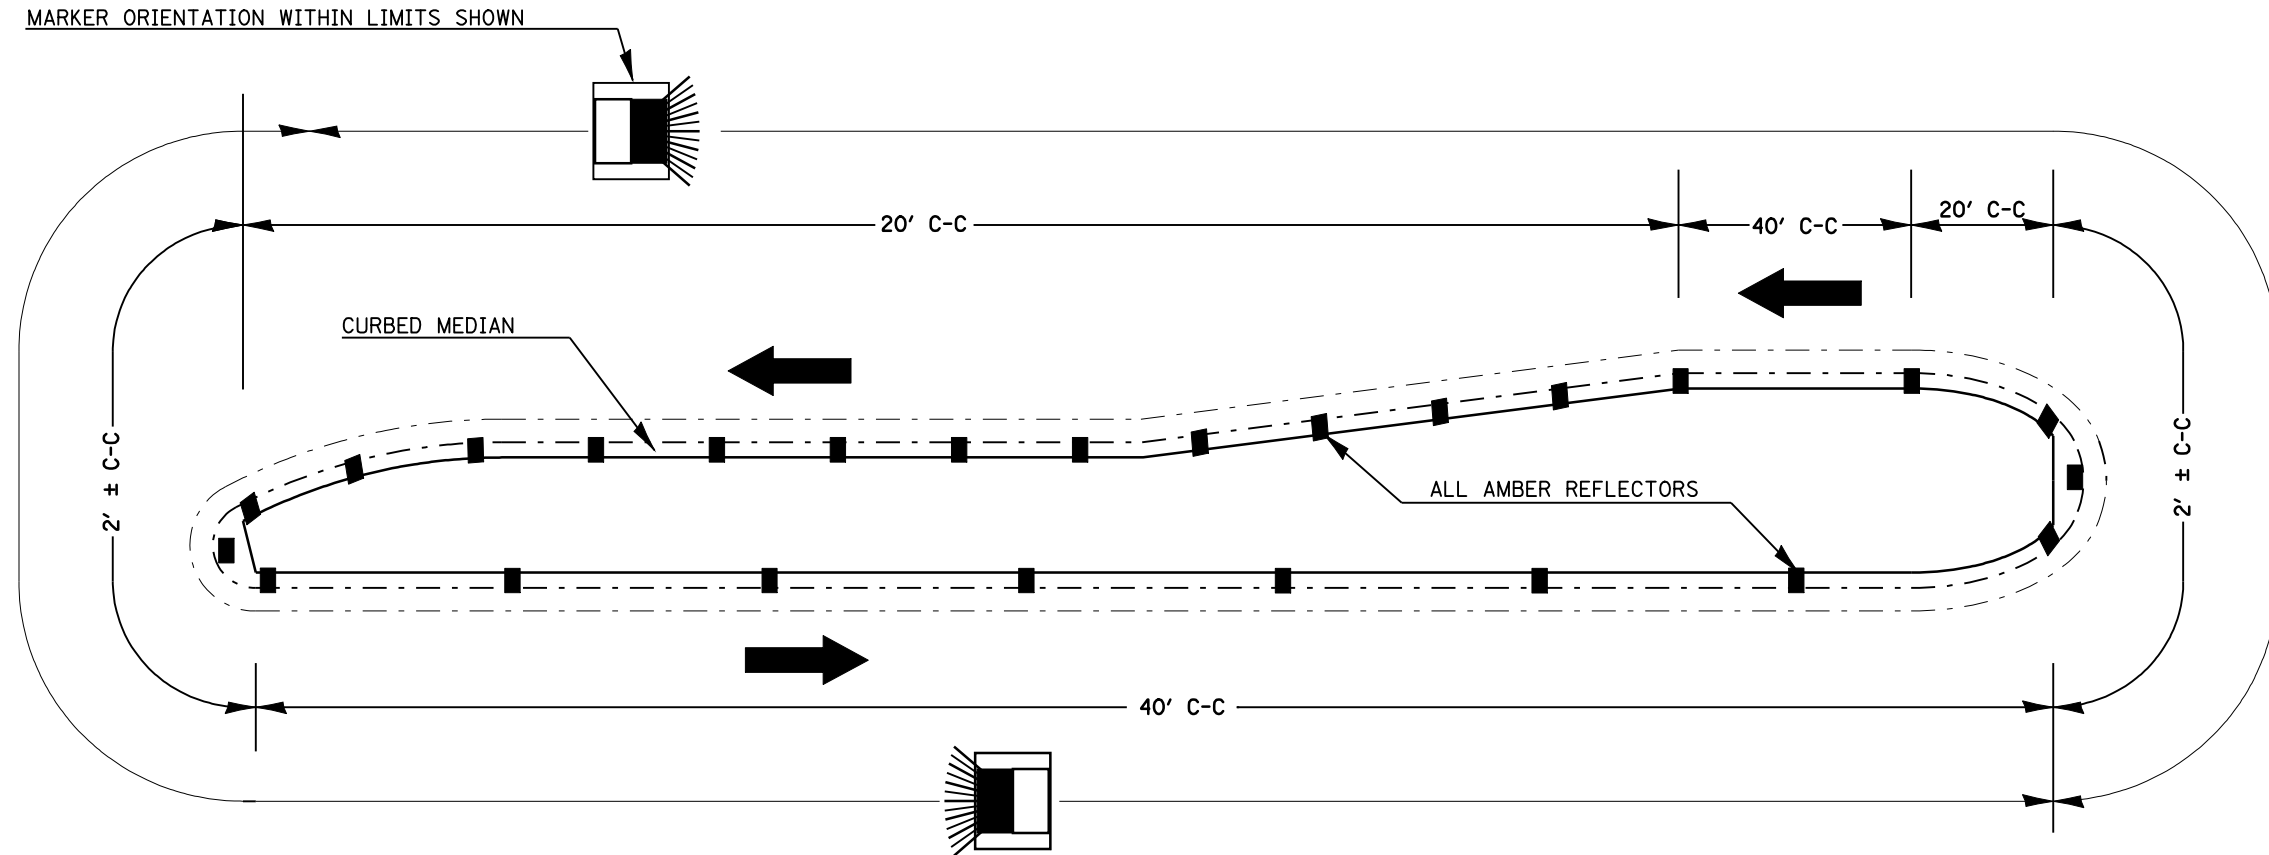

1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.
4. REFER TO SCHEDULES FOR PRISMATIC REFLECTOR QUANTITIES.

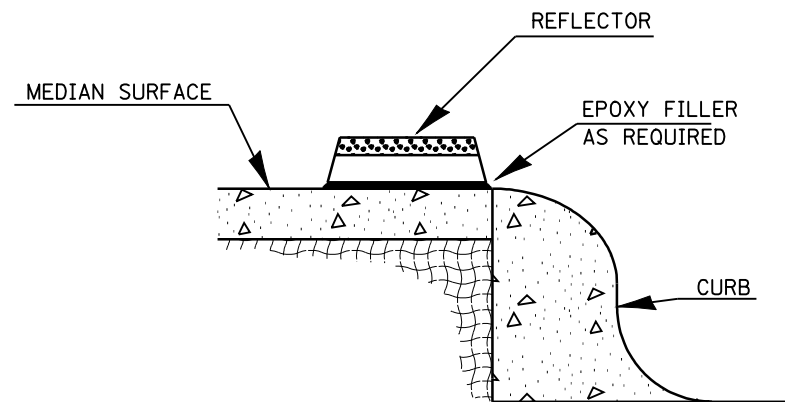

SECTION VIEW

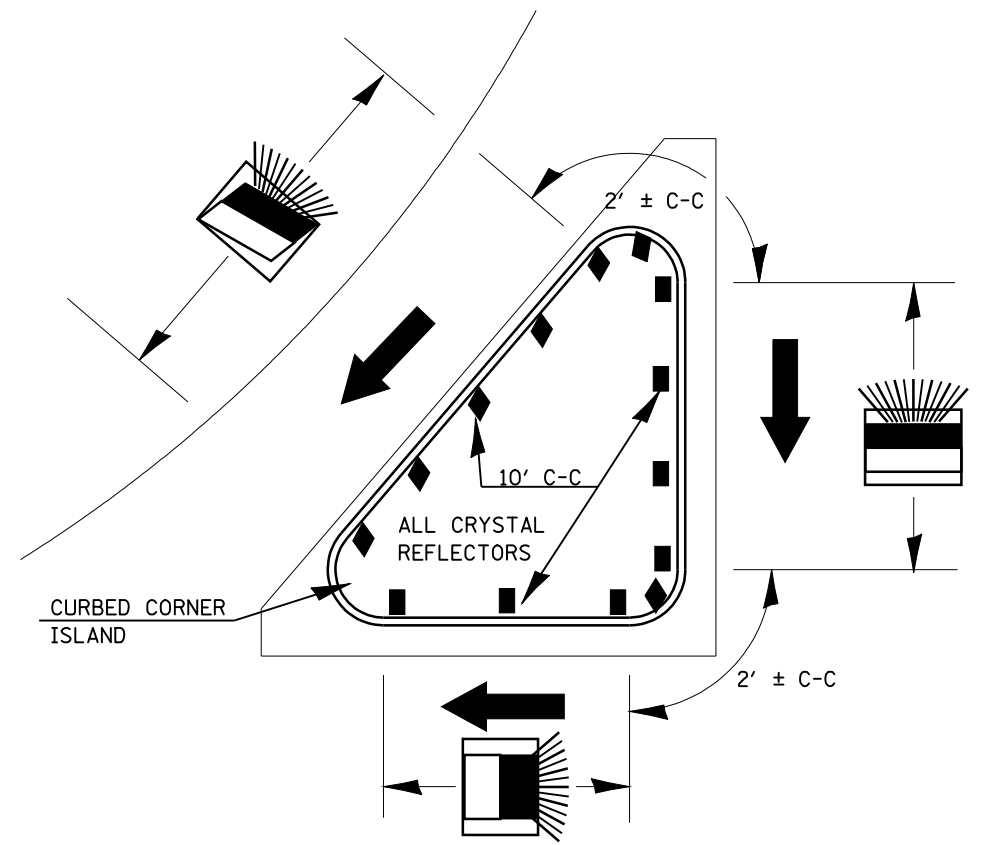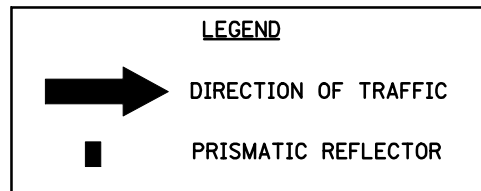

| | | |
|--|------------------------------------|----------------------|
| CUMMINS ENGINEERING CORPORATION | | JOB - 2200 |
| FILE NAME = | USER NAME = laughlinr1 | FILE - sht-prism.dgn |
| C:\Projects\d652204\cummins_final\d67289-sht-prism.dgn | DESIGNED - | REVISED - |
| | DRAWN - CAD-MG | REVISED - |
| | CHECKED - | REVISED - |
| | DATE - 1/24/2002 | REVISED - |
| | PLOT SCALE = 40.0000' / IN. | |
| | PLOT DATE = Mar-18-2008 11:43:48AM | |

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PRISMATIC CURB REFLECTOR

SCALE: SHEET NO. OF SHEETS STA. TO STA.

| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|-------------------------------|----------|--------------|-----------|
| 662 | 2-2(RS) & 3-1, 2(RS-10, TS-5) | SANGAMON | 181 | 137 |
| CONTRACT NO. 72889 | | | | |
| FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT | | | | |