



PLAN

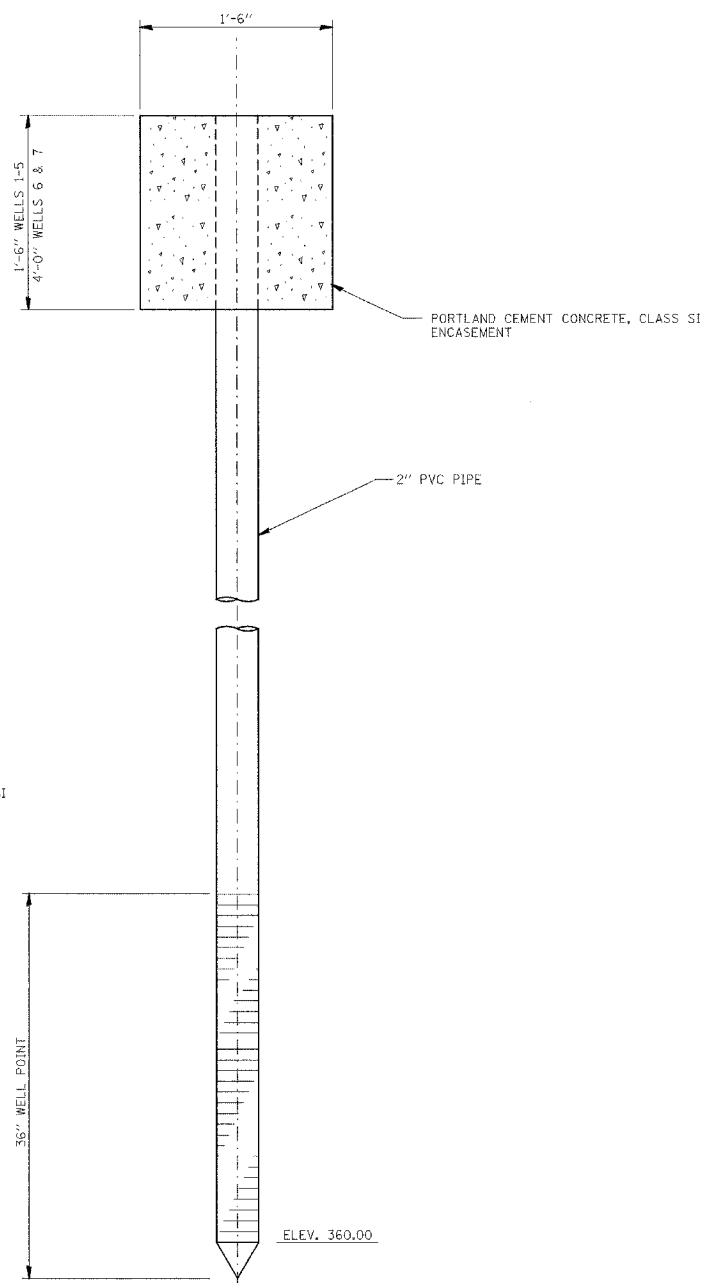


DETAIL OF EXIST. DRAINAGE WELL PIEZOMETER
N.T.S.

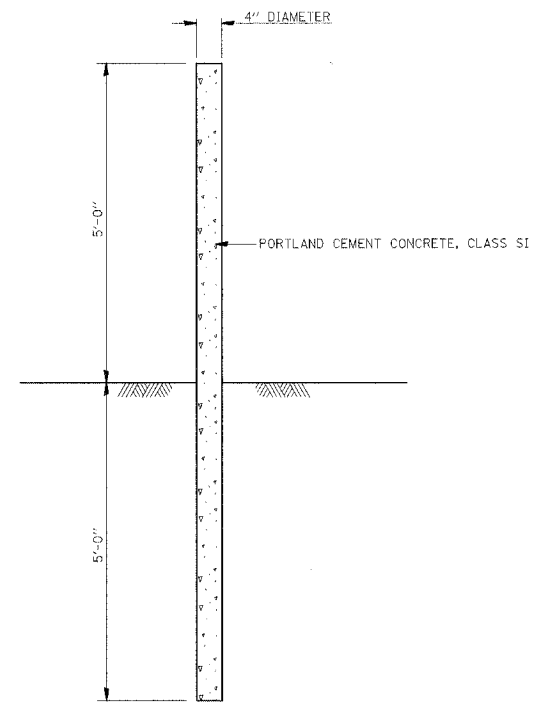

DETAIL OF CONCRETE BOLLARD
N.T.S.

NOTES:

SIX (6) CONCRETE BOLLARDS WILL BE REQUIRED TO PROTECT EACH WELL ENCLOSURE BOX.
1 BOLLARD ON EACH CORNER AND 1 BOLLARD IN THE CENTER OF EACH LONG SIDE. ACTUAL LOCATIONS IS TO BE DETERMINED IN FIELD BY THE ENGINEER.

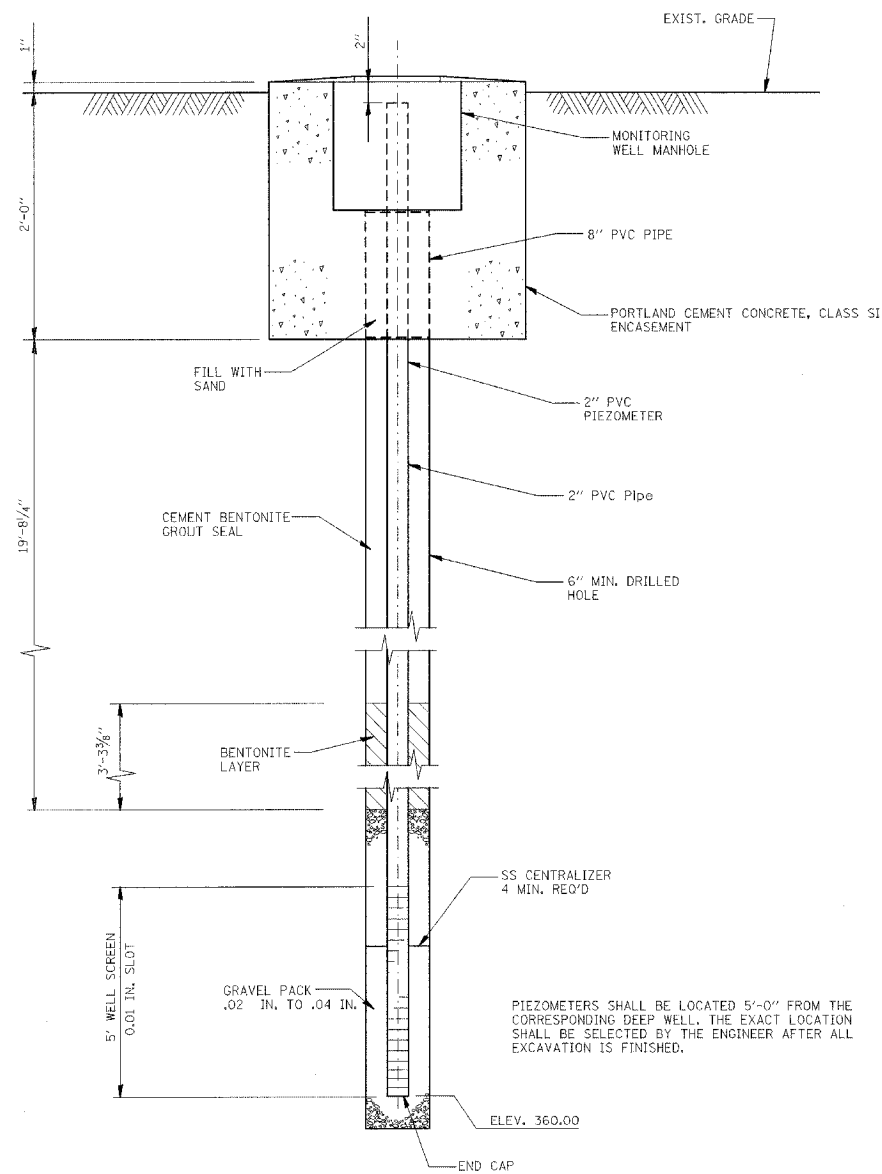

PROFILE
DETAIL OF NEW PIEZOMETER
N.T.S.

PIEZOMETERS SHALL BE LOCATED 5'-0" FROM THE CORRESPONDING DEEP WELL. THE EXACT LOCATION SHALL BE SELECTED BY THE ENGINEER AFTER ALL EXCAVATION IS FINISHED.

PORTLAND CEMENT CONCRETE, CLASS SI SHALL BE IN ACCORDANCE WITH THE ARTICLE 1020 OF THE STANDARD SPECIFICATIONS.

FILE NAME = \$FILEL\$	USER NAME = \$USER\$	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETAILS - PIEZOMETER & CONCRETE BOLLARD			F.A.P. RTE. 788	SECTION 2TT-7	COUNTY MADISON	TOTAL SHEETS 9	SHEET NO. 6
		DRAWN -	REVISED -					SCALE: SHEET NO. 6 OF SHEETS STA. TO STA.			FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT
		CHECKED -	REVISED -									
		DATE -	REVISED -									