



STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

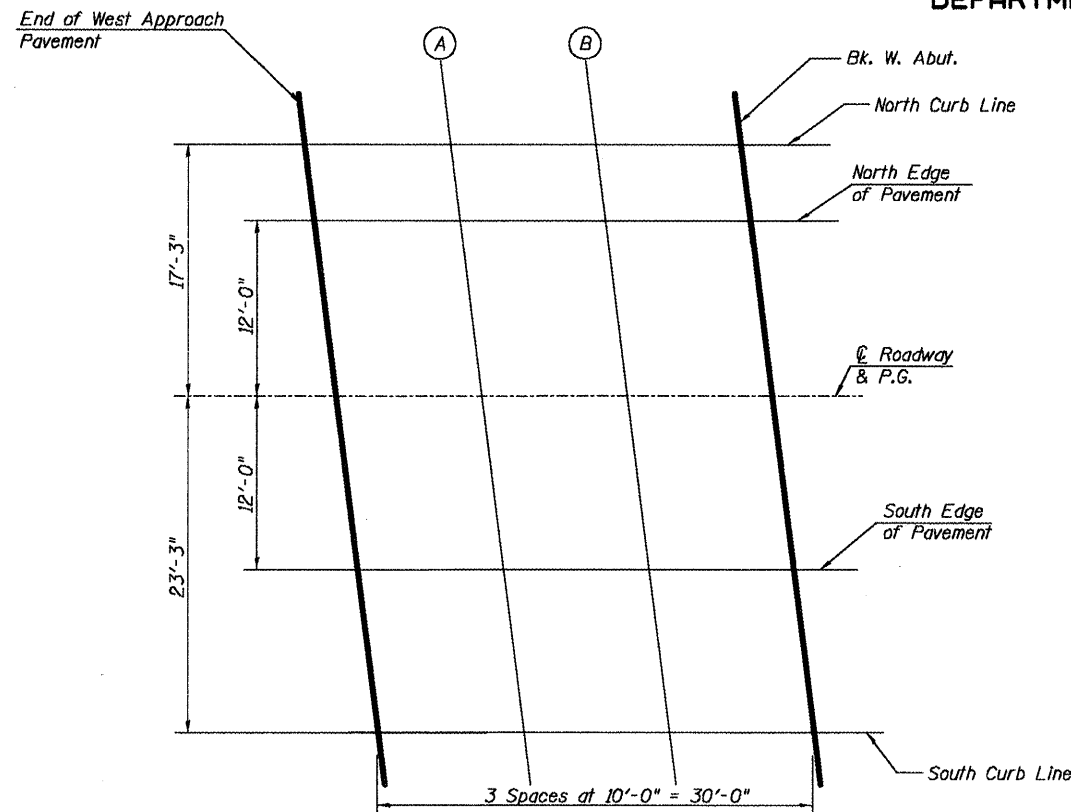

PLAN - WEST APPROACH

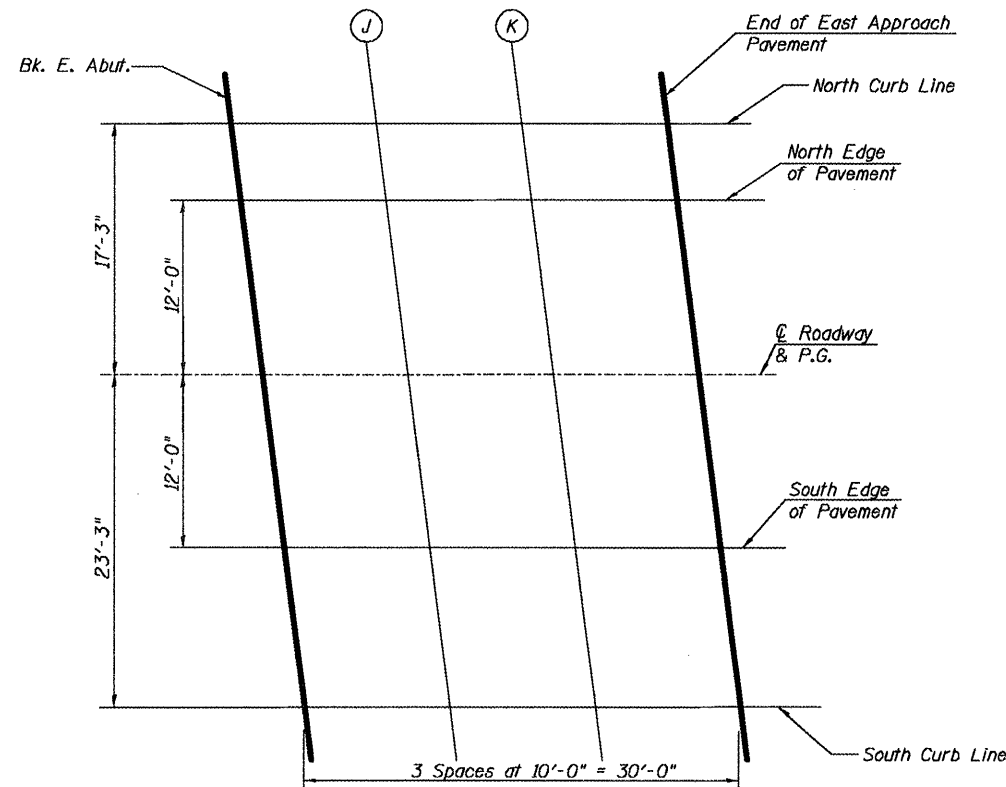

PLAN - EAST APPROACH



**NORTH CURB LINE**

Location	Station	Offset (ft)	Theoretical Grade Elevations
End W. Appr. Pav't	569+29.34	-17.25	749.86
A	569+39.34	-17.25	749.89
B	569+49.34	-17.25	749.93
Bk. W. Abut.	569+59.34	-17.25	749.97
Bk. E. Abut.	570+70.88	-17.25	750.37
J	570+80.88	-17.25	750.40
K	570+90.88	-17.25	750.44
End E. Appr. Pav't	571+00.88	-17.25	750.48

**SOUTH EDGE OF PAVEMENT**

Location	Station	Offset (ft)	Theoretical Grade Elevations
End W. Appr. Pav't	569+32.98	12.00	749.98
A	569+42.98	12.00	750.02
B	569+52.98	12.00	750.05
Bk. W. Abut.	569+62.98	12.00	750.09
Bk. E. Abut.	570+74.53	12.00	750.49
J	570+84.53	12.00	750.53
K	570+94.53	12.00	750.56
End E. Appr. Pav't	571+04.53	12.00	750.60

**NORTH EDGE OF PAVEMENT**

Location	Station	Offset (ft)	Theoretical Grade Elevations
End W. Appr. Pav't	569+29.99	-12.00	749.97
A	569+39.99	-12.00	750.01
B	569+49.99	-12.00	750.04
Bk. W. Abut.	569+59.99	-12.00	750.08
Bk. E. Abut.	570+71.54	-12.00	750.48
J	570+81.54	-12.00	750.52
K	570+91.54	-12.00	750.55
End E. Appr. Pav't	571+01.54	-12.00	750.59

**SOUTH CURB LINE**

Location	Station	Offset (ft)	Theoretical Grade Elevations
End W. Appr. Pav't	569+34.39	23.25	749.75
A	569+44.39	23.25	749.79
B	569+54.39	23.25	749.82
Bk. W. Abut.	569+64.39	23.25	749.86
Bk. E. Abut.	570+75.93	23.25	750.26
J	570+85.93	23.25	750.30
K	570+95.93	23.25	750.33
End E. Appr. Pav't	571+05.93	23.25	750.37

**Centerline of ROADWAY & P.G.**

Location	Station	Offset (ft)	Theoretical Grade Elevations
End W. Appr. Pav't	569+31.49	0.00	750.16
A	569+41.49	0.00	750.20
B	569+51.49	0.00	750.24
Bk. W. Abut.	569+61.49	0.00	750.27
Bk. E. Abut.	570+73.03	0.00	750.67
J	570+83.03	0.00	750.71
K	570+93.03	0.00	750.74
End E. Appr. Pav't	571+03.03	0.00	750.78

All offsets measured from Centerline of Roadway of South Structure.

**APPROACH PAVEMENT ELEVATIONS -2  
(SOUTH STRUCTURE)  
I-74 OVER TOWNSHIP ROAD 205  
E.A.I. RTE. 74 - SEC. 48-(27HB-5)I,I-1  
KNOX COUNTY  
STATION 570+11.72  
STRUCTURE NO. 048-0011 (WB), 0012 (EB)**

LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois	SHEET NO. 7	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	18 SHEETS	74	48-(27HB-5)I,I-1	KNOX	104	46
Designed By: ESH Checked By: MTH Drawn By: ESH Date: 10/2002 File: 048-0011.DWG.dgn		CONTRACT NO. 68062				
		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				