

BID PROPOSAL INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals are potential bidding proposals. Each proposal contains all certifications and affidavits, a proposal signature sheet and a proposal bid bond.

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later than 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

WHO CAN BID ?

Bids will be accepted from only those companies that request and receive written Authorization to Bid from IDOT's Central Bureau of Construction.

REQUESTS FOR AUTHORIZATION TO BID

Contractors wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124) and the ORIGINAL "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?

When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status"(BDE 124) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued an **Authorization to Bid or Not for Bid Report**, approved by the Central Bureau of Construction and the Chief Procurement Officer that indicates which items have been approved For Bidding. If **Authorization to Bid** cannot be approved, the **Authorization to Bid or Not for Bid Report** will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID

Firms that have not received an Authorization to Bid or Not For Bid Report within a reasonable time of complete and correct original document submittal should contact the Department as to the status. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

ADDENDA AND REVISIONS

It is the bidder's responsibility to determine which, if any, addenda or revisions pertain to any project they may be bidding. Failure to incorporate all relevant addenda or revisions may cause the bid to be declared unacceptable.

Each addendum or revision will be included with the Electronic Plans and Proposals. Addenda and revisions will also be placed on the Addendum/Revision Checklist and each subscription service subscriber will be notified by e-mail of each addendum and revision issued.

The Internet is the Department's primary way of doing business. The subscription service emails are an added courtesy the Department provides. It is suggested that bidders check IDOT's website at <http://www.idot.illinois.gov/doing-business/procurements/construction-services/construction-bulletins/transportation-bulletin/index#TransportationBulletin> before submitting final bid information.

IDOT IS NOT RESPONSIBLE FOR ANY E-MAIL FAILURES.

Addenda questions may be directed to the Contracts Office at (217)782-7806 or DOT.D&Econtracts@illinois.gov

Technical questions about downloading these files may be directed to Tim Garman at (217)524-1642 or Timothy.Garman@illinois.gov.

STANDARD GUIDELINES FOR SUBMITTING BIDS

- All pages should be single sided.
- Use the Cover Page that is provided in the Bid Proposal (posted on the IDOT Web Site) as the first page of your submitted bid. It has the item number in large bold type in the upper left-hand corner and lines provided for your company name and address in the upper right-hand corner.
- Do not use report covers, presentation folders or special bindings and do not staple multiple times on left side like a book. Use only 1 staple in the upper left hand corner. Make sure all elements of your bid are stapled together including the bid bond or guaranty check (if required).
- **Do not include any certificates of eligibility, your authorization to bid, Addendum Letters or affidavit of availability.**
- Do not include the Subcontractor Documentation with your bid (pages i – iii and pages a – g). This documentation is required only if you are awarded the project.
- Use the envelope cover sheet (provided with the proposal) as the cover for the proposal envelope.
- Do not rely on overnight services to deliver your proposal prior to 10 AM on letting day. It will not be read if it is delivered after 10 AM.
- Do not submit your Substance Abuse Prevention Program (SAPP) with your bid. If you are awarded the contract this form is to be submitted to the district engineer at the pre-construction conference.

BID SUBMITTAL CHECKLIST

- Cover page** (the sheet that has the item number on it) – This should be the first page of your bid proposal, **followed by your bid (the Schedule of Prices/Pay Items)**. If you are using special software or CBID to generate your schedule of prices, do not include the blank pages of the schedule of prices that came with the proposal package.
- Page 4 (Item 9)** – Check “YES” if you will use a subcontractor(s) with an annual value over \$50,000. Include the subcontractor(s) name, address, general type of work to be performed and the dollar amount. If you will use subcontractor(s) but are uncertain who or the dollar amount; check “YES” but leave the lines blank.
- After page 4** – Insert the following documents: Cost Adjustments for Steel, Bituminous and Fuel (if applicable) and the Contractor Letter of Assent (if applicable). The general rule should be, if you don’t know where it goes, put it after page 4.
- Page 10 (Paragraph J)** – Check “YES” or “NO” whether your company has any business in Iran.
- Page 10 (Paragraph K)** – (Not applicable to federally funded projects) List the name of the apprenticeship and training program sponsor holding the certificate of registration from the US Department of Labor. If no applicable program exists, please indicate the work/job category. Do not include certificates with your bid. Keep the certificates in your office in case they are requested by IDOT.
- Page 11 (Paragraph L)** – A copy of your State Board of Elections certificate of registration is no longer required with your bid.
- Page 11 (Paragraph M)** – Indicate if your company has hired a lobbyist in connection with the job for which you are submitting the bid proposal.
- Page 12 (Paragraph C)** – This is a work sheet to determine if a completed Form A is required. It is not part of the form and you do not need to make copies for each completed Form A.
- Pages 14-17 (Form A)** – One Form A (4 pages) is required for each applicable person in your company. Copies of the forms can be used and only need to be changed when the information changes. The certification signature and date must be original for each letting. **Do not staple the forms together.** If you answered “NO” to all of the questions in Paragraph C (page 12), complete the first section (page 14) with your company information and then sign and date the Not Applicable statement on page 17.
- Page 18 (Form B)** - If you check “YES” to having other current or pending contracts it is acceptable to use the phrase, “See Affidavit of Availability on file”. **Ownership Certification** (at the bottom of the page) - Check N/A if the Form A(s) you submitted accounts for 100 percent of the company ownership. Check YES if any percentage of ownership falls outside of the parameters that require reporting on the Form A. Checking NO indicates that the Form A(s) you submitted is not correct and you will be required to submit a revised Form A.
- Page 20 (Workforce Projection)** – Be sure to include the Duration of the Project. It is acceptable to use the phrase “Per Contract Specifications”.

Proposal Bid Bond – (Insert after the proposal signature page) Submit your proposal Proposal Bid Bond (if applicable) using the current Proposal Bid Bond form provided in the proposal package. The Power of Attorney page should be stapled to the Proposal Bid Bond. If you are using an electronic bond, include your bid bond number on the Proposal Bid Bond and attach the Proof of Insurance printed from the Surety’s Web Site.

Disadvantaged Business Utilization Plan and/or Good Faith Effort – The last items in your bid should be the DBE Utilization Plan (SBE 2026), followed by the DBE Participation Statement (SBE 2025) and supporting paperwork. If you have documentation of a Good Faith Effort, it is to follow the SBE Forms.

The Bid Letting is now available in streaming Audio/Video from the IDOT Web Site. A link to the stream will be placed on the main page of the current letting on the day of the Letting. The stream will not begin until 10 AM. The actual reading of the bids does not begin until approximately 10:30 AM.

Following the Letting, the As-Read Tabulation of Bids will be posted by the end of the day. You will find the link on the main Web page for the current letting.

QUESTIONS: pre-letting up to execution of the contract

Contractor pre-qualification 217-782-3413
Small Business, Disadvantaged Business Enterprise (DBE) 217-785-4611
Contracts, Bids, Letting process or Internet downloads 217-782-7806
Estimates Unit..... 217-785-3483
Aeronautics..... 217-785-8515
IDNR (Land Reclamation, Water Resources, Natural Resources)..... 217-782-6302

QUESTIONS: following contract execution

Subcontractor documentation, payments 217-782-3413
Railroad Insurance 217-785-0275

193

RETURN WITH BID

Proposal Submitted By
Name
Address
City

Letting March 6, 2015

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction.

BIDDERS NEED NOT RETURN THE ENTIRE PROPOSAL

Notice to Bidders, Specifications, Proposal, Contract and Contract Bond



**Illinois Department
of Transportation**

Springfield, Illinois 62764

**Contract No. 60W30
COOK County
Section 2013-012R
Route FAI 90/94
Project ACNHPP-000V(011)
District 1 Construction Funds**

PLEASE MARK THE APPROPRIATE BOX BELOW:

- A Bid Bond is included.
- A Cashier's Check or a Certified Check is included
- An Annual Bid Bond is included or is on file with IDOT.

Prepared by

Checked by

F

(Printed by authority of the State of Illinois)

Page intentionally left blank

RETURN WITH BID



PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

1. Proposal of _____

Taxpayer Identification Number (Mandatory) _____

For the improvement identified and advertised for bids in the Invitation for Bids as:

**Contract No. 60W30
COOK County
Section 2013-012R
Project ACNHPP-000V(011)
Route FAI 90/94
District 1 Construction Funds**

Rehabilitation and widening of the bridge carrying Taylor St. over I-90/94 also rehabilitation of the entrance ramp NB structure and retaining wall all located along I-90/94 in Chicago (SN 016-1165).

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents will govern performance and payments.

RETURN WITH BID

3. **ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER.** The undersigned bidder further declares that he/she has carefully examined the proposal, plans, specifications, addenda form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this bid proposal he/she waives all right to plead any misunderstanding regarding the same.

4. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned bidder further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, or as specified in the special provisions, guaranteeing the faithful performance of the work in accordance with the terms of the contract.

5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

<u>Amount of Bid</u>		<u>Proposal Guaranty</u>	<u>Amount of Bid</u>		<u>Proposal Guaranty</u>	
Up to	\$5,000	\$150	\$2,000,000	to	\$3,000,000	\$100,000
\$5,000	to \$10,000	\$300	\$3,000,000	to	\$5,000,000	\$150,000
\$10,000	to \$50,000	\$1,000	\$5,000,000	to	\$7,500,000	\$250,000
\$50,000	to \$100,000	\$3,000	\$7,500,000	to	\$10,000,000	\$400,000
\$100,000	to \$150,000	\$5,000	\$10,000,000	to	\$15,000,000	\$500,000
\$150,000	to \$250,000	\$7,500	\$15,000,000	to	\$20,000,000	\$600,000
\$250,000	to \$500,000	\$12,500	\$20,000,000	to	\$25,000,000	\$700,000
\$500,000	to \$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000	\$800,000
\$1,000,000	to \$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000	\$900,000
\$1,500,000	to \$2,000,000	\$75,000	over		\$35,000,000	\$1,000,000

Bank cashier's checks or properly certified checks accompanying bid proposals will be made payable to the Treasurer, State of Illinois.

If a combination bid is submitted, the proposal guaranties which accompany the individual bid proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is _____ \$(_____). If this proposal is accepted and the undersigned will fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty will become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond will become void or the proposal guaranty check will be returned to the undersigned.

Attach Cashier's Check or Certified Check Here

In the event that one proposal guaranty check is intended to cover two or more bid proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual bid proposal. If the guaranty check is placed in another bid proposal, state below where it may be found.

The proposal guaranty check will be found in the bid proposal for:

Item _____

Section No. _____

County _____

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

RETURN WITH BID

6. **COMBINATION BIDS.** The undersigned bidder further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual contract comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination No.	Sections Included in Combination	Combination Bid	
		Dollars	Cents

7. **SCHEDULE OF PRICES.** The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices will govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.

8. **AUTHORITY TO DO BUSINESS IN ILLINOIS.** Section 20-43 of the Illinois Procurement Code (the Code) (30 ILCS 500/20-43) provides that a person (other than an individual acting as a sole proprietor) must be a legal entity authorized to transact business or conduct affairs in the State of Illinois prior to submitting the bid.

9. **EXECUTION OF CONTRACT:** The Department of Transportation will, in accordance with the rules governing Department procurements, execute the contract and shall be the sole entity having the authority to accept performance and make payments under the contract. Execution of the contract by the Chief Procurement Officer (CPO) or the State Purchasing Officer (SPO) is for approval of the procurement process and execution of the contract by the Department. Neither the CPO nor the SPO shall be responsible for administration of the contract or determinations respecting performance or payment there under except as otherwise permitted in the Code.

10. **The services of a subcontractor will be used.**

Check box Yes
 Check box No

For known subcontractors with subcontracts with an annual value of more than \$50,000, the contract shall include their name, address, general type of work to be performed, and the dollar allocation for each subcontractor.
 (30 ILCS 500/20-120)

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X0301797	GATE REMOVAL	EACH	1.000				
X0322441	DIG LOOP DET SEN U 4C	EACH	2.000				
X0322442	TONE EQ 3 FRE REC PRG	EACH	8.000				
X0322443	TONE EQ 3 FREQ TR PRG	EACH	8.000				
X0322444	TONE EQ POWER SUPPLY	EACH	2.000				
X0322445	TONE EQ MOUNT FRAME	EACH	1.000				
X0322689	P S AB 10 7G 34'-6"	EACH	3.000				
X0324198	REMOV ASB CEM CONDUIT	FOOT	1,180.000				
X0324455	DRILL/SET SOLD P SOIL	CU FT	4,215.000				
X0324599	ROD AND CLEAN EX COND	FOOT	386.000				
X0325040	FO INNERDUCT 1 1/4"	FOOT	1,648.000				
X0325087	VIDEO TAPING MN DRAIN	FOOT	1,702.000				
X0325095	MAIN DRAIN CLEANING	FOOT	851.000				
X0325207	TV INSPECT OF SEWER	FOOT	1,504.000				
X0326326	CC TPX 2-1/C6 1-1/CG	FOOT	2,020.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X0326486	DECORATIVE RAIL PR MT	FOOT	478.000				
X0326801	COMBND SEWR TO BE CLN	FOOT	282.000				
X0326935	CROSSHOLE SONIC LOG	EACH	4.000				
X0326952	STEP-DOWN TRANSFORMER	EACH	3.000				
X0326968	JUN BOX POLE/POST MTD	EACH	9.000				
X0327349	TEMP WP 40 CL 4	EACH	21.000				
X0327357	CONSTRN VBRN MONITRNG	L SUM	1.000				
X0327371	PLUG EXISTING PIPE	CU YD	1.200				
X0327606	FIBER OPT SPL-LATERAL	EACH	3.000				
X0327607	FIBER OPT SPL-MAINLN	EACH	3.000				
X0327615	COMB SEW REM 8	FOOT	62.000				
X0327616	MAINT ITS DURG CONSTR	CAL MO	20.000				
X0327649	SOIL RETENTION SYSTEM	SQ FT	486.000				
X0327696	BUDG ALLOW TIMLAP CAM	L SUM	1.000				
X0327751	LIGHT PROT IND LOOP D	EACH	8.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X0327755	CAB HSG EQ ESP 3 CFM	EACH	1.000				
X0327757	FDN CONSTR EX OBSTRNS	EACH	15.000				
X0370013	CON FDN TPBM TSC CDOT	EACH	2.000				
X0370015	CF30 1.50A16.50B CDOT	EACH	5.000				
X0370018	ELCBL C #14 19C CDOT	FOOT	1,187.000				
X0370021	EL HH 30 24 F&L CDOT	EACH	2.000				
X0370023	EL MH 3X4X4 24FL CDOT	EACH	1.000				
X0370028	HRNS CBL 16 8/C CDOT	FOOT	627.000				
X0370031	PS AB12.5 3G34.5 CDOT	EACH	6.000				
X0370047	INST LP MA & LUM CHGO	EACH	2.000				
X0370049	UGRD C PVC2SCH80 CDOT	FOOT	565.000				
X0370050	ATC TRAF 16LB PC CDOT	EACH	2.000				
X0370052	ELCBL C # 4 2C CDOT	FOOT	47.000				
X0370060	MA STL MONO 35 CDOT	EACH	3.000				
X0370061	MA STL MONO 40 CDOT	EACH	2.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X0370062	MA STL MONO 44 CDOT	EACH	1.000				
X0370064	UGRD C PVC3SCH80 CDOT	FOOT	1,285.000				
X0370073	REM/REIN MST/LUM CDOT	EACH	4.000				
X0370074	RACKING CBL MH/HHCDOT	EACH	6.000				
X0370075	UGRD C PVC4SCH80 CDOT	FOOT	720.000				
X0370076	ROD/CL DCT COND CDOT	FOOT	100.000				
X0370080	COMB C&G B V.12(CDOT)	FOOT	633.000				
X0370084	DRILL MNHL/HNDHL CDOT	EACH	20.000				
X0370085	CLN MNHL/HNDHL (CDOT)	EACH	2.000				
X0370135	CONC CURB TB SPL CDOT	FOOT	530.000				
X0370139	MAINT LIGHT SYS CDOT	CAL MO	20.000				
X0370176	CF24 1.25A15B 9' CDOT	EACH	1.000				
X0370186	EL MH 3X4X4 30FL CDOT	EACH	2.000				
X0370206	INSTALL MA & LUM CHGO	EACH	9.000				
X0370207	REM/SLV EX MA/LUMCDOT	EACH	9.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X1200014	CB RECON NEW T1F OL C	EACH	2.000				
X1400006	FO CAB C 12F SM	FOOT	1,676.000				
X1400007	FO CAB C 24F SM	FOOT	450.000				
X1400008	FO CAB AER 12F SM	FOOT	522.000				
X1400009	FO CAB AER 24F SM	FOOT	1,128.000				
X1400010	ELE C AER INS 19 25PR	FOOT	1,200.000				
X1400011	ELE C AER INS 19 6/CR	FOOT	396.000				
X1400012	REM & REIN FIB OPT CC	FOOT	1,172.000				
X1400013	REM CABLE IN CONDUIT	FOOT	3,436.000				
X1400014	CIR BRKR ST LIGHT CNT	EACH	2.000				
X1700001	DRILL MH HDHH MWL JBX	EACH	13.000				
X2600001	DMS PROTECTION	EACH	1.000				
X4240800	DETECTABLE WARN SPL	SQ FT	131.000				
X4402020	CONC MEDIAN SURF REM	SQ FT	3,450.000				
X5537800	SS CLEANED 12	FOOT	197.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X5538200	SS CLEANED 24	FOOT	273.000				
X5860110	GRANULAR BACKFILL STR	CU YD	659.000				
X6050040	REMOV MANHOLES SPL	EACH	2.000				
X6061310	CONC MEDIAN SURF 4 SP	SQ FT	3,514.500				
X6370159	CONC BAR 1F 32HT SPL	FOOT	30.000				
X6640300	CH LK FENCE REMOV	FOOT	40.000				
X6640704	TEMP CL FENCE SCRNS 4	FOOT	425.000				
X6700410	ENGR FLD OFF A SPL	CAL MO	20.000				
X7010216	TRAF CONT & PROT SPL	L SUM	1.000				
X7010410	SPEED DISPLAY TRAILER	CAL MO	20.000				
X7011015	TR C-PROT EXPRESSWAYS	L SUM	1.000				
X7013820	TR CONT SURVEIL EXPWY	CAL DA	600.000				
X7035100	TEMP EPOXY PVT MK L&S	SQ FT	74.000				
X7035104	TEMP EPOXY PVT MK L4	FOOT	24,476.000				
X7035105	TEMP EPOXY PVT MK L5	FOOT	6,617.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X7035106	TEMP EPOXY PVT MK L6	FOOT	128.000				
X7035108	TEMP EPOXY PVT MK L8	FOOT	4,627.000				
X7035112	TEMP EPOXY PVT MK L12	FOOT	960.000				
X7035124	TEMP EPOXY PVT MK L24	FOOT	242.000				
X7200105	SIGN PANEL T1 SPL	SQ FT	61.000				
X7280105	TELES STL SIN SUP SPL	FOOT	31.000				
X8100863	INTERCEPT EX CONDUIT	EACH	5.000				
X8420510	REM TOWER FDN	EACH	1.000				
X8710035	FIB OPT CBL 96F SM	FOOT	1,236.000				
X8730249	ELCBL C 19 6/C	FOOT	780.000				
X8730312	EC C LEAD 18 4C TW SH	FOOT	360.000				
X8730401	ELCBL C COMM	FOOT	510.000				
X8850102	INDUCTION LOOP	FOOT	656.000				
X8900100	TEMP TR SIG INSTAL SP	EACH	1.000				
X8950425	REMOV TRAF SURV EQUIP	L SUM	1.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
X8951011	REM AERIAL CABLE	FOOT	5,868.000				
X9900001	LOUVERS	EACH	2.000				
Z0004552	APPROACH SLAB REM	SQ YD	446.000				
Z0006012	BR DK LTX C OLY 2 1/4	SQ YD	1,042.000				
Z0007112	C&D LEAD PT CL RES	L SUM	1.000				
Z0007118	UNTREATED TIMBER LAG	SQ FT	1,517.000				
Z0010501	CLEAN & PT STL BR N1	L SUM	1.000				
Z0010614	CLEAN EX MAN/HAND	EACH	4.000				
Z0012130	BR DECK SCAR 3/4	SQ YD	1,042.000				
Z0012754	STR REP CON DP = < 5	SQ FT	57.000				
Z0012755	STR REP CON DP OVER 5	SQ FT	12.000				
Z0013798	CONSTRUCTION LAYOUT	L SUM	1.000				
Z0016002	DECK SLAB REP (FD-T2)	SQ YD	86.000				
Z0018002	DRAINAGE SCUPPR DS-11	EACH	5.000				
Z0018051	DRAINAGE SCUPPERS ADJ	EACH	2.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
Z0018800	DRAINAGE SYSTEM	L SUM	1.000				
Z0019600	DUST CONTROL WATERING	UNIT	4.100				
Z0026404	FUR SOLDIER PILES WS	FOOT	420.000				
Z0030850	TEMP INFO SIGNING	SQ FT	350.000				
Z0033028	MAINTAIN LIGHTING SYS	CAL MO	20.000				
Z0046304	P UNDR FOR STRUCT 4	FOOT	272.000				
Z0062456	TEMP PAVEMENT	SQ YD	907.000				
Z0073002	TEMP SOIL RETEN SYSTM	SQ FT	7,504.000				
Z0073510	TEMP TR SIGNAL TIMING	EACH	8.000				
Z0076600	TRAINEES	HOUR	2,000.000		0.800		1,600.000
Z0076604	TRAINEES TPG	HOUR	2,000.000		15.000		30,000.000
20100110	TREE REMOV 6-15	UNIT	36.000				
20101100	TREE TRUNK PROTECTION	EACH	5.000				
20200100	EARTH EXCAVATION	CU YD	610.000				
20201200	REM & DISP UNS MATL	CU YD	305.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
20400800	FURNISHED EXCAVATION	CU YD	1,420.000				
20700220	POROUS GRAN EMBANK	CU YD	598.000				
20800150	TRENCH BACKFILL	CU YD	194.400				
21101615	TOPSOIL F & P 4	SQ YD	913.000				
21301072	EXPLOR TRENCH 72	FOOT	100.000				
25000210	SEEDING CL 2A	ACRE	0.500				
25000400	NITROGEN FERT NUTR	POUND	27.000				
25000600	POTASSIUM FERT NUTR	POUND	27.000				
25100115	MULCH METHOD 2	ACRE	0.500				
25100630	EROSION CONTR BLANKET	SQ YD	1,417.000				
25200110	SODDING SALT TOLERANT	SQ YD	913.000				
25200200	SUPPLE WATERING	UNIT	35.600				
28000250	TEMP EROS CONTR SEED	POUND	1,003.000				
28000400	PERIMETER EROS BAR	FOOT	982.000				
28000510	INLET FILTERS	EACH	41.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
30300112	AGG SUBGRADE IMPR 12	SQ YD	139.000				
31101200	SUB GRAN MAT B 4	SQ YD	1,289.000				
31101400	SUB GRAN MAT B 6	SQ YD	1,982.000				
31200500	STAB SUBBASE HMA 4	SQ YD	117.000				
35300400	PCC BSE CSE 9	SQ YD	1,574.000				
40600275	BIT MATLS PR CT	POUND	1,236.000				
40603085	HMA BC IL-19.0 N70	TON	199.000				
40603340	HMA SC "D" N70	TON	155.000				
40800050	INCIDENTAL HMA SURF	TON	41.000				
42000401	PCC PVT 9 JOINTED	SQ YD	117.000				
42001200	PAVEMENT FABRIC	SQ YD	1,574.000				
42001300	PROTECTIVE COAT	SQ YD	2,648.000				
42001420	BR APPR PVT CON (PCC)	SQ YD	149.000				
42300400	PCC DRIVEWAY PAVT 8	SQ YD	62.000				
42400200	PC CONC SIDEWALK 5	SQ FT	1,933.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
42400410	PC CONC SIDEWALK 8	SQ FT	383.000				
44000100	PAVEMENT REM	SQ YD	2,189.000				
44000200	DRIVE PAVEMENT REM	SQ YD	69.000				
44000300	CURB REM	FOOT	569.000				
44000500	COMB CURB GUTTER REM	FOOT	1,008.000				
44000600	SIDEWALK REM	SQ FT	4,111.000				
44001980	CONC BARRIER REMOV	FOOT	411.000				
44004250	PAVED SHLD REMOVAL	SQ YD	580.000				
44201809	CL D PATCH T4 13	SQ YD	47.000				
50100300	REM EXIST STRUCT N1	EACH	1.000				
50100400	REM EXIST STRUCT N2	EACH	1.000				
50102400	CONC REM	CU YD	12.400				
50157300	PROTECTIVE SHIELD	SQ YD	2,811.000				
50200100	STRUCTURE EXCAVATION	CU YD	3,468.000				
50300225	CONC STRUCT	CU YD	1,020.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
50300254	RUBBED FINISH	SQ FT	8,813.000				
50300255	CONC SUP-STR	CU YD	1,255.900				
50300260	BR DECK GROOVING	SQ YD	3,193.000				
50300285	FORM LINER TEX SURF	SQ FT	610.000				
50300300	PROTECTIVE COAT	SQ YD	3,835.000				
50400805	F & E P P CON I-BM 36	FOOT	528.000				
50500105	F & E STRUCT STEEL	L SUM	1.000				
50500505	STUD SHEAR CONNECTORS	EACH	12,628.000				
50606701	C & P STRUCT STL L1	L SUM	1.000				
50800105	REINFORCEMENT BARS	POUND	522,462.000				
50800205	REINF BARS, EPOXY CTD	POUND	437,770.000				
50800515	BAR SPLICERS	EACH	1,621.000				
50800530	MECHANICAL SPLICERS	EACH	448.000				
50901730	BRIDGE FENCE RAILING	FOOT	41.000				
51500100	NAME PLATES	EACH	2.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
51603000	DRILLED SHAFT IN SOIL	CU YD	1,534.000				
51604000	DRILLED SHAFT IN ROCK	CU YD	26.000				
52000110	PREF JT STRIP SEAL	FOOT	222.000				
52100010	ELAST BEARING ASSY T1	EACH	42.000				
52100520	ANCHOR BOLTS 1	EACH	28.000				
52100530	ANCHOR BOLTS 1 1/4	EACH	28.000				
52100540	ANCHOR BOLTS 1 1/2	EACH	56.000				
550A0340	STORM SEW CL A 2 12	FOOT	220.000				
55100500	STORM SEWER REM 12	FOOT	41.000				
55100700	STORM SEWER REM 15	FOOT	12.000				
55101200	STORM SEWER REM 24	FOOT	32.000				
58700300	CONCRETE SEALER	SQ FT	13,685.000				
59000200	EPOXY CRACK INJECTION	FOOT	684.000				
59100100	GEOCOMPOSITE WALL DR	SQ YD	340.000				
60108200	PIPE UNDERDRAIN 6 SP	FOOT	118.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
60200205	CB TA 4 DIA T1F CL	EACH	1.000				
60201340	CB TA 4 DIA T24F&G	EACH	3.000				
60207005	CB TC T1F CL	EACH	2.000				
60218400	MAN TA 4 DIA T1F CL	EACH	2.000				
60221100	MAN TA 5 DIA T1F CL	EACH	1.000				
60250200	CB ADJUST	EACH	4.000				
60251710	CB ADJ NEW T20F&G	EACH	2.000				
60252800	CB RECONST	EACH	3.000				
60255500	MAN ADJUST	EACH	4.000				
60257900	MAN RECONST	EACH	1.000				
60260100	INLETS ADJUST	EACH	1.000				
60300305	FR & LIDS ADJUST	EACH	5.000				
60406100	FR & LIDS T1 CL	EACH	1.000				
60500040	REMOV MANHOLES	EACH	3.000				
60500050	REMOV CATCH BAS	EACH	5.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
60603800	COMB CC&G TB6.12	FOOT	284.000				
60610400	COMB CC&G TM6.24	FOOT	275.000				
60624600	CORRUGATED MED	SQ FT	324.000				
63700175	CONC BAR 1F 42HT	FOOT	239.000				
63700805	CONC BAR TRANS	FOOT	60.000				
63700900	CONC BARRIER BASE	FOOT	329.000				
64200116	SHOULDER RUM STRIP 16	FOOT	573.000				
66408200	CH LK GATES 6X24 DBL	EACH	1.000				
66900200	NON SPL WASTE DISPOSL	CU YD	150.000				
66900450	SPL WASTE PLNS/REPORT	L SUM	1.000				
66900530	SOIL DISPOSAL ANALY	EACH	3.000				
67100100	MOBILIZATION	L SUM	1.000				
70103815	TR CONT SURVEILLANCE	CAL DA	600.000				
70106800	CHANGEABLE MESSAGE SN	CAL MO	40.000				
70300100	SHORT TERM PAVT MKING	FOOT	74,100.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
70300240	TEMP PVT MK LINE 6	FOOT	1,875.000				
70301000	WORK ZONE PAVT MK REM	SQ FT	15,494.000				
70400100	TEMP CONC BARRIER	FOOT	1,875.000				
70400200	REL TEMP CONC BARRIER	FOOT	1,825.000				
70600255	IMP ATTN TEMP FRN TL2	EACH	2.000				
70600260	IMP ATTN TEMP FRN TL3	EACH	4.000				
70600322	IMP ATTN REL FRN TL2	EACH	4.000				
70600332	IMP ATTN REL FRN TL3	EACH	4.000				
72000100	SIGN PANEL T1	SQ FT	184.000				
72000200	SIGN PANEL T2	SQ FT	32.000				
72000300	SIGN PANEL T3	SQ FT	404.000				
72400100	REMOV SIN PAN ASSY TA	EACH	1.000				
72400200	REMOV SIN PAN ASSY TB	EACH	2.000				
72400310	REMOV SIGN PANEL T1	SQ FT	196.000				
72600100	MILEPOST MKR ASSEMBLY	EACH	1.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
72800100	TELES STL SIN SUPPORT	FOOT	28.000				
73100100	BASE TEL STL SIN SUPP	EACH	2.000				
73304000	OVHD SIN STR BR MT	FOOT	37.000				
78000100	THPL PVT MK LTR & SYM	SQ FT	117.000				
78000200	THPL PVT MK LINE 4	FOOT	1,739.000				
78000400	THPL PVT MK LINE 6	FOOT	424.000				
78000500	THPL PVT MK LINE 8	FOOT	152.000				
78000600	THPL PVT MK LINE 12	FOOT	103.000				
78000650	THPL PVT MK LINE 24	FOOT	1,157.000				
78005110	EPOXY PVT MK LINE 4	FOOT	6,563.000				
78005120	EPOXY PVT MK LINE 5	FOOT	2,023.000				
78005140	EPOXY PVT MK LINE 8	FOOT	2,066.000				
78005150	EPOXY PVT MK LINE 12	FOOT	162.000				
78008210	POLYUREA PM T1 LN 4	FOOT	1,818.000				
78008240	POLYUREA PM T1 LN 8	FOOT	199.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
78008250	POLYUREA PM T1 LN 12	FOOT	225.000				
78008270	POLYUREA PM T1 LN 24	FOOT	336.000				
78200530	BAR WALL MKR TYPE C	EACH	32.000				
78300100	PAVT MARKING REMOVAL	SQ FT	6,317.000				
81028170	UNDRGRD C GALVS 1	FOOT	13.000				
81028200	UNDRGRD C GALVS 2	FOOT	683.000				
81028220	UNDRGRD C GALVS 3	FOOT	465.000				
81028350	UNDRGRD C PVC 2	FOOT	60.000				
81028730	UNDRGRD C CNC 1 1/4	FOOT	25.000				
81100320	CON AT ST 1 PVC GS	FOOT	930.000				
81100600	CON AT ST 2 GALVS	FOOT	10.000				
81100605	CON AT ST 2 PVC GALVS	FOOT	1,072.000				
81100805	CON AT ST 3 PVC GALVS	FOOT	1,028.000				
81101005	CON AT ST 4 PVC GALVS	FOOT	1,330.000				
81200230	CON EMB STR 2 PVC	FOOT	1,000.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
81200250	CON EMB STR 3 PVC	FOOT	42.000				
81200270	CON EMB STR 4 PVC	FOOT	180.000				
81300220	JUN BX SS AS 6X6X4	EACH	15.000				
81300530	JUN BX SS AS 12X10X6	EACH	16.000				
81300830	JUN BX SS AS 18X18X8	EACH	6.000				
81300915	JUN BX SS AS 20X20X8	EACH	1.000				
81301290	JUN BX SS ES 12X12X6	EACH	8.000				
81400200	HD HANDHOLE	EACH	5.000				
81603081	UD 3#2#4GXLP USE 1.5 P	FOOT	80.000				
81702110	EC C XLP USE 1C 10	FOOT	3,245.000				
81702130	EC C XLP USE 1C 6	FOOT	247.000				
81702410	EC C XLP USE 3-1C 4	FOOT	170.000				
81702417	EC C XLP 3-1C#6 1C#6G	FOOT	858.000				
81800230	A CBL 2-1C6 MESS WIRE	FOOT	330.000				
81800330	A CBL 3-1C6 MESS WIRE	FOOT	1,386.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

County Name - COOK- -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
82107100	UNDERPAS LUM 70W HPS	EACH	12.000				
82107200	UNDERPAS LUM 100W HPS	EACH	6.000				
83700350	LT TOWER FDN 54D	FOOT	31.500				
84200500	REM LT UNIT SALV	EACH	20.000				
84400205	RELOC EX LIGHT TOWER	EACH	1.000				
85000200	MAIN EX TR SIG INSTAL	EACH	2.000				
87200400	SPAN WIRE	FOOT	2,455.000				
87301790	ELCBL C SERV 2 2C	FOOT	551.000				
87301900	ELCBL C EGRDC 6 1C	FOOT	27.000				
87800200	CONC FDN TY D	FOOT	5.000				
88040070	SH P LED 1F 3S BM	EACH	4.000				
88040090	SH P LED 1F 3S MAM	EACH	10.000				
88040150	SH P LED 1F 5S BM	EACH	2.000				
88040160	SH P LED 1F 5S MAM	EACH	2.000				
88102825	PED SH P LED 1F BM CT	EACH	10.000				

ILLINOIS DEPARTMENT OF TRANSPORTATION
 SCHEDULE OF PRICES
 CONTRACT
 NUMBER -

60W30

State Job # - C-91-232-13

Project Number
 ACNHPP-000V/011/

Route
 FAI 90
 FAI 94

County Name - COOK - -

Code - 31 - -

District - 1 - -

Section Number - 2013-012R

Item Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
89000100	TEMP TR SIG INSTALL	EACH	1.000				
89502350	REM & RE ELCBL FR CON	FOOT	2,672.000				
89502375	REMOV EX TS EQUIP	EACH	2.000				
89502380	REMOV EX HANDHOLE	EACH	2.000				
89502385	REMOV EX CONC FDN	EACH	11.000				

CONTRACT NUMBER

60W30

THIS IS THE TOTAL BID

\$ _____

NOTES:

1. Each PAY ITEM should have a UNIT PRICE and a TOTAL PRICE.
2. The UNIT PRICE shall govern if no TOTAL PRICE is shown or if there is a discrepancy between the product of the UNIT PRICE multiplied by the QUANTITY.
3. If a UNIT PRICE is omitted, the TOTAL PRICE will be divided by the QUANTITY in order to establish a UNIT PRICE.
4. A bid may be declared UNACCEPTABLE if neither a unit price nor a total price is shown.

RETURN WITH BID

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

A. Article 50 of the Code establishes the duty of all State CPOs, SPOs, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.

B. In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. Except as otherwise required in subsection III, paragraphs J-M, by execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances have been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.

C. In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for the CPO to void the contract, and may result in the suspension or debarment of the bidder or subcontractor. If a false certification is made by a subcontractor the contractor's submitted bid and the executed contract may not be declared void unless the contractor refuses to terminate the subcontract upon the State's request after a finding that the subcontractor's certification was false.

I acknowledge, understand and accept these terms and conditions.

II. ASSURANCES

The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder.

A. Conflicts of Interest

Section 50-13. Conflicts of Interest.

(a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois State Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois State Toll Highway Authority.

(b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.

(d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.

(e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 calendar days after the officer, member, or employee takes office or is employed. The current salary of the Governor is \$177,412.00. Sixty percent of the salary is \$106,447.20.

RETURN WITH BID

The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code. Information concerning the exemption process is available from the Department upon request.

B. Negotiations

Section 50-15. Negotiations.

It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.

The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

C. Inducements

Section 50-25. Inducement.

Any person who offers or pays any money or other valuable thing to any person to induce him or her not to provide a submission to a vendor portal or to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract, not making a submission to a vendor portal, or who withholds a bid or submission to a vendor portal in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

D. Revolving Door Prohibition

Section 50-30. Revolving door prohibition.

CPOs, SPOs, procurement compliance monitors, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Reporting Anticompetitive Practices

Section 50-40. Reporting anticompetitive practices.

When, for any reason, any vendor, bidder, contractor, CPO, SPO, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the CPO.

The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid or submission to a vendor portal is submitted.

F. Confidentiality

Section 50-45. Confidentiality.

Any CPO, SPO, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

RETURN WITH BID

G. Insider Information

Section 50-50. Insider information.

It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

I acknowledge, understand and accept these terms and conditions for the above assurances.

III. CERTIFICATIONS

The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. Section 50-2 of the Code provides that every person that has entered into a multi-year contract and every subcontractor with a multi-year subcontract shall certify, by July 1 of each fiscal year covered by the contract after the initial fiscal year, to the responsible CPO whether it continues to satisfy the requirements of Article 50 pertaining to the eligibility for a contract award. If a contractor or subcontractor is not able to truthfully certify that it continues to meet all requirements, it shall provide with its certification a detailed explanation of the circumstances leading to the change in certification status. A contractor or subcontractor that makes a false statement material to any given certification required under Article 50 is, in addition to any other penalties or consequences prescribed by law, subject to liability under the Whistleblower Reward and Protection Act for submission of a false claim.

A. Bribery

Section 50-5. Bribery.

(a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:

(1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or

(2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.

(b) Businesses. No business shall be barred from contracting with any unit of State or local government, or subcontracting under such a contract, as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:

(1) the business has been finally adjudicated not guilty; or

(2) the business demonstrates to the governmental entity with which it seeks to contract, or which is signatory to the contract which the subcontract relates, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 2012.

(c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.

(d) Certification. Every bid submitted to and contract executed by the State, and every subcontract subject to Section 20-120 of the Code shall contain a certification by the contractor or the subcontractor, respectively, that the contractor or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO may declare the related contract void if any certifications required by this Section are false. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

The contractor or subcontractor certifies that it is not barred from being awarded a contract under Section 50-5.

B. Felons

Section 50-10. Felons.

(a) Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any State agency, or enter into a subcontract, from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

(b) Certification. Every bid submitted to and contract executed by the State and every subcontract subject to Section 20-120 of the Code and every vendor's submission to a vendor portal shall contain a certification by the bidder or contractor or subcontractor, respectively, that the bidder, contractor, or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO may declare the related contract void if any of the certifications required by this Section are false.

RETURN WITH BID

C. Debt Delinquency

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder or subcontractor, respectively, certifies that it, or any affiliate, is not barred from being awarded a contract or subcontract under the Code. Section 50-11 prohibits a person from entering into a contract with a State agency, or entering into a subcontract, if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency, or entering into a subcontract, if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The bidder or contractor or subcontractor, respectively, further acknowledges that the CPO may declare the related contract void if this certification is false or if the bidder, contractor, or subcontractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

D. Prohibited Bidders, Contractors and Subcontractors

Section 50-10.5 and 50-60(c). Prohibited bidders, contractors and subcontractors.

The bidder or contractor or subcontractor, respectively, certifies in accordance with Section 50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 or if in violation of Subsection (c) for a period of five years from the date of conviction. Every bid submitted to and contract executed by the State and every subcontract subject to Section 20-120 of the Code shall contain a certification by the bidder, contractor, or subcontractor, respectively, that the bidder, contractor, or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO shall declare the related contract void if any of the certifications completed pursuant to this Section are false.

E. Section 42 of the Environmental Protection Act

Section 50-14 Environmental Protection Act violations.

The bidder or contractor or subcontractor, respectively, certifies in accordance with Section 50-14 that the bidder, contractor, or subcontractor, is not barred from being awarded a contract or entering into a subcontract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency, or entering into any subcontract, that is subject to the Code by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The bidder or contractor or subcontractor, respectively, acknowledges that the CPO may declare the contract void if this certification is false.

F. Educational Loan

Section 3 of the Educational Loan Default Act, 5 ILCS 385/3.

Pursuant to the Educational Loan Default Act no State agency shall contract with an individual for goods or services if that individual is in default on an educational loan.

The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

G. Bid-Rigging/Bid Rotating

Section 33E-11 of the Criminal Code of 2012, 720 ILCS 5/3BE-11.

(a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article.

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

RETURN WITH BID

H. International Anti-Boycott

Section 5 of the International Anti-Boycott Certification Act provides every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.

The bidder makes the certification set forth in Section 5 of the Act.

I. Drug Free Workplace

The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.

The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace in compliance with the provisions of the Act.

J. Disclosure of Business Operations in Iran

Section 50-36 of the Code provides that each bid, offer, or proposal submitted for a State contract shall include a disclosure of whether or not the Company acting as the bidder, offeror, or proposing entity, or any of its corporate parents or subsidiaries, within the 24 months before submission of the bid, offer, or proposal had business operations that involved contracts with or provision of supplies or services to the Government of Iran, companies in which the Government of Iran has any direct or indirect equity share, consortiums or projects commissioned by the Government of Iran, or companies involved in consortiums or projects commissioned by the Government of Iran and either of the following conditions apply:

- (1) More than 10% of the Company's revenues produced in or assets located in Iran involve oil-related activities or mineral-extraction activities; less than 75% of the Company's revenues produced in or assets located in Iran involve contracts with or provision of oil-related or mineral-extraction products or services to the Government of Iran or a project or consortium created exclusively by that government; and the Company has failed to take substantial action.
- (2) The Company has, on or after August 5, 1996, made an investment of \$20 million or more, or any combination of investments of at least \$10 million each that in the aggregate equals or exceeds \$20 million in any 12-month period, which directly or significantly contributes to the enhancement of Iran's ability to develop petroleum resources of Iran.

The terms "Business operations", "Company", "Mineral-extraction activities", "Oil-related activities", "Petroleum resources", and "Substantial action" are all defined in the Code.

Failure to make the disclosure required by the Code may cause the bid, offer or proposal to be considered not responsive. The disclosure will be considered when evaluating the bid or awarding the contract. The name of each Company disclosed as doing business or having done business in Iran will be provided to the State Comptroller.

Check the appropriate statement:

Company has no business operations in Iran to disclose.

Company has business operations in Iran as disclosed on the attached document.

RETURN WITH BID

K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Code, the bidder certifies that it is a participant, either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. **The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project as reported on the Construction Employee Workforce Projection (Form BC-1256) and returned with the bid is accounted for and listed.**

Additionally, Section 30-22 of the Code requires that the bidder certify that an Illinois office be maintained as the primary place of employment for persons employed for this contract.

NA-FEDERAL

The requirements of these certifications and disclosures are a material part of the contract, and the contractor shall require these certification provisions to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking, or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

RETURN WITH BID

L. Political Contributions and Registration with the State Board of Elections

Sections 20-160 and 50-37 of the Code regulate political contributions from business entities and any affiliated entities or affiliated persons bidding on or contracting with the state. Generally under Section 50-37, any business entity, and any affiliated entity or affiliated person of the business entity, whose current year contracts with all state agencies exceed an awarded value of \$50,000, are prohibited from making any contributions to any political committees established to promote the candidacy of the officeholder responsible for the awarding of the contracts or any other declared candidate for that office for the duration of the term of office of the incumbent officeholder or a period 2 years after the termination of the contract, whichever is longer. Any business entity and affiliated entities or affiliated persons whose state contracts in the current year do not exceed an awarded value of \$50,000, but whose aggregate pending bids and proposals on state contracts exceed \$50,000, either alone or in combination with contracts not exceeding \$50,000, are prohibited from making any political contributions to any political committee established to promote the candidacy of the officeholder responsible for awarding the pending contract during the period beginning on the date the invitation for bids or request for proposals or any other procurement opportunity is issued and ending on the day after the date of award or selection if the entity was not awarded or selected. Section 20-160 requires certification of registration of affected business entities in accordance with procedures found in Section 9-35 of The Election Code.

By submission of a bid, the contractor business entity acknowledges and agrees that it has read and understands Sections 20-160 and 50-37 of the Code, and that it makes the following certification:

The undersigned bidder certifies that it has registered as a business with the State Board of Elections and acknowledges a continuing duty to update the registration in accordance with the above referenced statutes. If the business entity is required to register, the CPO shall verify that it is in compliance on the date the bid or proposal is due. The CPO shall not accept a bid or proposal if the business entity is not in compliance with the registration requirements.

These requirements and compliance with the above referenced statutory sections are a material part of the contract, and any breach thereof shall be cause to void the contract under Section 50-60 of the Code. This provision does not apply to Federal-aid contracts.

M. Lobbyist Disclosure

Section 50-38 of the Code requires that any bidder or offeror on a State contract that hires a person required to register under the Lobbyist Registration Act to assist in obtaining a contract shall:

- (i) Disclose all costs, fees, compensation, reimbursements, and other remunerations paid or to be paid to the lobbyist related to the contract,
- (ii) Not bill or otherwise cause the State of Illinois to pay for any of the lobbyist's costs, fees, compensation, reimbursements, or other remuneration, and
- (iii) Sign a verification certifying that none of the lobbyist's costs, fees, compensation, reimbursements, or other remuneration were billed to the State.

This information, along with all supporting documents, shall be filed with the agency awarding the contract and with the Secretary of State. The CPO shall post this information, together with the contract award notice, in the online Procurement Bulletin.

Pursuant to Subsection (c) of this Section, no person or entity shall retain a person or entity to attempt to influence the outcome of a procurement decision made under the Code for compensation contingent in whole or in part upon the decision or procurement. Any person who violates this subsection is guilty of a business offense and shall be fined not more than \$10,000.

Bidder acknowledges that it is required to disclose the hiring of any person required to register pursuant to the Illinois Lobbyist Registration Act (25 ILCS 170) in connection with this contract.

Bidder has not hired any person required to register pursuant to the Illinois Lobbyist Registration Act in connection with this contract.

Or

Bidder has hired the following persons required to register pursuant to the Illinois Lobbyist Registration Act in connection with the contract:

Name and address of person: _____
All costs, fees, compensation, reimbursements and other remuneration paid to said person: _____

I acknowledge, understand and accept these terms and conditions for the above certifications.

RETURN WITH BID

IV. DISCLOSURES

- A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The bidder further certifies that the Department has received the disclosure forms for each bid.

The CPO may void the bid, or contract, respectively, if it is later determined that the bidder or subcontractor rendered a false or erroneous disclosure. A contractor or subcontractor may be suspended or debarred for violations of the Code. Furthermore, the CPO may void the contract and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Code provides that all bids of more than \$50,000 and all submissions to a vendor portal shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act, filed with the Procurement Policy Board, and shall be incorporated as a material term of the contract. Furthermore, pursuant to Section 5-5, the Procurement Policy Board may review a proposal, bid, or contract and issue a recommendation to void a contract or reject a proposal or bid based on any violation of the Code or the existence of a conflict of interest as provided in subsections (b) and (d) of Section 50-35.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 100 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any individual or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each individual making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each individual making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

The current annual salary of the Governor is \$177,412.00.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. Disclosure Forms. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. A separate Disclosure Form A must be submitted with the bid for each individual meeting the above requirements. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies and a total ownership certification. **The forms must be included with each bid.**

C. Disclosure Form Instructions

Form A Instructions for Financial Information & Potential Conflicts of Interest

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 100 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any individual or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on Form A must be signed and dated by an individual that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

1. Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES ___ NO ___
2. Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than 60% of the annual salary of the Governor? YES ___ NO ___
3. Does anyone in your organization receive more than 60% of the annual salary of the Governor of the bidding entity's or parent entity's distributive income? YES ___ NO ___
4. Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than 60% of the annual salary of the Governor? YES ___ NO ___

(Note: Only one set of forms needs to be completed per individual per bid even if a specific individual would require a yes answer to more than one question.)

A "YES" answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the bidding entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by an individual that is authorized to execute contracts for your organization. The individual signing can be, but does not have to be, the individual for which the form is being completed. The bidder is responsible for the accuracy of any information provided.

If the answer to each of the above questions is "NO", then the NOT APPLICABLE STATEMENT of Form A must be signed and dated by an individual that is authorized to execute contracts for your company.

RETURN WITH BID

Form B: Instructions for Identifying Other Contracts & Procurement Related Information

Disclosure Form B must be completed for each bid submitted by the bidding entity. *Note: Checking the NOT APPLICABLE STATEMENT on Form A does not allow the bidder to ignore Form B. Form B must be completed, checked, and dated or the bidder may be considered nonresponsive and the bid will not be accepted.*

The Bidder shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the check box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:

Option I: If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an attached sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts and are not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development Board must be included. Bidders who submit Affidavits of Availability are suggested to use Option II.

Option II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type "See Affidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois agency pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the Affidavit of Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.

RETURN WITH BID

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form A Financial Information & Potential Conflicts of Interest Disclosure

Contractor Name
Legal Address
City, State, Zip
Telephone Number Email Address Fax Number (if available)

Disclosure of the information contained in this Form is required by Section 50-35 of the Code (30 ILCS 500). Vendors desiring to enter into a contract with the State of Illinois must disclose the financial information and potential conflict of interest information as specified in this Disclosure Form. This information shall become part of the publicly available contract file. This Form A must be completed for bids in excess of \$50,000, and for all open-ended contracts. A publicly traded company may submit a 10K disclosure (or equivalent if applicable) in satisfaction of the requirements set forth in Form A. See Disclosure Form Instructions.

The current annual salary of the Governor is \$177,412.00.

DISCLOSURE OF FINANCIAL INFORMATION

- 1. Disclosure of Financial Information. The individual named below has an interest in the BIDDER (or its parent) in terms of ownership or distributive income share in excess of 5%, or an interest which has a value of more than 60% of the annual salary of the Governor. (Make copies of this form as necessary and attach a separate Disclosure Form A for each individual meeting these requirements)

FOR INDIVIDUAL (type or print information)
NAME:
ADDRESS
Type of ownership/distributable income share:
stock sole proprietorship Partnership other: (explain on separate sheet):
% or \$ value of ownership/distributable income share:

- 2. Disclosure of Potential Conflicts of Interest. Check "Yes" or "No" to indicate which, if any, of the following potential conflict of interest relationships apply. If the answer to any question is "Yes", please attach additional pages and describe.

(a) State employment, currently or in the previous 3 years, including contractual employment of services. Yes ___ No ___

If your answer is yes, please answer each of the following questions.

- 1. Are you currently an officer or employee of either the Capitol Development Board or the Illinois State Toll Highway Authority? Yes ___ No ___
2. Are you currently appointed to or employed by any agency of the State of Illinois? If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor provide the name the State agency for which you are employed and your annual salary.

RETURN WITH BID

3. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor, are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 100% of the annual salary of the Governor? Yes ___ No ___
4. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor, are you and your spouse or minor children entitled to receive (i) more than 15% in aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of two times the salary of the Governor? Yes ___ No ___

(b) State employment of spouse, father, mother, son, or daughter, including contractual employment for services in the previous 2 years.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

1. Is your spouse or any minor children currently an officer or employee of the Capitol Development Board or the Illinois State Toll Highway Authority? Yes ___ No ___
2. Is your spouse or any minor children currently appointed to or employed by any agency of the State of Illinois? If your spouse or minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, provide the name of the spouse and/or minor children, the name of the State agency for which he/she is employed and his/her annual salary. _____
-
3. If your spouse or any minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess 100% of the annual salary of the Governor? Yes ___ No ___
4. If your spouse or any minor children are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, are you and your spouse or any minor children entitled to receive (i) more than 15% in the aggregate of the total distributable income from your firm, partnership, association or corporation, or (ii) an amount in excess of two times the salary of the Governor? Yes ___ No ___

(c) Elective status; the holding of elective office of the State of Illinois, the government of the United States, any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois currently or in the previous 3 years. Yes ___ No ___

(d) Relationship to anyone holding elective office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(e) Appointive office; the holding of any appointive government office of the State of Illinois, the United State of America, or any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois, which office entitles the holder to compensation in excess of the expenses incurred in the discharge of that office currently or in the previous 3 years. Yes ___ No ___

(f) Relationship to anyone holding appointive office currently or in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(g) Employment, currently or in the previous 3 years, as or by any registered lobbyist of the State government. Yes ___ No ___

RETURN WITH BID

(h) Relationship to anyone who is or was a registered lobbyist in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(i) Compensated employment, currently or in the previous 3 years, by any registered election or reelection committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

(j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a compensated employee in the last 2 years by any registered election or re-election committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

3. Communication Disclosure.

Disclose the name and address of each lobbyist and other agent of the bidder or offeror who is not identified in Section 2 of this form, who is has communicated, is communicating, or may communicate with any State officer or employee concerning the bid or offer. This disclosure is a continuing obligation and must be promptly supplemented for accuracy throughout the process and throughout the term of the contract. If no person is identified, enter "None" on the line below:

Name and address of person(s): _____

RETURN WITH BID

4. Debarment Disclosure. For each of the persons identified under Sections 2 and 3 of this form, disclose whether any of the following has occurred within the previous 10 years: debarment from contracting with any governmental entity; professional licensure discipline; bankruptcies; adverse civil judgments and administrative findings; and criminal felony convictions. This disclosure is a continuing obligation and must be promptly supplemented for accuracy throughout the procurement process and term of the contract. If no person is identified, enter "None" on the line below:

Name of person(s): _____

Nature of disclosure: _____

APPLICABLE STATEMENT

This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on previous page. Under penalty of perjury, I certify the contents of this disclosure to be true and accurate to the best of my knowledge.

Completed by: _____
Signature of Individual or Authorized Representative Date

NOT APPLICABLE STATEMENT

Under penalty of perjury, I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A.

This Disclosure Form A is submitted on behalf of the CONTRACTOR listed on the previous page.

Signature of Authorized Representative Date

The bidder has a continuing obligation to supplement these disclosures under Sec. 50-35 of the Code.

RETURN WITH BID

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form B Other Contracts & Financial Related Information Disclosure

Contractor Name, Legal Address, City, State, Zip, Telephone Number, Email Address, Fax Number (if available)

Disclosure of the information contained in this Form is required by Section 50-35 of the Code (30 ILCS 500). This information shall become part of the publicly available contract file. This Form B must be completed for all bids.

DISCLOSURE OF OTHER CONTRACTS AND PROCUREMENT RELATED INFORMATION

1. Identifying Other Contracts & Procurement Related Information. The BIDDER shall identify whether it has any pending contracts (including leases), bids, proposals, or other ongoing procurement relationship with any other State of Illinois agency: Yes ___ No ___

If "No" is checked, the bidder only needs to complete the signature box on this page.

2. If "Yes" is checked. Identify each such relationship by showing State of Illinois agency name and other descriptive information such as bid or project number (attach additional pages as necessary). SEE DISCLOSURE FORM INSTRUCTIONS:

THE FOLLOWING STATEMENT MUST BE CHECKED

Signature of Authorized Representative, Date

OWNERSHIP CERTIFICATION

Please certify that the following statement is true if the individuals for all submitted Form A disclosures do not total 100% of ownership.

Any remaining ownership interest is held by individuals receiving less than \$106,447.20 of the bidding entity's or parent entity's distributive income or holding less than a 5% ownership interest.

Yes No N/A (Form A disclosure(s) established 100% ownership)

RETURN WITH BID

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights Act are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Title 44, Illinois Administrative Code, Section 750.120. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.

RETURN WITH BID

**Contract No. 60W30
COOK County
Section 2013-012R
Project ACNHPP-000V(011)
Route FAI 90/94
District 1 Construction Funds**

PART II. WORKFORCE PROJECTION - continued

- B. Included in "Total Employees" under Table A is the total number of **new hires** that would be employed in the event the undersigned bidder is awarded this contract.

The undersigned bidder projects that: (number) _____ new hires would be recruited from the area in which the contract project is located; and/or (number) _____ new hires would be recruited from the area in which the bidder's principal office or base of operation is located.

- C. Included in "Total Employees" under Table A is a projection of numbers of persons to be employed directly by the undersigned bidder as well as a projection of numbers of persons to be employed by subcontractors.

The undersigned bidder estimates that (number) _____ persons will be directly employed by the prime contractor and that (number) _____ persons will be employed by subcontractors.

PART III. AFFIRMATIVE ACTION PLAN

- A. The undersigned bidder understands and agrees that in the event the foregoing minority and female employee utilization projection included under **PART II** is determined to be an underutilization of minority persons or women in any job category, and in the event that the undersigned bidder is awarded this contract, he/she will, prior to commencement of work, develop and submit a written Affirmative Action Plan including a specific timetable (geared to the completion stages of the contract) whereby deficiencies in minority and/or female employee utilization are corrected. Such Affirmative Action Plan will be subject to approval by the contracting agency and the **Illinois Department of Human Rights**.
- B. The undersigned bidder understands and agrees that the minority and female employee utilization projection submitted herein, and the goals and timetable included under an Affirmative Action Plan if required, are deemed to be part of the contract specifications.

Company _____ Telephone Number _____

Address _____

NOTICE REGARDING SIGNATURE

The Bidder's signature on the Proposal Signature Sheet will constitute the signing of this form. The following signature block needs to be completed only if revisions are required.

Signature: _____ Title: _____ Date: _____

- Instructions: All tables must include subcontractor personnel in addition to prime contractor personnel.
- Table A - Include both the number of employees that would be hired to perform the contract work and the total number currently employed (Table B) that will be allocated to contract work, and include all apprentices and on-the-job trainees. The "Total Employees" column should include all employees including all minorities, apprentices and on-the-job trainees to be employed on the contract work.
 - Table B - Include all employees currently employed that will be allocated to the contract work including any apprentices and on-the-job trainees currently employed.
 - Table C - Indicate the racial breakdown of the total apprentices and on-the-job trainees shown in Table A.

RETURN WITH BID

ADDITIONAL FEDERAL REQUIREMENTS

In addition to the Required Contract Provisions for Federal-Aid Construction Contracts (FHWA 1273), all bidders make the following certifications.

- A. By the execution of this proposal, the signing bidder certifies that the bidding entity has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with the submitted bid. This statement made by the undersigned bidder is true and correct under penalty of perjury under the laws of the United States.
- B. CERTIFICATION, EQUAL EMPLOYMENT OPPORTUNITY:
1. Have you participated in any previous contracts or subcontracts subject to the equal opportunity clause. YES _____ NO _____
 2. If answer to #1 is yes, have you filed with the Joint Reporting Committee, the Director of OFCC, any Federal agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements of those organizations?
YES _____ NO _____

RETURN WITH BID

**Contract No. 60W30
COOK County
Section 2013-012R
Project ACNHPP-000V(011)
Route FAI 90/94
District 1 Construction Funds**

PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

(IF AN INDIVIDUAL)

Firm Name _____
Signature of Owner _____
Business Address _____

(IF A CO-PARTNERSHIP)

Firm Name _____
By _____
Business Address _____
Name and Address of All Members of the Firm:

(IF A CORPORATION)

Corporate Name _____
By _____
Signature of Authorized Representative _____
Typed or printed name and title of Authorized Representative _____
Attest _____
Signature _____
(IF A JOINT VENTURE, USE THIS SECTION FOR THE MANAGING PARTY AND THE SECOND PARTY SHOULD SIGN BELOW)
Business Address _____

(IF A JOINT VENTURE)

Corporate Name _____
By _____
Signature of Authorized Representative _____
Typed or printed name and title of Authorized Representative _____
Attest _____
Signature _____
Business Address _____

If more than two parties are in the joint venture, please attach an additional signature sheet.



This Annual Proposal Bid Bond shall become effective at 12:01 AM (CDST) on _____ and shall be valid until _____ 11:59 PM (CDST).

KNOW ALL PERSONS BY THESE PRESENTS, That We _____

as PRINCIPAL, and _____

as SURETY, and held jointly, severally and firmly bound unto the STATE OF ILLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in the bid proposal under "Proposal Guaranty" in effect on the date of the Invitation for Bids, whichever is the lesser sum, well and truly to be paid unto said STATE OF ILLINOIS, for the payment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.

THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that whereas, the PRINCIPAL may submit bid proposal(s) to the STATE OF ILLINOIS, acting through the Department of Transportation, for various improvements published in the Transportation Bulletin during the effective term indicated above.

NOW, THEREFORE, if the Department shall accept the bid proposal(s) of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in the bidding and contract documents; and if, after award by the Department, the PRINCIPAL shall enter into a contract in accordance with the terms of the bidding and contract documents including evidence of the required insurance coverages and providing such bond as specified with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof; or if, in the event of the failure of the PRINCIPAL to enter into such contract and to give the specified bond, the PRINCIPAL pays to the Department the difference not to exceed the penalty hereof between the amount specified in the bid proposal and such larger amount for which the Department may contract with another party to perform the work covered by said bid proposal, then this obligation shall be null and void, otherwise, it shall remain in full force and effect.

IN THE EVENT the Department determines the PRINCIPAL has failed to comply with any requirement as set forth in the preceding paragraph, then Surety shall pay the penal sum to the Department within fifteen (15) days of written demand therefor. If Surety does not make full payment within such period of time, the Department may bring an action to collect the amount owed. Surety is liable to the Department for all its expenses, including attorney's fees, incurred in any litigation in which it prevails either in whole or in part.

In TESTIMONY WHEREOF, the said PRINCIPAL has caused this instrument to be signed by its officer _____ day of _____ A.D., _____

In TESTIMONY WHEREOF, the said SURETY has caused this instrument to be signed by its officer _____ day of _____ A.D., _____

(Company Name)

(Company Name)

By _____
(Signature and Title)

By _____
(Signature of Attorney-in-Fact)

Notary for PRINCIPAL

Notary for SURETY

STATE OF _____
COUNTY OF _____

STATE OF _____
COUNTY OF _____

Signed and attested before me on _____ (date)

Signed and attested before me on _____ (date)

by _____
(Name of Notary Public)

by _____
(Name of Notary Public)

(Seal) _____
(Signature of Notary Public)

(Seal) _____
(Signature of Notary Public)

(Date Commission Expires)

(Date Commission Expires)

In lieu of completing the above section of the Annual Proposal Bid Bond form, the Principal may file an Electronic Bid Bond. By signing the proposal(s) the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the State of Illinois under the conditions of the bid bond as shown above.

Electronic Bid Bond ID #	Company/Bidder Name	Signature and Title
--------------------------	---------------------	---------------------

This bond may be terminated, at Surety's request, upon giving not less than thirty (30) days prior written notice of the cancellation/termination of the bond. Said written notice shall be issued to the Illinois Department of Transportation, Chief Contracts Official, 2300 South Dirksen Parkway, Springfield, Illinois, 62764, and shall be served in person, by receipted courier delivery or certified or registered mail, return receipt requested. Said notice period shall commence on the first calendar day following the Department's receipt of written cancellation/termination notice. Surety shall remain firmly bound to all obligations herein for proposals submitted prior to the cancellation/termination. Surety shall be released and discharged from any obligation(s) for proposals submitted for any letting or date after the effective date of cancellation/termination.



Return with Bid

Division of Highways
Proposal Bid Bond

Item No. _____

Letting Date _____

KNOW ALL PERSONS BY THESE PRESENTS, That We _____

as PRINCIPAL, and _____

as SURETY, and held jointly, severally and firmly bound unto the STATE OF ILLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in the bid proposal under "Proposal Guaranty" in effect on the date of the Invitation for Bids, whichever is the lesser sum, well and truly to be paid unto said STATE OF ILLINOIS, for the payment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.

THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF ILLINOIS, acting through the Department of Transportation, for the improvement designated by the Transportation Bulletin Item Number and Letting Date indicated above.

NOW, THEREFORE, if the Department shall accept the bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in the bidding and contract documents; and if, after award by the Department, the PRINCIPAL shall enter into a contract in accordance with the terms of the bidding and contract documents including evidence of the required insurance coverages and providing such bond as specified with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof; or if, in the event of the failure of the PRINCIPAL to enter into such contract and to give the specified bond, the PRINCIPAL pays to the Department the difference not to exceed the penalty hereof between the amount specified in the bid proposal and such larger amount for which the Department may contract with another party to perform the work covered by said bid proposal, then this obligation shall be null and void, otherwise, it shall remain in full force and effect.

IN THE EVENT the Department determines the PRINCIPAL has failed to comply with any requirement as set forth in the preceding paragraph, then Surety shall pay the penal sum to the Department within fifteen (15) days of written demand therefor. If Surety does not make full payment within such period of time, the Department may bring an action to collect the amount owed. Surety is liable to the Department for all its expenses, including attorney's fees, incurred in any litigation in which it prevails either in whole or in part.

In TESTIMONY WHEREOF, the said PRINCIPAL has caused this instrument to be signed by its officer _____ day of _____ A.D., _____

In TESTIMONY WHEREOF, the said SURETY has caused this instrument to be signed by its officer _____ day of _____ A.D., _____

(Company Name)

(Company Name)

By _____ (Signature and Title)

By _____ (Signature of Attorney-in-Fact)

Notary for PRINCIPAL

Notary for SURETY

STATE OF _____
COUNTY OF _____

STATE OF _____
COUNTY OF _____

Signed and attested before me on _____ (date)
by _____

Signed and attested before me on _____ (date)
by _____

(Name of Notary Public)

(Name of Notary Public)

(Seal) _____ (Signature of Notary Public)

(Seal) _____ (Signature of Notary Public)

(Date Commission Expires)

(Date Commission Expires)

In lieu of completing the above section of the Proposal Bid Bond form, the Principal may file an Electronic Bid Bond. By signing the proposal the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the State of Illinois under the conditions of the bid bond as shown above.

Electronic Bid Bond ID # _____ Company/Bidder Name _____ Signature and Title _____

(1) Policy

It is public policy that disadvantageded businesses as defined in 49 CFR Part 26 and the Special Provision shall have the maximum opportunity to participate in the performance of contracts financed in whole or in part with Federal or State funds. Consequently the requirements of 49 CFR Part 26 apply to this contract.

(2) Obligation

The contractor agrees to ensure that disadvantageded businesses as defined in 49 CFR Part 26 and the Special Provision have the maximum opportunity to participate in the performance of contracts or subcontracts financed in whole or in part with Federal or State funds. The contractor shall take all necessary and reasonable steps in accordance with 49 CFR Part 26 and the Special Provision to ensure that said businesses have the maximum opportunity to compete for and perform under this contract. The contractor shall not discriminate on the basis of race, color, national origin or sex in the award and performance of contracts.

(3) Project and Bid Identification

Complete the following information concerning the project and bid:

Route _____	Total Bid _____
Section _____	Contract DBE Goal _____ (Percent) _____ (Dollar Amount)
Project _____	
County _____	
Letting Date _____	
Contract No. _____	
Letting Item No. _____	

(4) Assurance

I, acting in my capacity as an officer of the undersigned bidder (or bidders if a joint venture), hereby assure the Department that on this project my company : (check one)

- Meets or exceeds contract award goals and has provided documented participation as follows:
Disadvantaged Business Participation _____ percent

Attached are the signed participation statements, forms SBE 2025, required by the Special Provision evidencing availability and use of each business participating in this plan and assuring that each business will perform a commercially useful function in the work of the contract.

- Failed to meet contract award goals and has included good faith effort documentation to meet the goals and that my company has provided participation as follows:

Disadvantaged Business Participation _____ percent

The contract goals should be accordingly modified or waived. Attached is all information required by the Special Provision in support of this request including good faith effort. Also attached are the signed participation statements, forms SBE 2025, required by the Special Provision evidencing availability and use of each business participating in this plan and assuring that each business will perform a commercially useful function in the work of the contract.

Company

By _____

Title _____

Date _____

The "as read" Low Bidder is required to comply with the Special Provision.

Submit only one utilization plan for each project. The utilization plan shall be submitted in accordance with the special provision.

Bureau of Small Business Enterprises **Local Let Projects**
2300 South Dirksen Parkway Submit forms to the
Springfield, Illinois 62764 Local Agency

The Department of Transportation is requesting disclosure of information that is necessary to accomplish the purpose as outlined under State and Federal law. Disclosure of this information is **REQUIRED**. Failure to provide any information will result in the contract not being awarded. This form has been approved by the State Forms Manager Center.



**Illinois Department
of Transportation**

DBE Participation Statement

Subcontractor Registration Number _____

Letting _____

Participation Statement

Item No. _____

(1) Instructions

Contract No. _____

This form must be completed for each disadvantaged business participating in the Utilization Plan. This form shall be submitted in accordance with the special provision and will be attached to the Utilization Plan form. If additional space is needed complete an additional form for the firm.

(2) Work:

Please indicate: J/V _____ Manufacturer _____ Supplier (60%) _____ Subcontractor _____ Trucking _____

Pay Item No.	Description	Quantity	Unit Price	Total
Total				

(3) Partial Payment Items (For any of the above items which are partial pay items)
Description must be sufficient to determine a Commercially Useful Function, specifically describe the work and subcontract dollar amount:

(4) Commitment

When a DBE is to be a second-tier subcontractor, or if the first-tier DBE subcontractor is going to be subcontracting a portion of its subcontract, it must be clearly indicated on the DBE Participation Statement, and the details of the transaction fully explained.

In the event a DBE subcontractor second-tiers a portion of its subcontract to one or more subcontractors during the work of a contract, the prime must submit a DBE Participation Statement, with the details of the transaction(s) fully explained.

The undersigned certify that the information included herein is true and correct, and that the DBE firm listed below has agreed to perform a commercially useful function in the work of the contract item(s) listed above and to execute a contract with the prime contractor or 1st Tier subcontractor. The undersigned further understand that no changes to this statement may be made without prior approval from the Department's Bureau of Small Business Enterprises and that complete and accurate information regarding actual work performed on this project and the payment therefore must be provided to the Department.

Signature for Contractor __ 1st Tier __ 2nd Tier

Signature for DBE Firm __ 1st Tier __ 2nd Tier

Title _____

Title _____

Date _____

Date _____

Contact Person _____

Contact Person _____

Phone _____

Phone _____

Firm Name _____

Firm Name _____

Address _____

Address _____

City/State/Zip _____

City/State/Zip _____

E _____

WC _____

The Department of Transportation is requesting disclosure of information that is necessary to accomplish the statutory purpose as outlined under the state and federal law. Disclosure of this information is **REQUIRED**. Failure to provide any information will result in the contract not being awarded. This form has been approved by the State Forms Management Center.

PROPOSAL ENVELOPE



PROPOSALS

for construction work advertised for bids by the
Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:
Address:
Phone No.

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 326
Illinois Department of Transportation
2300 South Dirksen Parkway
Springfield, Illinois 62764

NOTICE

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

**Contract No. 60W30
COOK County
Section 2013-012R
Project ACNHPP-000V(011)
Route FAI 90/94
District 1 Construction Funds**



Illinois Department of Transportation

SUBCONTRACTOR DOCUMENTATION

Public Acts 96-0795, 96-0920, and 97-0895 enacted substantial changes to the provisions of the Code (30 ILCS 500). Among the changes are provisions affecting subcontractors. The Contractor awarded this contract will be required as a material condition of the contract to implement and enforce the contract requirements applicable to subcontractors that entered into a contractual agreement with a total value of \$50,000 or more with a person or entity who has a contract subject to the Code and approved in accordance with article 108.01 of the Standard Specifications for Road and Bridge Construction.

If the Contractor seeks approval of subcontractors to perform a portion of the work, and approval is granted by the Department, the Contractor shall provide a copy of the subcontract to the Illinois Department of Transportation's CPO upon request within 15 calendar days after execution of the subcontract.

Financial disclosures required pursuant to Sec. 50-35 of the Code must be submitted for all applicable subcontractors. The subcontract shall contain the certifications required to be made by subcontractors pursuant to Article 50 of the Code. This Notice to Bidders includes a document incorporating all required subcontractor certifications and disclosures for use by the Contractor in compliance with this mandate. The document is entitled State Required Ethical Standards Governing Subcontractors.

RETURN WITH SUBCONTRACT

STATE ETHICAL STANDARDS GOVERNING SUBCONTRACTORS

Article 50 of the Code establishes the duty of all State CPOs, SPOs, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.

The certifications hereinafter made by the subcontractor are each a material representation of fact upon which reliance is placed should the Department approve the subcontractor. The CPO may terminate or void the contract approval if it is later determined that the bidder or subcontractor rendered a false or erroneous certification. If a false certification is made by a subcontractor the contractor's submitted bid and the executed contract may not be declared void unless the contractor refuses to terminate the subcontract upon the State's request after a finding that the subcontractor's certification was false.

Section 50-2 of the Code provides that every person that has entered into a multi-year contract and every subcontractor with a multi-year subcontract shall certify, by July 1 of each fiscal year covered by the contract after the initial fiscal year, to the responsible CPO whether it continues to satisfy the requirements of Article 50 pertaining to the eligibility for a contract award. If a contractor or subcontractor is not able to truthfully certify that it continues to meet all requirements, it shall provide with its certification a detailed explanation of the circumstances leading to the change in certification status. A contractor or subcontractor that makes a false statement material to any given certification required under Article 50 is, in addition to any other penalties or consequences prescribed by law, subject to liability under the Whistleblower Reward and Protection Act for submission of a false claim.

A. Bribery

Section 50-5. Bribery.

(a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:

(1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or

(2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.

(b) Businesses. No business shall be barred from contracting with any unit of State or local government, or subcontracting under such a contract, as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:

(1) the business has been finally adjudicated not guilty; or

(2) the business demonstrates to the governmental entity with which it seeks to contract, or which is signatory to the contract to which the subcontract relates, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 2012.

(c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.

(d) Certification. Every bid submitted to and contract executed by the State, and every subcontract subject to Section 20-120 of the Code shall contain a certification by the contractor or the subcontractor, respectively, that the contractor or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO may declare the related contract void if any certifications required by this Section are false. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

The contractor or subcontractor certifies that it is not barred from being awarded a contract under Section 50-5.

B. Felons

Section 50-10. Felons.

(a) Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any State agency, or enter into a subcontract, from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

(b) Certification. Every bid submitted to and contract executed by the State and every subcontract subject to Section 20-120 of the Code shall contain a certification by the bidder or contractor or subcontractor, respectively, that the bidder, contractor, or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO may declare the related contract void if any of the certifications required by this Section are false.

RETURN WITH SUBCONTRACT

C. Debt Delinquency

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder or subcontractor, respectively, certifies that it, or any affiliate, is not barred from being awarded a contract or subcontract under the Code. Section 50-11 prohibits a person from entering into a contract with a State agency, or entering into a subcontract, if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency, or entering into a subcontract, if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The bidder or contractor or subcontractor, respectively, further acknowledges that the CPO may declare the related contract void if this certification is false or if the bidder, contractor, or subcontractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

D. Prohibited Bidders, Contractors and Subcontractors

Section 50-10.5 and 50-60(c). Prohibited bidders, contractors and subcontractors.

The bidder or contractor or subcontractor, respectively, certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 or if in violation of Subsection (c) for a period of five years from the date of conviction. Every bid submitted to and contract executed by the State and every subcontract subject to Section 20-120 of the Code shall contain a certification by the bidder, contractor, or subcontractor, respectively, that the bidder, contractor, or subcontractor is not barred from being awarded a contract or subcontract under this Section and acknowledges that the CPO shall declare the related contract void if any of the certifications completed pursuant to this Section are false.

E. Section 42 of the Environmental Protection Act

The bidder or contractor or subcontractor, respectively, certifies in accordance with 30 ILCS 500/50-14 that the bidder, contractor, or subcontractor, is not barred from being awarded a contract or entering into a subcontract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency, or entering into any subcontract, that is subject to the Code by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The bidder or contractor or subcontractor, respectively, acknowledges that the CPO may declare the contract void if this certification is false.

The undersigned, on behalf of the subcontracting company, has read and understands the above certifications and makes the certifications as required by law.

<hr/>		
Name of Subcontracting Company		
<hr/>		<hr/>
Authorized Officer		Date

RETURN WITH SUBCONTRACT
SUBCONTRACTOR DISCLOSURES

I. DISCLOSURES

- A.** The disclosures hereinafter made by the subcontractor are each a material representation of fact upon which reliance is placed. The subcontractor further certifies that the Department has received the disclosure forms for each subcontract.

The CPO may void the bid, contract, or subcontract, respectively, if it is later determined that the bidder or subcontractor rendered a false or erroneous disclosure. A contractor or subcontractor may be suspended or debarred for violations of the Code. Furthermore, the CPO may void the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Code provides that all subcontracts with a total value of \$50,000 or more, from subcontractors identified in Section 20-120 of the Code, shall be accompanied by disclosure of the financial interests of the subcontractor. This disclosed information for the subcontractor, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act, filed with the Procurement Policy Board, and shall be incorporated as a material term of the Prime Contractor's contract. Furthermore, pursuant to this Section, the Procurement Policy Board may recommend to allow or void a contract or subcontract based on a potential conflict of interest.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the subcontracting entity or its parent entity, whichever is less, unless the subcontractor is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a subcontractor is a privately held entity that is exempt from Federal 10K reporting, but has more than 100 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any individual or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each individual making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each individual making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

The current annual salary of the Governor is \$177,412.00.

In addition, all disclosures shall indicate any other current or pending contracts, subcontracts, proposals, leases, or other ongoing procurement relationships the subcontracting entity has with any other unit of state government and shall clearly identify the unit and the contract, subcontract, proposal, lease, or other relationship.

2. Disclosure Forms. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. A separate Disclosure Form A must be submitted with the bid for each individual meeting the above requirements. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies and a total ownership certification. **The forms must be included with each bid.**

C. Disclosure Form Instructions

Form A Instructions for Financial Information & Potential Conflicts of Interest

If the subcontractor is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a subcontractor is a privately held entity that is exempt from Federal 10K reporting, but has more than 100 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any individual or entity holding any ownership share that is in excess of 5%. If a subcontractor is not subject to Federal 10K reporting, the subcontractor must determine if any individuals are required by law to complete a financial disclosure form. To do this, the subcontractor should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the **NOT APPLICABLE STATEMENT** on the second page of Form A must be signed and dated by an individual that is authorized to execute contracts for the subcontracting company. Note: These questions are for assistance only and are not required to be completed.

1. Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES ___ NO ___
2. Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than 60% of the annual salary of the Governor? YES ___ NO ___
3. Does anyone in your organization receive more than 60% of the annual salary of the Governor of the subcontracting entity's or parent entity's distributive income? YES ___ NO ___

(Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.)

4. Does anyone in your organization receive greater than 5% of the subcontracting entity's or parent entity's total distributive income, but which is less than 60% of the annual salary of the Governor? YES ___ NO ___

(Note: Only one set of forms needs to be completed per individual per subcontract even if a specific individual would require a yes answer to more than one question.)

A "YES" answer to any of these questions requires the completion of Form A. The subcontractor must determine each individual in the subcontracting entity or the subcontracting entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by an individual that is authorized to execute contracts for your organization. The individual signing can be, but does not have to be, the individual for which the form is being completed. The subcontractor is responsible for the accuracy of any information provided.

If the answer to each of the above questions is "NO", then the **NOT APPLICABLE STATEMENT** on page 2 of Form A must be signed and dated by an individual that is authorized to execute contracts for your company.

RETURN WITH SUBCONTRACT

Form B: Instructions for Identifying Other Contracts & Procurement Related Information

Disclosure Form B must be completed for each subcontract submitted by the subcontracting entity. *Note: Checking the NOT APPLICABLE STATEMENT on Form A does not allow the subcontractor to ignore Form B. Form B must be completed, checked, and dated or the subcontract will not be approved.*

The Subcontractor shall identify, by checking Yes or No on Form B, whether it has any pending contracts, subcontracts, leases, bids, proposals, or other ongoing procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the subcontractor only needs to complete the check box on the bottom of Form B. If "Yes" is checked, the subcontractor must list all non-IDOT State of Illinois agency pending contracts, subcontracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an attached sheet(s). Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts and are not to be included. Contracts or subcontracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development Board must be included.

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form A Subcontractor: Financial Information & Potential Conflicts of Interest Disclosure

Subcontractor Name, Legal Address, City, State, Zip, Telephone Number, Email Address, Fax Number (if available)

Disclosure of the information contained in this Form is required by Section 50-35 of the Code (30 ILCS 500). Subcontractors desiring to enter into a subcontract of a State of Illinois contract must disclose the financial information and potential conflict of interest information as specified in this Disclosure Form.

The current annual salary of the Governor is \$177,412.00.

DISCLOSURE OF FINANCIAL INFORMATION

1. Disclosure of Financial Information. The individual named below has an interest in the SUBCONTRACTOR (or its parent) in terms of ownership or distributive income share in excess of 5%, or an interest which has a value of more than 60% of the annual salary of the Governor.

FOR INDIVIDUAL (type or print information) NAME: ADDRESS Type of ownership/distributable income share: stock sole proprietorship Partnership other: (explain on separate sheet): % or \$ value of ownership/distributable income share:

2. Disclosure of Potential Conflicts of Interest. Check "Yes" or "No" to indicate which, if any, of the following potential conflict of interest relationships apply. If the answer to any question is "Yes", please attach additional pages and describe.

(a) State employment, currently or in the previous 3 years, including contractual employment of services. Yes ___ No ___

If your answer is yes, please answer each of the following questions.

1. Are you currently an officer or employee of either the Capitol Development Board or the Illinois State Toll Highway Authority? Yes ___ No ___

2. Are you currently appointed to or employed by any agency of the State of Illinois? If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor, provide the name the State agency for which you are employed and your annual salary.

RETURN WITH SUBCONTRACT

3. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor, are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 100% of the annual salary of the Governor?
Yes ___ No ___

4. If you are currently appointed to or employed by any agency of the State of Illinois, and your annual salary exceeds 60% of the annual salary of the Governor, are you and your spouse or minor children entitled to receive (i) more than 15 % in the aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of two times the salary of the Governor?
Yes ___ No ___

(b) State employment of spouse, father, mother, son, or daughter, including contractual employment services in the previous 2 years.

Yes ___ No ___

If your answer is yes, please answer each of the following questions.

1. Is your spouse or any minor children currently an officer or employee of the Capitol Development Board or the Illinois State Toll Highway Authority?
Yes ___ No ___

2. Is your spouse or any minor children currently appointed to or employed by any agency of the State of Illinois? If your spouse or minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, provide the name of your spouse and/or minor children, the name of the State agency for which he/she is employed and his/her annual salary. _____

3. If your spouse or any minor children is/are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, are you entitled to receive (i) more than 7 1/2% of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of 100% of the annual salary of the Governor?
Yes ___ No ___

4. If your spouse or any minor children are currently appointed to or employed by any agency of the State of Illinois, and his/her annual salary exceeds 60% of the annual salary of the Governor, are you and your spouse or minor children entitled to receive (i) more than 15 % in the aggregate of the total distributable income of your firm, partnership, association or corporation, or (ii) an amount in excess of two times the salary of the Governor?
Yes ___ No ___

(c) Elective status; the holding of elective office of the State of Illinois, the government of the United States, any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois currently or in the previous 3 years.
Yes ___ No ___

(d) Relationship to anyone holding elective office currently or in the previous 2 years; spouse, father, mother, son, or daughter.
Yes ___ No ___

(e) Appointive office; the holding of any appointive government office of the State of Illinois, the United States of America, or any unit of local government authorized by the Constitution of the State of Illinois or the statutes of the State of Illinois, which office entitles the holder to compensation in excess of the expenses incurred in the discharge of that office currently or in the previous 3 years.
Yes ___ No ___

(f) Relationship to anyone holding appointive office currently or in the previous 2 years; spouse, father, mother, son, or daughter.
Yes ___ No ___

(g) Employment, currently or in the previous 3 years, as or by any registered lobbyist of the State government.
Yes ___ No ___

RETURN WITH SUBCONTRACT

(h) Relationship to anyone who is or was a registered lobbyist in the previous 2 years; spouse, father, mother, son, or daughter. Yes ___ No ___

(i) Compensated employment, currently or in the previous 3 years, by any registered election or reelection committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

(j) Relationship to anyone; spouse, father, mother, son, or daughter; who was a compensated employee in the last 2 years by any registered election or re-election committee registered with the Secretary of State or any county clerk of the State of Illinois, or any political action committee registered with either the Secretary of State or the Federal Board of Elections. Yes ___ No ___

3 Communication Disclosure.

Disclose the name and address of each lobbyist and other agent of the bidder or offeror who is not identified in Section 2 of this form, who is has communicated, is communicating, or may communicate with any State officer or employee concerning the bid or offer. This disclosure is a continuing obligation and must be promptly supplemented for accuracy throughout the process and throughout the term of the contract. If no person is identified, enter "None" on the line below:

Name and address of person(s): _____

RETURN WITH SUBCONTRACT

4. Debarment Disclosure. For each of the persons identified under Sections 2 and 3 of this form, disclose whether any of the following has occurred within the previous 10 years: debarment from contracting with any governmental entity; professional licensure discipline; bankruptcies; adverse civil judgments and administrative findings; and criminal felony convictions. This disclosure is a continuing obligation and must be promptly supplemented for accuracy throughout the procurement process and term of the contract. If no person is identified, enter "None" on the line below:

Name of person(s): _____

Nature of disclosure: _____

APPLICABLE STATEMENT

This Disclosure Form A is submitted on behalf of the INDIVIDUAL named on previous page. Under penalty of perjury, I certify the contents of this disclosure to be true and accurate to the best of my knowledge.

Completed by: _____ Date _____
Signature of Individual or Authorized Officer

NOT APPLICABLE STATEMENT

Under penalty of perjury, I have determined that no individuals associated with this organization meet the criteria that would require the completion of this Form A.

This Disclosure Form A is submitted on behalf of the SUBCONTRACTOR listed on the previous page.

_____ Date _____
Signature of Authorized Officer

RETURN WITH SUBCONTRACT

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form B
Subcontractor: Other Contracts & Financial Related Information Disclosure

Form with fields: Subcontractor Name, Legal Address, City, State, Zip, Telephone Number, Email Address, Fax Number (if available)

Disclosure of the information contained in this Form is required by Section 50-35 of the Code (30 ILCS 500). This information shall become part of the publicly available contract file.

DISCLOSURE OF OTHER CONTRACTS, SUBCONTRACTS, AND PROCUREMENT RELATED INFORMATION

1. Identifying Other Contracts & Procurement Related Information. The SUBCONTRACTOR shall identify whether it has any pending contracts, subcontracts, including leases, bids, proposals, or other ongoing procurement relationship with any other State of Illinois agency: Yes ___ No ___
If "No" is checked, the subcontractor only needs to complete the signature box on this page.

2. If "Yes" is checked. Identify each such relationship by showing State of Illinois agency name and other descriptive information such as bid or project number (attach additional pages as necessary). SEE DISCLOSURE FORM INSTRUCTIONS:

THE FOLLOWING STATEMENT MUST BE CHECKED

Signature box with fields for Signature of Authorized Officer and Date

OWNERSHIP CERTIFICATION

Please certify that the following statement is true if the individuals for all submitted Form A disclosures do not total 100% of ownership

Any remaining ownership interest is held by individuals receiving less than \$106,447.20 of the bidding entity's or parent entity's distributive income or holding less than a 5% ownership interest.

Yes No N/A (Form A disclosure(s) established 100% ownership)



NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS.** Sealed proposals for the improvement described herein will be received by the Department of Transportation. Electronic bids are to be submitted to the electronic bidding system (iCX-Integrated Contractors Exchange). Paper-based bids are to be submitted to the Chief Procurement Officer for the Department of Transportation in care of the Chief Contracts Official at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 a.m. March 6, 2015. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after 10:00 a.m.
- 2. DESCRIPTION OF WORK.** The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

**Contract No. 60W30
COOK County
Section 2013-012R
Project ACNHPP-000V(011)
Route FAI 90/94
District 1 Construction Funds**

Rehabilitation and widening of the bridge carrying Taylor St. over I-90/94 also rehabilitation of the entrance ramp NB structure and retaining wall all located along I-90/94 in Chicago (SN 016-1165).

- 3. INSTRUCTIONS TO BIDDERS.** (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.

(b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS.** This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the
Illinois Department of Transportation

Randall S. Blankenhorn,
Acting Secretary

INDEX
 FOR
 SUPPLEMENTAL SPECIFICATIONS
 AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2015

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS, frequently used RECURRING SPECIAL PROVISIONS, and LOCAL ROADS AND STREETS RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-12) (Revised 1-1-15)

SUPPLEMENTAL SPECIFICATIONS

<u>Std. Spec. Sec.</u>	<u>Page No.</u>
101 Definition of Terms	1
102 Advertisement, Bidding, Award, and Contract Execution	2
105 Control of Work	3
106 Control of Materials	5
107 Legal Regulations and Responsibility to Public	6
108 Prosecution and Progress	14
109 Measurement and Payment	15
202 Earth and Rock Excavation	17
211 Topsoil and Compost	19
250 Seeding	20
253 Planting Woody Plants	21
280 Temporary Erosion and Sediment Control	23
312 Stabilized Subbase	24
406 Hot-Mix Asphalt Binder and Surface Course	25
407 Hot-Mix Asphalt Pavement (Full-Depth)	28
420 Portland Cement Concrete Pavement	32
424 Portland Cement Concrete Sidewalk	34
440 Removal of Existing Pavement and Appurtenances	35
502 Excavation for Structures	36
503 Concrete Structures	37
504 Precast Concrete Structures	40
506 Cleaning and Painting New Steel Structures	41
512 Piling	42
516 Drilled Shafts	43
521 Bearings	44
540 Box Culverts	45
588 Bridge Relief Joint System	46
589 Elastic Joint Sealer	48
602 Catch Basin, Manhole, Inlet, Drainage Structure, and Valve Vault Construction, Adjustment, and Reconstruction	49
603 Adjusting Frames and Grates of Drainage and Utility Structures	50
606 Concrete Gutter, Curb, Median, and Paved Ditch	52
610 Shoulder Inlets with Curb	53
639 Precast Prestressed Concrete Sight Screen	54
642 Shoulder Rumble Strips	55
643 Impact Attenuators	56
644 High Tension Cable Median Barrier	58
669 Removal and Disposal of Regulated Substances	60
670 Engineer's Field Office and Laboratory	64
701 Work Zone Traffic Control and Protection	65
706 Impact Attenuators, Temporary	68
707 Movable Traffic Barrier	71
708 Temporary Water Filled Barrier	73
730 Wood Sign Support	75
780 Pavement Striping	76
816 Unit Duct	81
836 Pole Foundation	82

860	Master Controller	83
1001	Cement	84
1003	Fine Aggregates	85
1004	Coarse Aggregates	87
1006	Metals	91
1011	Mineral Filler	93
1017	Packaged, Dry, Combined Materials for Mortar	94
1018	Packaged Rapid Hardening Mortar or Concrete	95
1019	Controlled Low-Strength Material (CLSM)	96
1020	Portland Cement Concrete	97
1024	Grout and Nonshrink Grout	136
1030	Hot-Mix Asphalt	137
1040	Drain Pipe, Tile, Drainage Mat, and Wall Drain	142
1042	Precast Concrete Products	143
1069	Pole and Tower	144
1070	Foundation and Breakaway Devices	145
1073	Controller	146
1081	Materials for Planting	147
1082	Preformed Bearing Pads	148
1083	Elastomeric Bearings	149
1088	Wireway and Conduit System	150
1095	Pavement Markings	152
1101	General Equipment	155
1102	Hot-Mix Asphalt Equipment	157
1103	Portland Cement Concrete Equipment	159
1105	Pavement Marking Equipment	160
1106	Work Zone Traffic Control Devices	161

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

<u>CHECK SHEET #</u>		<u>PAGE NO.</u>
1	X Additional State Requirements for Federal-Aid Construction Contracts	163
2	X Subletting of Contracts (Federal-Aid Contracts)	166
3	X EEO	167
4	Specific EEO Responsibilities Non Federal-Aid Contracts	177
5	Required Provisions - State Contracts	182
6	Asbestos Bearing Pad Removal	188
7	Asbestos Waterproofing Membrane and Asbestos HMA Surface Removal	189
8	Temporary Stream Crossings and In-Stream Work Pads	190
9	Construction Layout Stakes Except for Bridges	191
10	X Construction Layout Stakes	194
11	Use of Geotextile Fabric for Railroad Crossing	197
12	Subsealing of Concrete Pavements	199
13	Hot-Mix Asphalt Surface Correction	203
14	Pavement and Shoulder Resurfacing	205
15	Reserved	206
16	Patching with Hot-Mix Asphalt Overlay Removal	207
17	Polymer Concrete	208
18	PVC Pipeliner	210
19	X Pipe Underdrains	211
20	X Guardrail and Barrier Wall Delineation	212
21	Bicycle Racks	216
22	Reserved	218
23	Temporary Portable Bridge Traffic Signals	219
24	X Work Zone Public Information Signs	221
25	X Nighttime Inspection of Roadway Lighting	222
26	English Substitution of Metric Bolts	223
27	English Substitution of Metric Reinforcement Bars	224
28	Calcium Chloride Accelerator for Portland Cement Concrete	225
29	Reserved	226
30	Quality Control of Concrete Mixtures at the Plant	227
31	X Quality Control/Quality Assurance of Concrete Mixtures	235
32	Digital Terrain Modeling for Earthwork Calculations	251
33	X Pavement Marking Removal	253
34	Preventive Maintenance – Bituminous Surface Treatment	254
35	Preventive Maintenance – Cape Seal	260
36	Preventive Maintenance – Micro-Surfacing	275
37	Preventive Maintenance – Slurry Seal	286
38	Temporary Raised Pavement Markers	296
39	Restoring Bridge Approach Pavements Using High-Density Foam	297

TABLE OF CONTENTS

LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
SOILS INFORMATION	1
CONTRACTOR COOPERATION	2
PROGRESS SCHEDULE	3
WINTER WORK.....	9
RESTRICTION ON WORKING DAYS AFTER A COMPLETION DATE	10
FAILURE TO COMPLETE THE WORK ON TIME.....	10
COMPLETION DATE PLUS WORKING DAYS.....	10
SUBMITTALS	11
STATUS OF UTILITIES TO BE ADJUSTED	12
MAINTENANCE OF ROADWAYS.....	14
TRAFFIC CONTROL PLAN.....	14
STAGING AND INTERCHANGE RESTRICTIONS	15
KEEPING THE EXPRESSWAY OPEN TO TRAFFIC	17
FAILURE TO OPEN TRAFFIC LANES TO TRAFFIC.....	19
TRAFFIC CONTROL SURVEILLANCE, EXPRESSWAYS	19
TEMPORARY INFORMATION SIGNING.....	20
TRAFFIC CONTROL FOR WORK ZONE AREAS	23
TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS).....	23
TRAFFIC CONTROL AND PROTECTION (ARTERIALS).....	27
ROAD CONSTRUCTION REPORTING AND SIGNING FOR VEHICLE WIDTH RESTRICTIONS	28
AGGREGATE FOR CONCRETE BARRIER (D-1)	30
AGGREGATE SUBGRADE IMPROVEMENT (D-1).....	31
COARSE AGGREGATE FOR BACKFILL, TRENCH BACKFILL AND BEDDING (D-1)	33
DRAINAGE AND INLET PROTECTION UNDER TRAFFIC (DISTRICT 1).....	34
EMBANKMENT I.....	35
GROUND TIRE RUBBER (GTR) MODIFIED ASPHALT BINDER (D-1).....	37
HEAT OF HYDRATION CONTROL FOR CONCRETE STRUCTURES (D-1).....	38
HMA MIXTURE DESIGN REQUIREMENTS (D-1).....	38
PUBLIC CONVENIENCE AND SAFETY (D-1).....	54

RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES (D-1)..... 55

HOT MIX ASPHALT QUALITY CONTROL FOR PERFORMANCE (BMPR) 66

HOT MIX ASPHALT QUANTITY CORRECTION (BMPR) 71

SLIPFORM PAVING (D-1)..... 71

NON-SPECIAL WASTE CERTIFICATION 72

ADJUSTMENTS AND RECONSTRUCTIONS 72

REMOVAL OF EXISTING STRUCTURES NO. 1..... 73

REMOVAL OF EXISTING STRUCTURES NO. 2..... 75

FORM LINER TEXTURED SURFACE 77

APPROACH SLAB REMOVAL 78

DRAINAGE SCUPPERS TO BE ADJUSTED..... 79

AIR QUALITY COMPLIANCE 79

CONSTRUCTION AIR QUALITY – DUST CONTROL 81

TEMPORARY PAVEMENT 83

TEMPORARY SOIL RETENTION SYSTEM 84

GATE REMOAL 86

REMOVAL OF ASBESTOS CEMENT CONDUIT..... 87

ROD AND CLEAN EXISTING CONDUIT 93

VIDEO TAPING OF MAIN DRAIN 94

MAIN DRAIN CLEANING 95

TELEVISION INSPECTION OF SEWER..... 96

DECORATIVE RAILING (PARAPET MOUNTED)..... 97

CROSSHOLE SONIC LOGGING 98

CONSTRUCTION VIBRATION MONITORING 104

PLUG EXISTING PIPE 107

COMBINED SEWER REMOVAL..... 108

SOIL RETENTION SYSTEM 108

FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS 110

COMBINATION CURB AND GUTTER TYPE B V.12 (CDOT) 112

CONCRETE CURB, TYPE B (SPECIAL) (CDOT)..... 112

DETECTABLE WARNINGS (SPECIAL) 113

CONCRETE MEDIAN SURFACE REMOVAL 113

CLEANING EXISTING SEWERS AND DRAINAGE STRUCTURES 114

CONCRETE MEDIAN SURFACE, 4 INCH (SPECIAL) 114

CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT (SPECIAL)	115
CHAIN LINK FENCE REMOVAL	115
TEMPORARY CHAIN LINK FENCE WITH SCREENING, 4'	116
ENGINEER'S FIELD OFFICE TYPE A (SPECIAL)	117
SIGN PANEL - TYPE 1 (SPECIAL)	118
TELESCOPING STEEL SIGN SUPPORT (SPECIAL)	120
TEMPORARY EPOXY PAVEMENT MARKING	120
HOT DIP GALVANIZING FOR STRUCTURAL STEEL	121
DYNAMIC MESSAGE SIGN (DMS) PROTECTION	124
GENERAL ELECTRICAL REQUIREMENTS.....	127
UNDERPASS LUMINAIRE, HPS, STAINLESS STEEL HOUSING.....	131
MAINTENANCE OF LIGHTING SYSTEMS.....	147
EXPOSED RACEWAYS	150
UNDERGROUND RACEWAYS.....	154
UNIT DUCT.....	155
WIRE AND CABLE	156
INSTALL LIGHT POLE, MAST ARM AND LUMINAIRE, CHICAGO	157
RACKING CABLES IN MANHOLE OR HANDHOLE (CDOT)	159
GROUND ROD, 3/4" DIA. X 10.0'-0" LENGTH (CDOT)	159
CABLE IN CONDUIT, TRIPLEX 2-1/C NO. 6 AND 1-1/C NO. 8 GROUND	160
UNDERGROUND CONDUIT, PVC, 2" DIA. SCHEDULE 80 (CDOT)	161
UNDERGROUND CONDUIT, PVC, 3" DIA. SCHEDULE 80 (CDOT)	161
UNDERGROUND CONDUIT, PVC, 4" DIA. SCHEDULE 80 (CDOT)	161
MAINTENANCE OF LIGHTING SYSTEM (CDOT).....	163
ELECTRICAL MANHOLE 3'X 4'X 4' WITH 30" FRAME AND LID (CDOT)	167
REMOVING MANHOLES, SPECIAL	168
INSTALL MAST ARM AND LUMINAIRE (CDOT).....	168
REMOVE AND SALVAGE EXISTING MAST ARM AND LUMINAIRE (CDOT).....	170
ELECTRIC CABLE IN CONDUIT, COMMUNICATION	171
CLEANING EXISTING MANHOLE OR HANDHOLE.....	172
REMOVAL OF TOWER FOUNDATION	173
REMOVE AND REINSTALL EXISTING MAST ARM AND LUMINAIRE (CDOT).....	173
TRAFFIC SURVEILLANCE. – GENERAL (TSC T 400#02)	174

OPERATION OF EXISTING TRAFFIC SURVEILLANCE/SPEED/COUNT STATIONS (TSC T400#03)..... 181

INDUCTION LOOP (TSC T418#1) 182

GROUNDING OF ITS SUBSYSTEMS (TSC T 420#8)..... 187

ELECTRIC CABLE NO. 19 - 6 CONDUCTORS OR 12 CONDUCTORS (TSC T421#2) 188

ELECTRICAL CABLE IN CONDUIT, 4C/NO. 18 SHIELDED LOOP LEAD-IN (TSC T 421#14) 190

LIGHTNING PROTECTION FOR INDUCTION LOOP DETECTORS (TSC T426 #13) 192

HANDHOLE (TSC T428#1) 193

TONE EQUIPMENT – PROGRAMMABLE (TSCT454#1)..... 195

TONE EQUIPMENT - POWER SUPPLY (TSCT454#2)..... 196

TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE RECEIVER (TSC-T454#3)..... 197

TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE TRANSMITTER (TSC T454#4)... 198

TONE EQUIPMENT-MOUNTING FRAME (TSC T454#7)..... 199

CABINET HOUSING EQUIPMENT, MOUNTING AND SIZE AS SPECIFIED (TSC T637#2).. 200

CONCRETE FOUNDATION (TSC T 427#01) 203

DIGITAL LOOP DETECTOR SENSOR UNIT (TSC T638#1)..... 205

INTERCEPT EXISTING CONDUIT 207

STEP-DOWN TRANSFORMER INSTALLATION IN SURVEILLANCE CABINET 208

FIBER OPTIC CABLE, SINGLE MODE..... 209

FIBER OPTIC SPLICE..... 223

MAINTAINING ITS DURING CONSTRUCTION..... 225

REMOVE EXISTING TRAFFIC SURVEILLANCE EQUIPMENT..... 227

REMOVE AND REINSTALL FIBER OPTIC CABLE IN CONDUIT 228

DRILL EXISTING HANDHOLE, HEAVY DUTY HANDHOLE OR MEDIAN WALL JUNCTION BOX 229

TEMPORARY WOOD POLE, 40 FT., CLASS 4..... 229

REMOVAL OF AERIAL CABLE 230

REMOVAL OF CABLE IN CONDUIT..... 230

ELECTRIC CABLE, AERIAL INSTALLATION, NO. 19, 25-PAIR AND NO. 19, 6/C..... 230

BUDGETARY ALLOWANCE FOR TIME-LAPSE CAMERA..... 231

FIBER OPTIC INNERDUCT 1 1/4" DIA. 231

CDOT TRAFFIC SIGNAL SPECIFICATIONS..... 233

TEMPORARY TRAFFIC SIGNAL INSTALLATION..... 233

TEMPORARY TRAFFIC SIGNAL INSTALLATION (SPECIAL)241

MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION242

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, BRACKET MOUNTED243

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, BRACKET MOUNTED243

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, MAST ARM MOUNTED ...244

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, MAST ARM MOUNTED ...244

PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, BRACKET MOUNTED WITH COUNT DOWN TIMER.....245

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT246

REMOVE EXISTING HANDHOLE247

REMOVE EXISTING CONCRETE FOUNDATION.....248

POLE, STEEL, ANCHOR BASE, 10" DIAMETER, 7 GAUGE, 34'-6" (CDOT)248

POLE, STEEL, ANCHOR BASE, 12.5" DIAMETER, 3 GAUGE, 34'-6" (CDOT).....248

JUNCTION BOX, POLE OR POST MOUNTED249

CONCRETE FOUNDATION FOR TYPE "P" BASE MOUNTED TRAFFIC SIGNAL CONTROLLER (CDOT).....250

CONCRETE FOUNDATION, 24" DIAMETER, 1 1/4" ANCHOR RODS, 15" BOLT CIRCLE, 9 FEET (CDOT)250

CONCRETE FOUNDATION, 30" DIAMETER, 1 1/2" ANCHOR RODS, 16 1/2" BOLT CIRCLE (CDOT)250

ELECTRIC CABLE IN CONDUIT, NO. 14, 19/C (CDOT)251

MANHOLE, ELECTRIC, 3'X4'X4', WITH 24" FRAME AND LID253

HARNESS CABLE, NO. 16, 8/C (CDOT)254

ADVANCED TRANSPORTATION CONTROLLER, TRAFFIC, 16 LOAD BAY, "P" CABINET (CDOT)255

ELECTRIC CABLE IN CONDUIT, NO. 42/C (CDOT)256

MAST ARM, STEEL, MONOTUBE, 35 FOOT (CDOT)257

MAST ARM, STEEL, MONOTUBE, 40 FOOT (CDOT)257

MAST ARM, STEEL, MONOTUBE, 44 FOOT (CDOT)257

ROD AND CLEAN DUCT IN EXISTING CONDUIT SYSTEM (CDOT).....260

DRILL MANHOLE OR HANDHOLE (CDOT)261

CLEAN MANHOLE OR HANDHOLE (CDOT)262

CIRCUIT BREAKER, 1 POLE, 70 AMPERE, 600 VOLT IN STREET LIGHT CONTROLLER 263

APPENDIX A – CITY OF CHICAGO DEPARTMENT OF TRANSPORTATION DIVISION OF ELECTRICAL OPERATIONS264

APPENDIX B – STORM WATER POLLUTION PREVENTION PLAN355

REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES.....370

TEMPORARY TRAFFIC SIGNAL TIMING371

CATCH BASINS TO BE RECONSTRUCTED WITH NEW TYPE 1 FRAME, OPEN LID (CITY OF CHICAGO)372

TEMPORARY CHAIN LINK FENCE WITH SCREENING372

FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS373

REMOVAL OF EXISTING STRUCTURES NO. 1.....375

CROSSHOLE SONIC LOGGING378

LOUVERS383

TEMPORARY SOIL RETENTION SYSTEM385

DECORATIVE RAILING (PARAPET MOUNTED).....388

DRAINAGE SYSTEM389

CLEANING AND PAINTING EXISTING STEEL STRUCTURES391

CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUES412

DECK SLAB REPAIR438

BRIDGE DECK LATEX CONCRETE OVERLAY.....444

DRILLED SOLDIER PILE RETAINING WALL.....454

PIPE UNDERDRAINS FOR STRUCTURES460

STRUCTURAL REPAIR OF CONCRETE462

GRANULAR BACKFILL FOR STRUCTURES.....473

BRIDGE DECK CONSTRUCTION474

COATED GALVANIZED STEEL CONDUIT (BDE).....477

COILABLE NONMETALLIC CONDUIT (BDE).....478

CONCRETE GUTTER, CURB, MEDIAN, AND PAVED DITCH (BDE)478

CONSTRUCTION AIR QUALITY – DIESEL RETROFIT (BDE)478

CONTRACT CLAIMS (BDE).....480

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE).....481

FRICTION AGGREGATE (BDE)493

HOT MIX ASPHALT – PRIME COAT (BDE)496

LRFD STORM SEWER BURIAL TABLES (BDE).....500

PAVED SHOULDER REMOVAL (BDE)509

PAVEMENT PATCHING (BDE)..... 510
PAVEMENT STRIPING - SYMBOLS (BDE)..... 510
PRECAST CONCRETE HANDHOLE (BDE)..... 511
PROGRESS PAYMENTS (BDE)..... 511
RETROREFLECTIVE SHEETING FOR HIGHWAY SIGNS (BDE)..... 512
REINFORCEMENT BARS (BDE)..... 514
SIDEWALK, CORNER, OR CROSSWALK CLOSURE (BDE)..... 515
SPEED DISPLAY TRAILER (BDE)..... 516
TEMPORARY CONCRETE BARRIER (BDE)..... 517
TRACKING THE USE OF PESTICIDES (BDE)..... 518
TRAINING SPECIAL PROVISIONS (BDE)..... 518
IDOT TRAINING PROGRAM GRADUATE ON-THE-JOB TRAINING SPECIAL PROVISION
(TPG)..... 521
UNDERPASS LUMINAIRE (BDE)..... 523
WATERWAY OBSTRUCTION WARNING LUMINAIRE (BDE)..... 524
WEEKLY DBE TRUCKING REPORTS (BDE)..... 524
STEEL COST ADJUSTMENT (BDE) (RETURN FORM WITH BID)..... 525

STATE OF ILLINOIS

SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction" adopted January 1, 2012, the latest edition of the "Manual of Uniform Traffic Control Devices for Streets and Highways, the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheets included herein which apply to and govern the construction of FAI Route 90/94 (I-90/94), Project ACNHPP-000V(011), Section 2013-012R, Cook County, Contract 60W30, and in case of conflict with any part or parts of said specifications, the said special provisions shall take precedence and shall govern.

LOCATION OF PROJECT

The project is located along Taylor Street from west of Union Avenue to west of Des Plaines Street. The gross length of the project is 690 feet (0.131 miles) and the net length of the project is 439 feet (0.083 miles).

DESCRIPTION OF PROJECT

The work consists of the reconstruction of Taylor Street from Union Avenue to Des Plaines Street and the reconstruction of the Taylor Street Bridge (SN 016-1165) over Interstate 90/94 and the NW Flyover Ramp, along with the repair and resurfacing of the NB Taylor Street Entrance Ramp Bridge (SN 016-2535).

Work includes bridge reconstruction, retaining wall construction, roadway reconstruction, erosion control and protection, special waste excavation, earth excavation and embankment, removal of existing improvements, new storm and combined sewers, curb and gutters, pavements, sidewalks, pavement marking and signage, roadway lighting, traffic signals, concrete abutments, steel furnishing and erection, bridge deck and railings, bridge repairs, bridge resurfacing, bridge painting, traffic control and protection, urban enhancements and all incidental and collateral work necessary to complete the improvements as shown on the plans and as described herein.

SOILS INFORMATION

Soil boring logs and generalized soil profiles are shown in the Plans for Taylor Street.

The reports below are available for inspection at IDOT District 1, 201 W. Center Court, Schaumburg, Illinois.

Structure Geotechnical Report
Performed for Taylor Street Bridge over Interstate 90/94
Existing SN 016-1165, Proposed SN 016-1165
Section 2013-012R
IDOT D-91-232-13, PTB 163/ITEM 001
Cook County, Illinois
Prepared by: Wang Engineering
Original: September 26, 2013
Revised: November 4, 2013

Structure Geotechnical Report
Retaining Wall 17
Proposed SN 016-1806
Section 2013-012R
IDOT D-91-227-13, PTB 163/ITEM 001
Cook County, Illinois
Prepared by: Wang Engineering
Original: August 8, 2014
Revised: November 24, 2014

CONTRACTOR COOPERATION

The Contractor's attention is directed to the fact that other separate contracts may be under construction during the duration of this Contract. Adjacent contracts may consist of, but are not limited to projects near:

- Contract 60W26 – Harrison Street Bridge (West) at I-90/94 and Halsted Street Bridge at I-290 (Circle Interchange)
- Contract 60W29 – Peoria Street Bridge at I-290 / Congress Pkwy (Circle Interchange)
- Contract 60W28 – Northwest Flyover Bridge at I-90/94 and I-290 / Congress Pkwy (Circle Interchange)
- Contract 60W71 – Harrison Street Bridge (East) at I-90/94 (Circle Interchange)
- Contract 60X61 - I-290 Mainline Outbound Lanes (WB) (Peoria St To Racine Ave)
- Future Westbound I-290 Reconstruction Project(s) Between Canal Street and Racine Avenue
- Future Eastbound I-290 Reconstruction Project(s) Between Canal Street and Loomis Street
- Bridge Painting Projects Within the I-90/94 and I-290 Corridors
- I-55 / Lake Shore Drive Interchange
- And others.

The Contractor will be governed by Article 105.08 of the Standard Specifications.

It is intended that the Contractor for Taylor Street, Contract 60W30, takes over the detour for the Taylor Street Entrance Ramp closure upon handover after the completion and release of the maintenance of the Taylor Street Entrance Ramp detour by the Contractor for Northwest Flyover Bridge Project – Contract 60W28.

This work shall include all labor, materials, transportation, handling and incidental work necessary to furnish, install, maintain and remove all traffic control devices required as indicated in the plans and as approved by the Engineer.

The Contractor shall be responsible for the repair and maintenance of the Taylor Street Entrance Ramp detour and all its related appurtenances. No extra payment will be made for systems maintenance, repairs or for damages incurred as a result of vandalism, theft or other criminal activities.

The work zone shall overlap the Contract 60W28 work zone shown on the plans and anticipated to already be in use under the 60W28 Contract. The Contractor shall provide a minimum of fifteen (15) feet wide path at all times to allow the Contract 60W28 Contractor vehicles and equipment to pass through the work zone under Contract 60W30.

The Contractor will be required to attend a weekly coordination meeting at a time and location to be determined by the Department.

The Contractor will coordinate proposed project start dates and sequence of construction with the Engineer and other Contractors to present an effective and timely schedule for successful completion of the project.

PROGRESS SCHEDULE

Description. Time is of the essence in this Contract. It may be necessary for the Contractor to work longer hours, use additional crews, and work during weekends in order to complete the work within the required time limit. The Contractor shall submit a Critical Path Method (CPM) Progress Schedule as described below for the Engineer's approval before the work can be started.

The Contractor will not be allowed any compensation for working longer hours or using extra shifts; and working on weekends or during Holidays; working during winter months, etc. to meet the specified Completion Date.

This work shall consist of preparing, revising and updating a detailed progress schedule based upon the Critical Path Method (CPM). This work shall also consist of performing time impact analysis of the progress schedule based upon the various revisions and updates as they occur.

Requirements. The software shall produce an electronic progress schedule for submission to the department that is 100% compatible with Primavera SureTrak 3.0 Project Manager, published by Primavera Systems, Inc.

Format. The electronic schedule format shall contain the following:

- a. Project Name: (Optional).
- b. Template: Construction.
- c. Type: SureTrak: Native file format for stand-alone contracts.
- d. Planning Unit: Days (calendar working).
- e. Number/Version: Original or updated number.
- f. Start Date: Not later than ten days after execution of the contract.
- g. Must Finish Date: Completion date for completion date contracts.
- h. Project Title: Contract number.
- i. Company Name: Contractor's name.

Calendars.

- a. Completion Date Contracts. The base calendar shall show the proposed working days of the week and the proposed number of work hours per day.

Schedule Development. The detailed schedule shall incorporate the entire contract time. The minimum number of activities shown on the schedule shall represent the work incorporating the pay items whose aggregate contract value constitutes 80 percent of the total contract value. These pay items shall be determined by starting with the pay item with the largest individual contract value and adding subsequent pay item contract values in descending order until 80 percent of the contract value has been attained. Any additional activities required to maintain the continuity of the schedule logic shall also be shown.

The following shall be depicted in the schedule for each activity:

- a. Activity Identification (ID) Numbers. The Contract shall utilize numerical designations to identify each activity. Numbering of activities shall be in increments of not less than ten digits.
- b. A description of the work represented by the activity (maximum forty-five characters). The use of descriptions referring to a percentage of a multi-element item (i.e., construct deck 50%) shall not be used. Separate activities shall be included to represent different elements of multi-element items (i.e., forms, reinforcing, concrete, etc.). Multiple activities with the same work description shall include a location as part of the description.
- c. Proposed activity duration shall be shown in whole days. The Contractor shall provide production rates to justify the activity duration. Schedule duration shall be contiguous and not interruptible.

The schedule shall indicate the sequence and interdependence of activities required for the prosecution of the work. The schedule logic shall not be violated.

Activities should be broken down such that each activity encompasses a single operation or tightly-integrated operations in a single, contiguous and continuous area of the project, with no activity exceeding \$200,000 without the consent of the Engineer.

Total Float shall be calculated as finish float. The schedule shall be calculated using retained logic. The Contractor shall not sequester float by calendar manipulations or extended duration. Float is not for the exclusive use or benefit of either the Department or the Contractor.

Tabular Reports.

- a. The following tabular reports will be required with each schedule submission:
 1. Classic Gantt
 2. Pert with Time Scale
- b. The heading of each tabular report shall include, but not be limited to, the project name, contract number, Contractor name, report date, data date, report title and page number.

- c. Each of the tabular reports shall also contain the following minimum information for each activity.
1. Activity ID
 2. Activity Description
 3. Original Duration (calendar day/working day)
 4. Remaining Duration (calendar day/working day)
 5. Activity Description
 6. Early Start Date
 7. Late Start Date
 8. Early Finish Date
 9. Late Finish Date
 10. Percent Complete
 11. Total Float
 12. Calendar ID
 13. Work performed by DBE Subcontractors and Trainees shall be shown in the Gantt Report.
- d. Reports shall be printed in color on 11 in. x 17 in. (minimum) size sheets. The Classic Gantt shall show all columns, bars, column headings at the top, time scale at the top and shall show relationships.

Submission Requirements. The initial schedule shall be submitted prior to starting work but no later than five calendar days after execution of the contract. Updated schedules shall be submitted according to Article 108.02 except that as a minimum, updated schedules will be required at the 25, 50, and 75 percent completion points of the contract.

Updating.

- a. The Contractor shall not make any changes to the original duration, activity relationships, constraints, costs, add or delete activities, or alter the schedule's logic when updating the schedule.

- b. The originally approved baseline CPM schedule will be designated as the "Target Schedule" and shall only be changed based on a Change Order that extends the Contract duration. All updates will be plotted against the "Target Schedule." If the Contractor believes any such changes result in an overall increase in the contract time, the Contractor will immediately submit a request for extension of time along with the changed progress schedule and a detailed justification for the time extension request in accordance with Article 108.08.
- c. The updated information will include the original schedule detail and the following additional information:
 1. Actual start dates
 2. Actual finish dates
 3. Activity percent completion
 4. Remaining duration of activities in progress
 5. Identified or highlighted critical activities
- d. The Contractor shall submit scheduling documents in the same formats and number as indicated in this section.
- e. The Engineer shall withhold progress payments if the Contractor does not submit scheduled updates as required.
- f. Upon receipt of the CPM schedule update, the Engineer will review the schedule for conformance with the Contract Documents and degree of detail. The Engineer, within fourteen (14) Days after receipt of the Updated CPM Schedule and supporting documents, will approve or reject it with written comments. If the Updated CPM schedule is rejected, the Contractor must submit a Revised Updated CPM Schedule within seven (7) Days after the date of rejection.
- g. The updated progress schedule must accurately represent the Project's current status.

Contractor Changes to the Schedule.

The Contractor shall comply with the following requirements regarding proposed changes to the approved baseline CPM schedule:

- a. If the Contractor proposes to make any changes in the approved baseline CPM schedule, the Contractor shall notify the Engineer in writing, stating the reasons for the change, identifying each changed activity (including duration and interrelationships between activities) and providing a diskette of the proposed changed schedule. Every effort must be made by the Contractor to retain the original Activity ID numbers.

- b. The Engineer has the authority to approve or disapprove the proposed change in the baseline CPM schedule and shall do so in writing within ten (10) Days after receipt to the Contractor's submission.
- c. If the Engineer approves the change in the baseline. All monthly updates will be plotted against the new "Target Schedule".
- d. If the Engineer approves a portion of the change to the baseline CPM schedule, the Contractor shall submit a revised CPM schedule incorporating such change(s) within ten (10) Days after approval along with a written description of the change(s) to the schedule.

Recovery Schedule.

- a. The Contractor shall maintain an adequate work force and the necessary materials, supplies and equipment to meet the current approved baseline CPM schedule. In the event that the Contractor, in the judgment of the Engineer, is failing to meet the approved CPM schedule including any Contract milestones, the Contractor shall submit a recovery schedule.
- b. The recovery schedule shall set forth a plan to eliminate the schedule slippage (negative float). The plan must be specific to show the methods to achieve the recovery of time, i.e. increasing manpower, working overtime, weekend work, employing multiple shifts. All costs associated with implementing the recovery schedule shall be borne by the Contractor.
- c. Upon receipt of the CPM recovery schedule, the Engineer will review the schedule for conformance with the Contract Documents and degree of detail. The Engineer will approve the schedule or reject it with written comments within fourteen (14) Days of receipt of the recovery schedule and supporting documents. If the detailed CPM recovery schedule is rejected, the Contractor must submit a revised CPM recovery schedule within seven (7) Days of the date of rejection.

Revised Schedule.

The Engineer may direct the Contractor to revise the approved CPM schedule. Reasons for such direction may include, but are limited to, the following: (1) changes in the Work, (2) rephrasing of the Project or any phase, (3) a change in the duration of the Project or phase, and (4) acceleration of the Project or phase.

- a. The Engineer will direct the Contractor to provide a revised CPM schedule in writing.
- b. The Contractor will provide the revised CPM schedule within ten (10) Days of receipt of the Engineer's written direction.

- c. The Engineer has the authority, in its sole discretion, to approve or reject the revised CPM schedule and will do so in writing within ten (10) Days after receipt of the Contractor's submission. If the Engineer approves the revised schedule, such schedule will be designated the new "Target Schedule".

The schedule shall be submitted in the Sorted by Activity Layout (SORT4). The activities on the schedule shall be plotted using early start, late start, early finish, late finish and total finish.

For every schedule submission, the Contractor shall submit to the Engineer, four Windows XP compatible compact disks of all schedule data. Included on the disks shall be all of the tabular and graphic reports, network diagrams and bar chart data. Two copies shall be submitted on CD/R disks and two copies shall be submitted on CDD/RW disks. In addition, four plots of the CD/R disks will be approved initial or revised progress schedule for the contract. The approval will be documented by the Engineer on a corresponding plot of the schedule and returned to the Contractor.

Four copies of each schedule submission shall be printed in color on 11 in. x 17 in. (minimum) size sheets showing all columns, bars, column headings at the top, time scale at the top and showing relationships.

The schedule shall indicate the critical path to contract completion. Only one controlling item shall be designated at any point in time on the schedule.

Acceptance or approval of any progress schedule by the Engineer shall not be construed to imply approval of any particular method of construction, sequence of construction, any implied or stated rate of production. Acceptance will not act as a waiver of the obligation of the Contractor to complete the work in accordance with the contract proposal, Plans and Specifications, modify any rights or obligations of the Department as set forth in the contract, nor imply any obligation of a third party. Acceptance shall not be construed to modify or amend the contract or the time limit(s) therein. Acceptance shall not relieve the Contractor of the responsibility for the accuracy of any of the information included on the schedule. Failure of the Contractor to include in the schedule any element of work required for the performance of the contract, any sequence of work required by the contract, or any known or anticipated condition affecting the work shall not excuse the Contractor from completing all work required within the time limit(s) specified in the contract notwithstanding acceptance of the schedule by the Engineer.

Basis of Payment. This work will not be paid for separately, but shall be considered as included in the costs of the various items of work in the contract.

WINTER WORK

No adjustment will be made in the contract unit prices for any concrete if winter work is necessary to meet the required completion dates specified in the contract.

RESTRICTION ON WORKING DAYS AFTER A COMPLETION DATE

All temporary lane closures *on arterial streets* during the period governed by working days after a completion date will not be permitted during the hours of 6:00 a.m. to 9:00 a.m. and 3:00 p.m. to 6:00 p.m. Monday through Friday.

All lane closure signs shall not be erected any earlier than one-half (1/2) hour before the starting hours listed above. Also, these signs should be taken down within one-half (1/2) hour after the closure is removed.

FAILURE TO COMPLETE THE WORK ON TIME

Should the Contractor fail to complete the work on or before the completion date as specified in the Special Provision for "Completion Date Plus Working Days", or within such extended time as may have been allowed by the Department, the Contractor shall be liable to the Department in the amount of \$ 10,000, not as a penalty but as liquidated damages, for each calendar day or a portion thereof of overrun in the contract time or such extended time as may have been allowed.

In fixing the damages as set out herein, the desire is to establish a certain mode of calculation for the work since the Department's actual loss, in the event of delay, cannot be predetermined, would be difficult of ascertainment, and a matter of argument and unprofitable litigation. This said mode is an equitable rule for measurement of the Department's actual loss and fairly takes into account the loss of use of the roadway if the project is delayed in completion. The Department shall not be required to provide any actual loss in order to recover these liquidated damages provided herein, as said damages are very difficult to ascertain. Furthermore, no provision of this clause shall be construed as a penalty, as such is not the intention of the parties.

A calendar day is every day shown on the calendar and starts at 12:00 midnight and ends at the following 12:00 midnight, twenty-four hours later.

COMPLETION DATE PLUS WORKING DAYS

Revise Article 108.05 (b) of the Standard Specifications as follows:

"When a completion date is specified, the Contractor shall complete all contract items and safely open all roadways to traffic by 11:59 PM on October 31, 2016.

The Pier 2 substructure and the East Abutment substructure shall be completed prior to March 31, 2016 in order to allow the construction of the Contract 60W28 ramp pavement.

The Contractor will be allowed to complete all clean-up work and punch list items within 10 working days after the completion date for opening the roadway to traffic. Under extenuating circumstances the Engineer may direct that certain items of work, not affecting the safe opening of the roadway to traffic, may be completed within the working days allowed for cleanup work and punch list items. Temporary lane closures for this work may be allowed at the discretion of the Engineer.”

Article 108.09 or the Special Provision for “Failure to Complete the Work on Time”, if included in this contract, shall apply to both the completion date and the number of working days.

SUBMITTALS

There are elements of construction that may require long lead times between order and delivery to the project site for installation. The Contractor must prioritize timely submittals of shop drawings to minimize any delays in project execution.

Submittals must be complete, include all necessary and required information, and must be submitted for review in a timely matter to insure that the Contract meets all milestone and completion date requirements. No additional compensation and no extension of calendar days will be made due to delays in receiving material or equipment to the site because of incomplete or delayed shop drawing submittals. The Contractor shall coordinate rolling schedules and long lead-time items in order to obtain approved shop drawings to meet the project schedule.

The Contractor shall provide notice to the Engineer concerning shop drawing submittal schedules and when shop drawing submittal deadlines may be delayed.

STATUS OF UTILITIES TO BE ADJUSTED

Effective: January 30, 1987

Revised: January 24, 2013

Utility companies involved in this project have provided the following estimated durations:

NAME OF UTILITY	TYPE	LOCATION	Estimated Duration of Time for the Completion of Relocation or Adjustments
ComEd	Electric	On Taylor Street between Halsted Street and Des Plaines Street	ComEd has identified that the electric and fiber optic facilities will be relocated away from the existing bridge no later than January 1, 2015. ComEd may require existing conduit removal to be coordinated with the Contractor's staging and traffic maintenance. ComEd will reconstruct ductbanks to proposed abutments. The ductbank construction shall be coordinated to allow ComEd to install ductbanks in advance of approach slab construction and the start of pavement placement. Existing ductbanks may remain with active cables.
ComEd	Electric	Manhole – 7610+09.66, 9.40' RT	ComEd will adjust manhole to final grad. The structure adjustment must be coordinated with ComEd.
City of Chicago	Electric - Communications	Current Package in Taylor Street	OEMC service will remain active at all times. The service will remain undamaged on the south portion of the bridge until conduits and cables across the north side of the proposed bridge are connected to existing City manholes to remain. At that time, OEMC will splice the new cables to the existing in two City manholes. The work to splice the cables has been estimated as one (1) to two (2) weeks by OEMC personnel.
City of Chicago	Electric – Roadway Lightings	Taylor Street	Removal of existing facilities and temporary and proposed improvements are included in this Contract.

City of Chicago	Electric – Traffic Signals	Taylor Street	Removal of existing facilities and temporary and proposed improvements are included in this Contract.
City of Chicago	Water	Taylor Street west of Union Avenue; Union Avenue	Water main shall be protected from damage during construction. Water main will remain active. Adjustment of water main structures is included in this contract.
City of Chicago	Water	Fire Hydrant – 7610+44.24, 60.24' RT	Fire hydrant shall be protected from damage during construction. Water main will remain active.
City of Chicago	Water	Taylor Street east of Ruble Street	Water main shall be protected from damage during construction. Water main will remain active. Adjustment of water main structures is included in this contract.
City of Chicago or State of Illinois	Water	Standpipe – 7614+11.68, 40.43' LT	Standpipe on 900 S. Des Plaines – Shall not be disturbed.
Peoples Gas	4" Steel Gas - Medium Pressure	Building Service – 7614+13.72	Existing gas service piping shall not be disturbed.
Peoples Gas	4" Steel Gas - Medium Pressure	Valve – 7614+17.83	Peoples will adjust the structure to final grade as required. The adjustment must be coordinated with Peoples Gas.
Illinois Department of Transportation	Electric	Along I-90/94	Roadway lighting to be modified as shown on the Plans.
Illinois Department of Transportation	Communications	Along I-90/94	ITS facilities to be modified as shown on the Plans.

The above represents the best information available to the Department and is included for the convenience of the bidder. The applicable portions of Articles 105.07 and 107.31 of the Standard Specifications shall apply.

In accordance with 605 ILCS 5/9-113 of the Illinois Compiled Statutes, utility companies have 90 days to complete the relocation of their facilities after receipt of written notice from the Department. The 90-day written notice will be sent to the utility companies after the following occurs:

- 1) Proposed right of way is clear for contract award.
- 2) Final plans have been sent to and received by the utility company.
- 3) Utility permit is received by the Department and the Department is ready to issue said permit.
- 4) If a permit has not been submitted, a 15 day letter is sent to the utility company notifying them they have 15 days to provide their permit application. After allowing 15 days for submission of the permit the 90 day notice is sent to the utility company.
- 5) Any time within the 90 day relocation period the utility company may request a waiver for additional time to complete their relocation. The Department has 10 days to review and respond to a waiver request.

MAINTENANCE OF ROADWAYS

Effective: September 30, 1985

Revised: November 1, 1996

Beginning on the date that work begins on this project, the Contractor shall assume responsibility for normal maintenance of all existing roadways within the limits of the improvement. This normal maintenance shall include all repair work deemed necessary by the Engineer, but shall not include snow removal operations. Traffic control and protection for maintenance of roadways will be provided by the Contractor as required by the Engineer.

If items of work have not been provided in the contract, or otherwise specified for payment, such items, including the accompanying traffic control and protection required by the Engineer, will be paid for in accordance with Article 109.04 of the Standard Specifications.

TRAFFIC CONTROL PLAN

Traffic Control shall be according to the applicable sections of the Standard Specifications, the Supplemental Specifications, the "Illinois Manual on Uniform Traffic Control Devices for Streets and Highways", any special details and Highway Standards contained in the plans, and the Special Provisions contained herein.

Special attention is called to Article 107.09 of the Standard Specifications and the following Highway Standards, Details, Quality Standard for Work Zone Traffic Control Devices, Recurring Special Provisions and Special Provisions contained herein, relating to traffic control.

The Contractor shall contact the District One Bureau of Traffic at least 72 hours in advance of beginning work.

STANDARDS: 635011, 701101, 701106, 701301, 701311, 701400, 701401, 701411, 701426, 701427, 701428, 701446, 701602, 701611, 701701, 701801, 701901 and 704001

DETAILS: Maintenance of Traffic – General Notes, Narrative, Typical Sections, Stages 1A, 1B, 1C, 2A, 2B, 2C, and 3, and TC-08, TC-09, TC-10, TC-12, TC-16, TC-17, TC-18, TC-21, TC-22, TC-24, and TC-27.

SPECIAL PROVISIONS:

- Traffic Control Plan,
- Pavement Marking Removal
- Maintenance of Roadways
- Staging and Interchange Restrictions
- Keeping the Expressway Open to Traffic,
- Failure to Open Traffic Lanes to Traffic
- Traffic Control Surveillance, Expressways,
- Temporary Information Signing,
- Traffic Control for Work Zone Areas,
- Traffic Control and Protection (Expressways),
- Traffic Control and Protection (Arterials),
- Road Construction Reporting and Signing for Vehicle Width Restrictions
- Public Convenience and Safety

STAGING AND INTERCHANGE RESTRICTIONS

Prior to the actual beginning and completion of the various stages of construction and traffic protection, the Contractor will be required to provide lane closures and barricade systems, for preparation work such as pavement marking removal, temporary lane marking, placing temporary concrete barrier, relocating existing guardrail, etc. These lane closures and barricade systems, including barricades, drums, cones, lights, signs, flaggers etc. shall be provided in accordance with details in the Plans and these Special Provisions and as approved by the Engineer. The cost of this work will not be paid for separately but shall be considered included in the contract lump sum price for **TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS)**.

LANE AND RAMP CLOSURES

Prior to and after stage construction, temporary lane closures on I-90/94 will only be permitted at night during the allowable hours as listed in the Special Provision "Keeping the Expressway Open to Traffic". These hours also apply to temporary closures of the ramps, which are shown as open on the Maintenance of Traffic plan sheets.

Special Ramp Closure Restrictions

The Contractor will be permitted to close the following lanes and/or ramps for extended time periods as noted below:

Exit Ramp to Taylor St / Roosevelt Rd.

- The Contractor is permitted to close the Exit Ramp to Taylor Street and Roosevelt Road for the extended closures as follows:
 - A maximum of eight (8), 55-hour (maximum) weekend closures to construct the west bridge abutment and Retaining Wall #17. The closures may not be allowed to be on consecutive weekends.
 - The closures shall not commence before 10 pm on Friday night of said weekend and Exit Ramp must be re-opened to traffic no later than 5 AM on Monday morning at the end of same said weekend.
 - Traffic shall be detoured per the approved plan.
 - No other service ramps along southbound I-90/94 or eastbound I-290 within three (3) miles of the Circle Interchange may be closed at the same time of this ramp unless approved by the Engineer.
 - All closures shall be approved in advance by the University of Illinois – Chicago. Specific weekends such as move-in and graduation must be avoided. The university may identify additional weekends when there are anticipated high volumes that may use the exit ramp.
 - United Parcel Service (UPS) will be advised of planned closures by the Engineer. UPS may request to have a weekend closure cancelled due to the anticipation of high volumes of their vehicles or suppliers utilizing the exit ramp. The notice to UPS should be a minimum of two (2) weeks prior to each planned closure.

For all ramp closures the Contractor shall furnish and install signage per District Detail TC-08, as directed by the Engineer.

The Contractor shall coordinate the work such that no two (2) adjacent entrance or exit ramps in one direction of the expressway are closed at the same time. The closing of ramps, which are used as the detour route for other roadways or ramps, is prohibited. Should the Contractor fail to completely open, and keep open, the ramps to traffic in accordance with the above limitations, the Contractor shall be liable to the Department for liquidated damages as noted under the Special Provision, "Failure to Open Traffic Lanes to Traffic".

The Contractor shall submit to the Department three (3) weeks ahead of time, in writing, the starting date for each of the extended ramp and/or lane closures. Approval from the Department is required prior to closing the ramp and/or lanes. Should the Contractor fail to complete the work and reopen the ramp to traffic within the allowable time limit, the Contractor shall be liable to the Department for liquidated damages as noted under FAILURE TO OPEN TRAFFIC LANES TO TRAFFIC

KEEPING THE EXPRESSWAY OPEN TO TRAFFIC

Effective: March 22, 1996

Revised: February 13, 2014

Whenever work is in progress on or adjacent to an expressway, the Contractor shall provide the necessary traffic control devices to warn the public and to delineate the work zone as required in these Special Provisions, the Standard Specifications, the State Standards and the District Freeway details. All Contractors' personnel shall be limited to these barricaded work zones and shall not cross the expressway.

The Contractor shall request and gain approval from the Illinois Department of Transportation's Expressway Traffic Operations Engineer at www.idotlcs.com twenty-four (24) hours in advance of all daily lane, ramp and shoulder closures and one week in advance of all permanent and weekend closures on all Freeways and/or Expressways in District One. This advance notification is calculated based on workweek of Monday through Friday and shall not include weekends or Holidays.

LOCATION: I-90/94 Dan Ryan: 31st to Roosevelt

WEEK NIGHT	TYPE OF CLOSURE	ALLOWABLE LANE CLOSURE HOURS		
Sunday-Thursday	1-Lane	9:00 PM	to	5:00 AM
	2-Lane*	11:59 PM	to	5:00 AM
Friday	1-Lane	11:00 PM (Fri)	to	6:00 AM (Sat)
	2-Lane*	11:59 PM (Fri)	to	6:00 AM (Sat)
Saturday	1-Lane	9:00 PM (Sat)	to	9:00 AM (Sun)
	2-Lane*	11:59 PM (Sat)	to	9:00 AM (Sun)

Note: The right lane of WB I-90/94 at Taylor St. shall be closed by closing the left two lanes south of Taylor St. and weaving the right lane to the left lane per TC-09. Lane closures on EB I-90/94 may require traffic control on both EB I-90/94 and EB I-290.

In addition to the hours noted above, temporary shoulder and partial ramp closures are allowed weekdays between 9:00 A.M. and 3:00 P.M. and between 7:00 P.M. and 5:00 A.M.

Temporary ramp closures for service interchanges will only be permitted at night during the restricted hours listed for temporary one-lane closures within the project limits. However, no two (2) adjacent entrance and exit ramps in one direction of the expressway shall be closed at the same time.

Freeway to freeway (system interchange) full ramp closures for two lane ramps will not be permitted. Partial ramp closures of system ramps may be allowed during the 1-lane closure hours above. System ramp full closures for single lane ramps are only permitted for a maximum of four (4) hours

- between the hours of 1:00 a.m. and 5:00 a.m. on Monday thru Friday
- between the hours of 1:00 a.m. and 6:00 a.m. on Saturday, and
- between the hours of 1:00 a.m. and 7:00 a.m. on Sunday.

The Contractor shall furnish and install large (48" X 48") "DETOUR with arrow" signs as directed by the Engineer for all system ramp closures. In addition, one portable changeable message sign will be required to be placed in advance of the ramp closure. The cost of these signs and PCMS board shall be included in the cost of traffic control and protection (6 static signs maximum per closure).

Should the Contractor fail to completely open, and keep open, the ramps to traffic in accordance with the above limitations, the Contractor shall be liable to the Department for liquidated damages as noted under the Special Provision, "Failure to Open Traffic Lanes to Traffic".

Narrow Lanes and permanent shoulder closures will not be allowed between Dec. 1st and April 1st.

Full Expressway Closures will only be permitted for a maximum of 15 minutes at a time during the low traffic volume hours of 1:00 A.M. to 5:00 A.M. Monday thru Friday and from 1:00 A.M. to 7:00 A.M. on Sunday. During Full Expressway Closures, the Contractor will be required to close off all lanes except one, using Freeway Standard Closures. Police forces should be notified and requested to close off the remaining lane at which time the work item may be removed or set in place. The District One Traffic Operations Department **shall be** notified (847-705-4151) at least 3 working days (weekends and holidays DO NOT count into this 72 hours notification) in advance of the proposed road closure and will coordinate the closure operations with police forces. Liquidated Damages as specified in the Failure to Open Traffic Lanes to Traffic for One lane or ramp blocked shall be assessed to the Contract for every 15 minutes beyond the initial 15 minutes all lanes are blocked.

All stage changes requiring the stopping and/or the pacing of traffic shall take place during the allowable hours for Full Expressway Closures and shall be approved by the Department.

All daily lane closures shall be removed during adverse weather conditions such as rain, snow, and/or fog and as determined by the Engineer.

Additional lane closure hour restrictions may have to be imposed to facilitate the flow of traffic to and from major sporting events and/or other events.

All lane closure signs shall not be erected any earlier than one-half (1/2) hour before the starting hours listed above. Also, these signs should be taken down within one-half (1/2) hour after the closure is removed.

The Contractor will be required to cooperate with all other contractors when erecting lane closures on the expressway. All lane closures (includes the taper lengths) without a three (3) mile gap between each other, in one direction of the expressway, shall be on the same side of the pavement. Lane closures on the same side of the pavement with a half (1/2) mile or less gap between the end of one work zone and the start of taper of next work zone should be connected. The maximum length of any lane closure on the project and combined with any adjacent projects shall be three (3) miles. Gaps between successive permanent lane closures shall be no less than two (2) miles in length.

Private vehicles shall not be parked in the work zone. Contractor's equipment and/or vehicles shall not be parked on the shoulders or in the median during non-working hours. The parking of equipment and/or vehicles on State right-of-way will only be permitted at the locations approved by the Engineer.

FAILURE TO OPEN TRAFFIC LANES TO TRAFFIC

Should the Contractor fail to completely open and keep open all the traffic lanes to traffic in accordance with the limitations specified under the Special Provision for "Keeping the Expressway Open to Traffic", the Contractor shall be liable to the Department for the amount of:

I-90/94 and Ramps:	All Stages
	One lane or ramp blocked = \$1,700 /15 min.
	Two lanes blocked = \$3,500 /15 min.

Not as a penalty but as liquidated and ascertained damages for each and every 15 minute interval or a portion thereof that a lane is blocked outside the allowable time limitations. Such damages may be deducted by the Department from any monies due the Contractor. These damages shall apply during the contract time and during any extensions of the contract time.

TRAFFIC CONTROL SURVEILLANCE, EXPRESSWAYS

Effective: 10/25/95
Revised: 1/9/98

The contractor shall provide a person with a vehicle to survey, inspect and maintain all temporary traffic control devices when a lane is closed to traffic and when hazards are present adjacent to or within 10 foot of the edge of pavement for more than 24 hours.

The surveillance person is required to drive through the project, to inspect all temporary traffic control devices, to correct all traffic control deficiencies, if possible, or immediately contact someone else to make corrections and to assist with directing traffic until such corrections are made, at intervals not to exceed 4 hours. This person shall list every inspection on an inspection form, furnished by the Engineer, and shall return a completed form on the first working day after the inspections are made.

The Contractor shall supply a telephone staffed on a 24-hour-a-day basis to receive any notification of any deficiencies regarding traffic control and protection or receive any request for improving, correcting or modifying traffic control, installations or devices, including pavement markings. The Contractor shall dispatch additional men, materials and equipment as necessary to begin to correct, improve or modify the traffic control as directed, within one hour of notification by this surveillance person or by the Department. Upon completion of such corrections and/or revisions, the Contractor shall notify the Department's Communication Center at (847) 705-4612.

Method of Measurement: Traffic Control Surveillance will be measured on calendar day basis. One calendar day is equal to a minimum of six (6) inspections. The inspections shall start within 4 hours after the lane is closed to traffic or a hazard exists within 10 foot from the edge of pavement and shall end when the lane closure or hazard is removed.

Basis of Payment: Surveillance will be paid for at the contract unit price per calendar day or fraction thereof for TRAFFIC CONTROL SURVEILLANCE, EXPRESSWAYS. The price shall include all labor and equipment necessary to provide the required inspection and maintenance on the expressway and on all cross streets which are included in the project. The cost of the materials for the maintenance of traffic control devices shall be included in the traffic control pay items.

TEMPORARY INFORMATION SIGNING

Effective: November 13, 1996
 Revised: January 02, 2007

Description. This work shall consist of furnishing, installing, maintaining, relocating for various states of construction and eventually removing temporary informational signs. This also includes the Advanced Warning Sign for use on arterial roads as described herein. These signs may be ground mounted, skid mounted, truss mounted, bridge mounted or overlaid sign panels which cover portions of existing signs.

Materials. Materials shall be according to the following Articles of Division 1000 - Materials:

	<u>Item</u>	<u>Article/Section</u>
(a)	Sign Base (Notes 1 & 2)	1090
(b)	Sign Face (Note 3)	1091
(c)	Sign Legends	1091
(d)	Sign Supports	1093
(e)	Overlay Panels (Note 4)	1090.02

Note 1 The Contractor may use 5/8 inch (16 mm) instead of 3/4 inch (19 mm) thick plywood.

Note 2 Type A sheeting can be used on the plywood base.

Note 3 All sign faces shall be Type A except all orange signs shall meet the requirements of Article 1106.01.

Note 4 The overlay panels shall be 0.08 inch (2 mm) thick.

GENERAL CONSTRUCTION REQUIREMENTS

Installation: The sign sizes and legend sizes shall be verified by the Contractor prior to fabrication.

Signs which are placed along the roadway and/or within the construction zone shall be installed according to the requirements of Article 720.04. The signs shall be 7 ft. (2.1 m) above the near edge of the pavement and shall be a minimum of 2 ft. (600 mm) beyond the edge of pavement. A minimum of three (3) posts shall be used.


The attachment of temporary signs to existing sign structures or sign panels shall be approved by the Engineer. Any damage to the existing signs due to the Contractor's operations shall be repaired or signs replaced, as determined by the Engineer, at the Contractor's expense.

Signs which are placed on overhead bridge structures shall be fastened to the handrail with stainless steel bands. These signs shall rest on the concrete parapet where possible. The Contractor shall furnish mounting details for approval by the Engineer.

Method of Measurement: This work shall not be measured for payment.

All hardware, posts or skids, supports, bases for ground mounted signs, connections, which are required for mounting these signs will be included as part of this pay item.

Basis of Payment. This work shall be paid for at the contract unit price per square foot for TEMPORARY INFORMATION SIGNING, which price shall be full compensation for all labor, equipment and materials required for performing the work as herein specified.

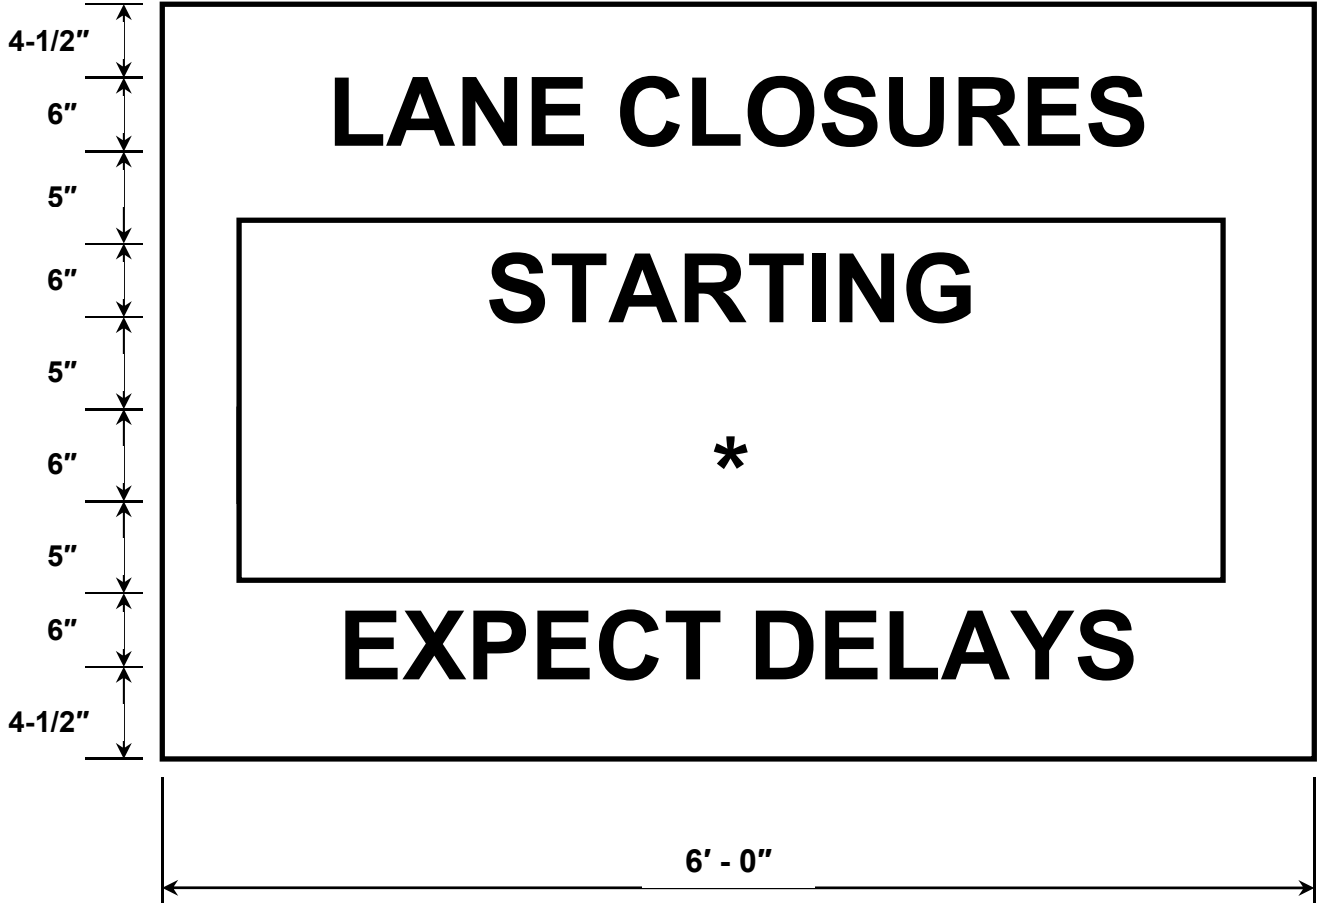

* Contractor shall provide overlay panel with the date for Start of lane closure. Signs shall be erected a minimum of one (1) week in advance of the start of the work. Overlay panel shall be removed soon after start of construction.

ADVANCED WARNING SIGN DETAIL
FOR ARTERIAL TRAFFIC

TRAFFIC CONTROL FOR WORK ZONE AREAS

Effective: 9/14/95

Revised: 1/1/07

Work zone entry and exit openings shall be established daily by the Contractor with the approval of the Engineer. All vehicles including cars and pickup trucks shall exit the work zone at the exit openings. All trucks shall enter the work zone at the entry openings. These openings shall be signed in accordance with the details shown elsewhere in the plans and shall be under flagger control during working hours.

The Contractor shall plan his trucking operations into and out of the work zone as well as on to and off the expressway to maintain adequate merging distance. Merging distances to cross all lanes of traffic shall be no less than 1/2 mile. This distance is the length from where the trucks enter the expressway to where the trucks enter the work zone. It is also the length from where the trucks exit the work zone to where the trucks exit the expressway. The stopping of expressway traffic to allow trucks to change lanes and/or cross the expressway is prohibited.

Failure to comply with the above requirements will result in a Traffic Control Deficiency charge. The deficiency charge will be calculated as outlined in Article 105.03 of the Standard Specifications. The Contractor will be assessed this daily charge for each day a deficiency is documented by the Engineer.

TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS)

Description. This work shall include furnishing, installing, maintaining, replacing, relocating, and removing all traffic control devices used for the purpose of regulating, warning, or directing traffic. Traffic control and protection shall be provided as called for in the plans, applicable Highway Standards, District One Expressway details, Standards and Supplemental Specifications, these Special Provisions, or as directed by the Engineer.

General. The governing factor in the execution and staging of work for this project is to provide the motoring public with the safest possible travel conditions on the expressway through the construction zone. The Contractor shall arrange his operations to keep the closing of lanes and/or ramps to a minimum.

The Contractor shall be responsible for the proper location, installation, and arrangement of all traffic control devices. Special attention shall be given to existing warning signs and overhead guide signs during all construction operations. Warning signs and existing guide signs with down arrows shall be kept consistent with the barricade placement at all times. The Contractor shall immediately remove, completely cover, or turn from the motorist's view all signs which are inconsistent with lane assignment patterns.

The Contractor shall coordinate all traffic control work on this project with adjoining or overlapping projects, including barricade placement necessary to provide a uniform traffic detour pattern. When directed by the Engineer, the Contractor shall remove all traffic control devices that were furnished, installed, or maintained by him under this contract, and such devices shall remain the property of the Contractor. All traffic control devices shall remain in place until specific authorization for relocation or removal is received from the Engineer.

Additional requirements for traffic control devices shall be as follows.

(a) Traffic Control Setup and Removal. The setting and removal of barricades for the taper portion of a lane closure shall be done under the protection of a vehicle with a truck/trailer mounted attenuator and arrow board per State Standard 701428 and the Traffic Control Setup and Removal Freeway/Expressway BDE Special Provision. Failure to meet this requirement will be subject to a Traffic Control Deficiency. The deficiency will be calculated as outlined in Article 105.03 of the Standard Specifications. Truck/trailer mounted attenuators shall comply with Article 1106.02(g) or shall meet the requirements of NCHRP 350 Test Level 3 with vehicles used in accordance with manufacturer's recommendations and requirements.

(b) Sign Requirements

(1) Sign Maintenance. Prior to the beginning of construction operations, the Contractor will be provided a sign log of all existing signs within the limits of the construction zone. The Contractor is responsible for verifying the accuracy of the sign log. Throughout the duration of this project, all existing traffic signs shall be maintained by the Contractor. All provisions of Article 107.25 of the Standard Specifications shall apply except the third paragraph shall be revised to read: "The Contractor shall maintain, furnish, and replace at his own expense, any traffic sign or post which has been damaged or lost by the Contractor or a third party. The Contractor will not be held liable for third party damage to large freeway guide signs".

(2) Work Zone Speed Limit Signs. Work zone speed limit signs shall be installed as required in Article 701.14(b) and as shown in the plans and Highway Standards. Based upon the existing posted speed limit, work zone speed limits shall be established and signed as follows.

a. Existing Speed Limit of 55mph or higher. The initial work zone speed limit assembly, located approximately 3200' before the closure, and shall be 55mph as shown in 701400. Additional work zone 45mph assemblies shall be used as required according to Article 701.14(b) and as shown in the Highway Standards and plans. WORK ZONE SPEED LIMIT 55 PHOTO ENFORCED assemblies may be omitted when this assembly would normally be placed within 1500 feet of the END WORK ZONE SPEED LIMIT sign.

- b. Existing Speed Limit of 45mph. The advance 55mph work zone speed limit assembly shown in 701400 shall be replaced with a 45mph assembly. Additional work zone 45mph assemblies shall be used as required according to Article 701.14(b) and as shown in the Highway Standards and plans. WORK ZONE SPEED LIMIT 55 PHOTO ENFORCED assemblies shall be eliminated in all cases. END WORK ZONE SPEED LIMIT signs are required.
- (3) Exit Signs. The exit gore signs as shown in Standard 701411 shall be a minimum size of 48 inch by 48 inch with 12 inch capital letters and a 20 inch arrow. EXIT OPEN AHEAD signs shown in Standard 701411 shall be a minimum size of 48 inch by 48 inch with 8 inch capital letters.
- (4) Uneven Lanes Signs. The Contractor shall furnish and erect "UNEVEN LANES" signs (W8-11) on both sides of the expressway, at any time when the elevation difference between adjacent lanes open to traffic equals or exceeds one inch. Signs shall be placed 500' in advance of the drop-off, within 500' of every entrance, and a minimum of every mile.
- (c) Drums/Barricades. Check barricades shall be placed in work areas perpendicular to traffic every 1000', one per lane and per shoulder, to prevent motorists from using work areas as a traveled way. Check barricades shall also be placed in advance of each open patch, or excavation, or any other hazard in the work area, the first at the edge of the open traffic lane and the second centered in the closed lane. Check barricades, either Type I or II, or drums shall be equipped with a flashing light.
- To provide sufficient lane widths (10' minimum) for traffic and also working room, the Contractor shall furnish and install vertical barricades with steady burn lights, in lieu of Type II or drums, along the cold milling and asphalt paving operations. The vertical barricades shall be placed at the same spacing as the drums.
- (d) Vertical Barricades. Vertical barricades shall not be used in lane closure tapers, lane shifts, exit ramp gores, or staged construction projects lasting more than 12 hours. Also, vertical barricades shall not be used as patch barricades or check barricades. Special attention shall be given, and ballast provided per manufacture's specification, to maintain the vertical barricades in an upright position and in proper alignment.
- (e) Temporary Concrete Barrier Wall. Prismatic barrier wall reflectors shall be installed on both the face of the wall next to traffic, and the top of sections of the temporary concrete barrier wall as shown in Standard 704001. The color of these reflectors shall match the color of the edgelines (yellow on the left and crystal or white on the right). If the base of the temporary concrete barrier wall is 12 inches or less from the travel lane, then the lower slope of the wall shall also have a 6 inch wide temporary pavement marking edgeline (yellow on the left and white on the right).

(f) Full Expressway Closures. Unless specified, Full Expressway Closures will only be permitted for a maximum of 15 minutes during the allowable hours listed in the Keeping the Expressway Open to Traffic Special Provision. During Full Expressway Closures, the Contractor will be required to close off all lanes except one, using Freeway Standard Closures. The Contractor will be required to provide one changeable message sign to be placed at the direction of the Engineer. The sign shall display a message as directed by the Engineer. A Maintenance of Traffic Plan shall be submitted to the District One Traffic Operations Department Two Weeks in advance of the planned work. The Maintenance of Traffic Plan shall include, but not be limited to: lane and ramp closures, existing geometrics, and equipment and material location. The District One Traffic Operations Department shall be contacted (847-705-4151) at least 3 working days in advance of the proposed road closure and will coordinate the closure operation with police forces.

Method of Measurement. This item of work will be measured on a lump sum basis for furnishing, installing, maintaining, replacing, relocating, and removing traffic control devices required in the plans and these Special Provisions. Traffic control and protection required under Standards 701101, 701106, 701400, 701401, 701406, 701411, 701421, 701422, 701423, 701426, 701427, 701428, 701446, 701901, 704001, 780001 and District details TC-08, TC-09, TC-10, TC-11, TC-12, TC-13, TC-16, TC-17, TC-18, TC-21, TC-22, TC-24, TC-25 and TC-27 will be included with this item.

Basis of Payment.

(a) This work will be paid for at the contract lump sum price for TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS). This price shall be payment in full for all labor, materials, transportation, handling, and incidental work necessary to furnish, install, maintain, replace, relocate, and remove all Expressway traffic control devices required in the plans and specifications.

In the event the sum total value of all the work items for which traffic control and protection is required is increased or decreased by more than ten percent (10%), the contract bid price for TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS) will be adjusted as follows:

$$\text{Adjusted contract price} = .25P + .75P [1 \pm (X - 0.1)]$$

Where: "P" is the bid unit price for Traffic Control and Protection

Where: "X" =	$\frac{\text{Difference between original and final sum total value of all work items for which traffic control and protection is required}}{\text{Original sum total value of all work items for which traffic control and protection is required.}}$
--------------	---

The value of the work items used in calculating the increase and decrease will include only items that have been added to or deducted from the contract under Article 104.02 of the Standard Specifications and only items which require use of Traffic Control and Protection.

- (b) The Engineer may require additional traffic control be installed in accordance with standards and/or designs other than those included in the plans. In such cases, the standards and/or designs will be made available to the Contractor at least one week in advance of the change in traffic control. Payment for any additional traffic control required will be in accordance with Article 109.04 of the Standard Specifications.
- (c) Revisions in the phasing of construction or maintenance operations, requested by the Contractor, may require traffic control to be installed in accordance with standards and/or designs other than those included in the plans. Revisions or modifications to the traffic control shown in the contract shall be submitted by the Contractor for approval by the Engineer. No additional payment will be made for a Contractor requested modification.
- (d) Temporary concrete barrier wall will be measured and paid for according to Section 704.
- (e) Impact attenuators, temporary bridge rail, and temporary rumble strips will be paid for separately.
- (f) Temporary pavement markings shown on the Standard will be measured and paid for according to Section 703 and Section 780.
- (g) All pavement marking removal will be measured and paid for according to Section 703 or Section 783.
- (h) Temporary pavement marking on the lower slope of the temporary concrete barrier wall will be measured and paid for as TEMPORARY PAVEMENT MARKING, 6”.
- (i) All prismatic barrier wall reflectors will be measured and paid for according to the Recurring Special Provision Guardrail and Barrier Wall Delineation.
- (j) The Changeable Message Sign required for Full Expressway Closures shall not be paid for separately.

TRAFFIC CONTROL AND PROTECTION (ARTERIALS)

Effective: February 1, 1996

Revised: March 1, 2011

Specific traffic control plan details and Special Provisions have been prepared for this contract. This work shall include all labor, materials, transportation, handling and incidental work necessary to furnish, install, maintain and remove all traffic control devices required as indicated in the plans and as approved by the Engineer.

When traffic is to be directed over a detour route, the Contractor shall furnish, erect, maintain and remove all applicable traffic control devices along the detour route according to the details shown in the plans.

Method of Measurement: All traffic control (except Traffic Control and Protection (Expressways)) and temporary pavement markings) indicated on the traffic control plan details and specified in the Special Provisions will be measured for payment on a lump sum basis.

Basis of Payment: All traffic control and protection will be paid for at the contract lump sum price for TRAFFIC CONTROL AND PROTECTION, (SPECIAL).

Temporary pavement markings will be paid for separately unless shown on a Standard.

ROAD CONSTRUCTION REPORTING AND SIGNING FOR VEHICLE WIDTH RESTRICTIONS

Introduction

The intent of this policy is to provide uniform width restriction signing and reporting in order to reduce the chances of oversized vehicles, particularly those operating under blanket permits, from becoming entrapped in construction zones.

Construction/Maintenance Projects Requiring Over Size and Over Weight Restrictions

- a) Closures of any roadway, Rail Road crossing, Interstate or Freeway Ramps
- b) All road construction that restricts the actual measured opening to less than 17' 6".
- c) Any construction zone with characteristics that have the potential of creating delays and/or potentially hazardous conditions such as roadways with a high traffic volume or unnecessary merging situations. Any other condition that the Engineer deems necessary to ensure safety should be listed.

Measuring with Restrictions

In order to ensure state-wide uniformity, the opening shall be measured as follows:

- a) Two fixed structures – Measurement shall be made between the narrowest points of the fixed structures. Fixed structures may include but are not limited to bridge railing, concrete barrier, cable rail, or guard rail.
- b) Fixed structure and non-fixed devices or equipment – Measurement shall be made between the two narrowest points of the fixed structure and non-fixed devices when such non-fixed devices cannot easily be moved to accommodate the overwidth load. Such devices or equipment may include snooper truckers, barricades/cones/drums placed to keep traffic away from open holes in the pavement, arrow boards, dynamic message signs, etc.
- c) Construction near a fixed structure – Construction activities near a fixed structure may result in a reportable width restriction where is insufficient room for an overwidth load to safely move onto the structure

Reporting

In order to provide timely information to truckers, all road construction or maintenance activities which result in measured openings for traffic of less than 17' 6" or which involve the closure of any roadway, railroad grade crossing or freeway ramp are to be reported to the Central Bureau of Operations at least 21 days in advance of the date of the restriction start date which may be different from the start date of the project itself. The reporting is to be on form OPER 2410. Note on the form if the restrictions will only be in effect during the time period of ½ hour before sunrise to ½ after sunset Monday through Friday and ½ hour before sunrise to noon on Saturday, or if they will be in effect at all times.

When using form OPER 2410, the restriction location on interstate routes or other freeways should be identified with mileposts and/or a distance from an identifiable location, such as an intersection of two routes. If the restriction is located a structure, identify the feature crossed. The location of restrictions on conventional highways should be identified with a distance from an identifiable locations, such as an intersection of two routes and the From Mile/To Mile fields left blank. If construction is located at a structure, identify the feature crossed. If there are multiple structures with different width restriction dimensions, each structure and restriction must be listed separately. This can be accomplished on the same form.

If the construction and/or width restriction start/stop dates change after being submitted, a revised OPER 2410 must be submitted.

The width restriction dimension to be listed on form OPER 2410 and used on the width restriction signing should be the actual measured opening less 18". For example if the actual measured opening is 16' 3", the restriction dimension is to be reported and signed at 14' 9".

A greater deduction than 18" may be taken if, in the opinion of the Engineer, it is warranted due to unusual geometrics or other operational considerations. The dimension listed on form OPER 2410 and used on the signing should reflect the greater deduction.

After completion, the form is to be e-mailed to the **IDOT ROAD INFO** mailbox.

Emergencies or any unusual construction restrictions or closures should be reported immediately.

- a) During Normal Business Hours: Call (217) 782-8551. Submittal of OPER 2410 by e-mail to **IDOT ROAD INFO** is still required.
- b) After Normal Business Hours/ Weekends/ Holidays: Call the Communications Center (Station 1) at (217) 782-2937. After calling Station 1, submit OPER 2410 by e-mail to **IDOT ROAD INFO** and fax a copy to the Communications Center at (217) 782-1927.

Signing

Signing shall be provided whenever the actual measured restriction is less than 17' 6". W12-I102 signs should be placed prior to the beginning of the traffic control where the width restriction occurs. Advance signing (W12-I103) shall also be placed where the roadway intersects with the previous state route and with any major local routes where overwidth vehicles are likely to enter the highway. The advance signing must be visible to approaching traffic sufficiently in advance of the intersection to enable overwidth trucks to change direction. This may require the use of more than one advance sign at the intersection. The dimensions shown on the signing shall be the actual measured opening less 18" as noted previously.

AGGREGATE FOR CONCRETE BARRIER (D-1)

Effective: March 11, 2004

Revised: January 24, 2008

Add the following paragraph to Article 637.02 of the Standard Specifications:

"The coarse aggregate to be used in the concrete barrier walls shall conform to the requirement for coarse aggregate used in Class BS concrete according to Article 1004.01(b), paragraph 2."

AGGREGATE SUBGRADE IMPROVEMENT (D-1)

Effective: February 22, 2012

Revised: November 1, 2014

Add the following Section to the Standard Specifications:

“SECTION 303. AGGREGATE SUBGRADE IMPROVEMENT

303.01 Description. This work shall consist of constructing an aggregate subgrade improvement.

303.02 Materials. Materials shall be according to the following.

Item	Article/Section
(a) Coarse Aggregate	1004
(b) Reclaimed Asphalt Pavement (RAP) (Notes 1, 2 and 3)	1031

Note 1. Crushed RAP, from either full depth or single lift removal, may be mechanically blended with aggregate gradations CS 01 or CS 02 but shall not exceed 40 percent of the total product. The top size of the Coarse RAP shall be less than 4 in. (100 mm) and well graded.

Note 2. RAP having 100 percent passing the 1 1/2 in. (37.5 mm) sieve and being well graded, may be used as capping aggregate in the top 3 in. (75 mm) when aggregate gradations CS 01 or CS 02 are used in lower lifts. When RAP is blended with any of the coarse aggregates, the blending shall be done with mechanically calibrated feeders.

Note 3. The RAP used for aggregate subgrade improvement shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, “Reclaimed Asphalt Pavement (RAP) for Aggregate Applications”.

303.03 Equipment. The vibratory machine shall be according to Article 1101.01, or as approved by the Engineer.

303.04 Soil Preparation. The stability of the soil shall be according to the Department’s Subgrade Stability Manual for the aggregate thickness specified.

303.05 Placing Aggregate. The maximum nominal lift thickness of aggregate gradations CS 01 or CS 02 shall be 24 in. (600 mm).

303.06 Capping Aggregate. The top surface of the aggregate subgrade shall consist of a minimum 3 in. (75 mm) of aggregate gradations CA 06 or CA 10. When Reclaimed Asphalt Pavement (RAP) is used, it shall be crushed and screened where 100 percent is passing the 1 1/2 in. (37.5 mm) sieve and being well graded. RAP that has been fractionated to size will not be permitted for use in capping. Capping aggregate will not be required when the aggregate subgrade improvement is used as a cubic yard pay item for undercut applications. When RAP is blended with any of the coarse aggregates, the blending shall be done with mechanically calibrated feeders.

303.07 Compaction. All aggregate lifts shall be compacted to the satisfaction of the Engineer. If the moisture content of the material is such that compaction cannot be obtained, sufficient water shall be added so that satisfactory compaction can be obtained.

303.08 Finishing and Maintenance of Aggregate Subgrade Improvement. The aggregate subgrade improvement shall be finished to the lines, grades, and cross sections shown on the plans, or as directed by the Engineer. The aggregate subgrade improvement shall be maintained in a smooth and compacted condition.

303.09 Method of Measurement. This work will be measured for payment according to Article 311.08.

303.10 Basis of Payment. This work will be paid for at the contract unit price per cubic yard (cubic meter) for AGGREGATE SUBGRADE IMPROVEMENT or at the contract unit price per square yard (square meter) for AGGREGATE SUBGRADE IMPROVEMENT, of the thickness specified.

Add the following to Section 1004 of the Standard Specifications:

“1004.06 Coarse Aggregate for Aggregate Subgrade Improvement. The aggregate shall be according to Article 1004.01 and the following.

- (a) Description. The coarse aggregate shall be crushed gravel, crushed stone, or crushed concrete.
- (b) Quality. The coarse aggregate shall consist of sound durable particles reasonably free of deleterious materials.
- (c) Gradation.
 - (1) The coarse aggregate gradation for total subgrade thicknesses of 12 in. (300 mm) or greater shall be CS 01 or CS 02.

Grad No.	COARSE AGGREGATE SUBGRADE GRADATIONS				
	Sieve Size and Percent Passing				
	8"	6"	4"	2"	#4
CS 01	100	97 ± 3	90 ± 10	45 ± 25	20 ± 20
CS 02		100	80 ± 10	25 ± 15	

COARSE AGGREGATE SUBGRADE GRADATIONS (Metric)					
Grad No.	Sieve Size and Percent Passing				
	200 mm	150 mm	100 mm	50 mm	4.75 mm
CS 01	100	97 ± 3	90 ± 10	45 ± 25	20 ± 20
CS 02		100	80 ± 10	25 ± 15	

(2) The 3 in. (75 mm) capping aggregate shall be gradation CA 6 or CA 10.

COARSE AGGREGATE FOR BACKFILL, TRENCH BACKFILL AND BEDDING (D-1)

Effective: November 1, 2011

Revised: November 1, 2013

This work shall be according to Section 1004.05 of the Standard Specifications except for the following:

Reclaimed Asphalt Pavement (RAP) maybe blended with gravel, crushed gravel, crushed stone crushed concrete, crushed slag, chats, crushed sand stone or wet bottom boiler slag. The RAP used shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, "Reclaimed Asphalt Pavement (RAP) for Aggregate Applications". The RAP shall be uniformly graded and shall pass the 1.0 in. (25 mm) screen. When RAP is blended with any of the coarse aggregate listed above, the blending shall be done mechanically with calibrated feeders. The feeders shall have an accuracy of + 2.0 percent of the actual quantity of material delivered. The final blended product shall not contain more than 40 percent by weight RAP.

The coarse aggregate listed above shall meet CA 6 and CA 10 gradations prior to being blended with the processed and uniformly graded RAP. Gradation deleterious count shall not exceed 10% of total RAP and 5% of other by total weight.

DRAINAGE AND INLET PROTECTION UNDER TRAFFIC (DISTRICT 1)

Effective: April 1, 2011

Revised: April 2, 2011

Add the following to Article 603.02 of the Standard Specifications:

- “ (i) Temporary Hot-Mix Asphalt (HMA) Ramp (Note)..... 1030
- (j) Temporary Rubber Ramps (Note 2)

Note 1. The HMA shall have maximum aggregate size of 3/8 in. (95 mm).

Note 2. The rubber material shall be according to the following.

Property	Test Method	Requirement
Durometer Hardness, Shore A	ASTM D 2240	75 ±15
Tensile Strength, psi (kPa)	ASTM D 412	300 (2000) min
Elongation, percent	ASTM D 412	90 min
Specific Gravity	ASTM D 792	1.0 - 1.3
Brittleness, °F (°C)	ASTM D 746	-40 (-40)”

Revise Article 603.07 of the Standard Specifications to read:

“ **603.07 Protection Under Traffic.** After the casting has been adjusted and the Class PP concrete has been placed, the work shall be protected by a barricade and two lights according to Article 701.17(e)(3)b.

When castings are under traffic before the final surfacing operation has been started, properly sized temporary ramps shall be placed around the drainage and/or utility castings according to the following methods.

- (a) Temporary Asphalt Ramps. Temporary hot-mix asphalt ramps shall be placed around the casting, flush with its surface and decreasing to a featheredge in a distance of 2 ft (600 mm) around the entire surface of the casting.

(b) Temporary Rubber Ramps. Temporary rubber ramps shall only be used on roadways with permanent posted speeds of 40 mph or less and when the height of the casting to be protected meets the proper sizing requirements for the rubber ramps as shown below.

Dimension	Requirement
Inside Opening	Outside dimensions of casting + 1 in. (25 mm)
Thickness at inside edge	Height of casting \pm 1/4 in. (6 mm)
Thickness at outside edge	1/4 in. (6 mm) max.
Width, measured from inside opening to outside edge	8 1/2 in. (215 mm) min

Placement shall be according to the manufacturer’s specifications.

Temporary ramps for castings shall remain in place until surfacing operations are undertaken within the immediate area of the structure. Prior to placing the surface course, the temporary ramp shall be removed. Excess material shall be disposed of according to Article 202.03.”

EMBANKMENT I

Effective: March 1, 2011
 Revised: November 1, 2013

Description. This work shall be according to Section 205 of the Standard Specifications except for the following.

Material. All material shall be approved by the District Geotechnical Engineer. The proposed material must meet the following requirements.

The laboratory Standard Dry Density shall be a minimum of 90 lb/cu ft (1450 kg/cu m) when determined according to AASHTO T 99 (Method C).

The organic content shall be less than ten percent determined according to AASHTO T 194 (Wet Combustion).

Soils which demonstrate the following properties shall be restricted to the interior of the embankment and shall be covered on both the sides and top of the embankment by a minimum of 3 ft (900 mm) of soil not considered detrimental in terms of erosion potential or excess volume change.

- 1) A grain size distribution with less than 35 percent passing the number 75 um (#200) sieve.
- 2) A plasticity index (PI) of less than 12.
- 3) A liquid limit (LL) in excess of 50.

Reclaimed asphalt shall not be used within the ground water table or as a fill if ground water is present.

The RAP used shall be according to the current Bureau of Materials and Physical Research Policy Memorandum, "Reclaimed Asphalt Pavement (RAP) for Aggregate Applications". Gradation deleterious count shall not exceed 10% of total RAP and 5% of other by total weight.

CONSTRUCTION REQUIREMENTS

Samples. Embankment material shall be sampled, tested, and approved before use. The contractor shall identify embankment sources, and provide equipment as the Engineer requires, for the collection of samples from those sources. Samples will be furnished to the Geotechnical Engineer a minimum of three weeks prior to use in order that laboratory tests for approval and compaction can be performed. Embankment material placement cannot begin until tests are completed and approval given.

Placing Material. In addition to Article 202.03, broken concrete, reclaimed asphalt with no expansive aggregate, or uncontaminated dirt and sand generated from construction or demolition activities shall be placed in 6 inches (150 mm) lifts and disked with the underlying lift until a uniform homogenous material is formed. This process also applies to the overlaying lifts. The disk must have a minimum blade diameter of 24 inches (600 mm).

When embankments are to be constructed on hillsides or existing slopes that are steeper than 3H:1V, steps shall be keyed into the existing slope by stepping and benching as shown in the plans or as directed by the engineer.

Compaction. Soils classification for moisture content control will be determined by the Soils Inspector using visual field examination techniques and the IDH Textural Classification Chart.

When tested for density in place each lift shall have a maximum moisture content as follows.

- a) A maximum of 110 percent of the optimum moisture for all forms of clay soils.
- b) A maximum of 105 percent of the optimum moisture for all forms of clay loam soils.

Stability. The requirement for embankment stability in Article 205.04 will be measured with a Dynamic Cone Penetrometer (DCP) according to the test method in the IDOT Geotechnical Manual. The penetration rate must be equal or less than 1.5 inches (38 mm) per blow.

Basis of Payment. This work will not be paid separately but will be considered as included in the various items of excavation.

GROUND TIRE RUBBER (GTR) MODIFIED ASPHALT BINDER (D-1)

Effective: June 29, 2006

Revised: January 01, 2013

Add the following to the end of article 1032.05 of the Standard Specifications:

“(c) Ground Tire Rubber (GTR) Modified Asphalt Binder. A quantity of 10.0 to 14.0 percent GTR (Note 1) shall be blended by dry unit weight with a PG 64-28 to make a GTR 70-28 or a PG 58-28 to make a GTR 64-28. The base PG 64-28 and PG 58-28 asphalt binders shall meet the requirements of Article 1032.05(a). Compatible polymers may be added during production. The GTR modified asphalt binder shall meet the requirements of the following table.

Test	Asphalt Grade GTR 70-28	Asphalt Grade GTR 64-28
Flash Point (C.O.C.), AASHTO T 48, °F (°C), min.	450 (232)	450 (232)
Rotational Viscosity, AASHTO T 316 @ 275 °F (135 °C), Poises, Pa·s, max.	30 (3)	30 (3)
Softening Point, AASHTO T 53, °F (°C), min.	135 (57)	130 (54)
Elastic Recovery, ASTM D 6084, Procedure A (sieve waived) @ 77 °F, (25 °C), aged, ss, 100 mm elongation, 5 cm/min., cut immediately, %, min.	65	65

Note 1. GTR shall be produced from processing automobile and/or light truck tires by the ambient grinding method. GTR shall not exceed 1/16 in. (2 mm) in any dimension and shall contain no free metal particles or other materials. A mineral powder (such as talc) meeting the requirements of AASHTO M 17 may be added, up to a maximum of four percent by weight of GTR to reduce sticking and caking of the GTR particles. When tested in accordance with Illinois modified AASHTO T 27, a 50 g sample of the GTR shall conform to the following gradation requirements:

Sieve Size	Percent Passing
No. 16 (1.18 mm)	100
No. 30 (600 μm)	95 ± 5
No. 50 (300 μm)	> 20

Add the following to the end of Note 1. of article 1030.03 of the Standard Specifications:

“A dedicated storage tank for the Ground Tire Rubber (GTR) modified asphalt binder shall be provided. This tank must be capable of providing continuous mechanical mixing throughout by continuous agitation and recirculation of the asphalt binder to provide a uniform mixture. The tank shall be heated and capable of maintaining the temperature of the asphalt binder at 300 °F to 350 °F (149 °C to 177 °C). The asphalt binder metering systems of dryer drum plants shall be calibrated with the actual GTR modified asphalt binder material with an accuracy of ± 0.40 percent.”

Revise 1030.02(c) of the Standard Specifications to read:

“(c) RAP Materials (Note 3)1031”

Add the following note to 1030.02 of the Standard Specifications:

Note 3. When using reclaimed asphalt pavement and/or reclaimed asphalt shingles, the maximum asphalt binder replacement percentage shall be according to the most recent special provision for recycled materials.

HEAT OF HYDRATION CONTROL FOR CONCRETE STRUCTURES (D-1)

Effective: November 1, 2013

Article 1020.15 shall not apply.

HMA MIXTURE DESIGN REQUIREMENTS (D-1)

Effective: January 1, 2013

Revised: November 1, 2014

1) Design Composition and Volumetric Requirements

Revise the last sentence of the first paragraph of Article 312.05 of the Standard Specifications to read:

“The minimum compacted thickness of each lift shall be according to Article 406.06(d).”

Delete the minimum compacted lift thickness table in Article 312.05 of the Standard Specifications.

Revise the second paragraph of Article 355.02 of the Standard Specifications to read:

“The mixture composition used shall be IL-19.0.”

Revise Article 355.05(a) of the Standard Specifications to read:

“(a) The top lift thickness shall be 2 1/4 in. (60 mm) for mixture composition IL-19.0.”

Revise the Leveling Binder table and second paragraph of Article 406.05(c) of the Standard Specifications to read:

“Leveling Binder	
Nominal, Compacted, Leveling Binder Thickness, in. (mm)	Mixture Composition
≤ 1 1/4 (32)	IL-4.75, IL-9.5, or IL-9.5L
> 1 1/4 to 2 (32 to 50)	IL-9.5 or IL-9.5L

The density requirements of Article 406.07(c) shall apply for leveling binder, machine method, when the nominal compacted thickness is: 3/4 in. (19 mm) or greater for IL-4.75 mixtures; and 1 1/4 in. (32 mm) or greater for IL-9.5 and IL-9.5L mixtures.”

Revise the table in Article 406.06(d) of the Standard Specifications to read:

“MINIMUM COMPACTED LIFT THICKNESS	
Mixture Composition	Thickness, in. (mm)
IL-4.75	3/4 (19)
SMA-9.5, IL-9.5, IL-9.5L	1 1/2 (38)
SMA-12.5	2 (50)
IL-19.0, IL-19.0L	2 1/4 (57)”

Revise the ninth paragraph of Article 406.14 of the Standard Specifications to read:

“Test strip mixture will be evaluated at the contract unit price according to the following.”

Revise Article 406.14(a) of the Standard Specifications to read:

“(a) If the HMA placed during the initial test strip is determined to be acceptable the mixture will be paid for at the contract unit price.”

Revise Article 406.14(b) of the Standard Specifications to read:

“(b) If the HMA placed during the initial test strip (1) is determined to be unacceptable to remain in place by the Engineer, and (2) was not produced within 2.0 to 6.0 percent air voids or within the individual control limits of the JMF according to the Department’s test results, the mixture will not be paid for and shall be removed at the Contractor’s expense. An additional test strip shall be constructed and the mixture will be paid for in full, if produced within 2.0 to 6.0 percent air voids and within the individual control limits of the JMF.”

Revise Article 406.14(c) of the Standard Specifications to read:

“(c) If the HMA placed during the initial test strip (1) is determined to be unacceptable to remain in place by the Engineer, and (2) was produced within 2.0 to 6.0 percent air voids and within the individual control limits of the JMF according to the Department’s test results, the mixture shall be removed. Removal will be paid according to Article 109.04. This initial mixture will be paid for at the contract unit price. An additional test strip shall be constructed and the mixture will be paid for in full, if produced within 2.0 to 6.0 percent air voids and within the individual control limits of the JMF.”

Delete Article 406.14(d) of the Standard Specifications.

Delete Article 406.14(e) of the Standard Specifications.

Delete the last sentence of Article 407.06(c) of the Standard Specifications.

Revise Note 2. of Article 442.02 of the Standard Specifications to read:

“Note 2. The mixture composition of the HMA used shall be IL-19.0 binder, designed with the same Ndesign as that specified for the mainline pavement.”

Delete the second paragraph of Article 482.02 of the Standard Specifications.

Revise the first sentence of the sixth paragraph of Article 482.05 of the Standard Specifications to read:

“When the mainline HMA binder and surface course mixture option is used on resurfacing projects, shoulder resurfacing widths of 6 ft (1.8 m) or less may be placed simultaneously with the adjacent traffic lane for both the binder and surface courses.”

Revise the second sentence of the fourth paragraph of Article 601.04 of the Standard Specifications to read:

“The top 5 in. (125 mm) of the trench shall be backfilled with an IL-19.0L Low ESAL mixture meeting the requirements of Section 1030 and compacted to a density of not less than 90 percent of the theoretical density.”

Revise the second sentence of the fifth paragraph of Article 601.04 of the Standard Specifications to read:

“The top 8 in. (200 mm) of the trench shall be backfilled with an IL-19.0L Low ESAL mixture meeting the requirements of Section 1030 and compacted to a density of not less than 90 percent of the theoretical density.”

Revise Article 1003.03(c) of the Standard Specifications to read:

“(c) Gradation. The fine aggregate gradation for all HMA shall be FA 1, FA 2, FA 20, FA 21, or FA 22. The fine aggregate gradation for SMA shall be FA/FM 20.

For mixture IL-4.75 and surface mixtures with an Ndesign = 90, at least 50 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag meeting the FA 20 gradation.

For mixture IL-19.0, Ndesign = 90 the fine aggregate fraction shall consist of at least 67 percent manufactured sand meeting FA 20 or FA 22 gradation. For mixture IL-19.0, Ndesign = 50 or 70 the fine aggregate fraction shall consist of at least 50 percent manufactured sand meeting FA 20 or FA 22 gradation. The manufactured sand shall be stone sand, slag sand, steel slag sand, or combinations thereof.

Gradation FA 1, FA 2, or FA 3 shall be used when required for prime coat aggregate application for HMA.”

Delete the last sentence of the first paragraph of Article 1004.03(b) of the Standard Specifications.

Revise the table in Article 1004.03(c) of the Standard Specifications to read:

“Use	Size/Application	Gradation No.
Class A-1, 2, & 3	3/8 in. (10 mm) Seal	CA 16
Class A-1	1/2 in. (13 mm) Seal	CA 15
Class A-2 & 3	Cover	CA 14
HMA High ESAL	IL-19.0 IL-9.5	CA 11 ^{1/} CA 16, CA 13 ^{3/}
HMA Low ESAL	IL-19.0L IL-9.5L Stabilized Subbase or Shoulders	CA 11 ^{1/} CA 16
SMA ^{2/}	1/2 in. (12.5mm) Binder & Surface IL 9.5 Surface	CA13 ^{3/} , CA14 or CA16 CA16, CA 13 ^{3/}

1/ CA 16 or CA 13 may be blended with the gradations listed.

2/ The coarse aggregates used shall be capable of being combined with stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation and mineral filler to meet the approved mix design and the mix requirements noted herein.

3/ CA 13 shall be 100 percent passing the 1/2 in. (12.5mm) sieve.

Revise Article 1004.03(e) of the Supplemental Specifications to read:

“(e) Absorption. For SMA the coarse aggregate shall also have water absorption ≤ 2.0 percent.”

Revise the nomenclature table in Article 1030.01 of the Standard Specifications to read:

“High ESAL	IL-19.0 binder; IL-9.5 surface; IL-4.75; SMA-12.5, SMA-9.5
Low ESAL	IL-19.0L binder; IL-9.5L surface; Stabilized Subbase (HMA) ^{1/} ; HMA Shoulders ^{2/}

1/ Uses 19.0L binder mix.

2/ Uses 19.0L for lower lifts and 9.5L for surface lift.”

Revise Article 1030.02 of the Standard Specifications and Supplemental Specifications to read:

“1030.02 Materials. Materials shall be according to the following.

Item	Article/Section
(a) Coarse Aggregate	1004.03
(b) Fine Aggregate	1003.03
(c) RAP Material	1031
(d) Mineral Filler	1011
(e) Hydrated Lime	1012.01
(f) Slaked Quicklime (Note 1)	
(g) Performance Graded Asphalt Binder (Note 2)	1032
(h) Fibers (Note 3)	
(i) Warm Mix Asphalt (WMA) Technologies (Note 4)	

Note 1. Slaked quicklime shall be according to ASTM C 5.

Note 2. The asphalt binder shall be an SBS PG 76-28 when the SMA is used on a full-depth asphalt pavement and SBS PG 76-22 when used as an overlay, except where modified herein. The asphalt binder shall be an Elvaloy or SBS PG 76-22 for IL-4.75, except where modified herein. The elastic recovery shall be a minimum of 80.

Note 3. A stabilizing additive such as cellulose or mineral fiber shall be added to the SMA mixture according to Illinois Modified AASHTO M 325. The stabilizing additive shall meet the Fiber Quality Requirements listed in Illinois Modified AASHTO M 325. Prior to approval and use of fibers, the Contractor shall submit a notarized certification by the producer of these materials stating they meet these requirements. Reclaimed Asphalt Shingles (RAS) may be used in Stone Matrix Asphalt (SMA) mixtures designed with an SBA polymer modifier as a fiber additive if the mix design with RAS included meets AASHTO T305 requirements. The RAS shall be from a certified source that produces either Type I or Type 2. Material shall meet requirements noted herein and the actual dosage rate will be determined by the Engineer.

Note 4. Warm mix additives or foaming processes shall be selected from the current Bureau of Materials and Physical Research Approved List, “Warm Mix Asphalt Technologies”.

Revise Article 1030.04(a)(1) of the Standard Specifications and the Supplemental Specifications to read:

“(1) High ESAL Mixtures. The Job Mix Formula (JMF) shall fall within the following limits.

High ESAL, MIXTURE COMPOSITION (% PASSING) ^{1/}										
Sieve Size	IL-19.0 mm		SMA ^{4/} IL-12.5 mm		SMA ^{4/} IL-9.5 mm		IL-9.5 mm		IL-4.75 mm	
	min	max	min	max	min	max	min	max	min	max
1 1/2 in. (37.5 mm)										
1 in. (25 mm)		100								
3/4 in. (19 mm)	90	100		100						
1/2 in. (12.5 mm)	75	89	80	100		100		100		100
3/8 in. (9.5 mm)				65	90	100	90	100		100
#4 (4.75 mm)	40	60	20	30	36	50	34	69	90	100
#8 (2.36 mm)	20	42	16	24 ^{5/}	16	32 ^{5/}	34 ^{6/}	52 ^{2/}	70	90
#16 (1.18 mm)	15	30					10	32	50	65
#30 (600 μm)			12	16	12	18				
#50 (300 μm)	6	15					4	15	15	30
#100 (150 μm)	4	9					3	10	10	18
#200 (75 μm)	3	6	7.0	9.0 ^{3/}	7.5	9.5 ^{3/}	4	6	7	9 ^{3/}
Ratio Dust/Asphalt Binder		1.0		1.5		1.5		1.0		1.0

- 1/ Based on percent of total aggregate weight.
- 2/ The mixture composition shall not exceed 44 percent passing the #8 (2.36 mm) sieve for surface courses with Ndesign = 90.
- 3/ Additional minus No. 200 (0.075 mm) material required by the mix design shall be mineral filler, unless otherwise approved by the Engineer.
- 4/ The maximum percent passing the #635 (20 μm) sieve shall be ≤ 3 percent.
- 5/ When establishing the Adjusted Job Mix Formula (AJMF) the percent passing the #8 (2.36 mm) sieve shall not be adjusted above the percentage stated on the table.
- 6/ When establishing the Adjusted Job Mix Formula (AJMF) the percent passing the #8 (2.36 mm) sieve shall not be adjusted below 34 percent.

Delete Article 1030.04(a)(3) of the Standard Specifications.

Delete Article 1030.04(a)(4) of the Standard Specifications.

Revise Article 1030.04(b)(1) of the Standard Specifications to read:

- “(1) High ESAL Mixtures. The target value for the air voids of the HMA shall be 4.0 percent and for IL-4.75 it shall be 3.5 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix, and shall conform to the following requirements.

VOLUMETRIC REQUIREMENTS High ESAL				
	Voids in the Mineral Aggregate (VMA), % minimum			Voids Filled with Asphalt Binder (VFA), %
Ndesign	IL-19.0	IL-9.5	IL-4.75 ^{1/}	
50	13.5	15.0	18.5	65 – 78 ^{2/}
70				65 - 75
90				

1/ Maximum Draindown for IL-4.75 shall be 0.3 percent

2/ VFA for IL-4.75 shall be 72-85 percent”

Revise the table in Article 1030.04(b)(2) of the Standard Specifications to read:

“VOLUMETRIC REQUIREMENTS Low ESAL				
Mixture Composition	Design Compactive Effort	Design Air Voids Target %	VMA (Voids in the Mineral Aggregate), % min.	VFA (Voids Filled with Asphalt Binder), %
IL-9.5L	N _{DES} =30	4.0	15.0	65-78
IL-19.0L	N _{DES} =30	4.0	13.5	N/A”

Replace Article 1030.04(b)(3) of the Standard Specifications with the following:

“(3) SMA Mixtures.

Volumetric Requirements SMA ^{1/}			
Ndesign	Design Air Voids Target %	Voids in the Mineral Aggregate (VMA), % min.	Voids Filled with Asphalt (VFA), %
80 ^{4/}	3.5	17.0 ^{2/}	75 - 83
		16.0 ^{3/}	

- 1/ Maximum draindown shall be 0.3 percent. The draindown shall be determined at the JMF asphalt binder content at the mixing temperature plus 30 °F.
- 2/ Applies when specific gravity of coarse aggregate is ≥ 2.760.
- 3/ Applies when specific gravity of coarse aggregate is < 2.760.
- 4/ Blending of different types of aggregate will not be permitted. For surface course, the coarse aggregate can be crushed steel slag, crystalline crushed stone or crushed sandstone. For binder course, coarse aggregate shall be crushed stone (dolomite), crushed gravel, crystalline crushed stone, or crushed sandstone.

Delete Article 1030.04(b)(4) of the Standard Specifications.

Delete Article 1030.04(b)(5) from the Supplemental Specifications.

Delete last sentence of the second paragraph of Article 1102.01(a) (13) a.

Add to second paragraph in Article 1102.01 (a) (13) a.:

“As an option, collected bag-house dust may be used in lieu of manufactured mineral filler, provided; 1) there is enough available for the production of the SMA mix for the entire project and 2) a mix design was prepared with collected bag-house dust.”

Revise the table in Article 1030.05(d)(2)a. of the Standard Specifications to read:

"Parameter	Frequency of Tests		Test Method See Manual of Test Procedures for Materials
	High ESAL Mixture	Low ESAL Mixture	
Aggregate Gradation % passing sieves: 1/2 in. (12.5 mm), No. 4 (4.75 mm), No. 8 (2.36 mm), No. 30 (600 μm) No. 200 (75 μm)	1	washed ignition oven test on the mix per half day of production Note 3.	Illinois Procedure
Asphalt Binder Content by Ignition Oven Note 1.	1	per half day of production	Illinois-Modified AASHTO T 308
VMA Note 2.	Day's production ≥ 1200 tons: 1	per half day of production Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	Illinois-Modified AASHTO R 35
Air Voids Bulk Specific Gravity of Gyratory Sample Note 4.	Day's production ≥ 1200 tons: 1	per half day of production Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	Illinois-Modified AASHTO T 312
Maximum Specific Gravity of Mixture	Day's production ≥ 1200 tons: 1	per half day of production Day's production < 1200 tons: 1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	Illinois-Modified AASHTO T 209

- Note 1. The Engineer may waive the ignition oven requirement for asphalt binder content if the aggregates to be used are known to have ignition asphalt binder content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the asphalt binder content.
- Note 2. The G_{sb} used in the voids in the mineral aggregate (VMA) calculation shall be the same average G_{sb} value listed in the mix design.
- Note 3. The Engineer reserves the right to require additional hot bin gradations for batch plants if control problems are evident.
- Note 4. The WMA compaction temperature for mixture volumetric testing shall be 270 ± 5 °F (132 ± 3 °C) for quality control testing. The WMA compaction temperature for quality assurance testing will be 270 ± 5 °F (132 ± 3 °C) if the mixture is not allowed to cool to room temperature. If the mixture is allowed to cool to room temperature, it shall be reheated to standard HMA compaction temperatures.”

Revise the table in Article 1030.05(d)(2)b. of the Standard Specifications to read:

“Parameter	High ESAL Mixture Low ESAL Mixture
Ratio Dust/Asphalt Binder	0.6 to 1.2
Moisture	0.3 %”

Revise the Article 1030.05(d)(4) of the Supplemental Specifications to read:

“(4) Control Limits. Target values shall be determined by applying adjustment factors to the AJMF where applicable. The target values shall be plotted on the control charts within the following control limits.

“CONTROL LIMITS						
Parameter	High ESAL		SMA		IL-4.75	
	Individual Test	Moving Avg. of 4	Test	Moving Avg. of 4	Individual Test	Moving Avg. of 4
% Passing: ^{1/}						
1/2 in. (12.5 mm)	± 6 %	± 4 %	± 6 %	± 4 %		
3/8 in. (9.5mm)			± 4 %	± 3 %		
No. 4 (4.75 mm)	± 5 %	± 4 %	± 5 %	± 4 %		
No. 8 (2.36 mm)	± 5 %	± 3 %	± 4 %	± 2 %		
No. 16 (1.18 mm)			± 4 %	± 2 %	± 4 %	± 3 %
No. 30 (600 µm)	± 4 %	± 2.5 %	± 4 %	± 2.5 %		
Total Dust Content No. 200 (75 µm)	± 1.5 %	± 1.0 %			± 1.5 %	± 1.0 %
Asphalt Binder Content	± 0.3 %	± 0.2 %	± 0.2 %	± 0.1 %	± 0.3 %	± 0.2 %
Voids	± 1.2 %	± 1.0 %	± 1.2 %	± 1.0 %	± 1.2 %	± 1.0 %
VMA	-0.7 % ^{2/}	-0.5 % ^{2/}	-0.7 % ^{2/}	-0.5 % ^{2/}	-0.7 % ^{2/}	-0.5 % ^{2/}

1/ Based on washed ignition oven

2/ Allowable limit below minimum design VMA requirement

DENSITY CONTROL LIMITS		
Mixture Composition	Parameter	Individual Test
IL-4.75	N _{design} = 50	93.0 - 97.4 % ^{1/}
IL-9.5	N _{design} = 90	92.0 - 96.0 %
IL-9.5,IL-9.5L	N _{design} < 90	92.5 - 97.4 %
IL-19.0	N _{design} = 90	93.0 - 96.0 %
IL-19.0, IL-19.0L	N _{design} < 90	93.0 ^{2/} - 97.4 %
SMA	N _{design} = 80	93.5 - 97.4 %

1/ Density shall be determined by cores or by correlated, approved thin lift nuclear gauge.

2/ 92.0 % when placed as first lift on an unimproved subgrade.”

Revise the table in Article 1030.05(d)(5) of the Supplemental Specifications to read:

“CONTROL CHART REQUIREMENTS	High ESAL, Low ESAL, SMA & IL-4.75
Gradation ^{1/ 3/}	% Passing Sieves: 1/2 in. (12.5 mm) ^{2/} No. 4 (4.75 mm) No. 8 (2.36 mm) No. 30 (600 µm)
Total Dust Content ^{1/}	No. 200 (75 µm)
	Asphalt Binder Content
	Bulk Specific Gravity
	Maximum Specific Gravity of Mixture
	Voids
	Density
	VMA

- 1/ Based on washed ignition oven.
- 2/ Does not apply to IL-4.75.
- 3/ SMA also requires the 3/8 in. (9.5 mm) sieve.”

Delete Article 1030.05(d)(6)a.1.(b.) of the Standard Specifications.

Delete Article 1030.06(b) of the Standard Specifications.

Delete Article 1102.01(e) of the Standard Specifications.

2) Design Verification and Production

Description. The following states the requirements for Hamburg Wheel and Tensile Strength testing for High ESAL, IL-4.75, and Stone Matrix Asphalt (SMA) hot-mix asphalt (HMA) mixes during mix design verification and production.

Mix Design Testing. Add the following below the referenced AASHTO standards in Article 1030.04 of the Standard Specifications:

- AASHTO T 324 Hamburg Wheel Test
- AASHTO T 283 Tensile Strength Test

Add the following to Article 1030.04 of the Standard Specifications:

“(d) Verification Testing. High ESAL, IL-4.75, and SMA mix designs submitted for verification will be tested to ensure that the resulting mix designs will pass the required criteria for the Hamburg Wheel Test (IL mod AASHTO T-324) and the Tensile Strength Test (IL mod AASHTO T-283). The Department will perform a verification test on gyratory specimens compacted by the Contractor. If the mix fails the Department’s verification test, the Contractor shall make the necessary changes to the mix and resubmit compacted specimens to the Department for verification. If the mix fails again, the mix design will be rejected.

All new and renewal mix designs will be required to be tested, prior to submittal for Department verification and shall meet the following requirements:

(1)Hamburg Wheel Test criteria. The maximum allowable rut depth shall be 0.5 in. (12.5 mm). The minimum number of wheel passes at the 0.5 in. (12.5 mm) rut depth criteria shall be based on the high temperature binder grade of the mix as specified in the mix requirements table of the plans.

Illinois Modified AASHTO T 324 Requirements ^{1/}

Asphalt Binder Grade	# Repetitions	Max Rut Depth (mm)
PG 70 -XX (or higher)	20,000	12.5
PG 64 -XX (or lower)	10,000	12.5

1/ When produced at temperatures of 275 ± 5 °F (135 ± 3 °C) or less, loose Warm Mix Asphalt shall be oven aged at 270 ± 5 °F (132 ± 3 °C) for two hours prior to gyratory compaction of Hamburg Wheel specimens.

Note: For SMA Designs (N-80) the maximum rut depth is 6.0 mm at 20,000 repetitions.
 For IL 4.75mm Designs (N-50) the maximum rut depth is 9.0mm at 15,000 repetitions.

(2) Tensile Strength Criteria. The minimum allowable conditioned tensile strength shall be 60 psi (415 kPa) for non-polymer modified performance graded (PG) asphalt binder and 80 psi (550 kPa) for polymer modified PG asphalt binder. The maximum allowable unconditioned tensile strength shall be 200 psi (1380 kPa).”

Production Testing. Revise Article 1030.06(a) of the Standard Specifications to read:

“(a) High ESAL, IL-4.75, WMA, and SMA Mixtures. For each contract, a 300 ton (275 metric tons) test strip, except for SMA mixtures it will be 400 ton (363 metric ton), will be required at the beginning of HMA production for each mixture with a quantity of 3000 tons (2750 metric tons) or more according to the Manual of Test Procedures for Materials “Hot Mix Asphalt Test Strip Procedures”.

Before start-up, target values shall be determined by applying gradation correction factors to the JMF when applicable. These correction factors shall be determined from previous experience. The target values, when approved by the Engineer, shall be used to control HMA production. Plant settings and control charts shall be set according to target values.

Before constructing the test strip, target values shall be determined by applying gradation correction factors to the JMF when applicable. After any JMF adjustment, the JMF shall become the Adjusted Job Mix Formula (AJMF). Upon completion of the first acceptable test strip, the JMF shall become the AJMF regardless of whether or not the JMF has been adjusted. If an adjustment/plant change is made, the Engineer may require a new test strip to be constructed. If the HMA placed during the initial test strip is determined to be unacceptable to remain in place by the Engineer, it shall be removed and replaced.

The limitations between the JMF and AJMF are as follows.

Parameter	Adjustment
1/2 in. (12.5 mm)	± 5.0 %
No. 4 (4.75 mm)	± 4.0 %
No. 8 (2.36 mm)	± 3.0 %
No. 30 (600 µm)	*
No. 200 (75 µm)	*
Asphalt Binder Content	± 0.3 %

* In no case shall the target for the amount passing be greater than the JMF.

Any adjustments outside the above limitations will require a new mix design.

Mixture sampled to represent the test strip shall include additional material sufficient for the Department to conduct Hamburg Wheel testing according to Illinois Modified AASHTO T324 (approximately 60 lb (27 kg) total).

The Contractor shall immediately cease production upon notification by the Engineer of failing Hamburg Wheel test. All prior produced material may be paved out provided all other mixture criteria is being met. No additional mixture shall be produced until the Engineer receives passing Hamburg Wheel tests.

The Department may conduct additional Hamburg Wheel tests on production material as determined by the Engineer.”

Revise the title of Article 1030.06(b) of the Standard Specifications to read:

“(b) Low ESAL Mixtures.”

Add the following to Article 1030.06 of the Standard Specifications:

“(c) Hamburg Wheel Test. All HMA mixtures shall be sampled within the first 500 tons (450 metric tons) on the first day of production or during start up with a split reserved for the Department. The mix sample shall be tested according to the Illinois Modified AASHTO T 324 and shall meet the requirements specified herein. Mix production shall not exceed 1500 tons (1350 metric tons) or one day’s production, whichever comes first, until the testing is completed and the mixture is found to be in conformance. The requirement to cease mix production may be waived if the plant produced mixture demonstrates conformance prior to start of mix production for a contract.

The Department may conduct additional Hamburg Wheel Tests on production material as determined by the Engineer. If the mixture fails to meet the Hamburg Wheel criteria, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria”

The Contractor shall immediately cease production upon notification by the Engineer of failing Hamburg Wheel test. All prior produced material may be paved out provided all other mixture criteria are being met. No additional mixture shall be produced until the Engineer receives passing Hamburg Wheel tests.

Method of Measurement:

Add the following after the fourth paragraph of Article 406.13 (b):

“The plan quantities of SMA mixtures shall be adjusted using the actual approved binder and surface Mix Design’s G_{mb} .”

Basis of Payment.

Replace the seventh paragraph of Article 406.14 of the Standard Specifications with the following:

“For all mixes designed and verified under the Hamburg Wheel criteria, the cost of furnishing and introducing anti-stripping additives in the HMA will not be paid for separately, but shall be considered as included in the contract unit price of the HMA item involved.

No additional compensation will be awarded to the Contractor because of reduced production rates associated with the addition of the anti-stripping additive.”

PUBLIC CONVENIENCE AND SAFETY (D-1)

Effective: May 1, 2012

Revised: July 15, 2012

Add the following to the end of the fourth paragraph of Article 107.09:

“If the holiday is on a Saturday or Sunday, and is legally observed on a Friday or Monday, the length of Holiday Period for Monday or Friday shall apply.”

Add the following sentence after the Holiday Period table in the fourth paragraph of Article 107.09:

“The length of Holiday Period for Thanksgiving shall be from 5:00 AM the Wednesday prior to 11:59 PM the Sunday after”

Delete the fifth paragraph of Article 107.09 of the Standard Specifications:

“On weekends, excluding holidays, roadways with Average Daily Traffic of 25,000 or greater, all lanes shall be open to traffic from 3:00 P.M. Friday to midnight Sunday except where structure construction or major rehabilitation makes it impractical.”

RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES (D-1)

Effective: November 1, 2012

Revise: January 2, 2015

Revise Section 1031 of the Standard Specifications to read:

“SECTION 1031. RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES

1031.01 Description. Reclaimed asphalt pavement and reclaimed asphalt shingles shall be according to the following.

- (a) Reclaimed Asphalt Pavement (RAP). RAP is the material resulting from cold milling or crushing an existing hot-mix asphalt (HMA) pavement. RAP will be considered processed FRAP after completion of both crushing and screening to size. The Contractor shall supply written documentation that the RAP originated from routes or airfields under federal, state, or local agency jurisdiction.
- (b) Reclaimed Asphalt Shingles (RAS). Reclaimed asphalt shingles (RAS). RAS is from the processing and grinding of preconsumer or post-consumer shingles. RAS shall be a clean and uniform material with a maximum of 0.5 percent unacceptable material, as defined in Bureau of Materials and Physical Research Policy Memorandum “Reclaimed Asphalt Shingle (RAS) Sources”, by weight of RAS. All RAS used shall come from a Bureau of Materials and Physical Research approved processing facility where it shall be ground and processed to 100 percent passing the 3/8 in. (9.5 mm) sieve and 90 percent passing the #4 (4.75 mm) sieve . RAS shall meet the testing requirements specified herein. In addition, RAS shall meet the following Type 1 or Type 2 requirements.
 - (1) Type 1. Type 1 RAS shall be processed, preconsumer asphalt shingles salvaged from the manufacture of residential asphalt roofing shingles.
 - (2) Type 2. Type 2 RAS shall be processed post-consumer shingles only, salvaged from residential, or four unit or less dwellings not subject to the National Emission Standards for Hazardous Air Pollutants (NESHAP).

1031.02 Stockpiles. RAP and RAS stockpiles shall be according to the following.

- (a) RAP Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. Additional processed RAP (FRAP) shall be stockpiled in a separate working pile, as designated in the QC Plan, and only added to the sealed stockpile when test results for the working pile are complete and are found to meet tolerances specified herein for the original sealed FRAP stockpile. Stockpiles shall be sufficiently separated to prevent intermingling at the base. All stockpiles (including unprocessed RAP and FRAP) shall be identified by signs indicating the type as listed below (i.e. "Non- Quality, FRAP -#4 or Type 2 RAS", etc...).
- (1) Fractionated RAP (FRAP). FRAP shall consist of RAP from Class I, Superpave HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in FRAP shall be crushed aggregate and may represent more than one aggregate type and/or quality but shall be at least C quality. All FRAP shall be processed prior to testing and sized into fractions with the separation occurring on or between the #4 (4.75 mm) and 1/2 in. (12.5 mm) sieves. Agglomerations shall be minimized such that 100 percent of the RAP in the coarse fraction shall pass the maximum sieve size specified for the mix the FRAP will be used in.
 - (2) Restricted FRAP (B quality) stockpiles shall consist of RAP from Class I, Superpave (High ESAL), or HMA (High ESAL). If approved by the Engineer, the aggregate from a maximum 3.0 inch single combined pass of surface/binder milling will be classified as B quality. All millings from this application will be processed into FRAP as described previously.
 - (3) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I, Superpave HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in this RAP shall be crushed aggregate and may represent more than one aggregate type and/or quality but shall be at least C quality. This RAP may have an inconsistent gradation and/or asphalt binder content prior to processing. All conglomerate RAP shall be processed (FRAP) prior to testing. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.
 - (4) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP from HMA shoulders, bituminous stabilized subbases or Superpave (Low ESAL)/HMA (Low ESAL) IL-19.0L binder mixture. The coarse aggregate in this RAP may be crushed or round but shall be at least D quality. This RAP may have an inconsistent gradation and/or asphalt binder content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.
 - (5) Non-Quality. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Non-Quality".

RAP or FRAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, joint sealants, plant cleanout etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.

- (b) RAS Stockpiles. Type 1 and Type 2 RAS shall be stockpiled separately and shall be sufficiently separated to prevent intermingling at the base. Each stockpile shall be signed indicating what type of RAS is present.

However, a RAS source may submit a written request to the Department for approval to blend mechanically a specified ratio of type 1 RAS with type 2 RAS. The source will not be permitted to change the ratio of the blend without the Department prior written approval. The Engineer's written approval will be required, to mechanically blend RAS with any fine aggregate produced under the AGCS, up to an equal weight of RAS, to improve workability. The fine aggregate shall be "B Quality" or better from an approved Aggregate Gradation Control System source. The fine aggregate shall be one that is approved for use in the HMA mixture and accounted for in the mix design and during HMA production.

Records identifying the shingle processing facility supplying the RAS, RAS type and lot number shall be maintained by project contract number and kept for a minimum of three years.

1031.03 Testing. FRAP and RAS testing shall be according to the following.

- (a) FRAP Testing. When used in HMA, the FRAP shall be sampled and tested either during processing or after stockpiling. It shall also be sampled during HMA production.
- (1) During Stockpiling. For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons (450 metric tons) for the first 2000 tons (1800 metric tons) and one sample per 2000 tons (1800 metric tons) thereafter. A minimum of five tests shall be required for stockpiles less than 4000 tons (3600 metric tons).
 - (2) Incoming Material. For testing as incoming material, washed extraction samples shall be run at a minimum frequency of one sample per 2000 tons (1800 metric tons) or once per week, whichever comes first.
 - (3) After Stockpiling. For testing after stockpiling, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP/FRAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to obtain representative samples throughout the pile for testing.

Before extraction, each field sample of FRAP, shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

(b) RAS Testing. RAS shall be sampled and tested during stockpiling according to Bureau of Materials and Physical Research Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Sources". The Contractor shall also sample as incoming material at the HMA plant.

(1) During Stockpiling. Washed extraction and testing for unacceptable materials shall be run at the minimum frequency of one sample per 200 tons (180 metric tons) for the first 1000 tons (900 metric tons) and one sample per 1000 tons (900 metric tons) thereafter. A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). Once a ≤ 1000 ton (900 metric ton), five-sample/test stockpile has been established it shall be sealed. Additional incoming RAS shall be in a separate working pile as designated in the Quality Control plan and only added to the sealed stockpile when the test results of the working pile are complete and are found to meet the tolerances specified herein for the original sealed RAS stockpile.

(2) Incoming Material. For testing as incoming material at the HMA plant, washed extraction shall be run at the minimum frequency of one sample per 250 tons (227 metric tons). A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). The incoming material test results shall meet the tolerances specified herein.

The Contractor shall obtain and make available all test results from start of the initial stockpile sampled and tested at the shingle processing facility in accordance with the facility's QC Plan.

Before extraction, each field sample shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedures. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

1031.04 Evaluation of Tests. Evaluation of tests results shall be according to the following.

- (a) Evaluation of FRAP Test Results. All test results shall be compiled to include asphalt binder content, gradation and, when applicable (for slag), G_{mm} . A five test average of results from the original pile will be used in the mix designs. Individual extraction test results run thereafter, shall be compared to the average used for the mix design, and will be accepted if within the tolerances listed below.

Parameter	FRAP
No. 4 (4.75 mm)	± 6 %
No. 8 (2.36 mm)	± 5 %
No. 30 (600 μm)	± 5 %
No. 200 (75 μm)	± 2.0 %
Asphalt Binder	± 0.3 %
G_{mm}	± 0.03 ^{1/}

- 1/ For stockpile with slag or steel slag present as determined in the current Manual of Test Procedures Appendix B 21, "Determination of Reclaimed Asphalt Pavement Aggregate Bulk Specific Gravity".

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the FRAP stockpile shall not be used in Hot-Mix Asphalt unless the FRAP representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

The Contractor shall maintain a representative moving average of five tests to be used for Hot-Mix Asphalt production.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)" or Illinois Modified AASHTO T-164-11, Test Method A.

- (b) Evaluation of RAS Test Results. All of the test results, with the exception of percent unacceptable materials, shall be compiled and averaged for asphalt binder content and gradation. A five test average of results from the original pile will be used in the mix designs. Individual test results run thereafter, when compared to the average used for the mix design, will be accepted if within the tolerances listed below.

Parameter	RAS
No. 8 (2.36 mm)	± 5 %
No. 16 (1.18 mm)	± 5 %
No. 30 (600 µm)	± 4 %
No. 200 (75 µm)	± 2.5 %
Asphalt Binder Content	± 2.0 %

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the RAS shall not be used in Hot-Mix Asphalt unless the RAS representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

- (c) Quality Assurance by the Engineer. The Engineer may witness the sampling and splitting conduct assurance tests on split samples taken by the Contractor for quality control testing a minimum of once a month.

The overall testing frequency will be performed over the entire range of Contractor samples for asphalt binder content and gradation. The Engineer may select any or all split samples for assurance testing. The test results will be made available to the Contractor as soon as they become available.

The Engineer will notify the Contractor of observed deficiencies.

Differences between the Contractor's and the Engineer's split sample test results will be considered acceptable if within the following limits.

Test Parameter	Acceptable Limits of Precision	
	FRAP	RAS
% Passing: ^{1/}		
1 / 2 in.	5.0%	
No. 4	5.0%	
No. 8	3.0%	4.0%
No. 30	2.0%	3.0%
No. 200	2.2%	2.5%
Asphalt Binder Content	0.3%	1.0%
G _{mm}	0.030	

1/ Based on washed extraction.

In the event comparisons are outside the above acceptable limits of precision, the Engineer will immediately investigate.

- (d) Acceptance by the Engineer. Acceptable of the material will be based on the validation of the Contractor's quality control by the assurance process.

1031.05 Quality Designation of Aggregate in RAP and FRAP.

- (a) RAP. The aggregate quality of the RAP for homogenous, conglomerate, and conglomerate "D" quality stockpiles shall be set by the lowest quality of coarse aggregate in the RAP stockpile and are designated as follows.

- (1) RAP from Class I, Superpave/HMA (High ESAL), or (Low ESAL) IL-9.5L surface mixtures are designated as containing Class B quality coarse aggregate.
- (2) RAP from Superpave/HMA (Low ESAL) IL-19.0L binder mixture is designated as Class D quality coarse aggregate.
- (3) RAP from Class I, Superpave/HMA (High ESAL) binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate.
- (4) RAP from bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate.

- (b) FRAP. If the Engineer has documentation of the quality of the FRAP aggregate, the Contractor shall use the assigned quality provided by the Engineer.

If the quality is not known, the quality shall be determined as follows. Fractionated RAP stockpiles containing plus #4 (4.75 mm) sieve coarse aggregate shall have a maximum tonnage of 5,000 tons (4,500 metric tons). The Contractor shall obtain a representative sample witnessed by the Engineer. The sample shall be a minimum of 50 lb (25 kg). The sample shall be extracted according to Illinois Modified AASHTO T 164 by a consultant prequalified by the Department for the specified testing. The consultant shall submit the test results along with the recovered aggregate to the District Office. The cost for this testing shall be paid by the Contractor. The District will forward the sample to the BMR Aggregate Lab for MicroDeval Testing, according to Illinois Modified AASHTO T 327. A maximum loss of 15.0 percent will be applied for all HMA applications. The fine aggregate portion of the fractionated RAP shall not be used in any HMA mixtures that require a minimum of "B" quality aggregate or better, until the coarse aggregate fraction has been determined to be acceptable thru a MicroDeval Testing.

1031.06 Use of FRAP and/or RAS in HMA. The use of FRAP and/or RAS shall be a Contractor's option when constructing HMA in all contracts.

- (a) FRAP. The use of FRAP in HMA shall be as follows.

- (1) Coarse Aggregate Size (after extraction). The coarse aggregate in all FRAP shall be equal to or less than the nominal maximum size requirement for the HMA mixture to be produced.
- (2) Steel Slag Stockpiles. FRAP stockpiles containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in HMA (High ESAL and Low ESAL) mixtures regardless of lift or mix type.
- (3) Use in HMA Surface Mixtures (High and Low ESAL). FRAP stockpiles for use in HMA surface mixtures (High and Low ESAL) shall have coarse aggregate that is Class B quality or better. FRAP shall be considered equivalent to limestone for frictional considerations unless produced/screened to minus 3/8 inch.
- (4) Use in HMA Binder Mixtures (High and Low ESAL), HMA Base Course, and HMA Base Course Widening. FRAP stockpiles for use in HMA binder mixtures (High and Low ESAL), HMA base course, and HMA base course widening shall be FRAP in which the coarse aggregate is Class C quality or better.
- (5) Use in Shoulders and Subbase. FRAP stockpiles for use in HMA shoulders and stabilized subbase (HMA) shall be FRAP, Restricted FRAP, conglomerate, or conglomerate DQ.

- (b) RAS. RAS meeting Type 1 or Type 2 requirements will be permitted in all HMA applications as specified herein.

- (c) FRAP and/or RAS Usage Limits. Type 1 or Type 2 RAS may be used alone or in conjunction with FRAP in HMA mixtures up to a maximum of 4.0% by weight of the total mix.

When FRAP is used alone or FRAP is used in conjunction with RAS, the percent of virgin asphalt binder replacement (ABR) shall not exceed the amounts indicated in the table below for a given N Design.

Max Asphalt Binder Replacement for FRAP with RAS Combination

HMA Mixtures ^{1/ 2/}	Maximum % ABR		
	Binder/Leveling Binder	Surface	Polymer Modified ^{3/}
Ndesign			
30L	50	40	10
50	40	35	10
70	40	30	10
90	40	30	10 ^{4/}
4.75 mm N-50			30
SMA N-80			20

- 1/ For HMA "All Other" (shoulder and stabilized subbase) N-30, the percent asphalt binder replacement shall not exceed 50% of the total asphalt binder in the mixture.
- 2/ When the binder replacement exceeds 15 percent for all mixes, except for SMA and IL-4.75, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent binder replacement using a virgin asphalt binder grade of PG64-22 will be reduced to a PG58-28). When constructing full depth HMA and the ABR is less than 15 percent, the required virgin asphalt binder grade shall be PG64-28.
- 3/ When the ABR for SMA or IL-4.75 is 15 percent or less, the required virgin asphalt binder shall be SBS PG76-22 and the elastic recovery shall be a minimum of 80. When the ABR for SMA or IL-4.75 exceeds 15%, the virgin asphalt binder grade shall be SBS PG70-28 and the elastic recovery shall be a minimum of 80.
- 4/ For polymerized surface mix used for overlays, with up to 10 percent ABR, an SBS PG70-22 will be required. However if used in full depth HMA, an SBS PG70-28 will be required.

1031.07 HMA Mix Designs. At the Contractor's option, HMA mixtures may be constructed utilizing RAP/FRAP and/or RAS material meeting the detailed requirements specified herein.

- (a) FRAP and/or RAS. FRAP and /or RAS mix designs shall be submitted for verification. If additional FRAP or RAS stockpiles are tested and found to be within tolerance, as defined under "Evaluation of Tests" herein, and meet all requirements herein, the additional FRAP or RAS stockpiles may be used in the original design at the percent previously verified.
- (b) RAS. Type 1 and Type 2 RAS are not interchangeable in a mix design. A RAS stone bulk specific gravity (Gsb) of 2.300 shall be used for mix design purposes.

1031.08 HMA Production. HMA production utilizing FRAP and/or RAS shall be as follows.

To remove or reduce agglomerated material, a scalping screen, gator, crushing unit, or comparable sizing device approved by the Engineer shall be used in the RAS and FRAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If during mix production, corrective actions fail to maintain FRAP, RAS or QC/QA test results within control tolerances or the requirements listed herein the Contractor shall cease production of the mixture containing FRAP or RAS and conduct an investigation that may require a new mix design.

- (a) RAS. RAS shall be incorporated into the HMA mixture either by a separate weight depletion system or by using the RAP weigh belt. Either feed system shall be interlocked with the aggregate feed or weigh system to maintain correct proportions for all rates of production and batch sizes. The portion of RAS shall be controlled accurately to within ± 0.5 percent of the amount of RAS utilized. When using the weight depletion system, flow indicators or sensing devices shall be provided and interlocked with the plant controls such that the mixture production is halted when RAS flow is interrupted.
- (b) HMA Plant Requirements. HMA plants utilizing FRAP and/or RAS shall be capable of automatically recording and printing the following information.

(1) Dryer Drum Plants.

- a. Date, month, year, and time to the nearest minute for each print.
- b. HMA mix number assigned by the Department.
- c. Accumulated weight of dry aggregate (combined or individual) in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
- d. Accumulated dry weight of RAS and FRAP in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).

- e. Accumulated mineral filler in revolutions, tons (metric tons), etc. to the nearest 0.1 unit.
 - f. Accumulated asphalt binder in gallons (liters), tons (metric tons), etc. to the nearest 0.1 unit.
 - g. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.
 - h. Aggregate RAS and FRAP moisture compensators in percent as set on the control panel. (Required when accumulated or individual aggregate and RAS and FRAP are printed in wet condition.)
 - i. When producing mixtures with FRAP and/or RAS, a positive dust control system shall be utilized.
 - j. Accumulated mixture tonnage.
 - k. Dust Removed (accumulated to the nearest 0.1 ton)
- (2) Batch Plants.
- a. Date, month, year, and time to the nearest minute for each print.
 - b. HMA mix number assigned by the Department.
 - c. Individual virgin aggregate hot bin batch weights to the nearest pound (kilogram).
 - d. Mineral filler weight to the nearest pound (kilogram).
 - f. RAS and FRAP weight to the nearest pound (kilogram).
 - g. Virgin asphalt binder weight to the nearest pound (kilogram).
 - h. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.

The printouts shall be maintained in a file at the plant for a minimum of one year or as directed by the Engineer and shall be made available upon request. The printing system will be inspected by the Engineer prior to production and verified at the beginning of each construction season thereafter.

1031.09 RAP in Aggregate Surface Course and Aggregate Shoulders. The use of RAP or FRAP in aggregate surface course and aggregate shoulders shall be as follows.

- (a) Stockpiles and Testing. RAP stockpiles may be any of those listed in Article 1031.02, except “Non-Quality” and “FRAP”. The testing requirements of Article 1031.03 shall not apply. RAP used to construct aggregate surface course and aggregate shoulders shall be according to the current Bureau of Materials and Physical Research’s Policy Memorandum, “Reclaimed Asphalt Pavement (RAP) for Aggregate Applications”
- (b) Gradation. One hundred percent of the RAP material shall pass the 1 1/2 in. (37.5mm) sieve. The RAP material shall be reasonably well graded from coarse to fine. RAP material that is gap-graded, FRAP, or single sized will not be accepted for use as Aggregate Surface Course and Aggregate Shoulders.”

HOT MIX ASPHALT QUALITY CONTROL FOR PERFORMANCE (BMPR)

Description. This special provision describes the procedures for production, placement and payment of hot-mix asphalt (HMA). This work shall be according to the Standard Specifications except as modified herein. This special provision shall apply to HMA mixtures as listed in the following table.

Mixture/Use:	Polymerized Hot-Mix Asphalt Surface Course, Mix "D", N70 (II-9.5 mm)
Location:	Proposed Taylor Street (Sta. 7609+67.36 to Sta. 7614+35.00)
	Proposed Union Avenue
Mixture/Use:	Hot-Mix Asphalt Binder Course, II-19.0, N70
Location:	Proposed I-290 Mainline Outbound (WB) (Sta. 5227+94.18 to Sta. 5247+80.00)
Mixture/Use:	Stabilized Subbase - Hot-Mix Asphalt, 4"
Location:	Proposed Taylor Street Exit Ramp (Sta. 7325+89.04 to Sta. 7326+25.62)

Exceptions may be approved for small tonnage less than 800 (725 metric) tons and miscellaneous mixture applications as defined by the Engineer.

Delete Articles:	406.06(b)(1), 2 nd Paragraph	(Temperature requirements)
	406.06 (e), 3 rd Paragraph	(Pavers speed requirements)
	406.07	(Compaction)
	1030.05(a)(4, 5, 9,)	(QC/QA Documents)
	1030.05(d)(2)a.	(Plant Tests)
	1030.05(d)(2)b.	(Dust-to-Asphalt and Moisture Content)
	1030.05(d)(2)d.	(Small Tonnage)
	1030.05(d)(2)f.	(HMA Sampling)
	1030.05(d)(3)	(Required Field Tests)
	1030.05(d)(4)	(Control Limits)
	1030.05(d)(5)	(Control Charts)
	1030.05(d)(7)	(Corrective Action for Field Tests (Density))
	1030.05(e)	(Quality Assurance by the Engineer)
	1030.05(f)	(Acceptance by the Engineer)
	1030.06(a), 3rd paragraph	(Before start-up...)
	1030.06(a), 7 th paragraph	(After an acceptable...)
	1030.06(a), 8 th paragraph	(If a mixture...)
	1030.06(a), 9 th paragraph	(A nuclear/core...)

Definitions:

- (a) Quality Control (QC): All production and construction activities by the Contractor required to achieve the required level of quality.
- (b) Quality Assurance (QA): All monitoring and testing activities by the Engineer required to assess product quality, level of payment, and acceptability of the product.
- (c) Pay Parameters: Pay Parameters shall be field Voids in the Mineral Aggregate (VMA), voids, and density. Field VMA will be calculated using the combined aggregates bulk specific gravity (G_{sb}) from the mix design.
- (d) Mixture Lot. A lot shall begin once an acceptable test strip has been completed and the AJMF has been determined. If the test strip is waived, a subplot shall begin with the start of production. A mixture lot shall consist of four sublots unless it is the last or only lot, in which case it may consist of as few as one subplot
- (e) Mixture Sublot. A mixture subplot for field VMA, voids, and Dust/AC will be a maximum of 1000 tons (910 metric tons).
 - If the remaining quantity is greater than 200 but less than 1000 tons, a subplot will consist of that amount.
 - If the remaining quantity is less than or equal to 200 tons, the quantity shall be combined with the previous subplot.
- (f) Density Interval. Density Intervals shall be every 0.2 mile (320 m) for lift thickness equal to or less than 3 in. (75 mm) and 0.1 mile (160 m) for lift thickness greater than 3 in. (75 mm).

- (g) Density Sublot. A subplot for density shall be the average of five consecutive Density Intervals. If a Density Interval is less than 200 ft (60 m), it will be combined with the previous Density Intervals.
- If one or two Density Intervals remain outside a subplot, they shall be included in the previous subplot.
 - If three or more Density Intervals remain, they shall be considered a subplot.
- (h) Density Test: A density test consists of a core taken at a random longitudinal and random transverse offset within each Density Interval. The HMA maximum theoretical gravity (G_{mm}) will be based on the running average of four Department test results. Initial G_{mm} will be based on the average of the first four test results. If less than four G_{mm} results are available, use an average of all available Department G_{mm} test results.

The random transverse offset excludes a distance from each outer edge equal to the lift thickness or a minimum of 4 in. (100 mm). If a core is located within one foot of an unconfined edge, 2.0 percent density will be added to the density of that core.

Quality Control (QC) by the Contractor:

The Contractor’s QC plan shall include the schedule of testing for both pay parameters and non-pay parameters required to control the product such as asphalt binder content and mixture gradation. The minimum test frequency shall be according to the following table.

Minimum Quality Control Sampling and Testing Requirements

Quality Characteristic		Minimum Test Frequency
Mixture Gradation		1 per subplot
Asphalt Binder Content		
Dust/AC Ratio		
Field VMA		
Voids	G_{mb}	
	G_{mm}	

The Contractor’s splits in conjunction with other quality control tests shall be used to control production.

The Contractor shall submit split jobsite mix sample test results to the Engineer within 48 hours of the time of sampling. All QC testing shall be performed in a qualified laboratory by personnel who have successfully completed the Department’s HMA Level I training.

Quality Assurance (QA) by the Engineer:

Voids, field VMA and Dust/AC ratio: The Engineer will determine the random tonnage and the Contractor shall be responsible for obtaining the sample according to the “PFP Hot-Mix Asphalt Random Jobsite Sampling” procedure.

Density: The Engineer will identify the random locations for each density testing interval. The Contractor shall be responsible for obtaining the four inch cores within the same day and prior to opening to traffic unless otherwise approved by the Engineer according to the “PFP and QCP Random Density Procedure”. The locations will be identified after final rolling and cores shall be obtained under the supervision of the Engineer. All core holes shall be filled immediately upon completion of coring. All water shall be removed from the core holes prior to filling. All core holes shall be filled with a rapid hardening mortar or concrete which shall be mixed in a separate container prior to placement in the hole. Any depressions in the surface of the filled core holes greater than 1/4 inch at the time of final inspection will require removal of the fill material to the depth of the lift thickness and replacement.

The Engineer will witness and secure all mixture and density samples. The Contractor shall transport the secured sample to a location designated by the Engineer.

The Engineer will test one or all of the randomly selected split samples from each lot for voids, field VMA and dust/AC ratio. The Engineer will test a minimum of one sample per project. The Engineer will test all of the pavement cores for density. All QA testing will be performed in a qualified laboratory by personnel who have successfully completed the Department’s HMA Level I training. QA test results will be available to the Contractor within 10 working days from receipt of secured cores and split mixture samples.

The Engineer will maintain a complete record of all Department test results and copies will be provided to the Contractor with each set of subplot results. The records will contain, as a minimum, the originals of all Department test results and raw data, random numbers used and resulting calculations for sampling locations, and quality level analysis calculations.

If the QA results do not meet the 100% subplot pay factor limits or do not compare to QC results within the precision limits listed below, the Engineer will test all split mix samples for the lot.

Test Parameter	Limits of Precision
G_{mb}	0.030
G_{mm}	0.026
Field VMA	1.0 %

Acceptance by the Engineer: All of the Department's tests shall be within the acceptable limits listed below:

Parameter		Acceptable Limits
Field VMA		-1.0 – +3.0% ^{1/}
Voids		2.0 – 6.0%
Density:	IL-9.5, IL-12.5, IL-19.0, IL-25.0, IL-4.75, IL-9.5FG ^{3/}	90.0 – 98.0%
	SMA	92.0 – 98.0%
Dust / AC Ratio		0.4 – 1.6 ^{2/}

1/ Based on minimum required VMA from mix design

2/ Does not apply to SMA.

3/ Acceptable density limits for IL-9.5FG placed less than 1.25 in. shall be 89.0% - 98.0%

In addition, no visible pavement distresses shall be present such as, but not limited to, segregation, excessive coarse aggregate fracturing or flushing.

Basis of Payment: Payment will be based on the calculation of the Composite Pay Factor using QA results for each mix according to the "QCP Payment Calculation" document.

Dust / AC Ratio. A monetary deduction will be made using the pay adjustment table below for dust/AC ratios that deviate from the 0.6 to 1.2 range. If the tested subplot is outside of this range, the Department will test the remaining subplots for Dust / AC pay adjustment.

Dust / AC Pay Adjustment Table^{1/}

Range	Deduct / subplot
$0.6 \leq X \leq 1.2$	\$0
$0.5 \leq X < 0.6$ or $1.2 < X \leq 1.4$	\$1000
$0.4 \leq X < 0.5$ or $1.4 < X \leq 1.6$	\$3000
$X < 0.4$ or $X > 1.6$	Shall be removed and replaced

1/ Does not apply to SMA.

HOT MIX ASPHALT QUANTITY CORRECTION (BMPR)

Effective: October 1, 2014

Revised: October 2, 2014

Revise the fifth paragraph of Article 406.13(b) of the Standard Specifications to read as follows:

“HMA and Stone Matrix Asphalt (SMA) mixture in excess of 103 percent of the quantity shown on the plans or the plan quantity as specified by the Engineer will not be measured for payment. The “adjusted quantity to be placed” and the “adjusted pay quantity” for HMA and SMA mixtures will be calculated as follows.

Adjusted Quantity To Be Placed = C x quantity shown on the plans or the plan quantity as specified by the Engineer

where: C = English: $C = \frac{G_{mb} \times 46.8}{U}$ Metric: $C = \frac{G_{mb} \times 24.99}{U}$

and where: G_{mb} = average bulk specific gravity from approved mix design
U = unit weight of HMA shown on the plans in lb/sq yd/in.
(kg/sq m/25 mm), used to estimate plan quantity
46.8 = English constant
24.99 = metric constant

Adjusted Pay Quantity (not to exceed 103 percent of the quantity shown on the plans or the plan quantity as specified by the Engineer) = B x HMA tons actually placed

where: $B = \frac{1}{C}$

If project circumstances warrant a new mix design, the above equations shall be used to calculate the adjusted plan quantity and adjusted pay quantity for each mix design using its respective average bulk specific gravity.”

SLIPFORM PAVING (D-1)

Effective: November 1, 2014

Revise Article 1020.04 Table 1, Note (5) of Standard Specifications to read:

“The slump range for slipform construction shall be 1/2 to 1 1/2 in.”

Revise Article 1020.04 Table 1 (metric), Note (5) of Standard Specifications to read:

“The slump range for slipform construction shall be 13 to 40 mm.”

NON-SPECIAL WASTE CERTIFICATION

The Department or its authorized representative will certify and sign any required transportation documentation for non-special waste as the generator of pre-existing non-special waste for this project.

ADJUSTMENTS AND RECONSTRUCTIONS

Effective: March 15, 2011

Revise the first paragraph of Article 602.04 to read:

“602.04 Concrete. Cast-in-place concrete for structures shall be constructed of Class SI concrete according to the applicable portions of Section 503. Cast-in-place concrete for pavement patching around adjustments and reconstructions shall be constructed of Class PP-1 concrete, unless otherwise noted in the plans, according to the applicable portions of Section 1020.”

Revise the third, fourth and fifth sentences of the second paragraph of Article 602.11(c) to read:

“Castings shall be set to the finished pavement elevation so that no subsequent adjustment will be necessary, and the space around the casting shall be filled with Class PP-1 concrete, unless otherwise noted in the plans, to the elevation of the surface of the base course or binder course. HMA surface or binder course material shall not be allowed. The pavement may be opened to traffic according to Article 701.17(e)(3)b.”

Revise Article 603.05 to read:

“603.05 Replacement of Existing Flexible Pavement. After the castings have been adjusted, the surrounding space shall be filled with Class PP-1 concrete, unless otherwise noted in the plans, to the elevation of the surface of the base course or binder course. HMA surface or binder course material shall not be allowed. The pavement may be opened to traffic according to Article 701.17(e)(3)b.”

Revise Article 603.06 to read:

“603.06 Replacement of Existing Rigid Pavement. After the castings have been adjusted, the pavement and HMA that was removed, shall be replaced with Class PP-1 concrete, unless otherwise noted in the plans, not less than 9 in. (225 mm) thick. The pavement may be opened to traffic according to Article 701.17(e)(3)b.

The surface of the Class PP concrete shall be constructed flush with the adjacent surface.”

Revise the first sentence of Article 603.07 to read:

“603.07 Protection Under Traffic. After the casting has been adjusted and the Class PP concrete has been placed, the work shall be protected by a barricade and two lights according to Article 701.17(e)(3)b.”

REMOVAL OF EXISTING STRUCTURES NO. 1

Description. This item shall consist of furnishing all labor, equipment and materials necessary for the removal and disposal of the existing Taylor Street Bridge over Interstate 90/94 and partial/complete removal and disposal of existing steel sheet piling interfering with new construction. The work shall be done in accordance with the applicable portions of Section 501 of the Standard Specifications.

All structure elements of the Taylor Street Bridge over I-90/94 including, but not limited to, abutments, abutments' footings, piers, piers' footings, beams, bearings, diaphragms, deck, sidewalk railing and fence, piles and drilled shafts (to a depth as noted on the plans or as directed by the Engineer), and abandoned sheet piling (interfering with new construction) shall be included in Removal of Existing Structures No. 1. Included in this item shall also be removal of the existing vaulted approach span deck, PPC I-beams, slopewall, bent and piles (interfering with new construction) as shown on the Plans (or as directed by the Engineer). Removal of the existing approach slabs shall be included with APPROACH SLAB REMOVAL.

Included in the Removal of Existing Structures No. 1 shall be the following:

- Complete removal of the southwest wing wall stem/footing and partial removal of existing supporting steel piles (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).
- Complete or partial removal (as required) of any remaining elements of the original 1960 Taylor Street Bridge interfering with new construction, including but not limited to, portions of West Abutment stem, curtain walls and drilled shafts (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).
- Partial removal of the existing drilled shafts at East Abutment as noted on the plans. The existing drilled shafts are utilized in the design to support the proposed abutment. All costs associated with partial removal and/or incorporation of existing drilled shaft into new structure, and cleaning and incorporating existing reinforcement into new construction, shall be included in this item. Any damage to existing drilled shafts/reinforcement caused by the Contractor during the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.
- Complete or partial removal, as required, of any abandoned steel sheet piling interfering with new construction or drainage items (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).

- Partial removal of the existing northeast and southeast curtain walls to a depth as noted on the plans or as directed by the Engineer. The Contractor is hereby alerted that the existing southeast curtain wall also serves as an abutment for the adjacent Ruble Street roadway. All necessary precautions shall be taken to ensure that the adjacent Ruble Street roadway is adequately supported during removal/construction operations and the design of the supporting elements used shall be performed by a Structural Engineer licensed in the State of Illinois. All costs associated with the Ruble Street roadway temporary support including, but not limited to, design, materials, labor and equipment shall not be paid separately but shall be included in this Item. Any damage to the adjacent Ruble Street roadway caused by the Contractor in the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.
- Complete or partial removal (to a minimum depth of 1 foot below proposed structure) of any abandoned structure elements that may interfere with the construction of the new bridge or roadway.
- Removal of items and appurtenances located on, attached to or adjacent to the bridge including, but not limited to, chain link fence and associated sign structures attached to bridge parapet and highway sign structures attached to the fascia of the bridge.
- Coordination with the City of Chicago Department of Electrical Operations (DEO) for the removal of street light and traffic signal poles and equipment by the DEO. The Contractor shall remove all embedded conduits and hand- or manholes. It should be noted that ComEd conduits (and asbestos insulation) attached to the existing structure using supports and hangers are anticipated to be removed by the ComEd Contractor prior to the beginning of work under this item. The work by the ComEd Contractor does not include the City of Chicago existing conduits (and asbestos insulation). It shall be the Contractor's responsibility to remove the City of Chicago existing conduits and asbestos insulation.
- Prior to any removal of conduit material, the existing conduits must be tested for the presence of asbestos content by qualified personnel and/or qualified testing firm. Tests shall be comprehensive, and include detailed visual inspection, sampling as determined by qualified testing firm or personnel and laboratory testing for samples in order to determine if conduits include asbestos cement. Each of the existing conduits should be independently reviewed due to unknown installation or maintenance improvement records. All testing records and results shall be provided to the Engineer prior to any removal of existing City of Chicago conduits. If tests identify that the conduits do contain asbestos, the removal of those conduits shall follow the specification for REMOVAL OF ASBESTOS CEMENT CONDUIT. Otherwise, the conduits shall be removed under the requirements of this section and will not be paid for separately. City of Chicago will remove cables and wire in advance of the conduit removal.

- Existing conduits and wires owned by ComEd will be removed by ComEd. Included in the Removal of Existing Structures No. 1 shall be any coordination with ComEd by the Contractor required for the removal of ComEd's conduits. The removal of the bridge shall be staged and the limits of removal and schedule of removal shall be coordinated with ComEd.

The work shall conform in every respect to all environmental, state and local regulations regarding construction requirements, the protection of adjacent properties, as well as dust and noise control.

Prior to commencing work under this Item, the Contractor shall verify the location of all existing utilities in the area. The Contractor shall submit drawings and written documentation to the Engineer of such verification. All work under this Item shall be executed in such a manner so as not to disturb or damage the existing utilities.

The Contractor shall exercise extreme caution in the performance of his/her work to ensure that all removal activities do not have detrimental effects on adjacent structures, existing 5'-10 $\frac{1}{4}$ "x6'-6" main drain located immediately west of proposed Pier 1, or other utilities. Any damage to these structures/utilities caused by the Contractor in the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.

All materials removed by the Contractor under this Item shall become the property of the Contractor and shall be disposed of by the Contractor off the site and in a lawful manner meeting all IDOT Policies and Procedures.

Traffic Operations

The traffic on the Interstate 90/94 must remain open to all lanes of traffic during demolition activities unless the Contractor has secured the necessary permits from the Illinois Department of Transportation to allow for temporary closure of lanes.

Method of Measurement. Removal of Existing Structures No. 1 shall be measured for payment by each of the structure removed including additional elements noted above.

Basis of Payment. The work under this Item will be paid for at the Contract unit price each for REMOVAL OF EXISTING STRUCTURES NO. 1, as indicated on the Plans and as specified herein.

REMOVAL OF EXISTING STRUCTURES NO. 2

Description. This item shall consist of furnishing all labor, equipment and materials necessary for the removal and disposal of the existing Southwest Retaining wall structure along South Union Ave. The work shall be done in accordance with the applicable portions of Section 501 of the Standard Specifications, as described herein, as detailed in the plans and as directed by the Engineer.

The scope of this item shall include removal and disposal of existing retaining wall. This work shall also include removal and disposal of miscellaneous items appurtenant to the structures, including but not limited to fence, existing steel sheet piling, expansion joint materials, reinforcing steel, existing conduits, conduit supports, electrical wires, junction boxes, light pole, traffic signal etc. The Contractor must submit a detailed procedure for removing the existing structures, to the Engineer for approval, prior to starting this work.

The Contractor shall remove existing retaining wall and associated foundation to a minimum depth of 1 foot below the bottom of existing footing elevation.

Contractor shall coordinate with utilities to remove and/or relocate existing utilities within the work zone prior to structure removal activities. Where utilities were identified during design they are shown on the drawings. The final location of utilities is the responsibility of the Contractor and is included in Removal of Existing Structures No. 2.

The work shall conform in every respect to all environmental, state and local regulations regarding construction requirements, the protection of adjacent properties, as well as dust and noise control.

Prior to commencing work under this Item, the Contractor shall verify the location of all existing utilities in the area. The Contractor shall submit drawings and written documentation to the Engineer of such verification. All work under this Item shall be executed in such a manner so as not to disturb or damage the existing utilities.

All materials removed under this Item shall become the property of the Contractor and shall be disposed of by the Contractor off the site and in a lawful manner meeting all IDOT Policies and Procedures.

Traffic Operations

The traffic using Interstate I-90/94 must remain open to all lanes of traffic during demolition activities unless the Contractor has secured the necessary permits from the Illinois Department of Transportation to allow for temporary closure of lanes.

Method of Measurement. No separate measurement will be made for removal of existing structures.

Excavation of earth necessary to perform the removal of existing structures will not be measured for payment..

Basis of Payment. The work under this Item will be paid for at the Contract unit price each for REMOVAL OF EXISTING STRUCTURES NO. 2, as indicated on the Plans and as specified herein.

FORM LINER TEXTURED SURFACE

The form liner textured surfaces shall conform to applicable portions of Section 503 of the Standard Specifications except as herein modified.

Description. This Work consists of designing, developing, furnishing and installing a form liner textured surface and forming concrete using reusable, high strength urethane and elastomeric form liners to achieve concrete treatment as shown on the Plans. Form liner textured surface shall be of the type specified at locations shown on the Plans or directed by the Engineer, and in accordance with the details shown in the Plans. This work shall also include furnishing and installing reveal and bevel strips.

Materials. Form liners for bridge piers shall be of high quality, highly reusable and capable of withstanding anticipated concrete pour pressures without causing leakage or physical defects. Forms for smooth surfaces shall be plastic coated to provide a smooth surface free of any impression or pattern.

General. Liners shall be attached to each other with flush seams and seams filled necessary to eliminate visible evidence of seams in cast concrete. Liner butt joints shall be blended into the pattern so as to create no vertical joints or reveals. Concrete pours shall be continuous form liner pattern fields. Finished textures shall be continuous without visual disruption and properly aligned over adjacent and multiple liner panels. After each use, liners shall be cleaned and visually inspected. Damaged liner shall be replaced when continued use or repair would diminish the aesthetics of the Work. At the end of the work, master molds and form liners shall be turned to the Owner, delivered at location designated by the Owner, for future use on other contracts.

All surfaces on columns and pier caps exposed to view and not indicated to receive textured liner will receive rubbed finish conforming to Section 503.15 of the Standard Specifications. All surfaces at concrete barrier at bridge exposed to view from pedestrian side, including sidewalk face, top and sides of barrier, will receive rubbed finish conforming to Section 503.15 of the Standard Specifications.

Submittals. Shop drawings of the form liner texture surface shall be provided for each area of textured concrete.

1. Individual form liner pattern descriptions, dimensions and sequencing of form liner sections, typical cross sections, joints, corners, joint locations, edge treatment and any other conditions.
2. Elevation views and layouts showing the full height and length of the structure with each form liner outlined.
3. Two 24"x 24" samples of each texture and two 36"x36" samples with all textures specified, adjacent to each other. Samples shall be made of the concrete mix specified for the structure.

4. Mockup: Partial mock up of the front face of the pier 1, with a minimum height of 4' and an approximate 6" thickness. The mockup must be available for review and approval of appearance and quality of the finish surface, at the project site by the Engineer, Department staff and their designees, Mockup to be made of the concrete mix specified for structure including the final finish.

No final concrete surfaces shall be cast until the Engineer accepts the final samples and mockup after approval of any submitted materials.

Acceptable Form Liner Manufactures:

1. Custom Rock International, St Paul, MN (Jim Rogers)
2. Scott Systems, Denver, CO
3. Creative Form Liner, INC, Brentwood, MD
4. Approved Equal.

Method of Measurement. This Work will be measured for payment, complete in place, per square feet for FORM LINER TEXTURED SURFACE.

Basis of Payment. This Work will be paid for at the Contract Unit Price per square feet for FORM LINER TEXTURED SURFACE which price includes furnishing and placing all material required, including all labor, equipment and incidentals necessary to complete the Work as herein specified.

APPROACH SLAB REMOVAL

Description. This work shall consist of the complete removal of the existing approach slabs including bituminous overlays, reinforcing bars, and sleeper slabs, at locations designated in the Plans and in accordance with the applicable portions of Sections 440 and 501 of the Standard Specifications.

This work shall also include the removal of existing timber piles and pile caps to at least 300mm (1 ft) below the proposed elevation of subgrade or ground surface within the area of construction and within the limits of the right of way when encountered. This work shall also include the removal of any mud jack cylinders encountered within the existing approach slabs.

The Contractor shall remove the existing approach slabs in a manner so as not to damage the adjacent structures that are to remain.

Method of Measurement. APPROACH SLAB REMOVAL shall be measured in place in square yards.

Basis of Payment. This work will be paid for at the contract unit price per square yard for APPROACH SLAB REMOVAL, which price shall include all labor and equipment necessary to remove and dispose of the entire approach slab pavement.

DRAINAGE SCUPPERS TO BE ADJUSTED

Description. This item of work shall consist of cleaning and adjusting the existing bridge drainage scuppers to the new elevation resulting from the concrete overlay as shown on the Plans, as directed by the Engineer and as specified herein. The adjustment shall be done by fabricating and installing a new adjusting ring, and removing and reinstalling the grate, to compensate for the elevation increase resulting from the overlay.

General Requirements. All cast iron parts shall be gray iron conforming to the requirements of AASHTO M 105, Class 35B. Bolts, washers and nuts shall conform to the requirements of ASTM A 307. All bolts, washers and nuts shall be galvanized according to AASHTO M 232.

The existing scuppers are provided with (4)-1/2" diameter A307 bolts to secure the grate in position; similar but longer bolts shall be used to fasten the adjusted existing grate to the scupper.

Basis of Payment. Adjusting drainage scuppers shall be paid for at the contract unit price per each for DRAINAGE SCUPPERS TO BE ADJUSTED, which price shall include all tools, equipment, material and labor required to complete the work as indicated on the Plans, directed by the Engineer and as specified herein. This item of work shall also include drilling for and providing stainless steel pins as required.

The cost of cleaning the existing scuppers shall also be included in the cost of DRAINAGE SCUPPERS TO BE ADJUSTED.

AIR QUALITY COMPLIANCE

Description. This work includes meeting or exceeding air quality requirements described herein, other Special Provision sections and the Standard Specifications.

General. The Contractor shall meet standards established to minimize air quality impacts due to construction activities. The obligations by the Contractor include the following:

Air Quality Plan – Prior to the start of construction activities, the Contractor will be supplied an Air Quality Plan developed by the Engineer. The Plan will serve as a guidance document for the duration of construction activities. The Air Quality Plan is intended to identify maximum thresholds of dust levels, particulate matter and diesel components in the air in and around the project site and will incorporate requirements identified within the Special Provisions. Baseline sampling in nearby areas without construction activity will be performed by the IEPA. Real-time monitoring will be conducted at the two locations adjacent to Circle Interchange. If during real-time monitoring there are exceedances of the screening standards, the Engineer will contact the Contractor and activities will cease and corrective actions will be developed.

Dust Control Plan – The Contractor shall comply with the requirements of CONSTRUCTION AIR QUALITY – DUST CONTROL in addition to Article 107.36 of the Standard Specifications.

Diesel Emissions – The maximum concentration of Diesel Components (PAHs) in sampled air shall not exceed $1 \mu\text{g}/\text{m}^3$, which is above the Chicago background level according to the IEPA. Following receipt of laboratory data that indicate exceedances of screening standards for diesel components as PAHs, IDOT will investigate the activity that was being performed at the time of the exceedance. IDOT will document the exceedance in the monthly report. Observations of consistent patterns in exceedances and potential corresponding work activities will assist in developing measures to manage the activity that caused the exceedance. Factors that will be evaluated include the activity being performed, the equipment being used for the activity, weather conditions, and general air quality at the time of the exceedance.

Construction Requirements. To ensure a prompt response to incidents involving the integrity of work zone Air Quality, the Contractor shall provide a telephone number where a responsible individual can be contacted on a 24 hour a day basis.

When the Engineer is notified, or determines, that an environmental control deficiency exists, he/she will notify the Contractor in writing, and direct the Contractor to correct the deficiency within a specified time frame. The specified time frame, which begins upon Contractor notification, will be from 1/2 hour to 24 hours long, and is based on the urgency of the situation and the nature of the deficiency. The Contractor may appeal the indicated deficiency to the Engineer on the grounds that the deficiency was caused by actions by a separate contractor, agency or public entity. The Engineer shall be the sole judge of these conditions and any appeal by the Contractor.

The deficiency may include lack of repair, maintenance or non-compliance with the related Articles of the Standard Specifications, the CONSTRUCTION AIR QUALITY – DUST CONTROL Special Provision and this Special Provision.

If the Contractor fails to respond within the allotted time frame, the Engineer may take action to correct the deficiency, or may cause the correction of the deficiency to be made by others, the cost thereof being deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities, and shall not be grounds for any claim.

If the Contractor accumulates three (3) environmental deficiency deductions for the same deficiency, all related Contractor activities will be shut down until the deficiency is corrected. Such a shut down will not be grounds for any extension of the completion date, waiver of penalties, or be grounds for any claim.

Basis of Payment. This work will not be paid for separately. All obligations described herein are included associated pay items. No extension of the completion date, waiver of penalties or claims shall arise from any Contractor activity shut down enacted due to deficiencies described herein.

CONSTRUCTION AIR QUALITY – DUST CONTROL

Description. This work shall consist of developing and implementing a detailed Dust Control Plan (DCP) in accordance with Article 107.36 of the Standard Specifications. Development of a DCP is required. All construction activities shall be governed by the DCP. The nature and extent of dust generating activities, and specific control techniques appropriate to specific situations shall be discussed at the pre-construction meeting, with subsequent development of the DCP to include but not be limited to the requirements below.

General Requirements. The Contractor is responsible for the control of dust at all times during the duration of the contract, 24 hours per day, 7 days per week, including non-working hours, weekends, and holidays. This work shall be considered complete after the completion of all permanent erosion control measures required for the contract, and after all temporary and permanent seeding is established.

Work on this contract shall be conducted in a manner that will not result in generating excessive total nuisance dust conditions or air borne particulate matter (PM_{2.5}). The IEPA will provide the Baseline Air Sampling in areas where there is no construction on the Circle Interchange. Two air quality monitoring locations have been identified; the UIC Student Recreational Building and IDOT Pump Station No. 5.

Following the baseline establishment, air quality will be monitored for total nuisance dust and air borne particulate matter (PM_{2.5}) as shown in the table below. Real-time monitoring will be conducted at the two locations adjacent to Circle Interchange. If during real-time monitoring there are exceedances of the screening standards, the Engineer will contact the Contractor and activities will cease and corrective actions will be developed.

Air Sample/Screening Standards			
Parameter		Concentration	Basis
Total Dust	Nuisance	335 µg/m ³	IEPA/IDPH
PM _{2.5}		35 µg/m ³	24 hours NAAQS

Notes: NAAQS = National Ambient Air Quality Standards
 IEPA = Illinois Environmental Protection Agency
 IDPH = Illinois Department of Public Health

The DCP shall describe the plan for the implementation of control measures before, during and after conducting any dust generating operation. These controls must be in place on non-working days and after working hours, not just while work is being done on the site. The DCP must contain information specific to the project site, proposed work, and dust control measures to be implemented. A copy of the DCP must be available on the project site at all times.

The DCP must contain, at a minimum, all of the following information:

1. Name, address and phone number of the person(s) responsible for the dust generating operation and for the submittal and implementation of the DCP.
2. A drawing specifying the site boundaries of the project with the areas to be disturbed, the locations of the nearest public roads, and all planned exit and entrance locations to the site from any paved public roadways.
3. Control measures to be applied to all actual and potential fugitive dust sources before, during and after conducting any dust generating operation, including non-work hours and non-work days.
4. A contingency plan consisting of at least one contingency measure for each activity occurring on the site in case the primary control measure proves inadequate.

The Contractor shall submit two copies of the DCP that outlines in detail the measures to be implemented by the Contractor complying with this section, including prevention, cleanup, and other measures at least 14 days before beginning any dust generating activity. The Contractor shall not begin any dust generating activities until the Engineer approves the DCP in writing.

Materials.

1. Dust Suppression Agents: Water shall meet the requirements of Section 1002 of the Standard Specifications.
2. Soil stabilizers shall consist of seed and mulch meeting the requirements of Article 1081.06 (a) (2) and (3).
3. Covers for stockpiles shall be commercially available plastic tarps, or other materials approved by the Engineer.

Construction Methods. Water shall be used to provide temporary control of dust on entrances/exits to the job site, haul roads and other active work areas. Several applications per day may be necessary to control dust depending upon meteorological conditions and work activity. The Contractor shall apply water on a routine basis as necessary or as directed by the Engineer to control dust. Wet suppression consists of the application of water. Wet suppression equipment shall consist of sprinkler pipelines, tanks, tank trucks or other devices approved by the Engineer, capable of providing a regulated flow, uniform spray and positive shut off.

Haul truck cargo areas shall be securely covered during the transport of materials on public roadways that are prone to cause dust.

Public Roadway Dust Control. Trackout, including carryout and spillage of material that adheres to the exterior surfaces of or are spilled from motor vehicles and/or equipment and subsequently fall onto a paved public roadway must be controlled at all times. Clean up of carryout and spillage is required immediately if it extends a cumulative distance of 50 feet or more on a paved public roadway. If the extent of carryout is less than 50 feet, clean up at the end of the day is permissible. Clean up of paved surfaces shall be by wet spray power vacuum street sweeper. Dry power sweeping is prohibited.

Control of Earthwork Dust. During batch drop operations (i.e. earthwork with a front-end loader, clamshell bucket, or backhoe), the free drop height of excavated or aggregate material shall be reduced to minimum heights as necessary to perform the specified task, and to minimize the generation of dust. To prevent spills during transport, a minimum of 2 inches of freeboard space shall be maintained between the material load and the top of the truck cargo bed rail. A maximum drop height of two feet (or minimum height allowed by equipment) will be allowed, or to heights as directed by the Engineer.

Control of Dust on Stockpiles and Inactive Work Areas. The Contractor shall use the following methods to control dust and wind erosion of stockpiles and inactive areas of disturbed soil:

1. Water shall be used during active stockpile load-in, load-out, and maintenance activities.
2. Soil stabilizers (hydraulic or chemical mulch) may be applied to the surface of inactive stockpiles and other inactive areas of disturbed soil. Final grading and seeding of inactive areas shall occur immediately after construction activity is completed in an area and as directed by the Engineer.
3. Plastic tarps may be used on small stockpiles, secured with sandbags or an equivalent method approved by the Engineer, to prevent the cover from being dislodged by the wind. The Contractor shall repair or replace the covers whenever damaged or dislodged at no additional cost.

Method of Measurement. Water used as a dust suppression measure shall be measured for payment in units of 1000 Gallons of water applied. All measuring devices shall be furnished by the Contractor and approved by the Engineer. All other dust control measures will not be measured for payment.

Basis of Payment. The application of water as a dust suppression agent will be paid for at the contract unit price per unit for DUST CONTROL WATERING.

All other dust control measures, along with preparation of the DCP, will not be paid for directly but shall be considered as included in the various items involved and no additional compensation will be allowed.

TEMPORARY PAVEMENT

Description. This work shall consist of constructing a temporary pavement at the locations shown on the Plans or as directed by the Engineer.

The Contractor shall use either Portland cement concrete (PCC) according to Sections 353 and 354 of the Standard Specifications or hot-mix asphalt (HMA) according to Sections 355, 356, 406 of the Standard Specifications, and other applicable PCC and HMA special provisions as contained herein. The HMA mixtures to be used shall be specified in the Plans. The thickness of the Temporary Pavement shall be as described in the Plans. The Contractor shall have the option of constructing either material type if both Portland cement concrete and HMA are shown in the Plans. The Contractor shall furnish and construct Subbase Granular Material, Type B 4" under the temporary pavement in accordance with the Standard Specifications.

Articles 355.08 and 406.11 of the Standard Specifications shall not apply.

The Temporary Pavement shall remain in place unless otherwise noted on the Plans, and if so, the removal shall conform to Section 440 of the Standard Specification.

Method of Measurement. TEMPORARY PAVEMENT and SUBBASE GRANULAR MATERIAL, TYPE B 4" will be measured in place and the area computed in square yards.

Basis of Payment. This work will be paid for at the contract unit price per square yard for TEMPORARY PAVEMENT and SUBBASE GRANULAR MATERIAL, TYPE B 4".

Removal of temporary pavement will be paid for at the contract unit price per square yard for PAVEMENT REMOVAL.

TEMPORARY SOIL RETENTION SYSTEM

Description. This work shall consist of designing, furnishing, installing, adjusting for stage construction when required and subsequent removal of the temporary soil retention system according to the dimensions and details shown on the Plans and in the approved design submittal, subject to the construction restrictions listed herein and on the drawings.

General. The temporary soil retention system shall be designed by the Contractor to retain, at a minimum, the exposed surface area specified in the Plans or as directed by the Engineer, including all loads as dictated by the site conditions. The design calculations and details for the temporary soil retention system proposed by the Contractor shall be submitted to the Engineer for approval. The calculations shall be prepared and sealed by an Illinois Licensed Structural Engineer. This approval will not relieve the Contractor of responsibility for the safety of the excavation. Approval shall be contingent upon acceptance by all involved utilities and/or agencies.

The design shall consider the restrictions on the installation of all components of the temporary soil retention system. These installation restrictions are listed in the next section of this special provision and in the "CONSTRUCTION VIBRATION MONITORING" special provision.

The proposed Temporary Soil Retention System shown on the plans for the Taylor Street structure (SN 016-1165) West Abutment is in close proximity to an existing 72"/84" diameter combined sewer. The invert elevation of this combined sewer is approximately ± 575.53 . The combined sewer is located on the plans based on the best available information.

Construction. The Contractor shall verify locations of all underground utilities before installing any of the temporary soil retention system components or commencing any excavation. Any disturbance or damage to existing structures, utilities or other property, caused by the Contractor's operation, shall be repaired by the Contractor in a manner satisfactory to the Engineer at no additional cost to the Department. Utility information shown on the drawings was collected from information available at the time of the design. There is no guarantee of complete accuracy with the utility locations.

The temporary soil retention system must be installed without the use of impact-type pile drivers. The location of the temporary soil retention system as shown on the drawings is in a highly sensitive populated area with the potential for damage to adjacent older structures. The proposed equipment and procedures used for installation of sheet piles or other underground support components must be submitted to the Engineer for approval prior to their use. It is anticipated that vibratory equipment may be utilized in performing the work, subject to requirements of other sections of this specification. Contractor shall also submit any documentation available regarding the operating noise levels and operating vibration characteristics of the equipment proposed, prior to approval of the Engineer.

The approval of the equipment and procedure by the Engineer does not guarantee the performance in the field of the equipment will be acceptable. If, in the judgment of the Engineer, the noise and/or vibration effects exceed those required by the local residents, then the Contractor must halt production and find a remedy suitable to the Engineer. Threshold values for vibration monitoring are included in the special provision "CONSTRUCTION VIBRATION MONITORING". The costs incurred finding suitable equipment and procedures shall be included in the cost of this item. No additional costs shall be paid for this effort.

The temporary soil retention system shall be installed according to the Contractor's approved design, or as directed by the Engineer, prior to commencing any related excavation. If unable to install the temporary soil retention system as specified in the approved design, the Contractor shall have the adequacy of the design re-evaluated. Any reevaluation shall be submitted to the Engineer for approval prior to commencing the excavation adjacent to the area in question. The Contractor shall not excavate below the maximum excavation line shown in the approved design without the prior permission of the Engineer. The temporary soil retention system shall remain in place until the Engineer determines it is no longer required.

The temporary soil retention system shall be removed and disposed of by the Contractor when directed by the Engineer. When allowed by the Engineer, the Contractor may elect to cut off a portion of the temporary soil retention system leaving the remainder in place. The remaining temporary soil retention system shall be removed to a depth which will not interfere with the new construction (including drainage and utilities), and as a minimum, to a depth of 2 ft. below the finished grade, or as directed by the Engineer. Removed system components shall become the property of the Contractor.

When an obstruction is encountered, the Contractor shall notify the Engineer and upon concurrence, the Contractor shall begin working to break up, push aside, or remove the obstruction. An obstruction shall be defined as any object (such as but not limited to, boulders, logs, old foundations etc.) where its presence was not obvious or specifically noted on the Plans prior to bidding, that cannot be driven or installed through or around, with normal driving or installation procedures, but requires additional excavation or other procedures to remove or miss the obstruction.

As stated earlier, the proposed Temporary Soil Retention System shown on the plans for the Taylor Street structure (SN 016-1165) West Abutment is in close proximity to an existing 72"/84" diameter combined sewer. The invert elevation of this combined sewer is approximately ± 575.53 . The Contractor shall at all times protect the combined sewer from loads induced by construction activities. The combined sewer is located on the plans based on the best available information. It is the responsibility of the Contractor to locate the combined sewer in the field.

Method of Measurement. The temporary soil retention system furnished and installed according to the Contractor's approved design or as directed by the Engineer will be measured for payment in square feet. The area measured shall be the vertical exposed surface area envelope of the excavation supported by temporary soil retention system. Portions of the temporary soil retention system left in place for reuse in later stages of construction shall only be measured for payment once.

Any temporary soil retention system installed beyond dimensions shown on the Plans or the approved Contractor's design, without the written permission of the Engineer, shall not be measured for payment but shall be done at the Contractor's own expense.

Basis of Payment. This work will be paid for at the contract unit price per square foot for TEMPORARY SOIL RETENTION SYSTEM.

Payment for any excavation, related solely to the installation and removal of the temporary soil retention system and/or its components, shall not be paid for separately but shall be included in the unit bid price for TEMPORARY SOIL RETENTION SYSTEM. Other excavation, performed in conjunction with this work, will not be included in this item but shall be paid for as specified elsewhere in this contract.

Payment for additional work required in design or construction to adequately protect the combined sewer at the West Abutment of the Taylor Street structure (SN 016-1165), and/or other utilities, shall be included in the bid price for TEMPORARY SOIL RETENTION SYSTEM.

Obstruction mitigation shall be paid for according to Article 109.04 of the Standard Specifications.

GATE REMOAL

Description: This work shall consist of removing and disposing the existing gate located at the Taylor Street entrance for 900 S. Des Plaines St as shown in the plans and as directed by the Engineer.

Construction Requirements: No removal work shall be completed without the approval of the Engineer. All associated hardware and appurtenances of the existing gate shall be removed off-site and disposed of by the Contractor in a legal disposal site. All postholes shall be backfilled and compacted to the satisfaction of the Engineer.

Method of Measurement. Gate removal shall be measured for payment by each of the gate removed.

Basis of Payment. The work under this Item will be paid for at the Contract unit price each for GATE REMOVAL, as indicated on the Plans and as specified herein.

REMOVAL OF ASBESTOS CEMENT CONDUIT

Description: This work consists of the removal and disposal of friable asbestos cement electrical conduits owned by the City of Chicago. The conduits shall be demolished including conduit supports and hangers. All work shall be done in accordance with the requirements of the U.S. Environmental Protection Agency (USEPA), the Illinois Environmental Protection Agency (IEPA), the Occupational Safety and Health Administration (OSHA), and as outlined herein.

Under the Taylor Street bridge structure, the City of Chicago has a 4 duct package that provides connections for their Office of Emergency Management and Communications across I-90/94. The ducts provide connections into the Cermak Pumping Station. The ducts were installed as part of the bridge reconstruction, which occurred in the 1980's.

The City of Chicago has identified that records are unclear if asbestos concrete is present in the existing conduits, though the chance for asbestos in the ducts along Harrison Street remains low. Prior to any removal of any conduit material, the existing conduits must be tested for the presence of asbestos content by qualified personnel and/or qualified testing firm. Tests should be comprehensive, and include detailed visual inspection, sampling as determined by qualified testing firm or personnel and laboratory testing of samples in order to determine if conduits include asbestos cement. Each of the existing conduits should be independently reviewed due to unknown installation or maintenance improvement records. No separate payment for testing of the existing conduits will be made. The testing of existing conduits shall be included as part of REMOVAL OF EXISTING STRUCTURE. All testing records and results shall be provided to the Engineer prior to any removal of existing City of Chicago conduits.

If testing identifies that asbestos cement is not present in the existing conduits, the conduits shall be demolished as part of REMOVAL OF EXISTING STRUCTURES. If testing identifies that asbestos cement is present in the existing conduits, the removal of the conduits shall follow the procedures identified within this specification.

The work involved in the removal and disposal of friable or non-friable asbestos done prior to demolition of the Harrison Street bridge structure shall be performed by a qualified Contractor or Sub-Contractor.

The Contractor shall provide a shipping manifest to the Engineer for the disposal of all asbestos containing material wastes.

The Contractor shall coordinate with the City of Chicago for the replacement of their ducts under this contract. The Contractor shall coordinate with ComEd for the removal of their ducts by others. Existing ComEd ducts parallel to the City of Chicago ducts may contain asbestos.

Permits: The Contractor shall apply for permit(s) in compliance with applicable regulations of the Illinois Environmental Protection Agency. Any and all other permits required by other federal, state, or local agencies for carrying on the work will be the responsibility of the Contractor. Copies of these permits must be sent to the district office and the Engineer.

Notifications: The "Demolition/Renovation Notice" form, which can be obtained from the IEPA office, shall be completed and submitted to the agencies listed below at least 10 days prior to commencement of any asbestos removal or demolition activity.

- A. Asbestos Demolition/Renovation Coordinator
Illinois Environmental Protection Agency
Division of Air Pollution Control
P. O. Box 19276
Springfield, Illinois 62794-9276
(217)785-1743

- B. U. S. Environmental Protection Agency
Air Compliance Branch
77 W. Jackson Blvd.
Chicago, Illinois 60604
Attention: Asbestos Coordinator

Notices must be updated if there is a change in the starting date or the amount of asbestos changes by more than 20 percent

Submittals

- A. All submittals and notices shall be made to the Engineer except where otherwise specified herein.

- B. Submittals that shall be made prior to start of work:
 - 1. Submittals required under Asbestos Abatement Experience.

 - 2. Submit documentation indicating that all employees have had medical examinations and instruction on the hazards of asbestos exposure, on use and fitting of respirators, on protective dress, on use of showers, on entry and exit from work areas, and on all aspects of work procedures and protective measures as specified in Worker Protection Procedures.

 - 3. Submit manufacturer's certification stating that vacuums, ventilation equipment, and other equipment required to contain airborne fibers conform to ANSI 29.2.

 - 4. Submit to the Engineer the brand name, manufacturer, and specification of all sealants or surfactants to be used. Testing under existing conditions will be required at the direction of the Engineer.

5. Submit proof that all required permits, site locations, and arrangements for transport and disposal of asbestos-containing or asbestos-contaminated materials, supplies, and the like have been obtained (i.e., a letter of authorization to utilize designated landfill).
 - Information about vehicles and equipment utilized for transport of material designated for disposal shall be submitted. This should include methods for restricting loose fibers from being released during travel.
6. Submit a list of penalties, including liquidated damages, incurred through non-compliance with asbestos abatement project specifications.
7. Submit a project specific Health and Safety plan for the removal operations. The Health and Safety Plan must be approved and signed by sub-contractor and Contractor personnel, and shall be provided to the Engineer prior to commencing site work activities. The Contractor shall be and remain liable for compliance by its employees, agents and subcontractors with the Contractor's Health and Safety Plan and procedures for the site and shall hold Engineer and Department harmless from all claims, damages, suits, losses and expenses in any way arising from non-compliance with the Health and Safety Plan.
 - i. In particular, the Health and Safety Plan shall address personal protection from asbestos fiber releases during asbestos abatement.
8. Submit a detailed plan of the procedures proposed for use in complying with the requirements of this specification. Include in the plan the location and layout of decontamination units, the sequencing of work, the respiratory protection plan to be used during this work, a site safety plan, a disposal plan including the location of an approved disposal site, and a detailed description of the methods to be used to control pollution. The plan must be submitted to the Engineer prior to the start of work.
9. Submit proof of written notification and compliance with Paragraph "Notifications."

C. Submittals that shall be made upon completion of abatement work:

1. Submit copies of all waste chain-of-custodies, trip tickets, and disposal receipts for all asbestos waste materials removed from the work area;
2. Submit daily copies of work site entry logbooks with information on worker and visitor access;
3. Submit logs documenting filter changes on respirators. HEPA vacuums, negative pressure ventilation units, and other engineering controls; and
4. Submit results of any bulk material analysis and air sampling data collected during the course of the abatement including results of any on-site testing by any federal, state, or local agency.

Certificate of Insurance:

- A. The Contractor shall document general liability insurance for personal injury, occupational disease and sickness or death, and property damage.
- B. The Contractor shall document current Workmen's Compensation Insurance coverage.
- C. The Contractor shall supply insurance certificates as specified by the Department.

Asbestos Abatement Experience:

A. Company Experience:

1. Prior to start of work, the Contractor shall supply:
 - a. Evidence that he/she has been qualified with the State of Illinois and he/she has been included on the Illinois Department of Public Health's list of approved Contractors.

B. Personnel Experience:

1. For Superintendent, the Contractor shall supply:
 - a. Evidence of knowledge of applicable regulations in safety and environmental protection is required as well as training in asbestos abatement as evidenced by the successful completion of a training course in supervision of asbestos abatement as specified in 40 CFR 763, Subpart E, Appendix C, EPA Model Contractor Accreditation Plan. A copy of the certificate of successful completion must be provided to the Engineer prior to the start of work.
 - b. Documentation of experience with abatement work in a supervisory position as evidenced through supervising at least two asbestos abatement projects; provide names, contact, phone number, and locations of two projects in which the individual(s) has worked in a supervisory capacity.
 - c. The superintendent shall be thoroughly familiar with and experienced at asbestos abatement, characterization, bulking, transportation, and disposal activities and other related work, and shall be familiar with and shall enforce the use of all applicable safety procedures and equipment. The Supervisor shall be knowledgeable of, and enforce, all applicable, USEPA, IEPA, and OSHA requirements and guidelines.
2. For Workers involved in the Removal of Friable and Nonfriable Asbestos the Contractor shall provide:
 - a. Training as evidenced by the participation and successful completion of an accredited training course for asbestos abatement workers as specified in 40 CFR 763, Subpart E, Appendix C, EPA Model Contractor Accreditation Plan. A copy of the certificate of successful completion must be provided to all employees who will be working on this project.
 - b. Workers shall be familiar with and experienced at asbestos abatement, characterization, bulking, transportation, and disposal activities and other related work; and Asbestos Workers shall be familiar with the use of applicable safety procedures and equipment.

Abatement Air Monitoring:

The Contractor shall comply with the following:

A. Personal Monitoring:

All personal monitoring shall be conducted per specifications listed in OSHA regulation, Title 29, Code of Federal Regulation 1926.58. All area sampling shall be conducted in accordance with 40 CFR Part 763.90. All air monitoring equipment shall be calibrated and maintained in proper operating condition. Excursion limits will be monitored daily. Personal monitoring is the responsibility of the Contractor. Additional personal samples may be required by the Engineer at any time during the project.

B. Contained Work Areas for Removal of Friable Asbestos

1. Area samples shall be collected for the department within the work area daily. A minimum of one sample shall be taken outside of the abatement area removal operations. The Engineer will also have the option to require additional personal samples and/or clearance samples during this type of work.

C. Air Monitoring Professional

1. All air sampling will be conducted by a qualified Air Sampling Professional supplied by the Contractor. The Air Sampling Professional must submit documentation of successful completion of the National Institute for Occupational Safety and Health (NIOSH) course #582 – “Sampling and Evaluating Airborne Asbestos Dust”.
2. Air Sampling will be conducted in accordance with NIOSH Method 7400. The results of these tests will be provided to the Engineer within 24 hours of the collection of air samples.

Method of Measurement: This work will be measured for payment per foot for REMOVAL OF ASBESTOS CEMENT CONDUIT, as shown for each individual conduit, which price shall include furnishing all labor, materials, equipment and services required to remove and dispose of the friable asbestos cement conduits, hangers, and conduit supports. No separate payment will be made for any testing of existing conduits for the presence of asbestos cement prior to the removal of any conduit material. Removal of concrete encasement is to be included in REMOVAL OF EXISTING STRUCTURES.

Basis of Payment: This work will be paid for at the contract unit price per foot for REMOVAL OF ASBESTOS CEMENT CONDUIT for all conduits identified to contain asbestos and removed in conformance with this specification and all current laws and regulations.

ROD AND CLEAN EXISTING CONDUIT

Description and Scope. This work will consist of inserting a duct rod or electrical fish rod or tape of sufficient length and rigidity into an electrical conduit opening in one electrical manhole or handhole, and pushing the said rod through the conduit to emerge at the next or subsequent manhole in the conduit system at the location shown on the plans. The duct rod may be inserted and removed by any standard construction method which causes no damage to the conduit system. The size of the conduit may vary from two inch (2") to four inch (4"), but there will be no differentiation in cost for the size of the conduit.

The conduit system which is to be rodded and cleaned may exist with various amounts of standing water in the manholes. The contractor must pump the water or sufficient water from the manholes to drain the conduit and to afford compatible working conditions for the installation of the duct rods and/or cables. The pumping of the manholes will be incidental to the work of rodding and cleaning of the conduit.

Any manhole which, in the opinion of the Resident Engineer contains excessive debris, dirt or other materials to the extent that conduit rodding and cleaning is not feasible, will be cleaned at the Engineer's order and payment approved as a separate pay item, and not a part of this specification.

Prior to removal, of the duct rod, a duct cleaning attachment such as a properly sized wire brush or cleaning mandrel must be attached to the duct rod, which by removal of the duct rod will be pulled through the conduit to remove sand, grit, or other light obstructions from the duct to provide a clean, clear passage for the installation of cable. Whenever the installation of cables is not performed as an adjunct to or immediately following the cleaning of the duct, a light weight pulling line such as a 1/8" polyethylene line or conduit measuring tape must be placed and will remain in the conduit to facilitate future work. When great difficulty of either inserting the duct rod or removal of the cleaning mandrel is encountered, the duct may require further cleaning by use of a compressed air gun, or a low pressure water hose. In the case of a broken duct line, the conduit must be excavated and repaired. The existence and location of breaks in the duct line may be determined by rodding, but the excavation and repair work required will not be a part of this pay item.

Method of Measurement. This work will be measured per lineal foot for each conduit cleaned. Measurements will be made from point to point horizontally. No vertical rises will count in the measurement.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for ROD AND CLEAN EXISTING CONDUIT for the installation of new electric cables. Such price will include the furnishing of all necessary tools, equipment, and polyethylene line as required to prepare a conduit for the installation of cable. When the number of cables to be installed requires the use of more than one conduit in the same run, each additional conduit required will be rodded and cleaned as a separate unit and paid for at the contract unit price.

VIDEO TAPING OF MAIN DRAIN

Description. This work will consist of televising the main storm sewer systems before and after construction as shown on Plans.

Requirements. The Contractor must furnish a videotape of a televised inspection of the interior of all existing main drain storm sewers within the areas of construction under this contract. The limits of main drain recording shall extend between the access points identified on the Plans. Record the videotape under the supervision of the Engineer. Perform two sessions of videotaping of the sewer: 1) before bridge and retaining wall construction and after cleaning as described under MAIN DRAIN CLEANING in areas where cleaning is necessary and 2) at the completion of major construction and at a time agreed upon by the Engineer. The main drains were previously videotaped in 2012 and 2013. The Contractor may elect to not videotape the section of main drain not required to be cleaned and accept the previous video as the video to establish existing condition.

The name, phone number, and contact person of the firm which will be performing the videotaping of the sewer must be provided by the Contractor at the pre-construction meeting.

After the completion of construction, the main drain shall be videotaped to document post-construction condition. After review by the Engineer, any damage uncovered during the post-construction video not previously shown in the pre-construction video shall have repair plans developed by the Contractor for review. After approval of repair plans, the Contractor shall complete all repairs within sixty (60) days. All costs incurred by the Contractor to make the required repairs are to be borne solely by the Contractor. The Contractor is required to then re-videotape the sewer to verify that the deficiencies noted on the post-construction videotape have been corrected to the satisfaction of the Engineer. All costs to re-videotape the sewer, regardless of the number of times required, will be borne solely by the Contractor.

Include location maps, legends and descriptions on all videotape submittals. 2 copies of each submittal are required.

Method of Measurement. This work will be measured for payment for sewer televising per foot for the videotaping of the sewer before construction and at the completion of construction.

Basis of Payment. This work will be paid for at the contract unit price per foot for the VIDEO TAPING OF MAIN DRAIN. The price shall include all costs for equipment and labor to perform videotaping and all traffic control necessary to enter or exit main drain structures.

The cleaning of the main drain sewers prior to videotaping before construction shall be paid for as MAIN DRAIN CLEANING.

MAIN DRAIN CLEANING

Description: This work consists of performing cleaning of the existing main drain sewer and main drain manholes and junction chambers with limits as shown on the Plans. The main drain sewer is identified in records as 5'-10 1/4" wide and 6'-6" in height.

The main drain was previously videotaped in 2012 and 2013. The reports and videotapes of that work may be available for review upon written request to the Department.

Equipment: The equipment selected for cleaning shall be capable of removing all dirt, grease, rock and other deleterious material from the main sewer and manholes. The cleaning process shall not allow dirt, grease, rock and other deleterious material from collecting in the wet well of the Department's Pump Station #26 immediately downstream of the access manhole point identified on the Plans. All material shall be removed from the main drain system. One or more of the access points into the main drain are within travel lanes and water supplied from water mains and fire hydrants will not be available. The distance between the access points may be quite long. All equipment proposed to be used under this item shall be appropriate for the work entailed in this Special Provision and as shown in the Plans.

When a sewer is found to be more than one-half full with debris, bucket machines, rodding, machines, and/or vacuum equipment shall be used to remove the major portion of material before hydraulic equipment is employed.

Construction Requirements: All dirt/debris due to the cleaning operations shall be removed from the site by the Contractor on a daily basis at a minimum, and disposed of properly in accordance with Section 202.03 of the Standard Specifications. Disposal shall be performed in accordance with all applicable environmental regulations. Disposal costs shall not be paid for separately, but shall be included in the unit price for MAIN DRAIN CLEANING.

All required traffic control to allow access into the main drain system at structures within travel lanes must be scheduled with the Engineer. Due to traffic control requirements, traffic shifts, lane and shoulder closures and staging under other contracts noted under CONTRACTOR COOPERATION, the work under this item shall be coordinated well in advance of the start of work.

Method of Measurement: This work will be measured for payment in feet for the main drain sewer cleaned and include all manholes and junction chambers along the length of the main drain.

Basis of Payment: This work will be paid for at the contract unit price per foot for MAIN DRAIN CLEANING which price is payment in full for all labor, tools, testing, equipment, and materials necessary to complete this item. The cost for traffic control for work under this item will not be paid for separately.

TELEVISION INSPECTION OF SEWER

Description. This work will consist of televising the storm sewer and combined sewer systems before and after construction as specified in the contract drawings.

Requirements. The Contractor must furnish a videotape of a televised inspection of the interior of all existing storm and combined sewers which may be impacted during construction under this contract. Record the videotape under the supervision of the Engineer. Perform two sessions of videotaping of the sewer: 1) before construction and 2) prior to the placement of final wearing surface.

The name, phone number, and contact person of the firm which will be performing the videotaping of the sewer must be provided by the Contractor at the pre-construction meeting.

Clean all sewers prior to videotaping before construction. The final acceptance of the sewer shall be based on the sewer videotape. All deficiencies exposed on the videotape must be corrected by the Contractor within 30 calendar days of notification. All costs incurred by the Contractor to make the required repairs are to be borne solely by the Contractor. The Contractor is required to re-videotape the sewer to verify that the deficiencies noted on any previous videotape have been corrected to the satisfaction of the Chicago Department of Sewers. All costs to re-videotape the sewer, regardless of the number of times required, will be borne solely by the Contractor.

Every effort is to be made by the Contractor to correct all deficiencies prior to the placement of the final wearing surface. If, in the opinion of the Engineer, the Contractor has delayed in submitting the videotape, the placement of the final wearing surface may be suspended. No time extension will be granted due to this suspension and the Engineer will be sole judge as to any delays.

Include location maps, legends and descriptions on all videotape submittals. 2 copies of each submittal are required.

Method of Measurement. This work will be measured for payment in sewer televising per foot for the videotaping of the sewer before construction and prior to placement of the final wearing surface.

Basis of Payment. This work will be paid for at the contract unit price per foot for the TELEVISION INSPECTION OF SEWER.

The cleaning of sewers prior to videotaping before construction shall be paid for as STORM SEWERS TO BE CLEANED, of the diameter specified or COMBINED SEWERS TO BE CLEANED.

DECORATIVE RAILING (PARAPET MOUNTED)

The railing shall conform to Section 503 and 509 of the Standard Specifications except as herein modified.

Description: This Work consists of furnishing and installing Chicago Barrier aluminum decorative railing, parapet mounted system of the type specified at locations shown on the Plans or directed by the Engineer, and in accordance with the details shown in the Plans.

Materials: Aluminum alloys 6063-T6 and 6061-T6 can be used interchangeably at the option of the manufacturer, with the requirements that the minimum physical properties must be 2500 PSI yield, 30,000 PSI Ultimate yield, and 10% elongations.

Finish: Clear anodized with minimum 1.0 mil thickness. Color samples are to be submitted to the Engineer for approval.

General: The rail sections must be factory pre-bent into curves to form radii rather than employing angular splices at the expansion joints. Any bending must be done prior to finishing to avoid distortion of the rail and/or damage to the finishing properties of the alloy.

Submittals:

1. Manufactures certification that aluminum rail and connections meet IDOT and CDOT specifications.
2. Shop drawings including wall and railing system.
3. Samples: two pieces of 2 feet long rail with specified finish.
4. Mockup: 2' long section of railing, including rail, one stanchion with thief protection device and anchor plate. All parts to have the final approved finish and be connected.
5. Calculations signed and sealed by an Illinois Registered Professional Structural Engineer

Coordination: Coordinate with Chicago Wall concrete barrier manufacturer, fence manufacturer, electrical and traffic surveillance requirements to install conduit and junction boxes.

Complete shop drawings and calculations by an Illinois Registered Professional Structural Engineer, and field installation drawings must be submitted to the Engineer for approval prior to ordering materials, commencement of any shop fabrication, and/or finishing.

Aluminum Railing: The aluminum rail system must be in accordance with the Plans and with AASHTO-AGC-ARTBE Joint Committee Task Force 13 Report "A Guide to Standardized Highway Barrier Hardware." This system must meet and match the shape, and composition of the Aluminum Railing as furnished and installed for the North Lake Shore Drive Project. Alternate systems that meet all requirements and specifications will be considered by the Engineer if submitted for approval at the time of the Pre-Bid Conference.

There will be a single source responsibility for the aluminum rail system, which will include but not be limited to the aluminum railing, the aluminum supports (stanchion system), anodizing, splices, color, thief protection system, structural calculations, and the design of all components above the top horizontal plane of the concrete wall system, bolts, fasteners, welding, shop fabrication, field erection, anchoring system, and freight etc. Bolts, studs, and embedment required must also be by the Contractor.

Design Requirements: The design requirements must be as set forth in the AASHTO Task Force 13 Report ("A Guide to Standardized Highway Barrier Hardware")

The cross section must conform to an ellipse 4" x7 7/8".

Exposed fasteners must be stainless steel. All bolts must be A307.

No field welding will be permitted.

Structural Requirements: The aluminum railing system must conform to the requirements of AASHTO "Standard Specifications for Highway Bridges" Section 2.7.

All thickness and material specifications requirements, unless otherwise approved by the Engineer, must be based on certifications based on structural calculations provided by the Contractor.

Acceptable Rail Manufactures:

1. Valentine & Company, Middletown, OH.
2. Midwest Fence
3. Approved Equal.
- 4.

Method of Measurement: This Work will be measured for payment, complete in place, per foot.

Basis of Payment: This Work will be paid for at the Contract Unit Price per foot for DECORATIVE RAILING (PARAPET MOUNTED) which price includes furnishing and placing all material required, including all labor, equipment and incidentals necessary to complete the Work as herein specified.

CROSSHOLE SONIC LOGGING

Description. This item shall consist of furnishing and installing test equipment access tubes in drilled shafts on the project, conducting Crosshole Sonic Logging (CSL) testing on drilled shafts to verify concrete quality, providing a report containing the test results and analysis, and subsequent grouting of the access tubes. The Engineer will determine which drilled shafts will have CSL testing and may expand the number of drilled shafts tested, beyond the number indicated in the summary of quantities.

The CSL test shall follow ASTM 6760 and measure the strength and time for an ultrasonic pulse to travel from a signal source in one access tube to a receiver in another access tube. In uniform, good quality concrete, the travel time between equidistant tubes should yield relatively consistent arrival times and corresponds to a reasonable pulse velocity, signal amplitude and energy from the bottom to the top of the shaft. Longer travel times, decrease in pulse velocity, and lower amplitude/energy signals indicate the presence of irregularities such as poor quality concrete, voids, honeycombing, cracking and soil intrusions.

Prequalification Requirements The CSL testing consultant shall have a minimum of two years of acceptable experience in CSL drilled shaft testing. No later than thirty (30) days prior to beginning drilled shaft construction, the Contractor shall submit to the Engineer for approval the following information:

- (a) Name, address, and phone number of the CSL testing consultant selected to perform the testing.
- (b) Names and experience of field staff conducting testing and engineer responsible for analyzing the results.
- (c) List of at least two (2) projects on which this consultant has successfully completed CSL testing. The list shall include a brief description of the project, the client or owner name and phone number, and number of shafts tested.

Submittals. No later than thirty (30) days prior to beginning drilled shaft construction, the Contractor shall submit to the Engineer for approval the following information:

- (a) Description of testing equipment and testing sequence on a typical shaft. Any modification or deviation to the testing procedures required by this special provision shall be so indicated.
- (b) The CSL tube size, materials compliance, end and top cap details, couplings, any coupling joints details, and the proposed method of attaching the tubes to the cage.
- (c) An example CSL report showing both sound and defective concrete.

Materials. The materials required for this item shall consist of the following:

- (a) The test equipment access tubes shall be either 1.5 inch (38 mm) or 2 inch (50 mm) inside diameter Schedule 80 or 40 steel pipe conforming to ASTM A53, Grade A or B, Type E, F, or S.
- (b) The grout used to fill the access tubes shall be a non-shrink grout according to Section 1024 with a compressive strength equal to, or greater than, that specified for the drilled shaft in which the grout is used.

Equipment. The minimum requirements of the CSL testing equipment are as follows unless otherwise approved as part of the Contractor's submittal:

- (a) A microprocessor based CSL system for display of individual CSL records, analog-digital conversion and recording of CSL data, analysis of receiver responses and printing of report quality CSL logs
- (b) Ultrasonic source and receiver probes must be small enough to travel through 1.5 inch (38 mm) or 2 inch (50 mm) I.D. steel pipe access tubes and extend the full depth of the tube.
- (c) The probes shall be capable of producing records at a minimum frequency of 40,000Hz with good signal amplitude and energy in typical concrete.
- (d) An ultrasonic voltage pulser to excite the source with a synchronized triggering system to start the recording system.
- (e) A depth measurement device to electronically measure and record the source and receiver depths associated with each CSL signal.
- (f) Appropriate filter/amplification and cable systems for CSL testing.
- (g) An acquisition system that stores each log in digital format, with drilled shaft identification, date, time and test details, including the source and receiver gain. Arrival time data must be displayed graphically during data acquisition.
- (h) 3D tomographic imaging software, or source for completing the work

The equipment must be capable of providing the test results on thermal or graphical printouts with the vertical scale representing the vertical position along the shaft, and the horizontal scale representing the propagation time.

CONSTRUCTION REQUIREMENTS

Access tubes:

The Contractor shall place access tubes in all drilled shafts on the project unless otherwise indicated on the Plans or approved by the Engineer. The CSL Consultant must contact the drilled shaft Contractor and provide the technical instruction and guidance on obtaining and installing the access tubes so they will provide adequate bond to the concrete and yield the necessary data. The tubes must have a round, regular internal diameter, free of defects or obstructions to permit the free passage of the source and receiver probes. Four access tubes shall be installed in all drilled shafts with a diameter of 4.5 feet or less, five access tubes are required in shafts between 5 feet and 6 feet in diameter, six access tubes shall be used in 6.5 feet and 7.0 feet diameter shafts while eight tubes are required on larger shafts. Install the tubes in each drilled shaft in a regular, symmetric pattern such that each tube is equally spaced from the others around the perimeter of the cage. Tube placement must be such that large vertical reinforcing bars do not block the direct line between adjacent tubes. Securely attach the tubes to the interior of the reinforcement cage at vertical intervals not to exceed 3 feet (1 m) or otherwise secured such that the tubes remain in position during placement of the rebar cage and the concrete. The tubes must be vertical and parallel. Extend the tubes from 6 inches (150 mm) above the shaft tip to at least 3 feet (1 m) above the top of the shaft. If the shaft top elevation is below ground elevation, extend tubes at least 2 feet (610 mm) above ground surface. If the drilled shaft tip elevation is extended more than 1 foot (305 mm) below the tip elevation shown in the Plans, extend the tubes using proper threaded mechanical couplings to within 6 inches (150 mm) of the final tip elevation. Any joints used to construct the full tube length must be threaded mechanical couplings that produce a smooth interior surface, occur at the same elevation in each tube within the shaft and be watertight. Threaded water tight end caps shall be used at the bottom of each tube and a removable threaded end cap shall be provided on the top of the tubes. Do not use duct tape, other wrapping materials, or butt welding to seal joints. Under no circumstance will the tubes be allowed to rest on the bottom of the shaft excavation. Take care to not damage the tubes during the placement of reinforcing cage and the concrete. Before placement of the reinforcement cage into the shaft excavation, record the tube lengths and tube positions along the length of the cage. After placement of concrete, measure the stickup of the tubes above the top of the drilled shaft and verify tube spacing. After placement of the reinforcement cage and within 2 hours after concrete placement, fill the CSL tubes with clean, potable water, and cap them to keep out debris. The Engineer will reject tubes not filled and capped within 2 hours.

CSL Testing Procedure:

The testing shall be conducted between 3 and 40 days after the drilled shaft has been placed and after concrete has attained 2/3 of the specified strength. The Contractor shall provide suitable access to the top of the shafts and any electricity, grout, water or other equipment support necessary to satisfy the CSL testing requirements. When removing the access tube caps, exercise care not to apply excess torque, force or stress, which could break the bond between the tubes and the concrete. The Contractor shall provide the CSL consultant with the as-constructed tube positions in each shaft including each tube length, top of tube elevation, top of shaft elevation, bottom of shaft elevation, and construction dates prior to beginning CSL testing.

Conduct CSL tests between each unique pairing of access tubes (i.e. 4 tubes have 6 different combinations, 5 have 10 combinations, 6 have 15, etc.). Perform the CSL testing with the source and receiver probes in the same horizontal plane unless test results indicate defects or poor concrete zones, in which case the defect zones must be further evaluated with angle tests (source and receiver vertically offset in the tubes). Report any defects indicated by decreased signal velocity and lower amplitude/energy signals to the Engineer at the time of testing, and conduct angle tests in the zones of the defects as defined by the Concrete Condition Rating Criteria (CCRC). Make CSL measurements at depth intervals of 3 inches (75 mm) or less from the bottom of the tubes to the top of each shaft. Pull the probes simultaneously, starting from the bottom of the tubes, using a depth-measuring device to electronically measure and record the depths associated with each CSL signal. The speed of ascent shall be less than 12 inches per second (300 mm/second). Remove any slack from the cables before pulling to provide for accurate depth measurements of the CSL records. In the event defects are detected, conduct additional logs, as needed, to fully identify the extent of the anomaly.

If steel tube debonding occurs, a 2 inch (50 mm) diameter hole shall be drilled to below the depth of debonding for each debonded tube in order to perform the CSL testing.

CSL Report:

The test results shall be submitted to the Engineer in the form of a report within 7 working days of completion of CSL testing. The CSL report should include but is not limited to the following:

- (a) Project identification
- (b) Dates of testing
- (c) Table and a plan view of each shaft tested with accurate identification of tube coordinates and tubes referenced to the site
- (d) Tube collar elevation
- (e) Names of personnel that performed the tests/interpretation and their affiliation
- (f) Equipment used
- (g) Data Logs, interpretation, analysis, and results.

The Data logs for each tube pair tested with analysis of the initial pulse arrival time, velocity, relative pulse energy/amplitude, and stacked waveform plotted versus depth. List all zones defined by the Concrete Condition Rating Criteria (CCRC) in a tabular format including the percent velocity reduction and the velocity values used from the nearby zone of good quality concrete. Discuss each zone defined by the CCRC in the CSL report as appropriate. Base the results on the percent reduction in velocity value from a nearby zone of good quality concrete with good signal amplitude and energy as correlated to the following:

Concrete Condition Rating Criteria (CCRC)		
CCRC (Rating Symbol)	Velocity Reduction	Indicative Results
Good (G)	< 10 %	Good quality concrete
Questionable (Q)	10 % to < 20 %	Minor concrete contamination or intrusion. Questionable quality concrete.
Poor/Defect (P/D)	≥ 20 %	Defects exist, possible water/slurry contamination, soil intrusion, and/or poor quality concrete.
Water (W)	V = 4750 fps (1450 mps) to 5000 fps (1525 mps)	Water intrusion or water filled gravel intrusion with few or no fines present.
No Signal (NS)	No Signal Received	Soil intrusion or other severe defect absorbed the signal (assumes good bond of the tube-concrete interface).

Do not grout the CSL tubes or perform any further work on the CSL tested drilled shaft until the Engineer determines whether the drilled shaft is acceptable. Perform tomography in order to further investigate and delineate the boundaries of any defective/unconsolidated zones with 20% or more reduction in velocity value as correlated to the CCRC. Process CSL data to construct easy to understand 2D/3D (2D cross-sections between tubes and 3D volumetric images for the entire shaft) color-coded tomographic images indicating velocity variations along the shaft. Location and geometry of defective/unconsolidated zones must be identified in 3D color images with detailed discussion in the CSL report.

Correction of drilled shaft defect:

When the field testing results or report determine that a defect is present, the Engineer will direct the Contractor to submit remedial measures for approval. No compensation will be made for remedial work or losses or damage due to remedial work of drilled shafts found defective or not in accordance with the drilled shaft special provision or the Plans. Modifications to the drilled shaft design or any load transfer mechanisms required by the remedial action must be designed, plans submitted sealed by an Illinois Licensed Structural Engineer, along with the design computations.

Access tube grouting:

After CSL test results have been reviewed and the Engineer has accepted the drilled shaft or approves grouting of the tubes, the tubes and any core holes shall be dewatered and filled with a nonshrink grout according to Section 1024. Shafts which are not initially selected for CSL testing shall not be grouted until the results of the tested CSL test shafts have been reviewed and accepted.

Method of Measurement: This work will be measured per each shaft CSL tested. Access tubes installed and not utilized by the CSL testing equipment will not be included in the measurement of this item.

Basis of Payment. This work will be paid at the contract unit price per EACH for CROSSHOLE SONIC LOGGING. This payment will constitute full compensation for furnishing, installing, all access tubes, coring for debonded or clogged access tubes, equipment procurement, installation, testing, analysis, report, supplemental testing of grouting of access tubes, and drilled shaft repairs necessary.

CONSTRUCTION VIBRATION MONITORING

Revised: January 20, 2015

Description. This work consists of monitoring buildings, structures, tunnels and other locations susceptible to movement. Additional monitoring of facilities may be required and will be determined by the Engineer during the work. Additional monitoring, as determined by the Engineer, is included in the cost of this item.

The Contractor shall monitor adjacent buildings for both vibration and displacement. The Contractor shall designate a minimum of two monitoring point locations for each of the structures located at the following addresses:

- 900 S. Des Plaines St. (Des Plaines Field Office)

The monitoring point locations shall be spaced as evenly as possible along the building edge at the interface between the retaining walls and the building properties. The monitoring points for vibration and displacement do not have to be at the same location. The Contractor shall coordinate with the Engineer and building owners to ensure the proposed monitoring locations are acceptable to the building and accessible to both the Contractor and the Engineer. Proposed locations of building vibration and displacement monitoring points are to be submitted to the Engineer for approval prior to construction.

Vibration Monitoring: The Contractor shall employ the services of a seismic monitoring consultant as approved by the Engineer. Monitoring point locations and frequency of data collection shall be as determined by the Contractor's Consultant and are subject to the approval of the Engineer. All vibration monitoring devices (seismographs) shall be attached to the floor of the buildings they are monitoring. The limit of acceptable vibration (Limiting Value) at structure shall be 0.5 in/s (inches per second) peak particle velocity. The Contractor's consultant may propose a Threshold Value of vibration for Engineer's review. When the Threshold Value is reached, the Contractor must stop the work and meets with the Engineer to determine the best course of action to reduce the vibrations (or minimize further displacement). Once the Limiting Value is reached, the work is stopped and a more formal response plan is submitted for approval before work can proceed. All seismographs on the project shall be programmed to actuate an alarm when the Threshold Value is exceeded. The alarm notification protocol shall consist of immediate dialing of mobile telephone numbers of the Engineer and the Contractor.

If the Limiting Value is exceeded, all vibration inducing work within 100 feet of the existing building shall be stopped. Work may resume at the direction of the Engineer with the Contractor continuing to closely monitor vibration in the area of the alarm. If the work is stopped because the Limiting Value is exceeded there will be no additional compensation nor any additional time extensions granted. Any change in construction methods to avoid exceeding Limiting Value will not be grounds for additional compensation.

Displacement Monitoring: The Contractor shall provide the exact horizontal and vertical location of the displacement monitoring points to the Engineer prior to the commencement of any construction activities. The data shall be presented in a tabular format and shall include horizontal positions (stations and offsets or Northing and Easting) as well as vertical elevation (Chicago City Datum) to a minimum of one hundredth of a foot (0.01').

Monitoring Frequency: During the beginning phase of each stage of demolition and construction, displacement monitoring shall be performed at the beginning and end of each work day at a minimum. These surveying intervals are the minimum required, and more frequent monitoring may be required by the Engineer as field conditions warrant.

If after a period of time resulting in movements that are small in magnitude, monitoring frequency can be reduced to a frequency as established by the Engineer. If resulting movements become random in nature and/or large in magnitude, the frequency shall be increased as directed by the Engineer. The frequency of readings will be dictated by the phase of current construction but must be sufficient to detect serious movements so that corrective measures can be initiated immediately.

Monitoring readings for displacement shall be dated, recorded, and reported to the Engineer the same day the readings are taken.

If displacement measurements indicate movements equal to or greater than one quarter of an inch (0.25"), the Contractor shall stop work immediately and the necessary corrective measures shall be initiated as directed by the Engineer

Vibration monitoring shall be a continuous and uninterrupted process. During demolition within 50 feet of a vibration monitoring point location, the Contractor shall report the results of the largest amplitude of vibration to the Engineer on the same day. At all other times the vibration report shall be submitted weekly.

Construction Requirements. Before the start of construction, the Contractor will complete a preconstruction inspection of the following addresses/locations:

- 900 S. Des Plaines St. (Des Plaines Field Office)

Before the start of construction, the Contractor will complete a preconstruction inspection of the existing buildings listed above. Readily visible conditions and distress such as unusual cracks in concrete or masonry, obvious signs of leakage, settlement, etc. will be photographically recorded and documented. The Contractor will also make a DVD survey to provide a more complete general record of conditions in those areas. The interior survey shall include the first floor and basement (if existing) within 30 feet of the exterior wall closest to the project site. The exterior survey will include the exterior wall closest to the project site and the two adjacent walls. The survey will be performed from grade without the use of magnification devices. At the conclusion of the pre-construction field work, a report shall be prepared by the Contractor presenting the observed existing conditions and shall include written, videotaped and photographic documentation. This record shall then be used by the Contractor as a basis for comparison to distresses that may occur after the survey. The locations of the displacement monitoring points shall be included in the Report.

The Contractor will use the preconstruction report to aid in the selection of the displacement monitoring points. The Contractor must devise means and methods of construction that will not exceed the specified vibration limits. The Contractor is advised that particularly careful demolition requirements will be required at the edges of the retaining wall where the property line is immediately adjacent to the area of construction.

Corrective Measures. If at any time resulting movements are serious in nature or cause damage to facilities or property, the Contractor shall stop work immediately and the necessary corrective measures shall be initiated as directed by the Engineer. Damage as a result of the work activity of the Contractor will be corrected by the Contractor as determined by the Engineer. No additional compensation will be due the Contractor for repairing these facilities. The Contractor will not be entitled to any claim of delay for stopping of working to make correct measures.

Submittals. The Contractor must submit a Vibration and Displacement Control Plan to the Engineer for Approval. The Plan must be approved prior to the commencement of work. The plan must include, but is not limited to the following:

- Locations of all monitoring points (Vibration and displacement).
- Procedure and outline for how the data will be provided to the Engineer.
- Type of seismograph to be used (Submit to Engineer for Approval).
- List of pneumatic equipment to be used during demolition operations.
- Contact information for the Seismic Monitoring consultant.
- Timetable that outlines the duration that each monitoring point will be maintained and checked.
- A "Response Plan" to detail how the Contractor will address any concerns with vibration or displacement.

Additional Submittals include:

- Daily reports of all displacement monitoring
- Weekly reports of all vibration monitoring

Method of Measurement. The work under this item as described herein will not be measured separately. It will be paid for as lump sum.

Basis of Payment. This work will be paid at the contract unit price per lump sum for CONSTRUCTION VIBRATION MONITORING which payment shall be full compensation for the work described herein and as directed by the Engineer.

PLUG EXISTING PIPE

Description. This work shall consist of plugging the ends of existing storm and/or combined sewers to be abandoned with a mortared brick or concrete masonry bulkhead, 8" minimum thickness in conformance with Sections 1041 and 1042 of the Standard Specifications, at locations shown on the Plans.

Construction Requirements. Based on a review of available information it is believed that there are no existing active connections draining into the pipe to be abandoned. However, before the pipe is abandoned, the Contractor must field verify there are no existing active connections draining into the pipe to be abandoned. In the event there are existing active connections, the Contractor must either re-route the existing active connection or maintain the existing pipe so as not to block flow from the existing active connections at no additional cost.

After field verification that there are no existing active connections draining into the pipe to be abandoned, the Contractor must plug the pipe to the satisfaction of the Engineer.

Method of Measurement. This work will be measured for payment per cubic yard of concrete masonry bulkhead for PLUG EXISTING PIPE.

Basis of Payment. This work will be paid at the contract unit price per cubic yard for PLUG EXISTING PIPE which price shall include all materials, labor and equipment necessary to plug existing storm and/or combined sewers at locations shown in the Plans, as specified herein, and as directed by the Engineer.

COMBINED SEWER REMOVAL

Description. This work will consist of the removal of combined sewers, including laterals.

Combined sewers shall be removed according to Article 551.03 of the Standard Specifications.

Method of Measurement. This work shall be measured for payment according to Article 550.09 of the Standard Specifications.

Excavation in rock will be measured for payment according to Article 502.12

Trench backfill for combined sewer removal will be measured for payment according to Article 208.03, except an addition will be made for one-half of the volume of the pipe removed.

Basis of Payment. This work will be paid for at the contract unit price per foot for COMBINED SEWER REMOVAL, of the diameter specified. TRENCH BACKFILL will be paid for separately.

Excavation in rock will be paid for according to Article 502.13.

Trench backfill will be paid for according to Article 208.04.

Removal and replacement of unsuitable material below plan bedding grade will be paid for according to Article 109.04.

SOIL RETENTION SYSTEM

Description. This work shall consist of designing, furnishing and installing the soil retention system (and associated pedestrian fence) between the north end of the proposed Taylor Street Bridge West Abutment and the south end of existing Retaining Wall 3 according to the dimensions and details shown on the plans or as approved by the Engineer.

General Requirements. The soil retention system shall be designed by the Contractor to retain the exposed surface area and all expected surcharge loads thereon as specified in the Plans or as directed by the Engineer. Included in the Contractor's design of the soil retention system shall be a chain link pedestrian fence (located above the soil retention system) which shall be installed to mitigate fall hazards and shall be designed according to the current AASHTO LRFD Bridge Design Specifications.

The design calculations and details for the soil retention system (and associated pedestrian fence) proposed by the Contractor shall be submitted to the Engineer for approval. The calculations shall be prepared and sealed by an Illinois Licensed Structural Engineer. This approval will not relieve the Contractor of responsibility for the safety of the excavation, nor will it relieve the Contractor of responsibility for adequate mitigation of fall hazards associated with the system. Approval shall be contingent upon acceptance by all involved utilities and/or agencies.

Construction. The Contractor shall verify locations of all underground utilities before installing any of the soil retention system components or commencing any excavation. Any disturbance or damage to existing structures, utilities or other property, caused by the Contractor's operation, shall be repaired by the Contractor in a manner satisfactory to the Engineer at no additional cost to the Department. The soil retention system (and associated pedestrian fence) shall be installed according to the Contractor's approved design, or as directed by the Engineer, prior to commencing any related excavation. If unable to install the soil retention system as specified in the approved design, the Contractor shall have the adequacy of the design re-evaluated. Any reevaluation shall be submitted to the Engineer for approval prior to commencing the excavation adjacent to the area in question. The Contractor shall not excavate below the maximum excavation line shown in the approved design without the prior permission of the Engineer. Once installed by the Contractor and approved by the Engineer, the soil retention system (and associated pedestrian fence) shall remain in place and not be removed.

When an obstruction is encountered, the Contractor shall notify the Engineer and upon concurrence of the Engineer, the Contractor shall begin working to break up, push aside, or remove the obstruction. An obstruction shall be defined as any object (such as but not limited to, boulders, logs, old foundations etc.) where its presence was not obvious or specifically noted on the Plans prior to bidding, that cannot be driven or installed through or around, with normal driving or installation procedures, but requires additional excavation or other procedures to remove or miss the obstruction.

Method of Measurement. The soil retention system (with associated pedestrian fence) furnished and installed according to the Contractor's approved design or as directed by the Engineer will be measured for payment in place, in square feet. The area measured shall be the vertical exposed surface area envelope of the excavation supported by soil retention system.

Any soil retention system installed beyond those dimensions shown on the contract Plans or the approved Contractor's design without the written permission of the Engineer shall not be measured for payment but shall be done at the Contractor's own expense.

Basis of Payment. This item will be paid for at the contract unit price per square foot for SOIL RETENTION SYSTEM.

Payment for any excavation, related solely to the installation of the soil retention system and/or its components, shall not be paid for separately but shall be included in the unit bid price for SOIL RETENTION SYSTEM. Other excavation, performed in conjunction with this work will not be included in this item but shall be paid for as specified elsewhere in this contract. Additionally, designing, furnishing and installing the chain link pedestrian fence shall not be paid for separately but shall be included in the unit bid price for SOIL RETENTION SYSTEM.

Obstruction mitigation shall be paid for according to Article 109.04 of the Standard Specifications.

FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS

Description. This work shall consist of providing all labor, materials, and equipment necessary to construct Drilled Shafts at locations where man-made obstructions are encountered. The drawings have identified locations where new foundations are anticipated to be in conflict with previously installed steel piles, sheet piling and/or drilled shafts. If additional man-made obstruction locations are encountered, as determined in the field by the Engineer, they shall also be covered by this specification.

Furnishing, fabricating and installing of drilled shafts shall be completed and paid for as described in their respective pay items.

The work under this item is considered additional compensation for the resources required to install drilled shafts through the identified obstructions. The Engineer shall determine applicability of this specification in the field when an obstruction is encountered.

This Special Provision applies to manmade obstructions. Non-manmade obstructions are covered in Standard Specification section 516.14. Obstruction mitigation for non-manmade obstructions is paid for in accordance with Article 109.04 of the Standard Specifications.

Equipment. The Contractor shall be responsible to provide the equipment required to advance the drilled shafts through previously constructed structures such as, but not limited to, tunnels and drilled shafts that are present. The Construction tolerances and requirements for the drilled foundations shall not be relieved due to the presence of an obstruction. The Contractor is cautioned that although a best effort was made to identify the locations of the existing structures, additional obstructions may be found during the construction.

The drilling equipment shall have adequate capacity, including power, torque and down thrust, to create a shaft excavation of the maximum diameter specified to a depth of 20 percent beyond the depths shown on the plans.

The equipment shall be capable of drilling a straight and true shaft as required by the specifications through existing reinforced concrete structures, grouted and bulk-headed tunnels, steel piles, sheet piling, timber piles and other man-made obstructions that are encountered in the drilling.

Construction Requirements. The Contractor is alerted to the following known obstructions:

- (b) Existing Reinforced Concrete Sub-Piers/Caissons and Steel Piles. The previously installed sub-piers/caissons and steel piles as identified on the drawings contain the following dimensions:

W. Abut.: 2'-6" dia. sub-pier (~57' length, $f_c = 3,500$ psi at 14 days) with 5'-3" dia. bell (~3.75' length)

HP14x73 and HP12x53 steel piles

Existing steel sheet piling and 1'-0" thick concrete mud slab left in place from 1986 construction

Pier 1: 3'-6" dia. sub-pier (~43' length, $f_c = 3,500$ psi at 14 days) with 9'-9" dia. bell (~7.25' length)

Pier 2: 3'-6" dia. caisson (~40' length, $f_c = 3,500$ psi at 28 days) with 9'-9" dia. bell (~7.25' length)

E. Abut.: 3'-0" dia. caisson (~40' length, $f_c = 3,500$ psi at 28 days) with 6'-6" dia. bell (~4.50' length)

Existing steel sheet piling and 1'-0" thick concrete mud slab left in place from 1986 construction

The caissons and sub-piers are reinforced with reinforcement bars. The construction was performed in 1960 and 1986. Existing bridge plans are available for reference and were utilized to locate the existing sub-piers/caissons, sheet piling and steel piles in the drawings; however, the Contractor should expect some variances from design which occurred during installation. No additional compensation shall be permitted for such variances from existing plans.

The Contractor shall submit to the Engineer a proposed construction sequence for approval prior to the beginning of this work. It shall include the methods and equipment used in accomplishing the work.

Method of Measurement. The Contractor shall provide equipment, labor and materials as required to install drilled shafts at the locations shown on the drawings. Where existing tunnel, reinforced concrete shaft obstructions, or other man-made obstructions are encountered, as determined by the Engineer, the Contractor will be paid the unit price per each for each shaft affected by obstructions, in addition to the applicable pay items for Drilled Shaft as specified elsewhere.

Basis of Payment. The drilling of foundations through tunnel and existing caisson structures, and other obstructions as described above, will be paid for at the contract unit bid price per each applicable location for FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS.

COMBINATION CURB AND GUTTER TYPE B V.12 (CDOT)

Description: Work under this item shall be performed according to Section 606 of the IDOT Standard Specifications for Road and Bridge Construction, and to the City of Chicago Department of Transportation Regulations for Openings, Construction and Repair in the Public Way. The work consists of constructing variable height Portland Cement Concrete (PCC) combination curb and gutter greater than 3" in height and less than 9" in height.

Materials: Materials shall meet the applicable requirements of Division 1000 of the Standard Specifications.

Construction Requirements: Meet applicable requirements of Section 606 of the Standard Specifications. Construct combination concrete curb and gutter type B V.12 (CDOT) at the locations, widths and thickness shown on the Plans.

Method of Measurement: COMBINATION CURB AND GUTTER TYPE B V.12 (CDOT) will be measured for payment in feet along the flow line of the gutter and along the face of the concrete curb, which measurement will include drainage castings incorporated in various curbs and curbs and gutters.

Basis of Payment: This work will be paid for at the contract unit price per foot for COMBINATION CURB AND GUTTER TYPE B V.12 (CDOT).

CONCRETE CURB, TYPE B (SPECIAL) (CDOT)

Description: Work under this item shall be performed according to Section 606 of the IDOT Standard Specifications for Road and Bridge Construction and to the City of Chicago Department of Transportation Regulations for Openings, Construction and Repair in the Public Way. The work consists of constructing variable height Portland Cement Concrete (PCC) curb greater than 3" in height and less than 9" in height.

Materials: Materials shall meet the applicable requirements of Division 1000 of the Standard Specifications.

Construction Requirements: Meet applicable requirements of Section 606 of the Standard Specifications. Construct concrete curb, type B (special) (CDOT) at the locations, widths and thickness shown on the Plans.

Method of Measurement: CONCRETE CURB, TYPE B (SPECIAL) (CDOT) will be measured for payment in feet along the face of the concrete curb, which measurement will include drainage castings incorporated in various curbs and curbs and gutters.

Basis of Payment: This work will be paid for at the contract unit price per foot for CONCRETE CURB, TYPE B (SPECIAL) (CDOT).

DETECTABLE WARNINGS (SPECIAL)

Description: Work under this item shall consist of installing cast iron detectable warning tiles on ADA curb ramps as shown on the Plans and according to the latest Chicago Department of Transportation ADA Standards. Work shall be performed according to Section 424 of the IDOT Standard Specifications for Road and Bridge Construction, except as herein modified.

Materials: Detectable warning tiles shall be cast gray iron and shall be provided by a Manufacturer approved by the City of Chicago Department of Transportation. A list of approved Manufacturers of cast iron detectable warning tiles is available on the City of Chicago Department of Transportation website under Construction Guidelines/Standards.

The cast iron detectable warning tiles shall be of uniform quality, free from surface defects and shall be provided with an untreated, natural surface finish as directed by the Engineer. All detectable warning systems shall be of the linear type.

Construction Requirements: The detectable warning system shall be installed in fresh concrete and shall comply with the City of Chicago Department of Transportation Regulations for Openings, Construction and Repair in the Public Way, Appendix B, ADA Standards. The equipment and installation procedures shall be according to the Manufacturer's specifications.

The Contractor shall install the detectable warning system flush with adjacent concrete, and resulting in a snug fit between tiles to limit water infiltration around the perimeter of the system and between tiles, as directed by the Engineer.

QC/QA Requirements: A Manufacturer's written certification that the material complies with these specifications shall be provided to the Engineer.

Method of Measurement: This work will be measured for payment in place in square feet.

Basis of Payment: This work will be paid for at the contract unit price per square foot for DETECTABLE WARNINGS (SPECIAL).

CONCRETE MEDIAN SURFACE REMOVAL

Description: This work consists of removing and disposing existing concrete median surfaces (regardless of thickness) at locations shown on the plans in accordance with the applicable portions of Section 440 of the Standard Specifications.

Method of Measurement: CONCRETE MEDIAN SURFACE REMOVAL will be measured in place in square feet.

Basis of Payment: This work will be paid for at the contract unit price per square foot for CONCRETE MEDIAN SURFACE REMOVAL, which price shall include all labor and equipment necessary to remove and dispose of the existing median surface.

CLEANING EXISTING SEWERS AND DRAINAGE STRUCTURES

Description. All existing storm sewers and combined sewers shall be considered as sewers insofar as the interpretation of this Special Provision is concerned. When specified for payment, the location of sewer to be cleaned will be shown on the plans.

All existing drainage structures which are to be adjusted or reconstructed shall be cleaned according to Article 602.15 of the Standard Specifications. This work will be paid for in accordance with Article 602.16 of the Standard Specifications.

All existing sewers which are specified to be cleaned on the plans will be cleaned according to Article 602.15 of the Standard Specifications.

Method of Measurement. This work will be measured for payment in feet for the length of sewer that is to be cleaned.

Basis of Payment. This work will be paid for at the contract unit price per foot for STORM SEWERS TO BE CLEANED, of the diameter specified, or at the contract unit price per foot for COMBINED SEWERS TO BE CLEANED.

CONCRETE MEDIAN SURFACE, 4 INCH (SPECIAL)

Description: This item of work shall consist of constructing CONCRETE MEDIAN SURFACE, 4 INCH SPECIAL in areas between concrete barrier walls and between concrete barrier walls and existing or proposed retaining walls, bridge piers and abutments as shown in the Plans. Work shall be in accordance with Section 606 of the Standard Specifications, details in the Plans and as directed by the Engineer.

The concrete median surface color and texture shall closely match the existing concrete median surface used between existing NB I-90/94 and Ramp NW/NE. The median surfaces shall be textured with a stamping tool capable of producing a "brick paver-like" effect on its surface and utilize integrally colored concrete materials.

Materials: Materials shall meet the applicable requirements of Division 1000 of the Standard Specifications.

The Contractor shall submit a mock-up of the concrete median under this item for review by the Engineer a minimum of three (3) weeks prior to installation. The mock-up shall be a minimum of two feet by two feet and shall include the proposed coloring and stamping pattern.

Construction Requirements: Meet applicable requirements of Section 606 of the Standard Specifications. Concrete median shall be constructed after all concrete barrier walls and proposed retaining walls are complete.

Welded wire fabric reinforcement shall be used. Welded wire fabric may be smooth or deformed and shall be equal to or better than 6" x 6" D8.0/D8.0 and meet the requirements of Article 1006.10 of the Standard Specifications.

Prior to stamping, a clear release shall be used to form a moisture barrier between the stamping tool and wet concrete, which facilitates the release of the tool. A clear seal to prevent discoloration and to protect the concrete shall be applied.

Method of Measurement: CONCRETE MEDIAN SURFACE, 4 INCH (SPECIAL) will be measured for payment in place per square foot.

Basis of Payment: This work will be paid for at the contract unit price per square foot for CONCRETE MEDIAN SURFACE, 4 INCH (SPECIAL) which price will be payment in full for all labor, equipment, coloring agents, reinforcement and other materials necessary to complete the work as described.

CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT (SPECIAL)

Description. This work shall consist of constructing concrete barrier walls with reinforcement bars (if any) on a concrete barrier base, as detailed in the Plans.

Construction Requirements. This work shall be done in accordance with the applicable portions of Section 637 of the Standard Specifications. The concrete barrier walls shall be constructed on a concrete barrier bases as detailed in the Plans. The concrete barrier walls shall be constructed separately and not poured monolithically with the concrete barrier bases.

Method of Measurement. CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT (SPECIAL) shall be measured for payment in feet along the centerline of the barrier. Concrete barrier bases shall be measured separately. All transitions to connect to segments of existing concrete barrier walls will be measured separately.

Basis of Payment. This work will be paid for at the contract unit price per foot for CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT (SPECIAL) which price shall include all equipment, labor, and materials necessary to construct the concrete barrier wall including all reinforcement bars in the concrete barrier wall.

CHAIN LINK FENCE REMOVAL

Description. This item shall consist of furnishing all labor, equipment and materials necessary for the removal and disposal of the existing chain link fence at the east and west sides of the Taylor Street to NB I-90/94 Entrance Ramp (SN 016-2535). The work shall be done in accordance with the applicable portions of Section 501 of the Standard Specifications.

All elements of the Taylor Street to NB I-90/94 Entrance Ramp (SN 016-2535) chain link fence including, but not limited to, wire mesh, posts, connecting elements, bolts, baseplates and anchor bolts shall be included in Chain Link Fence Removal. Associated items attached to the existing chain link fence including, but not limited to, sign structures shall also be included in Chain Link Fence Removal.

The existing chain link fence anchor bolts shall be removed such that no protrusions are present above the top of the existing barrier. All removal operations shall be performed in a manner so as to prevent damage to the existing barrier and/or other elements of the structure to remain. In the event that any bridge element to remain is damaged by the Contractor in the performance of his/her work, that element shall be repaired to the satisfaction of the Engineer and at no additional cost to the Department.

The work shall conform in every respect to all environmental, state and local regulations regarding construction requirements, the protection of adjacent properties, as well as dust and noise control.

All materials removed by the Contractor under this Item shall become the property of the Contractor and shall be disposed of by the Contractor off the site and in a lawful manner meeting all IDOT Policies and Procedures.

Traffic Operations

The traffic on the Interstate 90/94 must remain open to all lanes of traffic during demolition activities unless the Contractor has secured the necessary permits from the Illinois Department of Transportation to allow for temporary closure of lanes.

Method of Measurement. Chain Link Fence Removal shall be measured for payment by linear foot of the fence removed including additional elements noted above.

Basis of Payment. The work under this Item will be paid for at the Contract unit price per linear foot for CHAIN LINK FENCE REMOVAL, as indicated on the Plans and as specified herein.

TEMPORARY CHAIN LINK FENCE WITH SCREENING, 4'

Description. Work under this item shall consist of constructing, installing, maintaining and removing a chain link fence and gates with screening, of the height specified on the plans, or as directed by the Engineer. Work under this item shall be performed according to Section 664 of the IDOT Standard Specifications for Road and Bridge Construction, except as herein modified.

General Requirements. The chain link fence shall be anchored sufficient to resist wind loads of 30 pounds per square foot without deflection of more than three inches between top and bottom fence. The base shall not interfere with pedestrian and/or vehicular traffic, and shall be approved by the Engineer.

Opaque fabric meshing shall be affixed to the chain link fence face. The fabric meshing shall allow passage of air but shall contain dust and dirt. The mesh fabric shall be the full height of the fence and cover the entire length of the fence including any gated opening. The fabric meshing and fence shall not contain any advertisement. The color of the fabric shall be approved by the Engineer.

Method of Measurement. Chain link fence will be measured for payment in feet along the top of fence from center to center of end posts, including the length occupied by gates.

Basis of Payment. This work will be paid at the contract unit price per foot for TEMPORARY CHAIN LINK FENCE WITH SCREENING, of the height specified.

ENGINEER'S FIELD OFFICE TYPE A (SPECIAL)

Description. This item shall consist of furnishing all utilities and maintaining in good condition the existing office space and all appurtenances included in it, including but not limited to all communication devices, internet service, water coolers, copy machines, printers, refrigerators, air conditioning and heating systems, water services, furniture, buildings and all appurtenances thereof located at 900 South Des Plaines Street, Chicago, for the exclusive use of the Engineer or Authorized Representative. The Office shall meet the requirements of Article 670.02 of the Standard Specifications. It is intended that the Contractor for Taylor Street, Contract 60W30, takes over the maintenance of the Engineer's Field Office Type A (Special) upon the completion and release of the maintenance and handover of the Engineer's Field Office Type A (Special) by the Contractor for Halsted/Harrison Street – Contract 60W26.

1. The office space shall be maintained and kept in a clean condition at all times. The Contractor shall provide janitorial and/or cleaning service for a minimum of twice a week. Windows and window blinds shall be cleaned as directed by the Engineer. Maintenance shall include, but not limited to supply of paper towels, soap, toilet paper, and other necessary supplies. No additional compensation will be allowed for providing this service.
2. The existing interior walls may require one (1) coat of paint, as directed by the Engineer, at no additional cost.
3. The Contractor shall be responsible for security of the field office building and is liable for damages incurred as a result of vandalism, theft, and other criminal activities. Broken doors, windows or other appurtenances shall be replaced at no additional cost.
4. Four (4) on-site sanitary facilities shall be maintained.
5. The Contractor will be responsible for systems maintenance repairs which shall include the heating, cooling, sanitary and water distribution systems and light bulb replacements.
6. The (10) fire extinguishers meeting City of Chicago requirements shall be maintained.

7. The Contractor will be responsible for snow removal from parking areas and sidewalks surrounding the building & repair parking area damages as directed by the Engineer, at no additional cost.
8. The Contractor shall pay the cost of any building or equipment inspections by the City of Chicago. The Contractor shall also pay all costs to comply with the maintenance type inspection findings.
9. One (1) office copier black and white/color that has full network connectivity for all multifunction such as print, copy, scan and fax. The printer will have the capability of printing and scanning high quality documents as well as 11X17 size papers. The copier shall be complete with automatic document feeder and sorter. The unit shall have the ability to perform scanning over the network with the ability to generate files in JPEG, TIFF and PDF formats. Also included is the maintenance (servicing and repair as required) and operating supplies (paper supply of required sizes, ink and toner).

Basis of Payment. The office space maintenance and related support services will be paid for on a monthly basis until the space is released by the Engineer. The Contractor will be paid at the contract bid price each month, provided the space is maintained, equipped, and utilities furnished at the direction of the Engineer. Payment will not be made when the contract is suspended in accordance with Article 108.07 of the Standard Specifications for failure of the Contractor to comply with the provisions of the contract. The space, fully equipped and maintained as specified herein, will be paid for at the contract unit price per calendar month or fraction thereof for ENGINEER'S FIELD OFFICE TYPE A (SPECIAL). This price shall include all utility costs and shall reflect the salvage value, if any, of the equipment and furniture which becomes the property of the Contractor after release by the Engineer, except that the Department will pay that portion of each monthly long distance telephone bill in excess of \$50.

The Contractor shall be responsible for the repair and maintenance of the field office and all its related appurtenances. No extra payment will be made for systems maintenance, repairs or for damages incurred as a result of vandalism, theft or other criminal activities.

SIGN PANEL - TYPE 1 (SPECIAL)

Description. Work consists of furnishing and/or fabricating reflectorized and non-reflectorized sign panels complete with sign faces, legend, and supplemental panels, and installing them on previously erected sign support(s), sign structures, traffic signal poles, traffic signal mast arms, light poles, columns, piers, or bridges.

Work must be performed in accordance with the requirements of Section 720 of the Standard Specifications and the latest version of the City of Chicago Department of Transportation (CDOT) Field Manual for Sign Installation. Standard traffic signs designated by letters and numbers must be according to the Manual on Uniform Traffic Control Devices. Non-standard signs must be according to the CDOT Field Manual for Sign Installation and Detailed Drawings.

Submittals.

- A. Shop Drawings: Fabrication shop drawings showing full size sign layout, color, message (including "City of Chicago" logo and date of sign fabrication), graphics and proposed materials for each sign assembly, including poles, bases and hardware, must be submitted for approval prior to start of fabrication. Similar sign types that have the same sizes, colors, symbols and text layout must be submitted using one full size sign layout. Note: The message "City of Chicago XX", where XX represents the last two digits of the calendar year of sign manufacture, must be screened on all signs furnished under this contract. For stock items, submit manufacturer's catalog sheets for approval before shipping the order.
- B. Materials:
1. Aluminum: Mill Certifications, Samples
 2. Powder Coating: Test Data; Sample; Manufacturer's Certification that material complies with the required specifications.
 3. Sign Face Material: Test Data; Samples; Manufacturer's Certification that material complies with the required specifications. Test Data must be gathered by an independent agency, such as AASHTO's National Transportation Product Evaluation Program (NTPEP). Test data must cover retroreflective sheeting and process inks and/or overlay films manufactured by the sheeting manufacturer in standard traffic colors.
- C. Samples: Submit one sample for each sign type.
- D. Material Acceptance: The Contractor must provide a Manufacturer's written certification that the material complies with these specifications.
- E. Maintenance Instructions: Submit manufacturer's printed instructions for maintenance of each product, coating and film, including precautions for use of cleaning materials and solvents for paint removal which could damage specified materials.

Method of Measurement. The Sign Panels will be measured for payment in square feet of furnished and delivered sign panel. The area used for measurement will be the area of the smallest rectangle that will circumscribe each individual sign panel measured from edge to edge (horizontally and vertically). Double sided signs will be measured by the overall dimension of the complete panel, and not per face. Work will include all labor and materials necessary to install the sign. Mounting hardware and appurtenances are included in the work and will not be measured separately for payment.

Basis of Payment. This work will be paid for at the Contract Unit Price per square foot of SIGN PANEL TYPE 1, (SPECIAL) for a fabricated, furnished and delivered sign.

TELESCOPING STEEL SIGN SUPPORT (SPECIAL)

Description. This work shall consist of furnishing and installing telescoping steel sign supports for barrier wall or parapet mounted at locations shown on the Plans and details in accordance with the applicable portions of Section 728 of the Standard Specifications except as otherwise specified on the Plans.

Installation Methods. Installation methods shall be as specified in the Plans.

Method of Measurement. This work will be measured for payment in feet (meters). The length measured will be the total length of all sections installed. All mounting hardware and appurtenances are included in the work and will not be measured separately for payment.

Basis of Payment. This work will be paid for at the contract unit price per foot (meter) for TELESCOPING STEEL SIGN SUPPORT (SPECIAL), which price shall include all equipment, materials and labor required to complete the installation the sign supports.

TEMPORARY EPOXY PAVEMENT MARKING

Description. This work shall consist of furnishing, installing, and maintaining Temporary Epoxy Pavement Markings.

Material. Materials shall be according to Article 1095.04 of the Standard Specifications.

Equipment. Equipment shall be according to Article 1105.02.

Construction Requirements. Prior to application a surface preparation adhesive shall be applied to a clean, dry road surface. The pavement shall be cleaned by a method of approved by the Engineer to remove all dirt, grease, glaze, or other material that would reduce the adhesion of the markings with minimum or no damage to the pavement surface. No markings shall be placed until the Engineer approves the cleaning. The Temporary Epoxy Pavement Marking shall be placed according to the applicable portions of Article 780.09.

Method of Measurement and Basis of Payment. This work will be paid for at the contract unit price per foot for TEMPORARY EPOXY PAVEMENT MARKING of the line width specified; and/or per square foot (square meters) for TEMPORARY EPOXY PAVEMENT MARKING – LETTERS AND SYMBOLS.

Removal will be paid at the contract unit price per square foot (square meter) for WORK ZONE PAVEMENT MARKING REMOVAL.

When temporary pavement marking is shown on the Standard, the cost of the temporary pavement marking will be included in the cost of the Standard.

HOT DIP GALVANIZING FOR STRUCTURAL STEEL

Effective: June 22, 1999

Revised: March 26, 2012

Description. This work shall consist of surface preparation and hot dip galvanizing all structural steel specified on the plans and painting of galvanized structural steel when specified on the plans.

Materials. Fasteners shall be ASTM A 325 Type 1, High Strength bolts with matching nuts and washers.

Fabrication Requirements. To ensure identification after galvanizing, piece marks shall be supplemented with metal tags for all items where fit-up requires matching specific pieces.

After fabrication (cutting, welding, drilling, etc.) is complete, all holes shall be deburred and all fins, scabs or other surface/edge anomalies shall be ground or repaired per AASHTO M 160. The items shall then be cleaned per Steel Structures Painting Council's Surface Preparation Specification SSPC-SP1 (Solvent Cleaning) and SSPC-SP6 (Commercial Blast Cleaning). All surfaces shall be inspected to verify no fins, scabs or other similar defects are present.

The Contractor shall consult with the galvanizer to ensure proper removal of grease, paint and other deleterious materials prior to galvanizing.

Cleaning Structural Steel

If rust, mill scale, dirt, oil, grease or other foreign substances have accumulated prior to galvanizing, steel surfaces shall be cleaned by a combination of either caustic cleaning and cleaning according to SSPC-SP8 (Pickling) or cleaning according to SSPC-SP1 (Solvent Cleaning) and SSPC-SP6 (Commercial Blast Cleaning).

Special attention shall be given to the cleaning of corners and reentrant angles.

Surface Preparation and Hot Dip Galvanizing

General. Surfaces of the structural steel specified on the plans shall be prepared and hot dip galvanized as described herein.

Surface Preparation. A flux shall be applied to all steel surfaces to be galvanized. Any surfaces which will receive field-installed stud shear connectors shall not be galvanized within 2 in. (50 mm) of the stud location. Either the entire area receiving studs or just individual stud locations may be left ungalvanized. The following steel surfaces of bearings shall not be galvanized: stainless steel surfaces, surfaces which will be machined (except for fixed bearing sole plates), and surfaces which will have TFE, elastomer, or stainless steel parts bonded to them.

The cleaned surfaces shall be galvanized within 24 hours after cleaning, unless otherwise authorized by the Engineer.

Application of Hot Dip Galvanized Coating. Steel members, fabrications and assemblies shall be galvanized by the hot dip process in the shop according to AASHTO M 111.

Bolts, nuts, washers and steel components shall be galvanized in the shop according to ASTM F 2329.

All steel shall be safeguarded against embrittlement according to ASTM A 143. Water quenching or chromate conversion coating shall not be used on any steel work that is to be painted. All galvanized steel work shall be handled in such a manner as to avoid any mechanical damage and to minimize distortion.

Beams and girders shall be handled, stored and transported with their webs vertical and with proper cushioning to prevent damage to the member and coating. Members shall be supported during galvanizing to prevent permanent distortion.

Hot Dip Galvanized Coating Requirements. Coating weight, surface finish, appearance and adhesion shall conform to requirements of ASTM A 385, ASTM F2329, AASHTO M 111 or AASHTO M 232, as appropriate.

Any high spots of zinc coating, such as metal drip lines and rough edges, left by the galvanizing operation in areas that are to be field connected or in areas that are to be painted shall be removed by cleaning per SSPC-SP2 (Hand Tool Cleaning) or SSPC-SP3 (Power Tool Cleaning). The zinc shall be removed until it is level with the surrounding area, leaving at least the minimum required zinc thickness.

Shop assemblies producing field splices shall provide 1/8 in. (3 mm) minimum gaps between ends of members to be galvanized. At field splices of beams or girders, galvanizing exceeding 0.08 in. (2 mm) on the cross-sectional (end) face shall be partially removed until it is 0.04 in. to 0.08 in. (1 to 2 mm) thick.

Testing of Hot Dip Galvanized Coating. Inspection and testing of hot dip galvanized coatings shall follow the guidelines provided in the American Galvanizers Association publication "*Inspection of Products Hot Dip Galvanized After Fabrication*". Sampling, inspection, rejection and retesting for conformance with requirements shall be according to AASHTO M 111 or AASHTO M 232, as applicable. Coating thickness shall be measured according to AASHTO M 111, for magnetic thickness gage measurement or AASHTO M 232, as applicable.

All steel shall be visually inspected for finish and appearance.

Bolts, nuts, washers, and steel components shall be packaged according to ASTM F 2329. Identity of bolts, nuts and washers shall be maintained for lot-testing after galvanizing according to Article 505.04(f)(2) for high strength steel bolts.

A notarized certificate of compliance with the requirements listed herein shall be furnished. The certificate shall include a detailed description of the material processed and a statement that the processes used met or exceeded the requirements for successful painting of the surface, where applicable. The certificate shall be signed by the galvanizer.

Repair of Hot Dip Galvanized Coating. Surfaces with inadequate zinc thickness shall be repaired in the shop according to ASTM A 780 and AASHTO M 111.

Surfaces of galvanized steel that are damaged after the galvanizing operation shall be repaired according to ASTM A 780 whenever damage exceeds 3/16 in. (5 mm) in width and/or 4 in. (100 mm) in length. Damage that occurs in the shop shall be repaired in the shop. Damage that occurs during transport or in the field shall be repaired in the field.

After galvanizing, contact surfaces for any bolted connections shall be roughened by hand wire brushing or according to SSPC-SP7 (Brush-Off Blast Cleaning). Power wire brushing is not allowed.

All bolt holes shall be reamed or drilled to their specified diameters after galvanizing. All bolts shall be installed after galvanizing.

Surface Preparation and Painting

Surface Preparation. When galvanized steel surfaces are specified to be painted they shall be clean and free of oil, grease, and other foreign substances. Surface preparation necessary to provide adequate adhesion of the coating shall be performed according to ASTM D6386. Surface preparation shall include, but not be limited to the following:

- All galvanized steel surfaces that are to be painted shall be cleaned according to SSPC-SP1 (Solvent Cleaning). After cleaning, all chemicals shall be thoroughly rinsed from the surface with a suitable solvent. The steel shall be allowed to completely dry prior to coating application.
- All galvanized steel surfaces that are to be painted shall be checked for the presence of chromate conversion coating according to ASTM D 6386 Appendix X1. Surfaces where chromate conversion coating is found shall be cleaned according to the same appendix and blown down with clean, compressed air according to ASTM D 6386 Section 6.1.
- All galvanized steel surfaces that are to be painted shall be checked for the presence of wet storage stain. Surfaces where wet storage stain is found shall be cleaned, rinsed and completely dried according to ASTM D 6386 Section 6.2.
- Following galvanizing, thickness readings shall verify the acceptable thickness of the galvanizing according to AASHTO M111/ASTM A123.

Paint Requirements. The paint materials (epoxy intermediate coat and aliphatic urethane finish coat) shall meet the requirements of the Articles 1008.05(d) and (e) of the Standard Specification.

All paint materials for the shop and field shall be supplied by the same manufacturer, and samples of components submitted for approval by the Department, before use.

Paint storage, mixing, and application shall be according to Section 506 of the Standard Specifications and the paint manufacturer's written instructions and product data sheets. In the event of a conflict the Contractor shall advise the Engineer and comply with the Engineer's written resolution. Until a resolution is provided, the most restrictive conditions shall apply.

Shop Application of the Paint System. The areas to be painted shall receive one full coat of an epoxy intermediate coat and one full coat of an aliphatic urethane finish coat. The film thickness of each coat shall be according to Article 506.09(f)(2).

Construction Requirements. The contact surfaces of splice flange connections (mating flange faces and areas under splice bolt heads and nuts) shall be free of paint prior to assembly. If white rust is visible on the mating flange surfaces, the steel shall be prepared by hand wire brushing or brush-off blasting according to SSPC-SP7. Power wire brushing is not allowed.

After field erection, the following areas shall be prepared by cleaning according to SSPC-SP1 (Solvent Cleaning), tie- or wash-coated if applicable, and then painted or touched up with the paint specified for shop application (the intermediate coat and/or the finish coat):

- exposed unpainted areas at bolted connections
- areas where the shop paint has been damaged
- any other unpainted, exposed areas as directed by the Engineer.

Special Instructions. Painting Date/System Code. At the completion of the work, the Contractor shall stencil in contrasting color paint the date of painting the bridge and the paint type code from the Structure Information and Procedure Manual for the system used according to Article 506.10(i). The code designation for galvanizing is "V". If painting of the structural steel is not specified then the word "PAINTED" may be omitted, the month and year shall then correspond to the date the stencil is applied.

Basis of Payment. The cost of all surface preparation, galvanizing, painting and all other work described herein shall be considered as included in the unit price bid for the applicable pay items to be galvanized and painted, according to the Standard Specifications.

DYNAMIC MESSAGE SIGN (DMS) PROTECTION

Description. This work shall consist of protecting an active dynamic messaging sign (DMS) mounted to a sign truss structure south of the Taylor Street Bridge. The sign structure is located over NB I-90/94 and connects to the communications and power systems shown in the Plans. The sign structure is identified in the Plans. The preference is to keep the DMS panel mounted and fully operations throughout construction. The Contractor shall propose methods to ensure that the sign structure, panel and associated equipment are not damaged during construction, including girder removal and girder erection operations.

General. The work under this item shall include a plan submitted by the Contractor that will detail the operations around the structure and any protective measures to be installed including, but not limited to: plates, scaffolding, screens or cushioning materials. Any and all temporary material installations shall not disrupt the motorist view of text displayed on the DMS. Any lane closures necessary to install or maintain the temporary systems shall be in accordance with other sections of these Special Provisions.

In lieu of protecting the DMS and sign structure in place, the Contractor may elect to temporarily remove and store the DMS and all or portions of the sign structure before reinstalling after construction operations that have been deemed to threaten the DMS and sign structure have been completed. The removal of the DMS and sign structure must be approved by the Engineer in advance of any removal activities. The Contractor shall provide no less than two (2) portable changeable message sign panels for periods when the DMS is inoperable or has been removed completely.

Submittals. No less than four (4) weeks prior to construction operations that may risk damaging the existing DMS and sign structure, including, but not limited to, girder removal, the Contractor shall submit a detailed plan that describes planned construction activities and the plan to protect the DMS and sign structure. The submittal shall include all pertinent information about procedures, equipment, materials, staging, sequencing and other data related to the work adjacent to and above the DMS and sign structure. Any temporary materials and designs for temporary construction to protect the DMS and sign structure shall be detailed. Any scaffolding or bracing designs, and calculations supporting the design, shall be prepared and sealed by an Illinois Licensed Structural Engineer.

If the Contractor elects to temporarily remove and re-erect the DMS and all or portions of the sign structure, the plan shall include information based upon this Special Provision, relevant sections of the Standard Specifications, direction by the Engineer and direction from the Traffic Systems Center. The plan shall include procedures to be utilized during the removal, transportation, storage and re-installation of the DMS and the sign structure.

All submittals are expected to be approved a minimum of one (1) week prior to the start of work under this item.

Temporary Removal. If the Contractor elects to temporarily remove and re-erect the DMS and all or portions of the sign structure, the following procedures shall take place.

The Traffic Systems Center (TSC) Engineer will test the DMS prior to removal. The Contractor shall be responsible for the DMS, Sign Structure, and any associated equipment until they are transferred to the State after the successful reinstallation. The Contractor shall reconnect the DMS back to the Fiber Optic Network.

It shall be the Contractor's responsibility to contact the TSC Engineer a minimum of 7 working days prior to the DMS removal. The Contractor shall coordinate his work fully with the TSC Engineer both as to the work required and the timing of the removal of the DMS. No additional compensation will be granted under this or any other item for extra work caused by failure to comply with this requirement.

The DMS shall remain operational until it is in conflict with construction operations, or as determined by the Engineer. Prior to disconnecting the DMS, the portable changeable message signs shall be in place and deemed operational by the Engineer. Messaging to be displayed shall be coordinated by the Engineer, and may involve connecting into the existing DMS cabinet. Any temporary connections shall be approved in advance.

Prior to any work being performed by the Contractor, the Contractor shall (in the presence of the Engineer and the TSC Engineer) conduct an inspection of the DMS sign, sign structure, cabinet and the DMS cables, making note of any parts which are found broken, missing, defective, or malfunctioning. The TSC Engineer will test the sign as deemed necessary. Any problems will be noted, and/or repaired prior to transfer of maintenance

The Contractor shall assume full responsibility for the DMS, Sign Structure and required other equipment during removal, transportation, storage and reinstallation. Any damage shall be repaired to the satisfaction of the Engineer, at no additional cost to the Department.

This inspection shall be submitted in writing to the Engineer for record. Without such a record, any damage to the DMS, sign structure, equipment, hardware, and/or cables shall be repaired to the full satisfaction of the Engineer, at no additional cost to the Department.

Once the DMS sign is completely disconnected as coordinated with the Engineer and TSC Engineer, the Contractor shall remove the DMS from the sign structure, remove the sign structure and any equipment, and load and protect them for transport. All conduits to remain shall be temporarily capped with cables pulled to the nearest junction box or cabinet.

All or portions of the sign structure shall be disassembled and inventoried. Removal limits shall be in accordance with the pre-approved plan. The existing foundations, including all anchor bolts, shall be protected.

Throughout transportation and storage, the sign shall be protected from moisture and damage by a tarp and a protective wooden frame enclosure constructed around the DMS prior to loading it for transport. The DMS shall be stored at a facility pre-approved by the Engineer. The sign structure shall be stored at the same facility.

Similar procedures shall be followed to return all items for re-installation. The re-installation of the sign structure shall conform to standard procedures for the structure type. All work shall be identified in the re-installation plan previously approved by the Engineer and the TSC.

Basis of Payment. This work will be paid for at the contract unit price per each DYNAMIC MESSAGE SIGN (DMS) PROTECTION and include all necessary labor, materials, equipment and other items required to successfully protect the existing DMS.

GENERAL ELECTRICAL REQUIREMENTS

Effective: January 1, 2012

Add the following to Article 801 of the Standard Specifications:

“Maintenance transfer and Preconstruction Inspection:

General. Before performing any excavation, removal, or installation work (electrical or otherwise) at the site, the Contractor shall request a maintenance transfer and preconstruction site inspection, to be held in the presence of the Engineer and a representative of the party or parties responsible for maintenance of any lighting and/or traffic control systems which may be affected by the work. The request for the maintenance transfer and preconstruction inspection shall be made no less than seven (7) calendar days prior to the desired inspection date. The maintenance transfer and preconstruction inspection shall:

Establish the procedures for formal transfer of maintenance responsibility required for the construction period.

Establish the approximate location and operating condition of lighting and/or traffic control systems which may be affected by the work

Marking of Existing Cable Systems. The party responsible for maintenance of any existing lighting and/or traffic control systems at the project site will, at the Contractor's request, mark and/or stake, once per location, all underground cable routes owned or maintained by the State. A project may involve multiple "locations" where separated electrical systems are involved (i.e. different controllers). The markings shall be taken to have a horizontal tolerance of at least 304.8 mm (one (1) foot) to either side.. The request for the cable locations and marking shall be made at the same time the request for the maintenance transfer and preconstruction inspection is made. The Contractor shall exercise extreme caution where existing buried cable runs are involved. The markings of existing systems are made strictly for assistance to the Contractor and this does not relieve the Contractor of responsibility for the repair or replacement of any cable run damaged in the course of his work, as specified elsewhere herein. Note that the contractor shall be entitled to only one request for location marking of existing systems and that multiple requests may only be honored at the contractor's expense. No locates will be made after maintenance is transferred, unless it is at the contractor's expense.

Condition of Existing Systems. The Contractor shall conduct an inventory of all existing electrical system equipment within the project limits, which may be affected by the work, making note of any parts which are found broken or missing, defective or malfunctioning. Megger and load readings shall be taken for all existing circuits which will remain in place or be modified. If a circuit is to be taken out in its entirety, then readings do not have to be taken. The inventory and test data shall be reviewed with and approved by the Engineer and a record of the inventory shall be submitted to the Engineer for the record. Without such a record, all systems transferred to the Contractor for maintenance during construction shall be returned at the end of construction in complete, fully operating condition.”

Add the following to the 1st paragraph of Article 801.05(a) of the Standard Specifications:

“Items from multiple disciplines shall not be combined on a single submittal and transmittal. Items for lighting, signals, surveillance and CCTV must be in separate submittals since they may be reviewed by various personnel in various locations.”

Revise the second sentence of the 5th paragraph of Article 801.05(a) of the Standard Specifications to read:

“The Engineer will stamp the submittals indicating their status as ‘Approved’, ‘Approved as Noted’, ‘Disapproved’, or ‘Information Only’.

Revise the 6th paragraph of Article 801.05(a) of the Standard Specifications to read:

Resubmittals. All submitted items reviewed and marked ‘Approved as Noted’, or ‘Disapproved’ are to be resubmitted in their entirety with a disposition of previous comments to verify contract compliance at no additional cost to the state unless otherwise indicated within the submittal comments.”

Revise Article 801.11(a) of the Standard Specifications to read:

Lighting Operation and Maintenance Responsibility. The scope of work shall include the assumption of responsibility for the continuing operation and maintenance the of existing, proposed, temporary, sign and navigation lighting, or other lighting systems and all appurtenances affected by the work as specified elsewhere herein. Maintenance of lighting systems is specified elsewhere and will be paid for separately

Energy and Demand Charges. The payment of basic energy and demand charges by the electric utility for existing lighting which remains in service will continue as a responsibility of the Owner, unless otherwise indicated. Unless otherwise indicated or required by the Engineer duplicate lighting systems (such as temporary lighting and proposed new lighting) shall not be operated simultaneously at the Owner's expense and lighting systems shall not be kept in operation during long daytime periods at the Owner's expense. Upon written authorization from the Engineer to place a proposed new lighting system in service, whether the system has passed final acceptance or not, (such as to allow temporary lighting to be removed), the Owner will accept responsibility for energy and demand charges for such lighting, effective the date of authorization. All other energy and demand payments to the utility shall be the responsibility of the Contractor until final acceptance.”

Add the following to Section 801 of the Standard Specifications:

Lighting Cable Identification. Each wire installed shall be identified with its complete circuit number at each termination, splice, junction box or other location where the wire is accessible.”

Lighting Cable Fuse Installation. Standard fuse holders shall be used on non-frangible (non-breakaway) light pole installations and quick-disconnect fuse holders shall be used on frangible (breakaway) light pole installations. Wires shall be carefully stripped only as far as needed for connection to the device. Over-stripping shall be avoided. An oxide inhibiting lubricant shall be applied to the wire for minimum connection resistance before the terminals are crimped-on. Crimping shall be performed in accordance with the fuse holder manufacturer's recommendations. The exposed metal connecting portion of the assembly shall be taped with two half-lapped wraps of electrical tape and then covered by the specified insulating boot. The fuse holder shall be installed such that the fuse side is connected to the pole wire (load side) and the receptacle side of the holder is connected to the line side.”

Revise the 2nd paragraph of Article 801.16 of the Standard Specifications to read:

“When the work is complete, and seven days before the request for a final inspection, the full-size set of contract drawings. Stamped “RECORD DRAWINGS”, shall be submitted to the Engineer for review and approval and shall be stamped with the date and the signature of the Contractor's supervising Engineer or electrician. The record drawings shall be submitted in PDF format on CDROM as well as hardcopy for review and approval. In addition to the record drawings, copies of the final catalog cuts which have been Approved or Approved as Noted shall be submitted in PDF format along with the record drawings. The PDF files shall clearly indicate either by filename or PDF table of contents the respective pay item number. Specific part or model numbers of items which have been selected shall be clearly visible.”

Add the following to Article 801.16 of the Standard Specifications:

“In addition to the specified record drawings, the Contactor shall record GPS coordinates of the following electrical components being installed, modified or being affected in other ways by this contract:

- Last light pole on each circuit
- Handholes
- Conduit roadway crossings
- Controllers
- Control Buildings
- Structures with electrical connections, i.e. DMS, lighted signs.
- Electric Service locations
- CCTV Camera installations
- Fiber Optic Splice Locations

Datum to be used shall be North American 1983.

Data shall be provided electronically and in print form. The electronic format shall be compatible with MS Excel. Latitude and Longitude shall be in decimal degrees with a minimum of 6 decimal places. Each coordinate shall have the following information:

1. Description of item
2. Designation or approximate station if the item is undesignated
3. Latitude
4. Longitude

Examples:

Equipment Description	Equipment Designation	Latitude	Longitude
CCTV Camera pole	ST42	41.580493	-87.793378
FO mainline splice handhole	HHL-ST31	41.558532	-87.792571
Handhole	HH at STA 234+35	41.765532	-87.543571
Electric Service	Elec Srv	41.602248	-87.794053
Conduit crossing	SB IL83 to EB I290 ramp SIDE A	41.584593	-87.793378
Conduit crossing	SB IL83 to EB I290 ramp SIDE B	41.584600	-87.793432
Light Pole	DA03	41.558532	-87.792571
Lighting Controller	X	41.651848	-87.762053
Sign Structure	FGD	41.580493	-87.793378
Video Collection Point	VCP-IK	41.558532	-87.789771
Fiber splice connection	Toll Plaza34	41.606928	-87.794053

Prior to the collection of data, the contractor shall provide a sample data collection of at least six data points of known locations to be reviewed and verified by the Engineer to be accurate within 100 feet. Upon verification, data collection can begin. Data collection can be made as construction progresses, or can be collected after all items are installed. If the data is unacceptable the contractor shall make corrections to the data collection equipment and or process and submit the data for review and approval as specified.

Accuracy. Data collected is to be mapping grade. A handheld mapping grade GPS device shall be used for the data collection. The receiver shall support differential correction and data shall have a minimum 5 meter accuracy after post processing.

GPS receivers integrated into cellular communication devices, recreational and automotive GPS devices are not acceptable.

The GPS shall be the product of an established major GPS manufacturer having been in the business for a minimum of 6 years.”

UNDERPASS LUMINAIRE, HPS, STAINLESS STEEL HOUSING

Effective: January 1, 2012

Description. This item shall consist of furnishing, testing as required, and installing a luminaire suitable for roadway underpasses as specified herein.

General. The luminaire shall be optically sealed, mechanically strong and easy to maintain.

All wiring within the fixture shall have a minimum temperature rating of 125° C. In addition, the unit shall be designed to allow for a maximum supply wire rating of 90° C.

All hardware of the housing, reflector, and ballast assembly shall be captive.

The luminaire shall be UL Listed for Wet Locations.

The underpass luminaire shall be suitable for lighting a roadway underpass at approximate mounting height of 16 feet from a position suspended directly above the roadway.

The luminaire shall be certified by the U.L. testing laboratory to meet the IP66 criteria of the International Electro technical Commission Standard 529.

Housing. The housing shall be stainless steel and be made of 16 gauge minimum thickness stainless steel, Type 304, #2B finish.

Since the installed location of the luminaires has severe space limitations that prohibit servicing the luminaire from the top or side of the fixture, the luminaire must be serviceable from the bottom of the housing when in the installed position. Both ballast and optical compartments must be serviceable from the bottom of the fixture. Fixtures which open from the top or sides are not acceptable.

The housing shall have a maximum width of 13”

All internal and external hardware, unless specifically specified otherwise, shall be made of stainless steel.

Stainless Steel Housing

The stainless steel housing, and lens frame shall be made of 16 gauge minimum thickness stainless steel, Type 304 #2B.

All housing and frame components shall be cut within with a laser with a positioning accuracy of +/- .004" for assembly accuracy and machine welded to minimize irregularities in the weld joint.

All seams in the housing enclosure shall be welded by continuous welding. Stainless steel weld wire shall be used for all welds. A sample weld shall be submitted for review and approval.

The luminaire lens shall be flush, within 3.1 mm (0.122"), of the lens frame.

The lens frame shall be flat and the frame and luminaire housing shall not have any protruding flanges.

The lens frame assembly shall consist of a one-piece 16 gauge 304 stainless steel external frame with the lens facing toward the housing and a 16 gauge 304 stainless internal frame with the legs facing away from the housing. The internal frame shall have seam welded corners for added strength. The two panels will sandwich the glass lens and be fastened together with the use of no less than 10 #10 stainless steel fasteners.

The lens frame and the door frame shall each be secured through the use of two stainless steel draw latches secured to the fixture housing.

When in open position, it shall be possible to un-hinge and remove the lens frame for maintenance. The lens frame hinge shall be stainless steel and designed so that there must be a conscious action of the maintenance personnel to remove the lens frame. The frame hinging method shall not be designed so that bumping the frame accidentally could allow the frame to fall to the roadway surface. The removal method must be accomplished without the use of tools or hardware. The hinge pin shall be a minimum of 6.35 mm (0.250") in diameter. The pin shall be spring loaded and retractable with a safety catch to hold the pin in the retracted position for ease of maintenance.

The suspended housing shall be divided into two compartments, one for the ballast and optical assembly, the other for wire connections. The optical chamber shall be sealed from the environment. The wire portal between compartments shall be sealed so as to prevent air exchange through the portal. There shall be an internally mounted breather mechanism to allow internal and external air pressure to equalize without permitting dust or water into the unit.

The ballast and all electrical equipment shall be mounted to a removable aluminum chassis with a minimum thickness of 3.175, (0.125"). The chassis shall be held in place with captive stainless steel hardware. The hardware shall include a bracket that can be loosened and shifted to allow the chassis to pivot away from fastened position for removal. The splice box shall include a heavy-duty 3 pole terminal block to accommodate #6 conductors and a KTK 2 amp fuse with HPC fuse holder or approved equal. Quick-connect power distribution terminal blocks shall be a molded thermoset plastic, rated 70A, 600V and have 3 poles, each with (4) .250 quick connect terminals. Operating temperature rating to be 150° C. Input wire size shall accommodate #2-#14 AWG. Torque rating shall be 45 in./lb. Maximum. Agency approvals shall be UL E62622; CSA LR15364.

Ballast compartment surfaces shall be deburred and free of sharp edges, points or corners that may come in contact with installers or service personnel.

Gasketing. The junction between the lens frame and the ballast housing door and the housing shall be sealed with a one-piece vulcanized or molded high temperature solid silicone rubber gasket with the equivalent of a 60 Shore A durometer rating. The gasket between the lens frame and the luminaire housing shall be securely attached by mechanical means, such a retaining lip to prevent the movement of the gasket. The gasket may not be secured by adhesive means exclusively. The lens and ballast housing doors shall be designed and constructed so they seal to the gasket on a flat surface. The frame shall not seal to the gasket using the edge of leg on a doorframe. The lens shall be sealed inside of the lens frame with the use of a one-piece solid silicone rubber gasket with ribbed flanges and a rating of 60 Shore A Durometer

The junction between conduit connections to the luminaire and the lens frame junction to the housing shall withstand entry of water when subjected to a water jet pressure of 207 kPa (30 lbs. Per sq. inch), tested under laboratory conditions. Submittal information shall include data relative to gasket thickness and density and the means of securing it in place.

Mounting Brackets. The brackets shall be properly sized to accommodate the weight of the luminaire with calculations or other suitable reference documentation submitted to support the material choice.

The luminaire shall have an opening in the housing for installation (by others) of a 28.1 mm (3/4 inch) diameter flexible conduit. The location of the opening will be determined by the Engineer during the shop drawing review.

Lamp Socket. The lamp socket shall be a 4KV pulse rated mogul type, porcelain glazed enclosed, and be provided with grips, or other suitable means to hold the lamp against vibration. The rating of the socket shall exceed the lamp starting voltage, or starting pulse voltage rating.

If the lamp socket is of the sealed removable type, proper alignment of the socket shall be provided and molded into the socket assembly and indicated in a contrasting color.

If the lamp socket is adjustable, the factory setting must be indicated legibly in the luminaire housing.

ANSI Identification Decal. A decal, complying to ANSI standard C136-15 for luminaire wattage and distribution type, shall be factory attached permanently to the luminaire. The information contained in the decal shall enable a viewer, from the ground level, to identify the lamp wattage and type of luminaire distribution.

Optical Assembly. Lens and Lens Frame. The lens shall be made of crystal clear, impact and heat resistant tempered glass a minimum of 6.35 mm (0.25") thick. The lens shall be held in such a manner as to allow for its expansion and contraction, due to temperature variation. The lens shall be a flat glass design.

Reflector. The reflector shall be hydro formed aluminum, 0.063" thick, bright-dip and clear anodized finish.

The reflector shall be secured with a stainless steel aircraft cable during maintenance operations.

If the reflector has multiple light distribution positions, each position must have positive stop/mounting with the original factory distribution identified.

The luminaire shall be photometrically efficient. Luminaire efficiency, defined by the I.E.S. as "the ratio or luminous flux (lumens) emitted by a luminaire to that emitted by the lamp or lamps used within", shall not be less than 67%. Submittal information shall include published efficiency data.

The reflector, the refractor or lens, and the entire optical assembly shall not develop any discoloration over the normal life span of the luminaire.

The reflector shall not be altered by paint or other opaque coatings which would cover or coat the reflecting surface. Control of the light distribution by any method other than the reflecting material and the aforementioned clear protective coating that will alter the reflective properties of the reflecting surface is unacceptable

Ballast. The ballast shall be a High Pressure Sodium, high power factor, lead type, Isolated Regulator Ballast (CWI) or a Constant Wattage Auto-regulator (CWA), for operation on a nominal 240 volt system.

The ballast shall be designed to furnish proper electrical characteristics for starting and operating a high pressure sodium vapor lamp of the specified rating at ambient temperatures of -29 degrees to +40 degrees C. The ballast windings shall be adequately impregnated and treated for protection against the entrance of moisture, insulated with Class H insulation, and able to withstand the NEMA standard dielectric test.

The ballast shall include an electronic starting assembly. The starter assembly shall be comprised of solid state devices capable of withstanding ambient temperatures of 85 degrees C. The starter shall provide timed pulsing with sufficient follow-through current to completely ionize and start all lamps. Minimum amplitude of the pulse shall be 2,500 volts, with a width of one (1) microsecond at 2,250 volts, and shall be applied within 20 electrical degrees of the peak of the open circuit voltage wave with a repetition rate as recommended by the lamp manufacturer for the 60 cycle wave. The lamp peak pulse current shall be a minimum of 0.2 amperes. Proper ignition shall be provided over a range of input voltage from 216 to 264 volts. The starter component shall be field replaceable and completely interchangeable with no adjustment necessary for proper operation. The starter component shall have push-on type electrical terminations to provide good electrical and mechanical integrity and ease of replacement. Terminal configuration shall preclude improper insertion of plug-in components. The starter circuit board shall be treated in an approved manner to provide a water and contaminant-resistant coating.

The ballast shall have an overall power factor of at least 0.9 when operated under rated lamp load.


The ballast shall withstand a 2,500 volt dielectric test between the core and windings without damage to the insulation.

The ballast shall not subject the lamp to a crest factor exceeding 1.8 and shall operate the lamp without affecting adversely the lamp life and performance.

The ballast shall be designed to ANSI Standards and shall be designed and rated for operation on a nominal 240 volt system. The ballast shall provide positive lamp ignition at the input voltage of 216 volts. It shall operate the lamp over a range of input voltages from 216 to 264 volts without damage to the ballast. It shall provide lamp operation within lamp specifications for rated lamp life at input design voltage range. Operating characteristics shall produce output regulation not exceeding the following values:

Nominal Ballast Wattage	Maximum Ballast Regulation
400	25%
310	26%
250	22%
150	22%
70	17%

For this measure, regulation shall be defined as the ratio of the lamp watt difference between the upper and lower operating curves to the nominal lamp watts; with the lamp watt difference taken within the ANSI trapezoid at the nominal lamp operating voltage point parallel to the minimum lamp volt line:

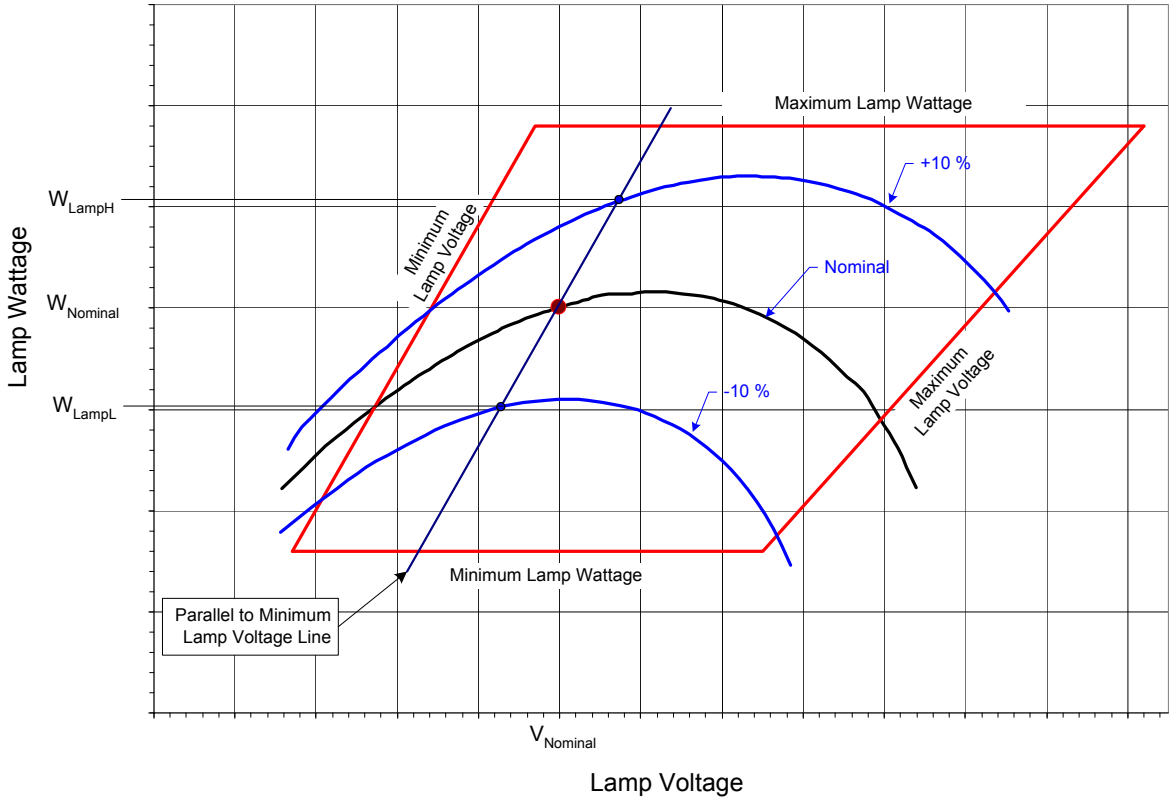

$$\text{Ballast Regulation} = \frac{W_{LampH} - W_{LampL}}{W_{LampN}} \times 100$$

where:

- W_{LampH} = lamp watts at +10% line voltage (264v)
- W_{LampL} = lamp watts at - 10% line voltage (216v)
- W_{lampN} = lamp watts at 240v"

Ballast losses, based on cold bench tests, shall not exceed the following values:

Nominal Ballast Wattage	Maximum Ballast Losses
400	16.0%
310	19.0%
250	17.5%
150	26.0%
70	34.0%

Ballast losses shall be calculated based on input watts and lamp watts at nominal system voltage as indicated in the following equation:

$$\text{Ballast Losses} = \frac{W_{Line} - W_{Lamp}}{W_{Lamp}} \times 100$$

where:

W_{line} = line watts at 240v

W_{lamp} = lamp watts at 240v

Ballast output to lamp. At nominal system voltage and a lamp voltage of 52v, the ballast shall deliver a lamp wattage within $\pm 4\%$ of the nominal lamp wattage. For a 70w luminaire, the ballast shall deliver 70 watts $\pm 4\%$ at a lamp voltage of 52v for the nominal system voltage of 240v.

Ballast output over lamp life. Over the life of the lamp the ballast shall produce an average of the nominal lamp rating $\pm 5\%$. Lamp wattage readings shall be taken at 5-volt increments throughout the ballast trapezoid. The lamp wattage values shall then be averaged within the trapezoid and shall be within $\pm 5\%$ of the nominal ballast rating. Submittal documents shall include a tabulation of the lamp wattage vs. lamp voltage readings.

The ballast shall be integral to the luminaire. The ballast components shall be mounted on a removable door or on a removable mounting tray. The ballast tray or mounting door shall be manufactured with dissimilar metal conflicts kept to a minimum.

Ballast wiring and lamp socket wiring shall be connected by means of keyed plugs. Upon unplugging the ballast wiring the entire ballast assembly shall be removable for maintenance. The plugs shall not be interchangeable to avoid improper connection of the assemblies.

The mounting adjustments and wiring terminals shall be readily accessible. The removable door or pad shall be secure when fastened in place and all individual components shall be secure upon the removable element. Upon ballast assembly removal, each component shall be readily removable for replacement.

The luminaire shall be completely wired. All wiring connections within the luminaire shall be made with insulated compression connectors or insulated terminal blocks. An insulated terminal block shall be provided to terminate the incoming supply wires. The terminal block shall be rated for 600 volts and shall accommodate wire sizes from #10 to #6 AWG. The use of "wire nuts" is unacceptable. A ground terminal shall be provided for the connection of a ground wire.

Ballast and lamp Leads shall not be smaller than #16 AWG conductors rated at a minimum temperature rating of 90° C.

All wires shall be coded by tagging and/or color coding for proper identification. A complete legible permanently attached wiring diagram (no smaller than 3" x 4" with a min. font size of 8 pts.) coordinated with the wire identifications shall be displayed at the convenient location on the interior of the luminaire. The wiring diagram shall be oriented so that it is right side up and readable when the luminaire is in the installed position.

The ballast shall not be excessively noisy. Noticeable noisy ballasts, as determined by the Engineer, shall be replaced at no additional cost to the State.

The ballast shall provide lamp operation within lamp specifications for the rated lamp life at the input design voltage range. It shall have a 6 month operation capability with a cycling lamp.

Submittal information shall include manufacturer's literature and data to confirm compliance with all specified requirements including an ANSI Standard Ballast Characteristic Graph (Trapezoid) diagram, with all items clearly identified.

Photometric Performance. The luminaire photometric performance shall produce results equal to or better than those listed in the included Luminaire Performance Table. Submittal information shall include computer calculations based on the controlling given conditions which demonstrate achievement of all listed performance requirements. The computer calculations shall be done according to I.E.S. recommendations and the submitted calculations shall include point-by-point illuminance, luminance and veiling luminance as well as listings of all indicated averages and ratios as applicable. Calculations shall be performed with AGI32. The program used to perform the calculations shall be identified on the submittal. The submittal data shall also include all photometric calculations files with the proposed photometric data on a CD ROM. The performance requirements shall define the minimum number of decimal places used in the calculations. Rounding of calculations shall not be allowed.

In addition to computer printouts of photometric performance, submittal information shall include: Descriptive literature; an Isofootcandle chart of horizontal lux (footcandles); Utilization curve; Isocandela diagram; Luminaire classification per ANSI designation; Candlepower values at every 2.5 degree intervals; Candlepower tables are to be provided on CD ROM in the IES format as specified in IES publication LM-63.

**IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE #1
 5 Lane Cross Section**

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	<u>60 ft</u>
	Number of Lanes	<u>5</u>
	I.E.S. Surface Classification	<u>R3</u>
	Q-Zero Value	<u>.07</u>
LIGHT POLE DATA	Mounting Height	<u>16 ft</u>
	Mast Arm Length	<u>0 ft</u>
	Pole Set-Back From Edge of Pavement	<u>2 ft</u>
LUMINAIRE DATA	Lamp Type	<u>HPS</u>
	Lamp Lumens	<u>9,500</u>
	I.E.S. Vertical Distribution	<u>Medium</u>
	I.E.S. Control Of Distribution	<u>Cutoff</u>
	I.E.S. Lateral Distribution	<u>IV</u>
	Total Light Loss Factor	<u>0.65</u>
LAYOUT DATA	Spacing	<u>35 ft</u>
	Configuration	<u>Opposite Side</u>
	Luminaire Overhang over edge of pavement	<u>-2 ft</u>

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS		
---------------------------------	--	--

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

ILLUMINATION	Ave. Horizontal Illumination, E_{AVE}	<u>18 Lux</u>
	Uniformity Ratio, E_{AVE}/E_{MIN}	<u>2.5:1</u>
LUMINANCE	Average Luminance, L_{AVE}	<u>1.2 Cd/m²</u>
	Uniformity Ratio, L_{AVE}/L_{MIN}	<u>2.5:1 (Max)</u>
	Uniformity Ratio, L_{MAX}/L_{MIN}	<u>4:1 (Max)</u>
	Veiling Luminance Ratio, L_V/L_{AVE}	<u>0.25:1 (Max)</u>

**IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE #2
 4 Lane Cross Section**

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	48 ft
	Number of Lanes	4
	I.E.S. Surface Classification	R3
	Q-Zero Value	.07
LIGHT POLE DATA	Mounting Height	16 ft
	Mast Arm Length	0 ft
	Pole Set-Back From Edge of Pavement	2 ft
LUMINAIRE DATA	Lamp Type	HPS
	Lamp Lumens	9,500
	I.E.S. Vertical Distribution	Medium
	I.E.S. Control Of Distribution	Cutoff
	I.E.S. Lateral Distribution	IV
	Total Light Loss Factor	0.65
LAYOUT DATA	Spacing	35 ft
	Configuration	Opposite Side
	Luminaire Overhang over edge of pavement	-2 ft

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS		
---------------------------------	--	--

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

ILLUMINATION	Ave. Horizontal Illumination, E_{AVE}	18 Lux
	Uniformity Ratio, E_{AVE}/E_{MIN}	2.5:1
LUMINANCE	Average Luminance, L_{AVE}	1.2 Cd/m ²
	Uniformity Ratio, L_{AVE}/L_{MIN}	2.5:1
	Uniformity Ratio, L_{MAX}/L_{MIN}	4:1
	Veiling Luminance Ratio, L_V/L_{AVE}	0.25:1

**IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE #3
 3 Lane Cross Section**

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	36 ft
	Number of Lanes	3
	I.E.S. Surface Classification	R3
	Q-Zero Value	.07
LIGHT POLE DATA	Mounting Height	16 ft
	Mast Arm Length	0 ft
	Pole Set-Back From Edge of Pavement	2 ft
LUMINAIRE DATA	Lamp Type	HPS
	Lamp Lumens	6,300
	I.E.S. Vertical Distribution	Medium
	I.E.S. Control Of Distribution	Cutoff
	I.E.S. Lateral Distribution	III
	Total Light Loss Factor	0.65
LAYOUT DATA	Spacing	45 ft
	Configuration	Opposite Side
	Luminaire Overhang over edge of pavement	-2 ft

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS		
---------------------------------	--	--

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

ILLUMINATION	Ave. Horizontal Illumination, E_{AVE}	18 Lux
	Uniformity Ratio, E_{AVE}/E_{MIN}	2.5:1
LUMINANCE	Average Luminance, L_{AVE}	1.2 Cd/m ²
	Uniformity Ratio, L_{AVE}/L_{MIN}	2.5:1
	Uniformity Ratio, L_{MAX}/L_{MIN}	4:1
	Veiling Luminance Ratio, L_V/L_{AVE}	0.30:1

**IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE #4
 2 Lane Cross Section**

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	24 ft
	Number of Lanes	2
	I.E.S. Surface Classification	R3
	Q-Zero Value	.07
LIGHT POLE DATA	Mounting Height	16 ft
	Mast Arm Length	0 ft
	Pole Set-Back From Edge of Pavement	2 ft
LUMINAIRE DATA	Lamp Type	HPS
	Lamp Lumens	6,300
	I.E.S. Vertical Distribution	Medium
	I.E.S. Control Of Distribution	Cutoff
	I.E.S. Lateral Distribution	III
	Total Light Loss Factor	0.65
LAYOUT DATA	Spacing	30 ft
	Configuration	Single Side
	Luminaire Overhang over edge of pavement	-2 ft

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS		
---------------------------------	--	--

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

ILLUMINATION	Ave. Horizontal Illumination, E_{AVE}	18 Lux
	Uniformity Ratio, E_{AVE}/E_{MIN}	3:1
LUMINANCE	Average Luminance, L_{AVE}	1.2 Cd/m ²
	Uniformity Ratio, L_{AVE}/L_{MIN}	3:1
	Uniformity Ratio, L_{MAX}/L_{MIN}	5:1
	Veiling Luminance Ratio, L_V/L_{AVE}	0.30:1

**IDOT DISTRICT 1 LUMINAIRE PERFORMANCE TABLE #5
 1 Lane Cross Section**

GIVEN CONDITIONS		
ROADWAY DATA	Pavement Width	16 ft
	Number of Lanes	1
	I.E.S. Surface Classification	R3
	Q-Zero Value	.07
LIGHT POLE DATA	Mounting Height	16 ft
	Mast Arm Length	0 ft
	Pole Set-Back From Edge of Pavement	5 ft
LUMINAIRE DATA	Lamp Type	HPS
	Lamp Lumens	6,300
	I.E.S. Vertical Distribution	Medium
	I.E.S. Control Of Distribution	Cutoff
	I.E.S. Lateral Distribution	III
	Total Light Loss Factor	0.65
LAYOUT DATA	Spacing	35 ft
	Configuration	Single Side
	Luminaire Overhang over edge of pavement	-5 ft

NOTE: Variations from the above specified I.E.S. distribution pattern may be requested and acceptance of variations will be subject to review by the Engineer based on how well the performance requirements are met.

PERFORMANCE REQUIREMENTS		
---------------------------------	--	--

NOTE: These performance requirements shall be the minimum acceptable standards of photometric performance for the luminaire, based on the given conditions listed above.

ILLUMINATION	Ave. Horizontal Illumination, E_{AVE}	18 Lux
	Uniformity Ratio, E_{AVE}/E_{MIN}	2.5:1
LUMINANCE	Average Luminance, L_{AVE}	1.2 Cd/m ²
	Uniformity Ratio, L_{AVE}/L_{MIN}	2.5:1
	Uniformity Ratio, L_{MAX}/L_{MIN}	4:1
	Veiling Luminance Ratio, L_V/L_{AVE}	0.30:1

Independent Testing. Independent testing of luminaires shall be required whenever the quantity of luminaires of a given wattage and distribution, as indicated on the plans, is 50 or more. For each luminaire type to be so tested, one luminaire plus one luminaire for each 50 luminaires shall be tested. Example: *A plan quantity of 75 luminaires would dictate that 2 to be tested; 135 luminaires would dictate that three be tested.*

The Contractor shall be responsible for all costs associated with the specified testing, including but not limited to shipping, travel and lodging costs as well as the costs of the tests themselves, all as part of the bid unit price for this item. Travel, lodging and other associated costs for travel by the Engineer shall be direct-billed to or shall be pre-paid by the Contractor, requiring no direct reimbursement to the Engineer or the independent witness, as applicable.

Commitment to test. The Vendor shall select one of the following options for the required testing with the Engineer's approval:

Engineer Factory Selection for Independent Lab: The Contractor may select this option if the luminaire manufacturing facility is within the state of Illinois. The Contractor shall propose an independent test laboratory for approval by the Engineer. The selected luminaires shall be marked by the Engineer and shipped to the independent laboratory for tests.

Engineer Witness of Independent Lab Test: The Contractor may select this option if the independent testing laboratory is within the state of Illinois. The Engineer shall select, from the project luminaires at the manufacturer's facility or at the Contractor's storage facility, luminaires for testing by the independent laboratory.

Independent Witness of Manufacturer Testing: The independent witness shall select from the project luminaires at the manufacturer's facility or at the Contractor's storage facility, the luminaires for testing. The Contractor shall propose a qualified independent agent, familiar with the luminaire requirements and test procedures, for approval by the Engineer, to witness the required tests as performed by the luminaire manufacturer. The independent witness shall:

- ▶ Have been involved with roadway lighting design for at least 15 years.
- ▶ Not have been the employee of a luminaire or ballast manufacturer within the last 5 years.
- ▶ Be a member of IESNA in good standing.
- ▶ Provide a list of professional references.

Engineer Factory Selection and Witness of Manufacturer Testing: The Contractor may select this option if the manufacturing facility is within the state of Illinois. At the manufacturer's facility, the Engineer shall select the luminaires to be tested and shall be present during the testing process. The Contractor shall schedule travel by the Engineer to and from the Manufacturer's laboratory to witness the performance of the required tests.

In all cases, the selection of luminaires shall be a random selection from the entire completed lot of luminaires required for the contract. Selections from partial lots will not be allowed. The selection of the testing option shall be presented with the information submitted for approval. The proposed independent laboratory or independent witness shall be included with that information. The selection of the testing option shall be presented with the information submitted for approval. The proposed independent laboratory or independent witness shall be included with that information.

The testing performed shall include photometric, electrical, heat and water jet testing.

Photometric testing shall be in accordance with IES recommendations except that the selected luminaire(s) shall be tested as manufactured without any disassembly or modification and, as a minimum shall yield an isofootcandle chart, with max candela point and half candela trace indicated, an isocandela diagram, maximum plane and cone plots of candela, a candlepower table (house and street side), a coefficient of utilization chart, a luminous flux distribution table, and complete calculations based on specified requirements and tests.

Electrical testing shall conform to NEMA and ANSI standards and as a minimum, shall yield a complete check of wiring connections, a ballast dielectric test, total ballast losses in watts and percent of input, a lamp volt-watt trace, regulation data, a starter test, lamp current crest factor, power factor (minimum over the design range of input voltage at nominal lamp voltage) and, a table of ballast characteristics showing input amperes, watts and power factor, output volts, amperes, watts and lamp crest factor as well as ballast losses over the range of values required to produce the lamp volt-watt trace. Ballast test data shall also be provided in an electronic format acceptable to the Engineer to demonstrate compliance with sections 9.7, 9.8, 9.9 and 9.10.

Heat Testing. Heat testing shall be conducted to ensure that the luminaire complies with UL 1572. An ambient temperature of 40 degrees centigrade (104 degrees F) shall be used for the test.

Water spray test. The luminaires must pass the following water spray test.:

A spray apparatus consisting of four spray nozzles set at an angle of 30 degrees from the vertical plane space 30 inches apart on a 2 inch pipe, each delivering 12 gallons of water per minute at a minimum of 100 psi at each nozzle in a 90 degree cone. A water pressure gauge shall be installed at the first nozzle.

The luminaires shall be mounted in a ceiling configuration and with each nozzle set a distance of 18 inches below the fixture in the vertical plane and 18 inches away in the horizontal plane from the fixture lens, apply spray for a duration of 3 minutes at a minimum of 100 psi. When opened, the fixture shall not show any signs of leakage.

The above test shall be repeated in the opposite horizontal plane from the fixture lens with no signs of leakage.

The summary report and the test results shall be certified by the independent test laboratory or the independent witness, as applicable, and shall be sent by certified mail directly to the Engineer. A copy of this material shall be sent to the Contractor and luminaire manufacturer at the same time.

Should any of the tested luminaires of a given distribution type and wattage fail to satisfy the specifications and perform according to approved submittal information, the luminaire of that distribution type and wattage shall be unacceptable and be replaced by alternate equipment meeting the specifications with the submittal and testing process repeated in their entirety; or corrections made to achieve required performance. In the case of corrections, the Vendor shall advise the Engineer of corrections made and shall request a repeat of the specified testing and, if the corrections are deemed reasonable by the Engineer, the testing process shall be repeated. The number of luminaires to be tested shall be the same quantity as originally tested. Luminaires which are not modified or corrected shall not be re-tested without prior approval from the Engineer.

Coordination shall be the Vendor's responsibility. Failure to coordinate arrangements and notice shall not be grounds for additional compensation or extension of time.

Submittal information shall include a statement of intent to provide the testing as well as a request for approval of the chosen laboratory.

Installation. Underpass luminaires shall be either attached to structures (such as piers, etc.) or suspended from structures (such as bridge decks) as indicated or implied by the configuration on the Plans. Mounting, including all hardware and appurent items, shall be included as part of this item.

Unless otherwise indicated, suspended underpass luminaires shall be installed one-inch above the lowest underpass beam and shall be mounted using vibration dampening assemblies. All mounting hardware shall be corrosion resistant and shall be stainless steel unless otherwise indicated.

The Engineer reserves the right to select the final light distribution pattern, luminaire aiming angle and change it as deemed necessary to produce the proper pavement luminance.

Surface mounted luminaires, all luminaires not mounted on suspension rods, shall have one-inch thick stainless steel spacers installed between the luminaire and the deck or wall.

Guarantee. The Vendor shall provide a written guarantee for materials, and workmanship for a period of 6 months after final acceptable of the lighting system.

Documentation. All instruction sheets required to be furnished by the manufacturer for materials and supplies and for operation of the equipment shall be delivered to the Engineer.

The manufacturer shall have been incorporated for at least five years and shall have at least five years in the design and manufacturing of roadway underpass lighting. The manufacturer shall provide evidence of financial strength to finance the production of the project by submitting the name of at least three projects completed in the previous calendar year of greater than \$250,000 each. All steel used in the project shall be certified to be provided domestically, and all fixture components used shall be manufactured domestically.

Method of Measurement. Luminaires shall be counted, each.

Basis of Payment. This item shall be paid at the contract unit price each for UNDERPASS LUMINAIRE, of the wattage specified, HIGH PRESSURE SODIUM VAPOR, which shall be payment in full for the material and work described herein.

MAINTENANCE OF LIGHTING SYSTEMS

Effective: January 1, 2012

Replace Article 801.11 and 801.12 of the Standard Specifications with the following:

Effective the date the Contractor's activities (electrical or otherwise) at the job site begin, the Contractor shall be responsible for the proper operation and maintenance of all existing and proposed lighting systems which are part of, or which may be affected by the work until final acceptance or as otherwise determined by the Engineer.

The Contractor shall be responsible for the proper operation and maintenance of the following existing and proposed lighting systems under this contract:

- Existing IDOT Lighting Controller 'D'; Circuits A and B.

Before performing any excavation, removal, or installation work (electrical or otherwise) at the site, the Contractor shall initiate a request for a maintenance transfer and preconstruction inspection, as specified elsewhere herein, to be held in the presence of the Engineer and a representative of the party or parties responsible for maintenance of any lighting systems which may be affected by the work. The request for the maintenance preconstruction inspection shall be made no less than seven (7) calendar days prior to the desired inspection date.

Existing lighting systems, when depicted on the plans, are intended only to indicate the general equipment installation of the systems involved and shall not be construed as an exact representation of the field conditions. It remains the Contractor's responsibility to visit the site to confirm and ascertain the exact condition of the electrical equipment and systems to be maintained.

Maintenance of Existing Lighting Systems

Existing lighting systems. Existing lighting systems shall be defined as any lighting system or part of a lighting system in service at the time of contract Letting. The contract drawings indicate the general extent of any existing lighting, but whether indicated or not, it remains the Contractor's responsibility to ascertain the extent of effort required for compliance with these specifications and failure to do so will not be justification for extra payment or reduced responsibilities.

Extent of Maintenance.

Partial Maintenance. Unless otherwise indicated, if the number of circuits affected by the contract is equal to or less than 40% of the total number of circuits in a given controller and the controller is not part of the contract work, the Contractor needs only to maintain the affected circuits. The affected circuits shall be isolated by means of in-line waterproof fuse holders as specified elsewhere and as approved by the Engineer.

Full Maintenance. If the number of circuits affected by the contract is greater than 40% of the total number of circuits in a given controller, or if the controller is modified in any way under the contract work, the Contractor shall maintain the entire controller and all associated circuits.

Maintenance of Proposed Lighting Systems

Proposed Lighting Systems. Proposed lighting systems shall be defined as any lighting system or part of a lighting system, temporary or permanent, which is to be constructed under this contract.

The Contractor shall be fully responsible for maintenance of all items installed under this contract. Maintenance shall include, but not be limited to, any equipment failures or malfunctions as well as equipment damage either by the motoring public, Contractor operations, vandalism, or other means. The potential cost of replacing or repairing any malfunctioning, damaged, or vandalized equipment shall be included in the bid price of this item and will not be paid for separately.

Lighting System Maintenance Operations

The Contractor's responsibility shall include all applicable responsibilities of the Electrical Maintenance Contract, State of Illinois, Department of Transportation, Division of Highways, District One. These responsibilities shall include the maintenance of lighting units (including sign lighting), cable runs and lighting controls. In the case of a pole knockdown or sign light damage, the Contractor shall promptly clear the lighting unit and circuit discontinuity and restore the system to service. The equipment shall then be re-set by the contractor within the time limits specified herein.

If the equipment damaged by normal vehicular traffic, not contractor operations, is beyond repair and cannot be re-set, the contractor shall replace the equipment in kind with payment made for such equipment under Article 109.04. If the equipment damaged by any construction operations, not normal vehicular traffic, is beyond repair and cannot be re-set, the contractor shall replace the equipment in kind and the cost of the equipment shall be included in the cost of this pay item and shall not be paid for separately.

Responsibilities shall also include weekly night-time patrol of the lighting system, with patrol reports filed immediately with the Engineer and with deficiencies corrected within 24 hours of the patrol. Patrol reports shall be presented on standard forms as designated by the Engineer. Uncorrected deficiencies may be designated by the Engineer as necessitating emergency repairs as described elsewhere herein.

The following chart lists the maximum response, service restoration, and permanent repair time the Contractor will be allowed to perform corrective action on specific lighting system equipment.

INCIDENT OR PROBLEM	SERVICE RESPONSE TIME	SERVICE RESTORATION TIME	PERMANENT REPAIR TIME
Control cabinet out	1 hour	4 hours	7 Calendar days
Hanging mast arm	1 hour to clear	na	7 Calendar days
Radio problem	1 hour	4 hours	7 Calendar days
Motorist caused damage or leaning light pole 10 degrees or more	1 hour to clear	4 hours	7 Calendar days
Circuit out – Needs to reset breaker	1 hour	4 hours	na
Circuit out – Cable trouble	1 hour	24 hours	21 Calendar days
Outage of 3 or more successive lights	1 hour	4 hours	na
Outage of 75% of lights on one tower	1 hour	4 hours	na
Outage of light nearest RR crossing approach, Islands and gores	1 hour	4 hours	na
Outage (single or multiple) found on night outage survey or reported to EMC	na	na	7 Calendar days
Navigation light outage	na	na	24 hours

- **Service Response Time** -- amount of time from the initial notification to the Contractor until a patrolman physically arrives at the location.
- **Service Restoration Time** – amount of time from the initial notification to the Contractor until the time the system is fully operational again (In cases of motorist caused damage the undamaged portions of the system are operational.)
- **Permanent Repair Time** – amount of time from initial notification to the Contractor until the time permanent repairs are made if the Contractor was required to make temporary repairs to meet the service restoration requirement.

Failure to provide this service will result in liquidated damages of \$500 per day per occurrence. In addition, the Department reserves the right to assign any work not completed within this timeframe to the Electrical Maintenance Contractor. All costs associated to repair this uncompleted work shall be the responsibility of the Contractor. Failure to pay these costs to the Electrical Maintenance Contractor within one month after the incident will result in additional liquidated damages of \$500 per month per occurrence. Unpaid bills will be deducted from any monies owed to the Contractor. Repeated failures and/or a gross failure of maintenance shall result in the State's Electrical Maintenance Contractor being directed to correct all deficiencies and the resulting costs deducted from any monies owed the contractor.

Damage caused by the Contractor's operations shall be repaired at no additional cost to the Contract.

Operation of Lighting

The lighting shall be operational every night, dusk to dawn. Duplicate lighting systems (such as temporary lighting and proposed new lighting) shall not be operated simultaneously. Lighting systems shall not be kept in operation during long daytime periods.

Method of Measurement

The contractor shall demonstrate to the satisfaction of the Engineer that the lighting system is fully operational prior to submitting a pay request. Failure to do so will be grounds for denying the pay request. Months in which the lighting systems are not maintained and not operational will not be paid for. Payment shall not be made retroactively for months in which lighting systems were not operational.

Basis of Payment. Maintenance of lighting systems shall be paid for at the contract unit price per calendar month for **MAINTENANCE OF LIGHTING SYSTEM**, which shall include all work as described herein.

EXPOSED RACEWAYS

Effective: January 1, 2012

Revise the first paragraph of Article 811.03(a) of the Standard Specifications to read:

"General. Rigid metal conduit installation shall be according to Article 810.05(a). Conduits terminating in junction and pull boxes shall be terminated with insulated and gasketed watertight threaded NEMA 4X conduit hubs. The hubs shall be Listed under UL 514B. The insulated throat shall be rated up to 105° C. When PVC coated conduit is utilized, the aforementioned hubs shall also be PVC coated."

Add the following to Article 811.03(b) of the Standard Specifications:

“Where PVC coated conduit is utilized, all conduit fittings, couplings and clamps shall be PVC coated. All other mounting hardware and appurtenances shall be stainless steel.”

“The personnel installing the PVC coated conduit must be trained and certified by the PVC coated conduit Manufacturer or Manufacturer’s representative to install PVC coated conduit. Documentation demonstrating this requirement must be submitted for review and approval.”

Add the following to Article 1088.01(a) of the Standard Specifications:

All iron and steel products, which are to be incorporated into the work, including conduit and all conduit fittings, shall be domestically manufactured or produced and fabricated as specified in Article 106.”

Revise Article 1088.01(a)(3) of the Standard Specifications to read:

“a. PVC Coated Steel Conduit. The PVC coated rigid metal conduit shall be UL Listed (UL 6). The PVC coating must have been investigated by UL as providing the primary corrosion protection for the rigid metal conduit. Ferrous fittings for general service locations shall be UL Listed with PVC as the primary corrosion protection. Hazardous location fittings, prior to plastic coating shall be UL listed.

b. The PVC coating shall have the following characteristics:

Hardness:	85+ Shore A Durometer
Dielectric Strength:	400V/mil @ 60 Hz
Aging:	1,000 Hours Atlas Weatherometer
Temperature	The PVC compound shall conform at 0° F. to Federal Specifications PL-406b, Method 2051, Amendment 1 of 25 September 1952 (ASTM D 746)
Elongation:	200%

c. The exterior and interior galvanized conduit surface shall be chemically treated to enhance PVC coating adhesion and shall also be coated with a primer before the PVC coating to ensure a bond between the zinc substrate and the PVC coating. The bond strength created shall be greater than the tensile strength of the plastic coating.

d. The nominal thickness of the PVC coating shall be 1 mm (40 mils). The PVC exterior and urethane interior coatings applied to the conduit shall afford sufficient flexibility to permit field bending without cracking or flaking at temperatures above -1°C (30°F).

- e. An interior urethane coating shall be uniformly and consistently applied to the interior of all conduit and fittings. This internal coating shall be a nominal 2 mil thickness. The interior coating shall be applied in a manner so there are no runs, drips, or pinholes at any point. The coating shall not peel, flake, or chip off after a cut is made in the conduit or a scratch is made in the coating.
- f. Conduit bodies shall have a tongue-in-groove gasket for maximum sealing capability. The design shall incorporate a positive placement feature to assure proper installation. Certified test results confirming seal performance at 15 psig (positive) and 25 in. of mercury (vacuum) for 72 hours shall be submitted for review when requested by the Engineer.
- g. The PVC conduit shall pass the following tests:

Exterior PVC Bond test RN1:

Two parallel cuts 13 mm (1/2 inch) apart and 40 mm (1 1/2 inches) in length shall be made with a sharp knife along the longitudinal axis. A third cut shall be made perpendicular to and crossing the longitudinal cuts at one end. The knife shall then be worked under the PVC coating for 13 mm (1/2 inch) to free the coating from the metal.

Using pliers, the freed PVC tab shall be pulled with a force applied vertically and away from the conduit. The PVC tab shall tear rather than cause any additional PVC coating to separate from the substrate.

Boil Test:

Acceptable conduit coating bonds (exterior and interior) shall be confirmed if there is no disbondment after a minimum average of 200 hours in boiling water or exposure to steam vapor at one atmosphere. Certified test results from a national recognized independent testing laboratory shall be submitted for review and approval. The RN1 Bond Test and the Standard Method for Measuring Adhesion by Tape Test shall be utilized.

Exterior Adhesion. In accordance with ASTM D870, a 6" length of conduit test specimen shall be placed in boiling water. The specimen shall be periodically removed, cooled to ambient temperature and immediately tested according to the bond test (RN1). When the PVC coating separates from the substrate, the boil time to failure in hours shall be recorded.

Interior Adhesion. In accordance with ASTM D3359, a 6" conduit test specimen shall be cut in half longitudinally and placed in boiling water or directly above boiling water with the urethane surface facing down. The specimen shall be periodically removed, cooled to ambient temperature and tested in accordance with the Standard Method of Adhesion by Tape Test (ASTM D3359). When the coating disbonds, the time to failure in hours shall be recorded.

Heat/Humidity Test:

Acceptable conduit coating bonds shall be confirmed by a minimum average of 30 days in the Heat and Humidity Test. The RN1 Bond Test and the Standard Method for Measuring Adhesion by Tape Test shall be utilized.

Exterior Adhesion. In accordance with ASTM D1151, D1735, D2247 and D4585, conduit specimens shall be placed in a heat and humidity environment where the temperature is maintained at 150°F (66°C) and 95% relative humidity. The specimens shall be periodically removed and a bond test (RN1) performed. When the PVC coating separates from the substrate, the exposure time to failure in days shall be recorded.

Interior Adhesion. In accordance with ASTM D3359, conduit specimens shall be placed in a heat and humidity environment where the temperature is maintained at 150°F (66°C) and 95% relative humidity. When the coating disbonds, the time to failure in hours shall be recorded.

Add the following to Article 1088.01(a)(4) of the Standard Specifications:

"All liquid tight flexible metal conduit fittings shall have an insulated throat to prevent abrasion of the conductors and shall have a captive sealing O-ring gasket. The fittings shall be Listed under UL 514B. The insulated throat shall be rated up to 105° C."

Revise the second paragraph of Article 811.04 of the Standard Specifications to read:

"Expansion fittings and LFNC will not be measured for payment."

Revise Article 811.05 of the Standard Specifications to read:

"811.05 Basis of Payment. This work will be paid for at the contract unit price per meter (foot) for CONDUIT ATTACHED TO STRUCTURE, of the diameter specified, RIGID GALVANIZED STEEL or CONDUIT ATTACHED TO STRUCTURE, of the diameter specified, RIGID GALVANIZED STEEL, PVC COATED."

UNDERGROUND RACEWAYS

Effective: January 1, 2012

Revise Article 810.04 of the Standard Specifications to read:

“Installation. All underground conduit shall have a minimum depth of 30-inches (700 mm) below the finished grade.”

Add the following to Article 810.04 of the Standard Specifications:

“All metal conduit installed underground shall be Rigid Steel Conduit unless otherwise indicated on the plans.”

Add the following to Article 810.04 of the Standard Specifications:

“All raceways which extend outside of a structure or duct bank but are not terminated in a cabinet, junction box, pull box, handhole, post, pole, or pedestal shall extend a minimum of 300 mm (12”) or the length shown on the plans beyond the structure or duct bank. The end of this extension shall be capped and sealed with a cap designed for the conduit to be capped. The ends of rigid metal conduit to be capped shall be threaded, the threads protected with full galvanizing, and capped with a threaded galvanized steel cap. The ends of rigid nonmetallic conduit and coilable nonmetallic conduit shall be capped with a rigid PVC cap of not less than 3 mm (0.125”) thick. The cap shall be sealed to the conduit using a room-temperature-vulcanizing (RTV) sealant compatible with the material of both the cap and the conduit. A washer or similar metal ring shall be glued to the inside center of the cap with epoxy, and the pull cord shall be tied to this ring.”

Add the following to Article 810.04(c) of the Standard Specifications:

“Coilable non-metallic conduit shall be machine straightened to remove the longitudinal curvature caused by coiling the conduit onto reels prior to installing in trench, encasing in concrete or embedding in structure. The straightening shall not deform the cross-section of the conduit such that any two measured outside diameters, each from any location and at any orientation around the longitudinal axis along the conduit differ by more than 6 mm (0.25”).” The longitudinal axis of the straightened conduit shall not deviate by more than 20 mm per meter (0.25” per foot” from a straight line. The HDPE and straightening mechanism manufacturer operating temperatures shall be followed.

UNIT DUCT

Effective: January 1, 2012

Revise the first paragraph of Article 810.04 to read:

“The unit duct shall be installed at a minimum depth of 30-inches (760 mm) unless otherwise directed by the Engineer.”

Revise Article 1088.01(c) to read:

“(c) Coilable Nonmetallic Conduit.

General:

The duct shall be a plastic duct which is intended for underground use and which can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties of performance. The duct shall be a plastic duct which is intended for underground use and can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties of performance.

The duct shall be made of high density polyethylene which shall meet the requirements of ASTM D 2447, for schedule 40. The duct shall be composed of black high density polyethylene meeting the requirements of ASTM D 3350, Class C, Grade P33. The wall thickness shall be in accordance with Table 2 for ASTM D 2447.

The duct shall be UL Listed per 651-B for continuous length HDPE coiled conduit. The duct shall also comply with NEC Article 354.100 and 354.120.

Submittal information shall demonstrate compliance with the details of these requirements.

Dimensions:

Duct dimensions shall conform to the standards listed in ASTM D2447. Submittal information shall demonstrate compliance with these requirements.

Nominal Size		Nominal I.D.		Nominal O.D.		Minimum Wall	
mm	in	mm	in	mm	in	mm	in
31.75	1.25	35.05	1.380	42.16	1.660	3.556 +0.51	0.140 +0.020
38.1	1.50	40.89	1.610	48.26	1.900	3.683 +0.51	0.145 +0.020

Nominal Size		Pulled Tensile	
mm	in	N	lbs
31.75	1.25	3322	747
38.1	1.50	3972	893

Marking:

As specified in NEMA Standard Publication No. TC-7, the duct shall be clearly and durably marked at least every 3.05 meters (10 feet) with the material designation (HDPE for high density polyethylene), nominal size of the duct and the name and/or trademark of the manufacturer.

Performance Tests:

Polyethylene Duct testing procedures and test results shall meet the requirements of UL 651. Certified copies of the test report shall be submitted to the Engineer prior to the installation of the duct. Duct crush test results shall meet or exceed the following requirements:

Duct Diameter		Min. force required to deform sample 50%	
mm	in	N	lbs
35	1.25	4937	1110
41	1.5	4559	1025

WIRE AND CABLE

Effective: January 1, 2012

Add the following to the first paragraph of Article 1066.02(a):

“The cable shall be rated at a minimum of 90°C dry and 75°C wet and shall be suitable for installation in wet and dry locations, and shall be resistant to oils and chemicals.”

Revise the Aerial Electric Cable Properties table of Article 1066.03(a)(3) to read:

Aerial Electric Cable Properties

Phase Conductor		Messenger wire			
Size AWG	Stranding	Average Insulation Thickness		Minimum Size AWG	Stranding
		mm	mils		
6	7	1.1	(45)	6	6/1
4	7	1.1	(45)	4	6/1
2	7	1.1	(45)	2	6/1
1/0	19	1.5	(60)	1/0	6/1
2/0	19	1.5	(60)	2/0	6/1
3/0	19	1.5	(60)	3/0	6/1
4/0	19	1.5	(60)	4/0	6/1

Add the following to Article 1066.03(b) of the Standard Specifications:

“Cable sized No. 2 AWG and smaller shall be U.L. listed Type RHH/RHW and may be Type RHH/RHW/USE. Cable sized larger than No. 2 AWG shall be U.L. listed Type RHH/RHW/USE.”

Revise Article 1066.04 to read:

“Aerial Cable Assembly. The aerial cable shall be an assembly of insulated aluminum conductors according to Section 1066.02 and 1066.03. Unless otherwise indicated, the cable assembly shall be composed of three insulated conductors and a steel reinforced bare aluminum conductor (ACSR) to be used as the ground conductor. Unless otherwise indicated, the code word designation of this cable assembly is “Palomino”. The steel reinforced aluminum conductor shall conform to ASTM B-232. The cable shall be assembled according to ANSI/ICEA S-76-474.”

Revise the second paragraph of Article 1066.05 to read:

“The tape shall have reinforced metallic detection capabilities consisting of a woven reinforced polyethylene tape with a metallic core or backing.”

INSTALL LIGHT POLE, MAST ARM AND LUMINAIRE, CHICAGO

(Material Provided by City of Chicago)

Description. This work will consist of the retrieving from the City of Chicago storage and installing a metal light pole, mast arm(s), luminaire(s), ballast housing (if required), additional mid-mount luminaire(s) and brackets on the pole (if required) and all associated hardware and appurtenances provided by the City of Chicago on a concrete foundation, as specified herein, and as shown on the plans, and as directed by the Commissioner.

It shall be the responsibility of the Contractor to transport the light pole, mast arm(s), luminaire(s), ballast housing and all associated hardware and appurtenances from the City storage site to the job site.

Inspection and Acceptance. The Contractor shall examine the metal light pole, mast arm, luminaires, ballast housing, pole base and all associated components required for a complete installation provided by the City in the presence of the Engineer. After accepting the lighting equipment, the Contractor shall be held responsible for the preservation of the condition of the lighting unit, as it was at the time of acceptance, until the Final Acceptance Inspection.

Transportation. The Contractor shall transport, handle and store (as applicable) the lighting equipment in complete conformance with the manufacturer's recommendations. The Contractor shall make arrangements to transfer the street lighting equipment from the City of Chicago's storage facility located at 4100 South Cicero Avenue, Chicago, IL to the job site. This shall be done on weekdays between the hours of 8:00 a.m. and 4:00 p.m., excluding City holidays. Forty-eight hours advance notice is necessary before pickup of the street lighting equipment.

Installation. Installation shall be as described in Articles 821, 830 and 877.

Method of Measurement. The lighting unit shall be counted as EACH installed.

Basis of Payment. This item shall be paid for at the contract unit per INSTALL LIGHT POLE, MAST ARM AND LUMINAIRE, CHICAGO, which shall be payment in full for the installation.

REMOVAL OF LIGHTING UNIT, SALVAGE

Add the following to Article 842.03(b) of the Standard Specifications:

Removal of City of Chicago Lighting Unit, Salvage. Where indicated, poles, mast arms, luminaires, ballast housing and all associated hardware and appurtenances shall remain the property of the City of Chicago and shall be delivered back to the City. City of Chicago salvaged lighting units must be delivered to the City storage yard located at 4100 South Cicero Avenue, Chicago, IL or to another City of Chicago locations as directed by the Engineer.

Transportation. The Contractor shall crate and transport the light pole, mast arm, luminaire and ballast housing in complete conformance with the manufacturer's recommendations. The Contractor shall make arrangements to transfer the street lighting equipment to the City of Chicago's storage facility located at 4100 South Cicero Avenue, Chicago, IL. This shall be done on weekdays between the hours of 8:00 a.m. and 4:00 p.m., excluding City holidays. Forty-eight hours advance notice is necessary before drop off of street lighting equipment.

RACKING CABLES IN MANHOLE OR HANDHOLE (CDOT)

Description. This item consists of providing labor and materials for the racking of fiber optic cables, communication cables, traffic signal cables and lighting cables around the inside perimeter of a manhole, in conformance with the Plans. In each manhole, the Contractor shall furnish and install at least four support brackets attached to the manhole walls, on which neatly coiled fiber optic cable in split innerduct and copper cable can be secured. The support brackets shall be attached firmly by screws drilled into the wall. Specific racking layout and components shall be provided in a submittal to the Engineer for each manhole, for review and approval in advance of installation.

In the event that a cable enclosure or other protective treatment of cable is used in place of racking on brackets at the direction of the Engineer, such alternate treatment shall be considered incidental to this pay item.

Method of Measurement. This Work will be measured on a per each basis each for manhole or handhole racked.

Basis of Payment. This Work will be paid for at the Contract Unit Price each per RACKING CABLES IN MANHOLE OR HANDHOLE (CDOT), which will be payment in full for the material and work described herein.

GROUND ROD, 3/4" DIA. X 10.0'-0" LENGTH (CDOT)

Description. This item consists of furnishing, installing, and connecting ground rods for the grounding of service neutral conductors and for supplementing the equipment grounding system via connections at lighting units, manholes, handholes, street lighting controllers, underpass lighting controllers, and traffic signal controllers throughout the system. All materials and Work must be in accordance with Article 250 of the NEC.

Materials. Materials must be according to the following Department of Electrical Operations (DEO) Specifications and Articles of Standard Specifications Section 1000 - Materials:

Item Requirement

- (a) Copper Ground Wire DEO Specification No. 1440
- (b) Ground Rod DEO Specification No. 1465 and
Standard Specifications, Article 1087.01

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Department of Electrical Operations Standards and the City of Chicago Electrical Code, except as herein modified.

Installation. Ground rods must be driven so that the tops of the rod are 24 inches below finished grade, unless noted otherwise on the Contract Drawings. Where indicated, ground rods must be installed through concrete foundations or manholes. Where ground conditions, such as rock, preclude the installation of the ground rod, the ground rod may be deleted with the prior approval of the Commissioner.

Ground rod connection must be made by approved clamps. Ground wire for connection to foundation steel, or as otherwise indicated, must be stranded uncoated bare copper, in accordance with the applicable requirements of ASTM Designation B-3 and ASTM Designation B-8 and must be included in this item. Unless otherwise indicated, the wire must not be less than No. 8 AWG.

The ground wire must be interconnected to the ground rod, reinforcing steel and anchor bolts at each foundation. All connections to ground rods, structural steel and anchor bolts must be made with approved clamp. Where such connections are made to insulated conductors, the connection must be wrapped with at least 4 layers of electrical tape extended 6 inches onto the conductor insulation.

Method of Measurement. Ground rods will not be paid for separately. Ground wires and connection of ground rods at lighting units, manholes, handholes, controller foundations, and wall mounted controllers will be included in the cost of the item for which it is installed.

Basis of Payment. This work will not be paid for separately, but shall be included in the cost of the item for which it is installed.

CABLE IN CONDUIT, TRIPLEX 2-1/C NO. 6 AND 1-1/C NO. 8 GROUND

Description. This work will consist of furnishing and installing electric cable that is triplexed. The cable must be rated at 600 volts and must consist of two number 6 conductors and one number 8 conductor. The cable will be installed in conduit underground.

Material. The cable must meet all requirements of Material Specification 1534 of the Bureau of Electricity, City of Chicago.

Construction Method. All cables must be installed with care to prevent damage to the cable. Any defects found in the cable must be reported to the resident engineer. Damaged cable must be replaced.

The cable must be pulled into the conduit with a minimum of dragging on the ground or pavement. This will be accomplished by means of reels mounted on jacks or other suitable devices located for unreeling cable directly into duct. Lubricants must be used to facilitate installation if deemed necessary by the contractor.

Bends in the cable will conform to the recommended minimum radii as outlined in the National Electric Code.

Cable passing through manholes must be trained and racked around the sides of the manhole into a permanent position. The contractor must install new cable racks if there are no existing racks in the manhole or if the existing racks are in poor condition,. The material must be approved by the resident engineer. Any material and labor involved in training and racking the cable will be considered incidental to the cost of this pay item.

Where cable runs continue from manhole to manhole without tapping within a light pole, they will be continuous without splices unless authorized by the resident engineer.

The cable installation must be color coded so that each lead of all circuits may be easily identified and lighting units connected to the proper leg as indicated on the plans. The equipment grounding conductor (no. 8) must be color coded green.

All wire or cable in the distribution panels and control cabinets must be properly trained and have sufficient slack provided for any rearrangement of equipment or future additions.

There must be at least three feet of slack in a street light pole base or street light controller base. A handhole must have at least five feet of slack and a manhole at least ten feet of slack. Method of Measurement. The length of triplex cable furnished and installed will be measured as the length of conduit plus three feet for cable entering and leaving a light pole or street light control cabinet, plus any slack in manholes or handholes.

Basis of Payment. This work shall be paid for at the contract unit price per linear foot for CABLE IN CONDUIT, TRIPLEX, 2 1/C NO.6 AND 1-1/C NO.8. GROUND The price will be payment in full for furnishing, installing, and testing the cable, and will include all material, labor, terminations, and incidentals necessary to complete the work as per the contract plans.

UNDERGROUND CONDUIT, PVC, 2" DIA. SCHEDULE 80 (CDOT)

UNDERGROUND CONDUIT, PVC, 3" DIA. SCHEDULE 80 (CDOT)

UNDERGROUND CONDUIT, PVC, 4" DIA. SCHEDULE 80 (CDOT)

Description. This work will consist of furnishing and installing an underground conduit lateral of the type and size specified including fittings and accessories as part of the raceway either laid in trench or bored and pulled in place.

Underground conduits shall be furnished and installed according to Section 810 of the Standard Specifications and as describe herein.

Materials. Polyvinyl chloride (PVC) conduit must conform to the requirements of Material Specification 1533 and to the requirements of the National Electrical Manufacturers Association Standard, Publication Number TC2 for EPC-80. Conduit color will be determined by the Resident Engineer.

Construction.

Definition of Laterals. A lateral will mean a conduit raceway extending from one sub-surface location to another sub-surface location, and in every case intended to encase electric circuit cable under paved surfaces, or in unpaved parkway, street or alley, where specifically designated.

Locations. Laterals must be installed at the locations shown on the construction plans. Laterals must be installed in the shortest practicable line between points of termination, or under adverse conditions, as directed by the Resident Engineer. Laterals not shown on the drawing, but necessary to be installed will be paid for at the unit price bid for laterals as additional units of construction.

Installation Requirements. Installation of the underground raceways shall be done according to Article 810.04 of the Standard Specifications and as describe herein.

The Contractor must exercise care in installing the conduit to ensure that it is smooth, free from sharp bends or kinks, and has the minimum practicable number of bends. Crushed or deformed conduit will not be accepted. All conduit and fittings must have the burrs and rough places smoothed, and all conduit runs must be cleaned and swabbed before installation of electric cables. If cable is not to be installed immediately after cleaning of the conduit, a light weight pulling line such as 1/8" polyethylene line must be placed in the conduit and will remain in the conduit for future work. All underground conduits must have a minimum cover of thirty inches (30") below grade. If conduit cannot be installed with a minimum cover of thirty inches (30"), the conduit must be encased in concrete for protection. The method of encasement and protection must be approved by the engineer. Concrete encasement will be paid for as a separate pay item.

When multiple laterals in a common trench are required, no more than three (3) three inch (3") or smaller conduit laterals can be laid on a single, horizontal level. Four or more conduit laterals must be installed on two (2) levels in accordance with instructions of the Resident Engineer.

Conduit laterals installed under vaulted walks must be securely attached to the retaining wall by means of galvanized clamps and clamp backs held in place by anchor bolts. Laterals will be fastened as close to the underside of the sidewalk as possible, and securing clamps installed every five feet (5'). Laterals must be continuous through party walls.

Threaded fittings and bends of the same material as conduit must be furnished and installed as required. Threadless couplings may be used only for splicing existing conduit. All conduit splices, where required, will be considered incidental to this pay item.

Method of Measurement. The length measured will be the number of lineal feet of conduit installed and accepted, measured in place. The length for measurement will be the distance horizontally between changes in the direction of the conduit.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for UNDERGROUND CONDUIT, PVC of the type and size as specified, which price will be payment in full for furnishing and installing the conduit and fittings complete. Cleaning, swabbing, and p-lining of new conduit will be incidental to this pay item.

MAINTENANCE OF LIGHTING SYSTEM (CDOT)

Description. This item consists of furnishing all labor, equipment, and incidental materials for maintaining existing City of Chicago (CDOT) street lighting system until the proposed new equipment is installed, energized, tested, and accepted for operation by the Commissioner.

The Contractor shall be responsible for the proper operation and maintenance of the following existing and proposed lighting systems under this contract:

- Existing CDOT Lighting Controller No. 1 located on the southwest corner of Taylor and Union Streets, shown on Edison Service Atlas No. O-24; All Circuits.

The work must include any necessary temporary devices to maintain existing illumination. The location and protection devices necessary to comply with these requirements will be subject to the approval of the Commissioner.

Any temporary wire or cable which may be required to be installed overhead between existing poles, existing underpass luminaires, or temporary devices must be furnished, installed, terminated, and maintained in service until the proposed lighting equipment is installed, tested, and accepted for operation by the Commissioner.

Materials. Materials must be according to the applicable Department of Electrical Operations (DEO) Specifications and Articles of Standard Specifications Section 1000 - Materials as noted elsewhere in these Specifications.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Department of Electrical Operations Standards and the City of Chicago Electrical Code, except as herein modified.

The Contractor shall maintain the City street lighting systems (temporary and permanent) and proposed lighting systems, as well as receptacles and other ancillary devices connected to the applicable street or underpass lighting controllers. Effective the day the Contractor starts work, the Contractor must maintain the existing lighting equipment located within the project limits as it then exists.

Inspection of Electrical Systems: Add the following to Article 801.11 of the Standard Specifications:

"Maintenance Preconstruction Inspection:

General. Before performing any excavation, removal, or installation work (electrical or otherwise) at the site, the Contractor must request a maintenance preconstruction site inspection, to be held in the presence of the Commissioner and a representative of the party or parties responsible for maintenance of any lighting and/or traffic control systems which may be affected by the work. The request for the maintenance preconstruction inspection must be made no less than seven (7) calendar days prior to the desired inspection date. The maintenance preconstruction inspection shall:

Establish the procedures for formal transfer of maintenance responsibility required for the construction period.

Establish the approximate location and operating condition of lighting and/or traffic control systems which may be affected by the work.

Marking of Existing Cable Systems. The party responsible for maintenance of any existing lighting and/or traffic control systems at the project site will, at the Contractor's request, mark and/or stake, once per location, all underground cable routes owned or maintained by the City. A project may involve multiple "locations" where separated electrical systems are involved (i.e. different controllers). The markings shall be taken to have a horizontal tolerance of at least one (1) foot to either side. The request for the cable locations and marking shall be made at the same time the request for the maintenance preconstruction inspection is made. The Contractor must exercise extreme caution where existing buried cable runs are involved. The markings of existing systems are made strictly for assistance to the Contractor and this does not relieve the Contractor of responsibility for the repair or replacement of any cable run damaged in the course of his work, as specified elsewhere herein. NOTE THAT THE CONTRACTOR WILL BE ENTITLED TO ONLY ONE REQUEST FOR LOCATION MARKING OF EXISTING SYSTEMS AND THAT MULTIPLE REQUESTS MAY ONLY BE HONORED AT THE CONTRACTOR'S EXPENSE. NO LOCATES WILL BE MADE AFTER MAINTENANCE IS TRANSFERRED, UNLESS IT IS AT THE CONTRACTOR'S EXPENSE.

Condition of Existing Systems. The Contractor must conduct an inventory of all existing electrical system equipment within the project limits, which may be affected by the work, making note of any parts which are found broken or missing, defective or malfunctioning. Megger and load readings must be taken for all existing circuits which will remain in place or be modified. If a circuit is to be taken out in its entirety, then readings do not have to be taken. The inventory and test data will be reviewed with and approved by the Commissioner and a record of the inventory must be submitted to the Commissioner for the record. Without such a record, all systems transferred to the Contractor for maintenance during construction must be returned at the end of construction in complete, fully operating condition."

Damage to Electrical Systems. Delete the last paragraph of Article 801.06 of the Standard Specifications.

Lighting Operation and Maintenance Responsibility. The scope of work includes the assumption of responsibility for the continuing operation of existing, temporary or other lighting systems and all appurtenances affected by the work as may be specified elsewhere herein. Existing lighting systems, when depicted on the plans, are intended only to indicate the general equipment installation of the systems involved and must not be construed as an exact representation of the field conditions. It remains the Contractor's responsibility to visit the site to confirm and ascertain the exact extent of the electrical equipment and systems to be maintained. Where there is existing lighting within the project limits, prior to the start of activities at the site, the Contractor must schedule a formal transfer of maintenance via the Commissioner, however failure to do so does not relieve the Contractor of the maintenance responsibility specified herein and such failure obligates the Contractor to correct deficiencies in the existing system at his own expense.

Effective the date the Contractor's activities (electrical or otherwise) at the job site begin, the Contractor will be responsible for the proper operation and maintenance of all existing lighting systems which may be affected by the work for which maintenance has been transferred to the Contractor and all temporary and newly constructed lighting systems under this Contract, until final acceptance or as otherwise determined by the Commissioner.

Except as specified herein, the Contractor's responsibility will include all applicable responsibilities of the City of Chicago, Department of Streets and Sanitation. These responsibilities will include lighting units (including underpass and navigational lighting), cable runs and lighting controls.

Electrical System Damage Response. The Contractor must respond to damage calls for all system components being maintained and/or installed by the Contractor, existing and proposed, including, but not limited to pole knockdowns, circuit outages, more than 3 luminaires on a circuit, 3 successive luminaires, and controller outages within one hour after notification and provide immediate corrective action. The Contractor must also repair other outages within 5 days. The Contractor must maintain in stock a sufficient amount of material and equipment to provide temporary and permanent repairs. Any damage to the lighting system from any cause whatsoever must be repaired or replaced in kind with equipment in the same condition before the incident or with new equipment provided by the Contractor at no additional cost to the Contract, all as approved by the Commissioner. If the Contractor fails to respond so as to produce immediate corrective action within the specified time frames, or fails to complete repairs in a timely manner the Commissioner may direct other forces, such as the City's Maintenance Contractor, to perform the work. Charges incurred will be direct billed to the Contractor. The City will retain all rights to pursue claims against third parties in all situations regardless of who is maintaining the system. The Contractor must also provide the City with all accident and damage reports from any incidents.

Weekly Night-time Patrols. Responsibilities must also include weekly night-time patrol of the lighting system, with patrol reports filed immediately with the Commissioner and with deficiencies corrected within 24 hours of the patrol. Patrol reports must be presented on standard forms as designated by the Commissioner. Uncorrected deficiencies may be designated by the Commissioner as necessitating emergency repairs as described elsewhere herein. Failure to submit patrol reports on a weekly basis will result in a Penalty for Non-Compliance as specified herein.

Contractor's Responsibility. Existing lighting systems which may be affected by the work will include, as a minimum, all existing lighting units within the project limits and these units may be temporarily isolated by means of in-line waterproof fuse holders as approved by the Commissioner. When a controller is to be replaced or modified under the Contract work, or where otherwise indicated, the controller and all systems connected to it must be included in the Contractor's responsibility for proper operation of lighting systems. The Contract Drawings may indicate the general extent of any existing lighting, but whether indicated or not, it remains the Contractor's responsibility to ascertain the extent of effort required for compliance with these specifications and failure to do so will not be justification for extra payment or reduced responsibilities.

Energy and Demand Charges. The payment of basic energy and demand charges by the electric utility for existing lighting which remains in service will continue as a responsibility of the Owner, unless otherwise indicated. Unless otherwise indicated or required by the Commissioner duplicate lighting systems (such as temporary lighting and proposed new lighting) shall not be operated simultaneously at the Owner's expense and lighting systems will not be kept in operation during long daytime periods at the Owner's expense. Upon written authorization from the Commissioner to place a proposed new lighting system in service, whether the system has passed final acceptance or not, (such as to allow temporary lighting to be removed), the Owner will accept responsibility for energy and demand charges for such lighting, effective the date of authorization. All other energy and demand payments to the utility will be the responsibility of the Contractor until final acceptance.

Coordination Requirements for Existing and Temporary Lighting. The Contractor must coordinate maintenance of existing, temporary, and proposed lighting with the sequence of construction and maintenance of traffic for this Project.

Installation. Location of cables and fixtures for temporary lighting as required must be adjusted and supported to accommodate field conditions encountered, including any potential interferences with other construction or equipment to be installed.

The Contractor will determine the exact route and location of each temporary lighting fixture and associated wiring, prior to installation.

Temporary lighting must be installed to permit removal (without damage to other parts) of parts requiring periodic replacement or maintenance.

Temporary wiring/lighting must be removed immediately upon acceptance of permanent lighting.

Penalty for Non-Compliance. The Contractor will be subject to a penalty of \$500.00 per incident, per day, to be deducted from next pay estimate due Contractor, for each occurrence when the Commissioner determines that Contractor or his Subcontractor is not in full compliance with this Section of the Specifications.

Penalty for Failure to Respond. The Contractor is required to respond within ½ hour to any request from the Commissioner for repair or replacement of any broken, defective and/or missing parts as specified under this section. "Response" is interpreted to mean on the job, preparing to make repairs. Failure by Contractor to so respond will be grounds for a penalty of \$500.00 for each and every occurrence, to be deducted from next pay estimate due Contractor.

Reimbursement. If the Contractor utilizes any lighting equipment owned by the City or uses existing ComEd service, the Contractor must compensate the City for such usage.

Method of Measurement. The contractor shall demonstrate to the satisfaction of the Engineer that the City lighting systems are fully operational prior to submitting a pay request. Failure to do so will be grounds for denying the pay request. Months in which the lighting systems are not maintained and not operational will not be paid for. Payment shall not be made retroactively for months in which lighting systems were not operational.

Basis of Payment. This work will be paid for at the contract unit price per calendar month for MAINTENANCE OF LIGHTING SYSTEM (CDOT), which will be payment in full for: furnishing and installing all temporary lighting units; maintaining existing, temporary, and proposed lighting systems; and aerial cable and ancillary equipment required to maintain the existing lighting system as described herein and as directed by the Engineer and CDOT.

ELECTRICAL MANHOLE 3'X 4'X 4' WITH 30" FRAME AND LID (CDOT)

Description. This item will consist of furnishing and installing an electrical manhole of the dimensions indicated with a 30" frame and lid.

Material. The concrete manhole must meet the applicable requirements of Material Specification 1528. The frame and lid must meet the requirements of Material Specification 1458. The 30" frame and lid must meet the requirements of Standard Drawings 874 and 10927. Bricks must meet the requirements of Article 1041 of the Standard Specifications. All other materials used must meet the appropriate material requirements of the Standard Specifications.

Method of Construction. The manhole will be a precast concrete structure, or, if conditions merit, a cast in place concrete structure, complete with cast iron frame and lid. The manhole with a 30" frame and lid must conform to Drawing 729. The number and size of conduit openings will be as shown on the construction plans.

Each manhole will be installed in paved sidewalk, earth parkway, or in pavement at the location specified on the construction plans or at a location as directed by the Resident Engineer.

The area where the manhole is to be placed must be properly excavated. All disposable material will be properly disposed of per Section 202.03 of the Standard Specifications. Each manhole must be set or constructed to conform with the appropriate City of Chicago drawings, except that the number and size of conduit openings will be in accordance with the construction plans. The frame casting must be accurately set on a full bed of mortar to the finished elevation so that no subsequent adjustment will be necessary. Mortar and brick, or mortar and concrete rings, may be used to adjust to the proper grade. Adjustment rings, bricks, and frames must be set in a full mortar bed. Use of partial bricks will not be allowed. Bricks must be laid in full header courses only. In no instance will the neck of the manhole exceed two (2) feet in height. Mortar will be mixed in a proportion of one (1) part cement to three (3) parts sand by volume of dry materials. After entering laterals have been installed in place in the manhole, the openings in the wall must be plugged in an approved manner flush with the inner surface. If backfill is required, screenings must be used and properly compacted. Parkway must be restored to the proper grade. Pavement must be restored to the correct grade. Patching of the pavement must be done with high early strength concrete meeting the requirements of Articles 1001 and 1020 of the Standard Specifications. Sidewalks must be restored to the proper grade using a 5 inch thickness of concrete. The inside of the manhole must be clean of all debris.

Method of Measurement. This item will be measured per each unit installed.

Basis of Payment. The unit price for installing manholes will include necessary excavation, backfilling and restoration of parkway and pavement in accordance with the foregoing specifications. No additional payment will be allowed for restoring parkway or the restoration of sidewalk or pavement. Removal of sidewalk or pavement will be covered by separate pay items. New conduit, if necessary, will also be paid for separately. The unit cost will be for complete installation for each unit for ELECTRICAL MANHOLE 3'X 4'X 4' WITH 30" FRAME AND LID (CDOT).

REMOVING MANHOLES, SPECIAL

Description. This work will consist of completely breaking down and removing an existing electric manhole and filling in the affected area to grade or as directed by the Engineer.

Definition. This work will consist of removing the frame and cover of the existing manhole, breaking down the manhole walls, removing the debris and backfilling the hole with screenings or other approved material. Backfill must be installed in 6 inch layers and tamped. If the manhole is in pavement, the pavement will be restored under a different pay item. If the frame or cover is deemed re-useable by the Engineer, the frame and/or cover must be delivered to the Department of Electrical Operations at a location identified by the Engineer. Any debris, including the frame and cover must be disposed of off-sight in an approved manner. The contractor will pay for all disposal fees.

Method of Measurement. This work shall be paid for per each manhole removed. All backfill will be considered as part of this manhole removal pay item.

Basis of Payment. This work will be paid for at the contract unit price per each for REMOVING MANHOLES, SPECIAL, which price will be payment in full for all labor and materials necessary to complete the work as described. Salvaging of the frame and cover will be considered incidental to this item.

INSTALL MAST ARM AND LUMINAIRE (CDOT)

(Material Provided by City of Chicago)

Description. This work will consist of the retrieving from the City of Chicago storage and installing a mast arm, luminaire and all associated hardware and appurtenances provided by the City of Chicago on a traffic signal pole, as specified herein, and as shown on the plans, and as directed by the Commissioner.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Department of Electrical Operations Standards and the City of Chicago Electrical Code, except as herein modified.

It shall be the responsibility of the Contractor to transport the mast arm, luminaire and all associated hardware and appurtenances from the City storage site to the job site.

Inspection and Acceptance. The Contractor shall examine the mast arm and luminaire in the presence of the Engineer. After accepting the lighting equipment, the Contractor shall be held responsible for the preservation of the condition of the equipment, as it was at the time of acceptance, until the Final Acceptance Inspection.

Transportation. The Contractor shall transport, handle and store (as applicable) the mast arm, luminaire, all associated hardware and appurtenances in complete conformance with the manufacturer's recommendations. The Contractor shall make arrangements to transfer the street lighting equipment from the City of Chicago's storage facility located at 4100 South Cicero Avenue, Chicago, IL to the job site. This shall be done on weekdays between the hours of 8:00 a.m. and 4:00 p.m., excluding City holidays. Forty-eight hours advance notice is necessary before pickup of the street lighting equipment.

Installation. Installation shall be as described in Articles 821 and 877.

The mast arm and luminaire shall be installed on a traffic signal pole. The contractor shall replace the existing pole wire at no additional cost.

When a conduit or duct extension is required, the conduit and/or duct may be spiced and a new span of cable installed. The Engineer will inspect all conduit/duct splices before backfilling.

The mast arm and luminaire may be removed and reinstalled as a unit, at the option of the Contractor, with approval from the Engineer. No additional compensation will be paid for these operations.

Any damage sustained to the mast arm and luminaire during the removal, storage and reinstallation operations shall be repaired, or replaced in kind, to the satisfaction of the Engineer at no additional cost.

Method of Measurement. This work will be measured per each combined set of mast arm and luminaire installed on a traffic signal pole.

Basis of Payment. This work will be paid for at the Contract Unit Price for each INSTALL MAST ARM AND LUMINAIRE (CDOT), which price will be payment in full for all labor, equipment, materials and incidental work necessary to complete the work as specified.

REMOVE AND SALVAGE EXISTING MAST ARM AND LUMINAIRE (CDOT)

Description. This work will consist of the removing an existing street lighting mast arm and luminaire from a traffic signal pole at the locations shown on the plans, or as directed by the Commissioner.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Department of Electrical Operations Standards and the City of Chicago Electrical Code, except as herein modified.

Removal of City of Chicago Mast Arm, Salvage. Where indicated, mast arms, luminaires and all associated hardware and appurtenances shall remain the property of the City of Chicago and shall be delivered back to the City. City of Chicago salvaged lighting units must be delivered to the City storage yard located at 4100 South Cicero Avenue, Chicago, IL or to another City of Chicago locations as directed by the Engineer.

The street lighting cable must be removed or reconnected as required back to the last unaffected source as directed by the Department of Electrical Operations (DEO) field representative. Removed cable will become the property of the Contractor, and must be disposed of outside the right of way by the Contractor. Cable removal, or reconnection, including any required temporary splices, will not be paid for separately but will be included in this item at no additional expense.

No removal work shall be permitted without approval from the Engineer. Existing mast arms and luminaires to be removed must be disassembled as required for the complete and safe removal with care to prevent damage. Removal will include all incidental work and items associated with the equipment as directed by the Commissioner.

Any damage resulting from the removal of the mast arm, luminaire and associated hardware, shall be repaired or replaced in kind. The Engineer will be the sole judge to determine the extent of damage and the suitability of repair and/or replacement.

Transportation. The Contractor shall crate and transport the mast arm and luminaire in complete conformance with the manufacturer's recommendations. The Contractor shall make arrangements to transfer the street lighting equipment to the City of Chicago's storage facility located at 4100 South Cicero Avenue, Chicago, IL. This shall be done on weekdays between the hours of 8:00 a.m. and 4:00 p.m., excluding City holidays. Forty-eight hours advance notice is necessary before drop off of street lighting equipment.

The reflector and lens of the existing luminaire shall be cleaned and a new lamp installed in the existing luminaire prior to installation. This work will not be paid for separately but will be included in this item at no additional expense. The new lamp must be in accordance with Article 1067.06 of the Standard Specifications.

Any damage sustained to the mast arm and luminaire during the removal, storage and reinstallation operations shall be repaired, or replaced in kind, to the satisfaction of the Engineer at no additional cost.

Method of Measurement. This work will be measured per each combined set of mast arm and luminaire removed from a traffic signal pole.

Basis of Payment. This work will be paid for at the Contract Unit Price for each REMOVE AND SALVAGE EXISTING MAST ARM AND LUMINAIRE (CDOT), which price will be payment in full for all labor, equipment, materials and incidental work necessary to complete the work as specified.

ELECTRIC CABLE IN CONDUIT, COMMUNICATION

Description. This work will consist of the furnishing and installing a 100 pair, Number 19 AWG copper electric communication cable in conduit as specified herein, as shown on the plans and as directed by the Engineer.

The cables must comply with the City of Chicago Office of Emergency Management and Communications requirements. The cables must be purchased from a cable manufacturer approved by the City of Chicago Office of Emergency Management and Communications prior to processing the purchase order.

All work must be coordinated and comply with the City of Chicago Office of Emergency Management and Communications requirements.

All splices will be performed by the City of Chicago Office of Emergency Management and Communications personnel.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, in accordance with City of Chicago Office of Emergency Management and Communications Standards and the City of Chicago Electrical Code, except as herein modified.

Material. The 100-pair, 19 AWG copper communication cable will be the BELL System Type BHBH as manufactured by GENERAL CABLE, Air Core Bonded PASP, Catalog Number 7502214 or approved equal.

The cable shall comply with Telcordia (Bellcore) Specification GR-421-CORE and be ROHS Compliant (effective 1/1/10).

Catalog cuts of the cable must be provided by the Contractor and submitted to IDOT for review and approval prior to purchase.

Cable Installation. The communication cables shall be installed in continuous runs in conduit and manholes as shown on the plans.

Cable pulling apparatus shall have no sharp edges or protrusions which could damage the cables or raceways. The cable must be directly installed from the cable reels on which the cable was shipped. Dragging or laying cable on the ground or pavement will not be permitted. This will be accomplished by means of reels mounted on jacks or other suitable devices located for unreeling cable directly into the duct.

Immediately after placement, the cable ends shall be sealed to prevent entrance of moisture and contaminants, unless splicing or termination work is performed concurrently.

Wire and cable shall not be bent to a radius less than the manufacturer's recommended bending radius, either in temporary/permanent placement or during installation.

Cable passing through manholes must be trained and racked around the sides of the manhole into a permanent position. If racks are non-existent or the existing racks are in poor condition, the contractor must install new racks. The rack must be approved by the resident engineer prior to installation. Any material and labor involved in training and racking the cable and the cost of providing a new rack will be considered incidental to the cost of this pay item.

Method of Measurement. Cable will be measured for payment in feet in place. Cable will be measured horizontally and vertically between the changes in direction, including any extra slack cable as specified herein.

Basis of Payment. This work shall be paid for at the contract unit price per foot for ELECTRIC CABLE IN CONDUIT, COMMUNICATION as specified. The price will be payment in full for furnishing, installing and testing the cable, and will include all material, labor and incidentals necessary for a complete installation of the work per the contract plans.

CLEANING EXISTING MANHOLE OR HANDHOLE

Description. This item consists of cleaning an existing IDOT handhole or manhole for the installation of new conduit(s) and cable(s).

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Bureau of Electricity Standards and the City of Chicago Electrical Code, except as herein modified.

Installation. Existing cable hooks must be relocated and existing cables must be retrained as required prior to drilling the existing manhole or handhole. Existing and new debris must be removed and disposed of off-site by the Contractor. Existing and new gas and water must be pumped out as directed by the Engineer. Debris removal, de-gassing and water pumping must be included in this item; separate payment will not be made.

The Contractor must furnish and install cable racks and/or cable hooks for new and existing cables in all manholes and handholes as required to facilitate new cable installation. This Work must be included in this item and separate payment will not be made.

Coordination with ComEd for ComEd handholes or manholes, and coordination with the Bureau of Electricity for city electric handholes or manholes must be performed by the Contractor prior to starting any Work. Coordination must be included in this item; separate or additional payment will not be made.

Drilling the existing manhole or hand hole will not be included in this item and will be paid for under a separate pay item.

Method of Measurement. Each manhole or hand hole that is cleaned (relocating existing cable hooks, installing new cable hooks, retraining cables, removing debris, and pumping out gas and water) as indicated will be counted as a unit for payment. Each manhole or handhole that is drilled will be measured for payment for cleaning, and will be measured for cleaning only once.

Basis of Payment. This work will be paid for at the contract unit price each for CLEANING EXISTING MANHOLE OR HANDHOLE, which will be payment in full for performing the work described herein.

REMOVAL OF TOWER FOUNDATION

Description. This item consists of removing and disposing of an existing high mast light tower foundation and backfilling the excavated areas as specified herein, as shown on the Plans and as directed by the Engineer.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, except as herein modified.

Removal. Removal must be in accordance with Article 842.04 of the Standard Specifications.

Method of Measurement. Each foundation that is removed and disposed of properly as indicated will be counted as a unit for payment.

Basis of Payment. This work will be paid for at the Contract unit price each for REMOVAL OF TOWER FOUNDATION, which shall be payment in full for the work described herein.

REMOVE AND REINSTALL EXISTING MAST ARM AND LUMINAIRE (CDOT)

Description. This work will consist of the removing and reinstalling an existing City street lighting mast arm and luminaire complete with all hardware and accessories required for the intended permanent use of the combination pole. The existing mast arm and luminaire shall be removed from a temporary traffic signal pole and reinstalled on a new permanent traffic signal pole at the locations shown on the plans, or as directed by the Commissioner.

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Department of Electrical Operations Standards and the City of Chicago Electrical Code, except as herein modified.

Removal. The mast arms, luminaires and all associated connections, hardware and appurtenances shall be disconnected and removed from the temporary traffic signal pole. The mast arm and luminaire shall be immediately installed on the new traffic signal pole.

No removal work shall be permitted without approval from the Engineer. Existing mast arms and luminaires shall be removed with care to prevent damage. Removal will include all incidental work and items associated with the mast arm and luminaire for a complete removal.

All luminaires will be inspected by the Engineer. Non-operating or damaged luminaires shall be repaired or replaced in kind.

With approval from the Engineer, the Contractor may partially remove the temporary lighting system after parts of the permanent lighting system are operational. Any modifications required to keep the temporary and permanent lighting systems operational shall be performed at no additional cost to the Department.

Installation. Installation shall be as described in the applicable sections of Articles 821, 830, 841 and 844. The removed mast arm and luminaire shall be reinstalled on a permanent traffic signal pole. The contractor shall provide new pole wire at no additional cost.

The mast arm and luminaire may be removed and reinstalled as a unit, at the option of the Contractor, with approval from the Engineer. No additional compensation will be paid for these operations.

Any damage sustained to the mast arm and luminaire during the removal and reinstallation operations shall be repaired or replaced in kind, to the satisfaction of the Engineer at no additional cost. The Engineer will be the sole judge to determine the extent of damage and the suitability of repair and/or replacement.

Method of Measurement. This work will be measured per each combined set of mast arm(s) and luminaire(s) removed from a temporary traffic signal pole and reinstalled on a permanent traffic signal pole.

Basis of Payment. This work will be paid for at the Contract Unit Price for each REMOVE AND REINSTALL EXISTING MAST ARM AND LUMINAIRE (CDOT), which price will be payment in full for all labor, equipment, materials and incidental work necessary to complete the work as specified.

TRAFFIC SURVEILLANCE. – GENERAL (TSC T 400#02)

Effective: June 1, 1994 Revised: July 21, 2011

1.0 The following supplements applicable sections of Section 800 of the Standard Specifications for Road and Bridge Construction.

The intent of this Special Provision is to prescribe the materials and construction methods commonly used in traffic surveillance installations. All material furnished shall be new. The locations and the details of all installations shall be as indicated on the Plans or as directed by the Engineer.

When the road is open to traffic, except as otherwise provided, the Contractor may request a turn on and inspection of all complete traffic surveillance installations system. This request must be made to the Engineer a minimum of seven (7) working days prior to the time of the requested inspection. Upon demonstration that all surveillance is operational and all work is completed in accordance with the contract and to the satisfaction of the Bureau of Traffic Operations Electrical Engineer, The Bureau of Traffic Operations Electrical Engineer will then allow all of the surveillance to be placed in continuous operation. The Agency that is responsible for the maintenance of the traffic surveillance installations will assume the maintenance upon successful completion of this inspection.

Projects which call for the storage and re-use of existing traffic surveillance equipment shall have a 30 day test period prior to project acceptance.

1.1 DEFINITION OF TERMS.

Whenever in these Special Provisions the following terms are used, the intent and meaning shall be interpreted as follows:

Induction Loop - A continuous non-spliced wire, three turns, permanently placed and sealed in sawcuts in the roadway and adjacent area, used in conjunction with an induction loop detector sensor unit.

State Highway Communications Center - The main communication control facility of the Illinois Department of Transportation with present offices at 201 W. Center Court, Schaumburg, Illinois 60196-1096.

1.2 PROSECUTION OF SURVEILLANCE WORK.

The work shall be as indicated on the Plans and as required by the Specifications. Unless otherwise indicated, the Contractor shall furnish and install all required materials and equipment, including all associated appurtenances, to produce a complete and operational installation. The appurtenances shall be as indicated, and the costs shall be included in the unit prices bid for the pay items of this contract. The work shall be done in a workmanlike manner.

1.3 CONNECTIONS TO EXISTING INSTALLATIONS.

Where new work connects to existing installations, the Contractor shall do all necessary cutting, fitting and foundation drilling to the existing installation and shall remove all existing work, as required, to make satisfactory connections, with the work to be performed under these Provisions, so as to leave the entire work in a finished and workmanlike manner, as approved by the Bureau of Traffic Operations Electrical Engineer. No raceways shall be allowed to enter cabinet through the sides or back walls.

Some contracted work which does not call for a complete rebuilding of a surveillance location but the replacement of detector loops and lead-in cable only in conjunction with work such as pavement overlay, cut and grind, curb and gutter replacement and other similar type work where existing appurtenances have been in place for several years. This at times has created pre-existing conditions (such as blocked/broken lead-in conduits, buried handholes) which the contractor may have to repair/replace to make the location fully functioning. The Contractor will be compensated for such work utilizing contract items after a complete inspection by the Bureau of Traffic Operations Electrical Engineer, Resident Engineer and Electrical Maintenance Contractor's Rep. with a full review on a case by case basis. Upon completing such work the Contractor shall notify the R.E. to contact the Bureau of Traffic Operations Electrical Engineer for checks and test to insure the location is on-line and working correctly.

The Contractor shall furnish all labor and material to the furtherance of this end, whether or not distinctly shown on the plans, in any of the "Standard Specifications" or in the Special Provisions.

Note that the Contractor shall be entitled to only one request for location marking of existing systems by the Electrical Maintenance Contractor and that multiple requests may only be honored at the Contractor's expense.

1.4 STANDARD GUARANTEE.

Manufacturers' warranties or guarantees on all electrical and mechanical equipment consistent with those provided as customary trade practice shall be obtained and transferred to the State.

1.5 IN-SERVICE WARRANTIES OR GUARANTEES.

The Contractor shall provide warranties or guarantees that will provide for satisfactory in-service operation of the mechanical and electrical equipment and related components. These warranties or guarantees shall cover a period of two (2) years following project acceptance. The cost of these warranties and guarantees shall be considered incidental to the Contract.

1.6 EQUIPMENT DOCUMENTS.

The Contractor shall furnish five (5) diagrams of the internal and external connection of the equipment in each Bureau of Traffic Operations Electrical cabinet. Contractor shall also furnish the Operating and maintenance instructions for all equipment supplied. One copy of the wiring diagrams for each cabinet shall be retained in each field cabinet. A wiring diagram shall be contained in a plastic pouch that shall be permanently mounted to the door of each cabinet. Contractor shall permanently mark the cabinet for each termination and each terminal connection as to loop, tone, closure, phone, and lane function of each termination in the cabinet and provide a completed cable log and location as-built diagram at each location.

1.7 TERMINAL BLOCKS.

Terminal blocks provided in field cabinets shall be the heavy duty barrier type. The terminal block shall be a minimum of 2 inches (50.8 mm) wide and 1-3/16 inch (30.16 mm) deep. Center to center of the terminal screws or studs shall be a minimum of 21/32 inch (16.67 mm) with barriers in between. Terminal blocks shall be rated at 45 amps 600 volts breakdown RMS line to line 11,000 V. and breakdown RMS line to ground 13,800 V. A marking strip shall be provided with each terminal block.

1.8 EXISTING EQUIPMENT.

All existing equipment, replaced by new equipment shall remain the property of the State and shall be delivered to the Electrical Maintenance Contractor. The cost of removing and delivering the replaced equipment shall be paid for under separate pay item for Cabinet Housing Equipment - Removal.

1.9 TELECOMMUNICATION CABLE.

When installing the telecommunication cable, the Contractor shall extend his installation and connections of the cable to the next adjacent Surveillance installations or junction box, beyond the limits of his contract section. He shall be responsible for insuring that the cable is continuous and connected from one contract section to the other.

The Contractor shall comply with the agreement between the State of Illinois and IBT/Ameritech as to connections, locations, and terminations of the phone lines (Telephone Company, Engineering, General Service Engineering Division, Outside Plant Engineering Notes 14-36A., March 1971, Administrative Aids and Procedures).

1.10 EXISTING SURVEILLANCE EQUIPMENT AND APPURTENANCES.

Before starting work, the Contractor, in the presence of the Resident Engineer, Bureau of Traffic Operations Electrical Engineer and the State Electrical Maintenance Contractor's rep., shall inspect the existing equipment to be delivered or maintained by the Contractor and shall take an inventory of all defective, broken, and/or missing parts. Those parts found broken, defective, and/or missing shall be repaired or replaced by the State Electrical Maintenance contractor and shall be recorded as such. The Contractor shall be required to maintain all tone transmitters, tone receivers, tone power supplies, tone mounting frames, harnesses, controller and wiring. The Contractor shall be required to maintain all metering and surveillance cabinets, foundation, concrete handhole, vehicle detection equipment, all interconnecting cables and all Surveillance appurtenances including signal heads. Contractor shall number each cabinet as indicated on the plans, with reflective decals as those used on lighting pole standard.

Should damage occur to any surveillance items during the Contractor's contract period, the Contractor shall repair or replace all damaged equipment at his own expense. The Bureau of Traffic Operations Electrical Engineer shall determine what equipment shall be reusable and what shall be replaced. Replaced equipment shall be of equal or better quality and type.

The Contractor, prior to the commencement of his work, shall notify the Bureau of Traffic Operations Electrical Engineer for a pre-construction inspection. If construction begins prior to this meeting, the Contractor assumes maintenance responsibilities of the locations within his contract limits and shall make any repairs or replace any damaged equipment pre-existing or damaged as a result of his own negligence at his own expense. This also relieves the Electrical Maintenance Contractor of providing one free locate of the surveillance installations within the contract limits.

1.11 AS-BUILT PLANS.

Upon completion of the work, the Contractor shall furnish one (1) copy of "as-built" drawings on CD compatible with Micro Station V8-2004 Edition software at the Bureau of Traffic Operations Electrical Design Section and four (4) full size sets of "as-built" plans to the Resident Engineer. The plans shall include definite locations and length of all cables, duct, conduit pushes, induction loop, lead-in, foundations, handhole and P-duct. The cost of the "as-built" plans shall be incidental to the contract. The Engineer will not authorize final inspection of any installations until the said plans are in his possession.

1.12 PROTECTION OF THE WORK.

Electrical work, equipment and appurtenances shall be protected from damage during construction until final acceptance. Electrical raceway or duct openings, shall be capped or sealed from the entrance of water and dirt. Wiring shall be protected from mechanical injury.

1.13 STANDARDS OF INSTALLATION.

Electrical work shall be installed in a neat and workmanlike manner in accordance with the best practices of the trade. Unless otherwise indicated, materials and equipment shall be installed in accordance with the manufacturer's recommendations.

Except as specified elsewhere herein, materials and equipment shall be in conformance with the requirements of Section 800 & 1088 of the Standard Specifications for Road and Bridge Construction.

In addition to the requirements of the Standard Specifications relating to control of materials, the Contractor shall comply with the following requirements.

The Contractor shall supply samples of all wire, cable, and equipment and shall make up and supply samples of each type of cable splice proposed for use in the work for the Engineer's approval.

Before equipment and/or material including cabinet, telemetry, and detectors are delivered to the job site, the Contractor shall obtain and forward to the Engineer a certified, notarized statement from the manufacturer, containing the catalog numbers of the equipment and/or material, guaranteeing that the equipment and/or material, after manufacture, comply in all respects with the requirements of the Specifications and these Special Provisions. Re-manufactured or modified equipment other than by the original manufacturer shall not be allowed. Original manufacturer shall certify that he made modification to the equipment.

All cost of work and materials required to comply with the above requirements shall be included in the pay item bid prices, under which the subject materials and equipment are paid, and no additional materials and equipment are paid, and no additional compensation will be allowed. Materials and equipment not complying with the above requirements that have been installed on the job will be done at the Contractor's own risk and may be subject to removal and disposal at the Contractor's expense.

1.14 PROCUREMENT.

Materials and equipment shall be the products of established manufacturers, shall be new, and suitable for the service required. The Contractor is obligated to conduct his own search into the timely availability of the specified equipment and to ensure that all materials and equipment are in strict conformance with the contract documents. Materials or equipment items which are similar or identical shall be the product of the same manufacturer. The cost of submittals, certifications, any required samples and similar costs shall not be paid for extra but shall be included into the pay item bid price for the respective material or work.

1.15 EXCEPTIONS, DEVIATIONS AND SUBSTITUTIONS.

Exceptions to and deviations from the requirements of the Contract Documents shall not be allowed without approval by Engineer and Bureau of Traffic Operations Electrical Engineer. It is the Contractor's responsibility to note any deviations from contract requirements at the time of submittal and to make any requests for deviations in writing to the Engineer. In general, substitutions will not be acceptable. Requests for substitutions must demonstrate that the proposed substitution is superior to the material or equipment required by the Contract Documents. No substitutions shall be permitted without the approval of the Engineer, and Bureau of Traffic Operations Electrical Engineer.

1.16 SUBMITTALS.

Within 30 days after contract award, the Contractor shall submit, for approval, complete manufacturer's product data (for standard products and components) and detailed shop drawings (for fabricated equipment). All of the submittal information shall be assembled by the Contractor and submitted to the Engineer at one time. All equipment samples shall be submitted at this time. Partial and sporadic submittals may be returned without review. The Contractor may request, in writing, permission to make a partial submittal. The Engineer will evaluate the circumstances of the request and may accept to review such a partial submittal. However, no additional compensation or extension of time shall be allowed for extra costs or delays incurred due to partial or late submittals.

1.17 TESTING.

Before final acceptance, the electrical equipment, material, induction loops and work provided under this contract shall be tested. Tests will not be made progressively, as parts of the work are completed they shall be all made at one time. Items which fail to test satisfactorily shall be repaired or replaced. Bureau of Traffic Operations Electrical Engineer will witness all testing.

1.18 INSTALLATION/INSPECTION PROCEDURES.

After all control boxes and equipment to be installed has been physically inspected and approved by Bureau of Traffic Operations Electrical Engineer, the equipment supplier shall then deliver all equipment to the job site. The Contractor shall then install/safeguard all the equipment which has been delivered prior to requesting an inspection. No unapproved equipment shall be on the job site or installed as part of the job. This does not relieve the Contractor from replacement/repairs of equipment found to be damaged or in non-compliance of these provisions.

Certain items such as conduit, wire, duct, anchor bolts, and junction boxes will be inspected and may be tested by the Department's Bureau of Materials and these items shall not be delivered to the job site without inspection approval. Items such as cabinets shall be inspected by the Engineer at the contractor's or manufacturer's shop and these items shall not be delivered to the job site without Bureau of Traffic Operations Electrical Engineer inspection approval. It shall be the Contractor's responsibility to arrange inspection activities with the Engineer thirty (30) days prior to installation. 30 days prior to installation of the tone equipment being supplied and, prior to request for a turn-on, the Bureau of Traffic Operations Electrical Engineer will be contacted for the correct frequencies, controller addresses and "DB" setting for each location to be installed. When the work is complete, all equipment fully operational, the Contractor shall schedule a turn-on inspection with the Engineer. Acceptance will be made as a total system, not as parts. The Contractor shall request the inspection no less than seven (7) working days prior to the desired inspection date.

No inspection shall be made until the delivery of acceptable "as built" drawings, specified certifications, and the required guarantees.

It will be the responsibility of the installing contractor to provide a qualified technician representing the tone equipment supplier to be at the turn-on inspection of each location to provide the technical expertise to bring each location on line.

The Contractor shall furnish the necessary manpower and equipment to make the Inspection. The Engineer may designate the type of equipment required for the inspection tests.

A written record of the loop analyzer readings shall be submitted to the Bureau of Traffic Operations Electrical Engineer prior to the final inspection.

Any part or parts of the installation that are missing, broken, defective, or not functioning properly during the inspection shall be noted and shall be adjusted, repaired, or replaced as directed by the Engineer and another inspection shall be made at another date. Only upon satisfaction of all points shall the installation be acceptable.

After the subject inspections are completed the Bureau of Traffic Operations Electrical Engineer will provide the contractor with a complete punch list of items necessary to be completed prior to final inspection and acceptance for maintenance.

The Contractor shall furnish a written guarantee for all materials, equipment and work performed under the contract for a period of not less than two (2) years from the date of final acceptance.

OPERATION OF EXISTING TRAFFIC SURVEILLANCE/SPEED/COUNT STATIONS (TSC T400#03)

Effective: June 1, 1994

Revised: November 12, 2008

Existing traffic surveillance installations and/or any electrical facilities at certain locations included in this Section may be altered or reconstructed totally or partially as part of the work on this Section. The Contractor is hereby advised that all traffic surveillance equipment, presently installed at these locations, is the property of the State of Illinois, Department of Transportation, Division of Highways or Springfield Bureau of Traffic.

The Contractor is further advised that the existing traffic surveillance, or the existing speed/data installations, must remain in operation during all construction stages except for the most essential down time. Any shutdown of the installation, for a period to exceed four (4) hours must have the prior approval of the Engineer. Such approval will generally only be granted during the period extending from 10:00 a.m. to 2:00 p.m. on weekdays. Any other traffic shutdown, either for periods in excess of one (1) hour or outside of the 10:00 a.m. to 2:00 p.m. weekday period must have prior approval of the Engineer.

The Contractor, prior to the commencement of his work, shall notify the State's Electrical Maintenance Contractor and the Bureau of Traffic Operations of his intent to perform this work. Failure to notify either the Bureau/EMC when starting work will cause maintenance to be transferred to the Contractor without pre-inspection and will require the Contractor to complete all repairs without compensation. This also relieves the EMC from providing a locate without compensation. Upon request from the Contractor, the State Electrical Maintenance Contractor will locate any buried conduit or other electrical facility which may interfere with the Contractor's operations without charge to him. This shall in no way relieve the Contractor of his responsibility to repair and/or replace electrical facilities damaged by his operations.

Note that the Contractor shall be entitled to only one request for location marking of existing systems and that multiple requests may only be honored at the Contractor's expense.

Any known or suspected damage to the electrical facility shall be reported immediately to the Engineer. The Contractor will be held fully responsible for the repair and/or replacement of any part of the existing installation, whether permanent or temporary, if, in sole opinion of the Engineer, such damage was caused by the negligence of the Contractor, his agents, or employees. The State, at its own discretion, may call upon the State's Electrical Maintenance Contractor or the concerned bureau to make any such repairs and/or replacements at the total expense of the Contractor for this Section.

INDUCTION LOOP (TSC T418#1)

Effective: June 1, 1994

Revised: August 20, 2013

1. Description

This item shall consist of furnishing, installing and testing an induction loop, of the dimensions shown on the plans or of the dimension from Table 1, at the locations shown. The induction loop shall be installed in accordance with all details shown on the plans and applicable portions of Section.886 Standard Specifications for Road and Bridge Construction. All saw cutting, cable installation, joint sealing, lead-ins and testing necessary to complete the installation shall conform with the following requirements.

2. Materials

The cable used for induction loop shall be #14-19 strand XHHW XLP-600V, encased in orange Detecta-duct tubing as manufactured by Kris-Tech Wire Company, Inc., IMSA 51-7, or comparable. All loop wire shall be UL listed. Lead-ins shall be Canoga 30003 or equal cable. The jacket, constructed of high density polyethylene, shall be rated to 600 volts in accordance with UL 83 Section 36.

Joint sealer shall have sufficient strength and resiliency to withstand stresses set up by vibrations and differences in expansion and contraction due to temperature changes. The joint sealer shall have a minimum tensile strength of 100 P.I.E. when tested by ASTM Method D638-58T. Adhesion to clean dry, oil-free Portland Cement concrete shall be at least equal to the tensile strength of the concrete. The joint sealer, with qualities described above, shall be capable of curing in a maximum time of 30 minutes at all temperatures above 50 degrees F (10 degrees C). Curing shall be defined as the capability of withstanding normal traffic loads without degradation. A hard asphalt-based filling and insulating compound having a high softening point and a high pouring temperature shall be used if the outside installation temperature is below 50 degrees F (10 degrees C). The filling compound shall have a softening point of not less than 235 degrees F (110 degrees C) and a summer pouring temperature of 375 degrees F (190 degrees C); winter pouring temperature of 425 degrees F (220 degrees C). Sealant for Detector Loop(s): The sealer shall meet or exceed the characteristics provided by OZ GEDNEY DOZSeal 230 filling compound.

3. Installation Details

Slots in the pavement shall be cut with a concrete sawing machine in accordance with the applicable portions of Art. 420.05 of the Standard Specifications for Road and Bridge Construction. The slot must be clean, dry, and oil-free. Wire shall be inserted in the pavement slot with a blunt tool which will not damage the insulation. Loops shall not be dry cut. Loops should not be installed at an outside temperature below 50 degrees F (10 degrees C) unless directed by Engineer.

Plastic sleeving shall be used to insulate the wire where loop wire crosses cracks and joints in the pavement. The sleeving shall be properly sealed with electrical tape to prevent joint sealer from entering sleeves. Sleeving shall extend a minimum of 8 inch (20 cm) each side of joint.

Induction loops on exit and entrance ramps shall be square or rectangular with edges perpendicular or parallel to traffic flow. All mainline loops shall be round loops, 6 feet (1.8 m.) in diameter. Induction loops shall be centered on all ramps and in traffic lanes unless designated otherwise on the plans or by the Engineer. Traffic lanes shall be referred to by number and loop wire shall be color-coded and labeled accordingly. Lane one shall be the lane adjacent to the median, or that lane on the extreme left in the direction of the traffic flow; subsequent lanes are to be coded sequentially towards the outside shoulder. A chart which shows the coding for each installation shall be included in each cabinet. Core holes shall not be allowed at corner of loop. Saw cuts for all induction loops and lead-ins shall not be greater than 2.75 inches (7 cm) in depth.

All excess joint sealer shall be removed so that the level of the sealer in the saw cut is at the same level as the adjoining pavement.

All induction loops shall contain three (3) turns of No. 14 wire min. Each induction loop shall have its own Canoga 30003 or equal home run or lead-in to the cabinet when said induction loops are over 150 feet (45 m) from cabinet. Induction loops shall not be connected in series with other loops. This wire shall be free from kinks or any insulation abrasions. The loop lead-in shall be a Canoga 30003 cable. The loop lead-in shall be barrel sleeved, crimped, soldered and protected by heat shrinkable tubing to the loop #14 wire. Lead-ins shall be twisted in such a manner so as to prevent mechanical movement between the individual cables. Lead-ins shall be brought into a cabinet or handhole at the time the induction loop is placed in the pavement. Loops located over 1000 feet (300m) from cabinet require four (4) turns of No. 14 wire.

Where lead in runs are less than 150 feet (45 meters) the loop wire will be utilized as lead in to the point of termination w/o splices, being twisted 16 turns per meter (5 turns per foot). The loop wire will be paid for as "lead in" from last point of saw cut in pavement at dive hole to point of termination.

Where duct is collapsed or damaged, making it impossible to pull loop lead-in, the affected area will need to be replaced. This will be paid for by the pay items CONDUIT IN TRENCH, HIGH DENSITY POLYETHYLENE COILABLE 1-1/4" and TRENCH AND BACKFILL FOR ELECTRICAL WORK.

Loop lead-ins placed in handholes shall be coiled, taped and hung from the side of the handhole to protect against water damage. Any other method of installation will require prior written approval of the Engineer. Each loop lead-in shall be color coded and tagged in each handhole thru which it passes. The loop lead-in shall be color coded and tagged at the core hole, in each junction box it passes thru, and at the termination point in the cabinet.

Contractor shall core drill all mainline round loops 6 feet (183 meters) in diameter x .25 inch (6 mm) in width x 2.75 inches (7 cm) in depth.

Loop lead-ins shall not be allowed in saw cuts in shoulders. The Engineer shall be contacted regarding proposed changes in loop locations necessitated by badly deteriorated pavement. The Engineer may relocate such loops. Loop Wire and lead-ins shall not be installed in the curb and gutter section or through the edge of pavement. A hole shall be drilled at least 12 inches (30 cm) in from the edge of pavement through which the P-duct, loop wire and lead-in shall be installed. Saw cuts through shoulders to core hole shall not be allowed.

W (M)	S (M)
13 ft (4.0 m)	9 ft (2.8 m)
14 ft (4.3 m)	10 ft (3.1 m)
15 ft (4.6 m)	11 ft (3.4 m)
16 ft (4.9 m)	12 ft (3.7 m)
17 ft (5.2 m)	13ft (4.0 m)
18 ft (5.5 m)	14ft (4.3 m)
19 ft (5.8 m)	15 ft (4.6 m)
20 ft (6.1 m)	16 ft (4.9 m)
21 ft (6.4 m)	17 ft(5.2 m)
22 ft (6.7 m)	18 ft (5.5 m)
23 ft (7.0 m)	19 ft (5.8 m)
24 ft (7.3 m)	20 ft (6.1 m)
25 ft (7.6 m)	21 ft (6.4 m)

Should the induction loop and/or core hole for the induction loop and loop lead-in cable be paved over by other construction operations, it shall be the contractor's responsibility for locating and finding the induction loop and/or the core hole for the repair of a bad loop or lead-in or for the installation of a new loop or loop lead-in. The locating of the core hole and the induction loop shall be incidental to the cost of the induction loop lead-in installation.

No extra compensation shall be allowed for finding and locating induction loops and/or core hole.

The loop shall be spliced to the lead-in wire with a barrel sleeve crimped and soldered. Epoxy filled heat shrink tubing shall be used to protect the splice. The soldered connection shall be made with a soldering iron or soldering gun. No other method will be acceptable, i.e. the use of a torch to solder will not be acceptable. The heat shrink tube shall be shrunk with a heat gun. Any other method will not be acceptable, i.e. the use of a torch will not be acceptable. No burrs shall be left on the wire when done soldering. Cold solder joints will not be acceptable. Refer to T.S.C. typical(s) TY-1TSC-418 #2 & #3 for proper loop to loop lead-in splice detail.

Where there are continuous count stations or multiple lane exits or entrance ramps the loop in the left most lane shall be wrapped clockwise, the adjacent lane loop wrapped counter-clockwise, etc, alternating wrapping the loops every other lane.

4. Traffic Systems Center Loop Splicing Requirement Color Code

MAINLINE LOOPS				METERING LOOPS	
Lane 1	Blue	Lane 4	Violet	Loop 1	Green
Lane 2	Brown	Exit	Black	Loop 2	Yellow
Lane 3	Orange	Entrance	White	Loop 3	Red

When 2 or 3 loops are installed on an exit or entrance ramp the loop color code shall conform to the mainline loop color code and shall be marked as entrance or exit ramp loops.

In addition to color codes each loop shall be identified with a written label attached to the loop wire, or lead-in wire. The tags shall be Panduit #MP250W175-C or equivalent. All wires and cables shall be identified in each handhole or cabinet that the cable passes through, or terminates in. The labels shall be attached to the cable by use of two cable ties.

5. Prosecution Of Surveillance Work

The work shall consist of replacement and/or repairs caused by the pavement repair, removal and resurfacing to all induction loops, loop lead-in, poly-duct, steel conduits, all interconnecting cables and all Surveillance appurtenances. The Contractor shall make modifications to existing installations to render the location functional. The Contractor shall also furnish and install new induction loops, loop lead-ins, poly-duct, steel conduits, all interconnecting cables, and all Surveillance appurtenances.

Should damage occur to any Traffic Systems Center cabinets, housing telemetry equipment and/or vehicle detection equipment, the Contractor shall install and replace all damaged equipment at his own expense. The Traffic Systems Center staff shall determine what equipment shall be reusable and what shall be replaced. Replaced equipment shall be of equal or better quality and type.

6. Connections To Existing Installations

Where new work connects to existing installations, the Contractor shall do all necessary cutting, fitting and foundation drilling to the existing installation. The Contractor shall remove all existing equipment, as required to make satisfactory connections, so as to leave the entire work in a finished and workmanlike manner, as approved by the Engineer. No raceways shall be allowed to enter cabinet through the sides or backwalls.

7. Protection Of Work

Electrical work, equipment and appurtenances shall be protected from damage during construction until final acceptance. Electrical raceway or duct openings, shall be capped or sealed from the entrance of water and dirt. Wiring shall be protected from mechanical injury.

8. Standards Of Installation

Electrical work shall be installed in a neat and workmanlike manner in accordance with the best practices of the trade. Unless otherwise indicated, materials and equipment shall be new and installed in accordance with the manufacturer's recommendations.

Except as specified elsewhere herein, materials and equipment shall be in conformance with the requirements of Section 106 of the Standard Specifications.

9. Testing

Before final acceptance, the induction loops shall be tested. Tests will not be made progressively, as parts of the work are completed. They shall be all made at one time. Items which fail to test satisfactorily shall be repaired or replaced.

An electronic test instrument capable of measuring large values of electrical resistance, such as Major Megger, shall be used to measure the resistance of the induction loop and its lead-in. The resistance of the loop and its lead-in shall be a minimum of 100 meg ohms above ground under any conditions of weather or moisture. The resistance tests and all electronic tests shall be performed in the presence of the Engineer any number of times specified by the Engineer. The loop and loop lead-in shall have an inductance between 100 micro henries and 700 micro henries. The continuity test of the loop and loop lead-in shall not have a resistance greater than two (2) ohms. The Contractor shall do all testing in the presence of the Engineer and all readings will be recorded by the Engineer. Testing shall be done with an approved loop tester.

10. Final Acceptance Inspection

When the work is complete, tested and fully operational, the Contractor shall schedule a Final Acceptance Inspection with the Engineer. Final acceptance will be made as a total system, not as parts.

The Contractor shall furnish the necessary manpower and equipment to make the Final Acceptance Inspection. The Engineer will designate the type of equipment required for the inspection tests.

11. Method of Measurement

The induction loop measurement shall be the length of saw cut in the pavement which contain loop wire. The actual length of wire used in the saw cut shall not be considered in any measurement.

12. Basis of Payment.

This item will be paid at the contract unit price per lineal foot (meter) as INDUCTION LOOP for furnishing and installing all materials listed complete and operating in place. If loop is less than 150 ft. from cabinet, loop wire shall be used as lead-in and paid for at the contract unit price per lineal foot (meter) as ELECTRIC CABLE IN CONDUIT, LEAD-IN, NO. 14, 1 PR.. If loop is greater than 150 ft. from cabinet, loop wire shall be spliced in handhole to an ELECTRIC CABLE IN CONDUIT, LEAD-IN NO. 18 4/C TWISTED SHIELDED (see ELECTRICAL CABLE IN CONDUIT, 4C NO. 18 SHIELDED LOOP DETECTOR WIRE SPECIAL PROVISION).

GROUNDING OF ITS SUBSYSTEMS (TSC T 420#8)

Effective: March 12, 2009

The grounding of ITS subsystems shall meet the requirements of Section 806 of the Standard Specifications. In addition, amend Article 806.03 of the Standard Specifications to include:

General. All ITS subsystems (ramp metering system, dynamic message sign system, system detector stations, etc.), associated equipment, and appurtenances shall be properly grounded in strict conformance with the NEC and as shown on the Plans.

Testing shall be according to Section 801. 13(a)(5) of the Standard Specifications:

a) The grounded conductor (neutral conductor) shall be white color-coded. This conductor shall be bonded to the equipment-grounding conductor only at the Electric Service installation. All power cables shall include one neutral conductor of the same size as the phase (hot) conductors.

b) The equipment-grounding conductor shall be green color-coded. The following is in addition to Section 801.04 of the Standard Specifications.

1.) Equipment grounding conductors shall be XLP insulated No. 6, unless otherwise noted on the Plans, and bonded to the grounded conductor (neutral conductor) only at the Electric Service Installation. The equipment-grounding conductor is paid for separately and shall be continuous. The Earth shall not be used as the equipment-grounding conductor.

2.) Equipment grounding connectors shall be bonded, using a listed grounding conductor, to all ramp meters, DMS, and detector cabinets, handholes, and other metallic enclosures throughout the ITS subsystems, except where noted herein. A listed electrical joint compound shall be applied to all conductor terminations, connector threads, and contact points.

3.) All metallic and non-metallic raceways containing ITS circuit runs shall have a continuous equipment grounding conductor, except raceways containing only detector loop lead-in circuits, circuits under 50 volts and/or fiber optic cable will not be required to include an equipment grounding conductor.

c) The grounding electrode conductor shall be similar to the equipment grounding conductor in color-coding (green) and size. The grounding electrode conductor is used to connect the ground rod to the equipment grounding conductor and is bonded to ground rods via exothermic welding, listed pressure connectors, listed clamps or other approved listed means.

Basis Of Payment. Payment shall be included in the various items associated with ITS.

ELECTRIC CABLE NO. 19 - 6 CONDUCTORS OR 12 CONDUCTORS (TSC T421#2)

Effective: June 1, 1994

Revised: May 12, 2008

DESCRIPTION

This item shall consist of furnishing and installing telephone cable intended for direct burial in P-duct or G.S. conduit. The number of conductors shall be twisted into pairs stranded into a cable core and enclosed in two polyethylene jackets, with a copper shield between the inner and outer jackets. All

No. 19 electric cable shall conform with these specifications and the current addition of the Rural Electrification Specification for fully color-coded, polyethylene or crystalline propylene/ethylene copolymer-insulated, double polyethylene copolymer-insulated, double polyethylene-jacketed telephone cables for direct burial PE 54. The No. 19 cables shall be installed in complete spans.

MATERIAL AND TESTING

No. 19 electric cable shall meet the requirement set forth in the REA Specification PE 54.

CONSTRUCTION

CONDUCTORS: Each conductor shall be a solid round wire of commercially pure annealed copper. Conductors shall meet the requirements of ASTM Designation B-3, latest issue, except that the requirements for dimensions and permissible variations are waived.

CONDUCTOR INSULATION: Each conductor shall be insulated with colored insulating grade high density polyethylene or crystalline propylene/ethylene copolymer. The manufacturer shall have the option of using either of the above materials.

IDENTIFICATION OF PAIRS: The polyethylene or propylene copolymer compounds used for conductor insulation shall be colored so as to identify (1) the "tip" and "ring" conductor of each pair, and (2) each pair in the completed cable.

STANDARDS OF COLOR: The colors of insulated conductors supplied in accordance with this specification shall fall within the limits of standards of color as defined by the Munsell Color Notations specified in paragraph 4.031.

TWISTING OF PAIRS: The insulated conductors shall be twisted into pairs.

In order to provide sufficiently high crosstalk losses at voice and carrier frequencies, the pair twists shall be designed to enable the cable to meet the pair-to-pair capacitance unbalance requirements and the crosstalk requirements.

CORE COVERING: The core shall consist of an inner jacket of polyethylene applied over the completed core, a metal shield, and an outer jacket of polyethylene.

SHIELD: A gopher-resistant corrugated shield of fully annealed copper shall be applied longitudinally over the inner jacket. The shield shall completely cover the inner jacket and shall be so constructed that the completed cable shall meet the bending requirements given in paragraph 9 of Rural Electrification Specification PE-54. The shield shall provide 100% electrical shielding plus resistance to gopher attack or other severe service conditions.

MUTUAL CAPACITANCE: The average mutual capacitance of all pairs in any reel shall be in accordance with the following table:

<u>Number of Cable Pairs</u>	<u>Average Mutual Capacitance</u>	
	<u>mf/mile</u>	<u>(mf/km)</u>
3	0.083 plus or minus 0.010	(0.052 plus or minus 0.006)
6, 12	0.083 plus or minus 0.007	(0.052 plus or minus 0.004)
18 or more	0.083 plus or minus 0.004	(0.052 plus or minus 0.002)

Mutual capacitance is the effective capacitance between the two wires of a pair.

CAPACITANCE UNBALANCE: (Pair to Pair): Pair-to-pair capacitance unbalances as measured on the completed cable at a frequency of 1000 plus or minus 100 Hz shall not exceed the following values:

<u>Number of Cable Pairs</u>	<u>Pair-to-Pair Capacitance Unbalance (Max)</u>	
	<u>mmf/kft</u>	<u>(mmf/km)</u>
Less than 12	100	(181.1)

CAPACITANCE UNBALANCE - (Crosstalk Loss): The r.m.s. output-to-output far-end crosstalk loss as measured on the completed cable at a frequency of 150 kHz shall be not less than 73 db per 1,000 feet (67.8 db per kilometer) for cable sizes of 6 pairs and larger. The r.m.s. calculation shall be based on the combined total of all adjacent and alternate pair combinations within the same layer and center to first layer pair combinations.

CAPACITANCE UNBALANCE - (Pair to Shield): Pair-to-shield direct capacitance unbalances as measured on the completed cable at a frequency of 1000 plus or minus 100 Hz shall not exceed the following values:

<u>Cable Pairs</u>	<u>Pair-to-Shield Unbalance (Max)</u> mmf/kf (mmf/km) <u>Max. Individual</u>
Less than 12	250 (820)

CONDUCTOR RESISTANCE: The d.c. resistance of any conductor as measured on the completed cable shall not exceed the following values when measured at or corrected to 20° C.

<u>AWG</u>	<u>Maximum Resistance</u> ohms/kf (ohms/km)
19	8.7 (28.5)

BASIS OF PAYMENT

This work will be paid for at the contract price per lineal foot (meter) for ELECTRIC CABLE IN CONDUIT, NO. 19 of the number of conductors specified, for furnishing all materials, making all electrical connection and installing the cable in place.

ELECTRICAL CABLE IN CONDUIT, 4C/NO. 18 SHIELDED LOOP LEAD-IN (TSC T 421#14)

Effective: March 1, 2010

Revised: 3/30/11

Description. This work shall consist of furnishing materials and labor for installation of shielded loop lead-in cables in conduit as specified herein and indicated by the Engineer, complete with all identification, terminating and testing.

Materials.

General:

Lead-ins shall be Canoga 30003 or equal cable. The jacket of high density polyethylene shall be rated to 600 volts in accordance with UL 83 Section 36.

All cables shall be UL listed.

Unless otherwise indicated, all cable shall be rated 600 volts.

The cable shall be rated 90 degrees C dry and 75 degrees C wet and shall be suitable for installation in wet and dry locations, exposed to the weather, and shall be resistant to oils and chemicals.

The UL listing mark, cable voltage, insulation type and ratings, as well as the cable size shall all be clearly printed on the cable in a color contrasting with the insulation color.

Conductors:

Conductors shall be #18 awg 7X.0152" un-coated copper.

Conductors shall meet the requirements of ASTM Designation B-8 as applicable.

Unless otherwise indicated, all conductors shall be stranded and twisted 4 turns per foot.

The cable shall be an assembly of pairs of left hand lay twisted insulated conductors, with a core filled with a petroleum base flooding compound, overlapped conductive tape shield and a black high density polyethylene jacket overall. This cable shall meet the requirements of IEEE Standard 383.

Insulation:

The conductors shall be coded as follows: black-red-white-green.

Cable insulation shall incorporate polyvinyl chloride (PVC) with a clear nylon covering overall as specified and the insulation shall meet or exceed the requirements of ICEA S-61-402, NEMA Standard Publication No. WC-5, UL Standard 83, as applicable.

Unless otherwise indicated, cable conductors shall be solid full color coded via insulation color.

Quality Control:

Submittal information shall include demonstration of compliance with all specified requirements.

All cables shall be delivered to the site in full reels. Cable on the reels shall be protected from damage during shipment and handling by wood lagging or other means acceptable to the Engineer. Reels shall be tagged or otherwise identified to show the UL listing.

Installation. The loop lead-in shall be a Canoga 30003 or approved equal cable. The loop lead-in shall be barrel sleeved, crimped, soldered and protected by heat shrinkable tubing to the loop #14 wire. Lead-ins shall be twisted in such a manner so as to prevent mechanical movement between the individual cables. Lead-ins shall be twisted in such a manner so as to prevent mechanical movement between the individual cables. Lead-ins shall be brought into the cabinet or handhole at the time the induction loop is placed in the pavement. Loops located over 1000 feet from cabinet require four (4) turns of No. 14 wire.

Lead-in cable Canoga 30003 or equivalent will be installed where the lead-in length from point of interception to the point of termination exceeds 150 feet.

Where lead-in runs are less than 150 feet, the loop wire will be utilized as lead-in to the point of termination w/o splices, being twisted 5 turns per foot. The loop wire will be paid for as "lead-in" from last point of sawcut in pavement at dive hole to point of termination.

Loop lead-ins placed in handholes shall be coiled, taped, and hung from the side of the handhole to protect against water damage. Any other method of installation will require prior written approval of the Engineer. Each loop lead-in shall be color coded and tagged in each handhole through which it passes. The loop lead-in shall be color coded and tagged at the core hole, in each junction box it passes through and at the termination point in the cabinet.

TRAFFIC SYSTEMS CENTER LOOP SPLICING REQUIREMENT

<u>MAINLINE LOOPS</u>		<u>METERING LOOPS</u>			
Lane 1	Blue	Lane 4	Violet	Loop 1	Green
Lane 2	Brown	Exit	Black	Loop 2	Yellow
Lane 3	Orange	Entrance	White	Loop 3	Red

When 2 or 3 loops are installed on an exit or entrance ramp the loop color code shall conform to the mainline loop color code and shall be marked as entrance or exit ramp loops.

In addition to color codes each loop shall be identified with a written label attached to the loop wire, or lead-in wire. The tags shall be Panduit #MP250W175-C or equivalent. All wires and cables shall be identified in each handhole or cabinet the cable passes through, or terminates in. The labels shall be attached to the cable by use of two cable ties.

Testing. After installation, the cable shall be tested as approved by the Engineer. Cable failing to pass the test shall be replaced with new cable at no additional cost.

Method of Measurement. The cable shall be measured for payment in linear foot in place. Measurements shall be made in straight lines between changes in direction and to the centers of Equipment. All vertical cable and permissible cable slack shall be measured for payment. A total of six (6) feet of slack shall be allowed for the end of a run terminating at a panel and four (4) feet will similarly be allowed when terminating at a wall-mounted panel. Additional vertical distance for the height of conduit risers, etc., as applicable, will be measured for payment for equipment so mounted.

Basis of Payment. This work shall be paid at the Contract unit price per linear foot, furnished and installed for **ELECTRIC CABLE IN CONDUIT , LEAD IN, NO. 18 4/C, TWISTED SHIELDED.**

LIGHTNING PROTECTION FOR INDUCTION LOOP DETECTORS (TSC T426 #13)

Effective: February 6, 2013

DESCRIPTION

The Contractor shall furnish and install stud-mounted lightning protection devices on each induction loop terminated inside the cabinet at locations shown on plans and as directed by Engineer.

MATERIALS

The lightning protection device shall be a three-terminal device, two of which are connected across the loop input of the detector for differential mod protection and the third terminal grounded to protect against common mode damage. Differential mode surge shall be clamped by the semi-conductor array instantly and common mode surges shall be handled by three element gas discharge tube which fires at 400 VDC and thereafter clamps the two loop leads to 30 Volts in respect to ground. The lightning protection device shall be mounted in the cabinet in close proximity to the loop input. Extension of the factory leads off the lightning protection device to extend them to the loop input will not be allowed. Miscellaneous hardware and mounting will not be paid for separately but shall be included in the cos of this item

METHOD OF MEASUREMENT

This item shall be measured for payment as each completely installed and tested.

BASIS OF PAYMENT

This work shall be paid for at the contract unit price each for LIGHTNING PROTECTION FOR INDUCTION LOOP DETECTOR, which price shall be payment in full for all work as described herein and as directed by the Engineer.

HANDHOLE (TSC T428#1)

Effective: June 1, 1994

Revised: May 19, 2009

Description.

This item shall consist of constructing a handhole, a heavy-duty handhole, or a double handhole, cast in place, complete with frame and cover and in accordance with the following requirements and conforming in all respects to the lines, grades, and dimensions shown on the plans or as directed by the Engineer. All handholes shall be installed in accordance with the Standard Specifications Sec. 814.

Materials.

All handholes shall be constructed of Class SI concrete meeting the requirements of the Standard Specifications for Road and Bridge Construction Section 1020.

Construction Details.

Handhole of the type specified shall be constructed in accordance with the details shown on the plans and conform to the following requirements:

1. Concrete: Concrete construction shall be done in accordance with the provisions of Concrete for Structures and Incidental Construction contained in the Standard Specifications for Road and Bridge Construction Sec. 503.
2. Placing Castings: Castings shall be set accurately to the finished elevation so that no subsequent adjustment will be necessary. Castings shall be set flush with a sidewalk or pavement surface. When installed in an earth shoulder away from the pavement edge, the top surface of the casting shall be 1 in. (25.4mm) above the finished surface of the ground.
3. Backfilling: Any backfilling necessary under a pavement, shoulder, sidewalk or within 2 ft. (60 cm) of the pavement edge shall be made with sand or stone screenings.
4. Forming: Forms will be required for the inside face of the handhole wall, and across all trenches leading into the handholes excavation. The ends of conduits leading into the handhole shall fit into a conduit bell which shall fit tightly against the inside form and the concrete shall be carefully placed around it so as to prevent leakage.
5. French Drain: A french drain conforming to the dimensions shown on the plans shall be constructed in the bottom of the handhole excavation.
6. Steel Hooks: Each handhole shall be provided with four galvanized steel hooks of appropriate size, one on each wall of the handhole.
7. Frame and Cover: The outside of the cover shall contain a recessed ring Type "G" for lifting and a legend "IDOT TSC" cast-in.
8. Cleaning: The handhole shall be thoroughly cleaned of any accumulation of silt, debris, or foreign matter of any kind, and shall be free from such accumulations at the time of final inspection.

Basis Of Payment.

This work will be paid for at the contract unit price each for HANDHOLE or HEAVY DUTY HANDHOLE, or CONCRETE HEAVY DUTY HANDHOLE (SPECIAL), as the case may be, for all necessary excavating, backfilling, disposal of surplus material and form work, frame and cover, and furnishing all materials.

STONE EQUIPMENT – PROGRAMMABLE (TSCT454#1)

Effective: June 1, 1994 Revised: May 19, 2009

1.0 General

- 1.1 Telemetering equipment shall be furnished and installed in the Traffic Systems Center Office and along expressway at locations designated in these Special Provisions and Plans, and in strict accordance with these specifications.
- 1.2 Communication link from field located cabinets to the Traffic Systems Center Office will be via 3002 Channel, C1 conditioning, Type 7 FDDC telephone pairs leased by the Traffic Systems Center, or telecommunication cable in barrier wall.
- 1.3 All tone transmitters and tone receivers shall be three frequency frequency-shift; that is equipment which the center frequency is normally on at all times and is electrically shifted +30 Hz to a higher frequency (mark) or -30 Hz to a lower frequency (space). Other frequency shifts from +10 to +300 shall be user selectable.
- 1.4 All transmitters, receivers, and power supplies shall be of the modular plug-in type construction. The circuitry of each unit shall be protected by a U-shaped metal chassis, cadmium-plated, with iridite finish.
- 1.5 All tone equipment shall be physically interchangeable with existing Traffic Systems Center tone equipment, that is furnished tone equipment shall be directly compatible with and replaceable by existing tone equipment with no modification to any hardware.
- 1.6 All transmitters, receivers, and power supplies shall be solid state. All transistors shall be silicon, excepting the power transistors in power supplies. All transmitters and receivers I.C.s shall be plug in.
- 1.7 All transmitters, and receivers shall be programmable frequency-shift key units. These units shall have a universal card which is field programmable for any channel frequency or shift. The frequencies available shall be in the range of 120 Hz to 5235 Hz in increments of 5 Hz. The shifts available shall be 10, 25, 30, 35, 42.5, 60, 70, 75, 120, 150, 240 and 300 Hz. A new center frequency or shift shall be field programmed by simply changing setting of the program switch.
- 1.8 All transmitters and receivers shall be capable of being operated at any frequency program switches. The center frequency shall be clearly visible through or on the front of each transmitter and receiver. Such indication shall always correspond to the frequency of the elements currently operating in each module. Contractor shall supply 500 complete sets of pre-printed tags for labeling the units indicating the center frequency.

1.9 Transmitters and receivers shall work into a communication link with standard impedance of 600 ohms.

1.10 Transmitters and receivers shall be individually fused.

2.0 Mechanical and Environmental Requirements

2.1 Field Units

2.1.1 Receivers, transmitters and power supplies shall be capable of operation in field cabinets which provide protection against direct contact with the elements with no special provisions for environment control.

2.1.2 All field located tone equipment shall be mounted in the surveillance cabinets as designated elsewhere in these specifications.

2.1.3 All field located tone equipment shall be capable of operation on a temperature range of -22 degrees F to 140 degrees F (-30° to +60° C) and shall have P.C. boards coated for protection against humidity in the range of 0% to 96%.

2.1.4 All field tone equipment shall be capable of being tipped, while in operation, from the vertical to the horizontal position and back again, without having adverse effect on the continuous operation of the transmitter, receiver or power supply.

STONE EQUIPMENT - POWER SUPPLY (TSCT454#2)

Effective: June 1, 1994

Revised: May 19, 2009

1.0 Power Supply

1.1 The power supply shall operate on input voltage of 117 VAC allowing for 10% variation in line voltage.

1.2 The power supply shall provide a regulated 12 VDC output at 1.7 amps.

1.3 Each tone equipment mounting frame field located or office located, shall have its own regulated power supply, capable of operating at least ten tone modules in any combination of transmitters and receivers.

1.4 The power supply shall have floating type gold plated connections to insure good connection.

1.5 The front panel of the power supply shall have an on/off switch and a Red LED that indicates the status of the output DC voltage.

- 1.6 The power supply shall contain a switch and L.E.D. on the front panel to permit the monitoring of the supply voltage with the existing Traffic Systems Center tone test meter.
- 1.7 The power supply shall be fused.
- 1.8 The power supply shall have a DC voltage control.

Basis Of Payment.

This item shall be paid for at the contract unit price each for TONE EQUIPMENT - POWER SUPPLY, installed, operating, and completely in place.

Terminal boards, wiring, and miscellaneous hardware will not be paid for separately, but shall be considered as incidental to the cost of this item.

TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE RECEIVER (TSC-T454#3)

Effective: June 1, 1994 Revised: May 19, 2009

1.0 Receiver

- 1.1 The requirements as to the programmable channel frequency range, channel spacing, holding of shifted frequency, and operating voltage shall be the same as those for 3 Frequency Transmitter.
- 1.2 Input sensitivity of tone receiver shall be adjustable down to -45 dbm. The dynamic range shall be 25 db.
- 1.3 Adjacent channel attenuation shall be at least 35 db.
- 1.4 Each receiver shall be capable of test operation of at least 30 pulses per second.
- 1.5 Each receiver shall have one single pole, double throw, mark relay output and one single pole, double throw space output relay.
- 1.6 Each receiver shall also have a carrier detector circuit with one single pole, double throw relay output.
- 1.7 All output relay contacts shall be capable of handling a minimum of 30 VA continuously. Any substitution shall be subject to written approval of the Engineer.
- 1.8 Receiver shall have L.E.D. indicators for Mark-Red, Space-Yellow and Carrier-Green, visible through the face panel.
- 1.9 The receiver shall have a floating type gold plated connector to insure good connection.

- 1.10 Receiver shall operate in a space hold, 2 state operation.
- 1.11 An attenuation plug shall be provided to set sensitivity level of receiver.
- 1.12 Each receiver shall come with 2 spare relays as outlined in Sec. 1.5 of this specification.
- 1.13 Test points through front face plate shall be provided to test for DC voltage levels.

Basis Of Payment.

This item will be paid for at the contract unit price each for TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE RECEIVER, installed, operating, and completely in place.

Terminal boards, wiring, optical-isolator, relays, cable assemblies and miscellaneous hardware will not be paid for separately, but shall be considered as this item.

TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE TRANSMITTER (TSC T454#4)

Effective: June 1, 1994 Revised: May 19, 2009

1.0 Transmitter

- 1.1 The tone transmitter shall operate on an input of a regulated 12 VDC.
- 1.2 The tone frequencies shall be programmable in the audio frequency range between 120 and 3820hertz.
- 1.3 The transmission quality shall be such that there may be as many as 25 channels of tone transmitters operating over one telephone pair with perfect discrimination by the associated tone receivers. The frequency of one tone transmitter shall have no adverse effect on the operation of the frequency of any other transmitter connected to the same telephone pair.
- 1.4 Output level of tone transmitters shall be adjustable over a range of -40 to +13 dbm.
- 1.5 Transmitter harmonic output shall be at least 42 db down from the fundamental for each harmonic component.
- 1.6 Each unit furnished shall have an external jumper wire on the barrier type terminal block to provide a two frequency space-hold operation.
- 1.7 The transmitter shall have a floating type gold plate connector to insure good connection.
- 1.8 The transmitter shall be capable of holding any of its assigned frequencies (mark, space) continuously without degradation in life of performance.

- 1.9 Each transmitter shall be capable of test operation of at least 30 pulses per second.
- 1.10 No transmitter plugs shall be required for tone output. A toggle switch thru the face plate shall put the transmitter "on line" and "off line".
- 1.11 Transmitter shall have L.E.D. indicators for Mark-Red, Space-Yellow and Carrier-Green visible thru the face panel.
- 1.12 Test points through front face plate shall be provided to test for DC voltage levels.

Basis Of Payment.

This item will be paid for at the contract unit price each for TONE EQUIPMENT - 3 FREQUENCY PROGRAMMABLE TRANSMITTER, installed, operating, and completely in place.

Terminal boards, wiring, optical-isolator, relays, cable assemblies and miscellaneous hardware will not be paid for separately, but shall be considered as this item.

TONE EQUIPMENT-MOUNTING FRAME (TSC T454#7)

Revised: May 19, 2009

Description.

Under this item, for a unit price each, the Contractor shall furnish and install an Iniven 1X 11-1 mounting rack or equivalent in strict accordance with supplement and specified herein.

Each tone equipment mounting frame field located or office located, shall have with power supply added, 11 slots capable of operating at least ten tone modules in any combination of transmitters and receivers.

Each mounting frame shall provide a separate barrier type terminal block with screw-type terminal for each transmitter, receiver, and power supply.

Each mounting frame shall be constructed of steel with zinc bonderizing and hard baked finish of gold metallic epoxy paint.

Where the mounting frame is not completely filled with tone modules, the unused modules spaces shall be provided with the barrier type terminal blocks, within each mounting frame, shall be wired to the 12 VDC power supply.

Each mounting frame for the field equipment shall be of a size that shall hold the power supply, all transmitters and all receivers required at each field cabinet as specified elsewhere in these Special Provisions.

In all field cabinet locations where mounting frames are specified the mounting frames shall be bolted to the rear wall of the cabinet by means of a swing bracket as per field mounting frame with cradle assembly drawing #TY-1TSC 400#6.

The bracket cradle shall have three (3) position stops: horizontal, 45 degree and vertical.

The bracket cradles shall be constructed of ¼” (6.35mm) steel, cadmium plated with an irridite finish, as shown on plan for cradle assembly drawing #TY-1TSC 400#7.

Basis Of Payment.

This work shall be paid at the contract unit price each for TONE EQUIPMENT MOUNTING FRAME, which shall be payment in full for all work as described herein and as directed by the Engineer.

CABINET HOUSING EQUIPMENT, MOUNTING AND SIZE AS SPECIFIED (TSC T637#2)

Effective: June 1, 1994 Revised: March 21, 2013

Description.

This item shall consist of furnishing and installing cabinets of the type and size specified in place including anchor bolts, bases, pedestals, posts, fans, cable harnesses, ground rods, terminal boards, shelves, mounting hardware, and all miscellaneous items at locations as directed by the Engineer.

Materials.

Cabinets shall be of fabricated aluminum supplied in sizes with minimum inside dimensions as listed below.

<u>TYPE</u>	<u>HEIGHT</u>	<u>WIDTH</u>	<u>DEPTH</u>	<u>THICKNESS</u>	<u>OPENING</u>
E.S.P. 1	22-1/2”	14-1/4”	9-3/4”	3/16”	18” x 11”
E.S.P. 2	36”	20”	15”	3/16”	28” x 17-1/2”
E.S.P. 3	49-1/2”	30”	17”	3/16”	38” x 27-11/2”
E.S.P. 4	55”	44”	26”	3/16”	2-1/2” x 41-1/2”
E.S.P. 1	571.5mm	362mm	248mm	4.7mm	457mm x 279mm
E.S.P. 2	914.4mm	508mm	381mm	4.7mm	711mm x 444.5mm
E.S.P. 3	1257.3mm	762mm	432mm	4.7mm	965mm x698.5mm
E.S.P. 4	1397mm	1117.6mm	660.4mm	4.7mm	1079.5mm x 1054.1mm

Cabinets shall be watertight. Doors shall be gasketed to provide a waterproof seal. Bases shall be caulked to obtain a moisture-proof bond. All cabinet types shall have a minimum of two (2) shelves for setting detectors and other equipment on, and Type 2 Corbin brass locks or equal.

E.S.P. Type 3 and Type 4 cabinets shall be fitted with a thermostatically controlled fan. It shall be mounted at the top of the cabinet for a forced air fan system that has a screened air exhaust opening under roof overhang and no opening in top of cabinetry. The fan shall be capable of operating at 130C.F.M. (3.68m³/min) at .160" (4.1mm) of water static pressure.

Where the E.S.P. Type 3 cabinet is used to house equipment controlling ramp metering signals, the E.S.P. Type 3 cabinet shall have a signal load relay installed. The signal load relay shall consist of two components, a base which is mounted on the E.S.P. Type 3 cabinet wall and a locking screw. The coil of this relay shall be connected to the mark output of the signal change tone receiver. The one set contacts of the load relay shall be used to change the ramp signals and one set of contacts shall be used to key the mark input to the signal change transmitter. This relay shall be incidental to the cost of the cabinet when used.

Materials shall conform to controller cabinets as listed in the Standard Specifications 1074.03 except that the door shall not have any outside designation nor shall the cabinet door be equipped with a police door or louvers. Post top mounted cabinets, shall have a ¼" (6.4mm) bottom of cabinet welded.

Each Induction loop shall have lightning protection. The Contractor shall furnish and install stud-mounted lightning protection devices. The device shall have three-terminals, two of which are connected across the loop input of the detector for differential mode protection and the third terminal grounded to protect against common mode damage. Differential mode surge shall be clamped by the semi-conductor array instantly and common mode surge shall be handled by three element gas discharge tube which fires at 400VDC and thereafter clamps the two loop leads to 30 volts in respect to ground. The device shall be installed in close proximity to the loop input. Extension of the factory leads of the device shall not be allowed.

Each Cabinet shall have a Corbin # 2 lock.

Installation Details.

Installation shall conform to applicable portions of Section 863 of the Standard Specifications.

Cabinets, cabinet posts, and cabinet pedestals shall be primed and painted in accordance with TSC Specification T712#1. The final coat color shall be specified by the T.S.C. at the time of the pre-construction meeting. Interior of all cabinets shall be painted high gloss white.

CMS/DMS Type 4 cabinets shall be serviced by 117 volts AC power with a 60 amp circuit breaker minimum.

All cabinets shall be serviced by 117 volts AC power and a telecommunication system. Each cabinet shall be equipped with a 10 ampere circuit breaker, ground rod, 115 VAC RFI filtering surge protector (ACD-340 surrestor), 130 volt, 70 joules, 10 amp varistor, lightning protection for each loop (SRA-6LC surrestor), data line protection for each leg of the four (4) wire telecommunication system (SRA 64C surrestor), a pull chain porcelain base light fixture with a 3 prong 110 volt outlet. The porcelain fixture shall be mounted on metal plate, that shall be mounted on the cabinet ceiling. No holes shall be drilled thru the cabinet exterior for internal equipment mounting.

Each wire entering a cabinet shall be trained in a workmanlike manner and lugged at each terminal strip or switch. If more than one wire has a common terminal on a terminal strip, the adjacent strip shall be used and an appropriate jumpered connection shall be made.

All cables and wiring entering a cabinet shall be dressed, harnessed, tied, laced, and clamped to produce a workmanlike wiring installation.

All cables (loop wires, power, phone) shall be labeled with a panduit type cable tag. The tag will identify the type of cable and the cable destination.

A copper grounding bus shall be mounted on the rear wall of the cabinets.

Each cabinet shall contain a wiring diagram of the installation in addition to the diagrams which are to be submitted to the Engineer.

Prior to the wiring of the cabinet, the contractor shall submit box print for approval before cabinet wiring shall begin.

The Contractor shall furnish three (3) diagrams of the internal and external connections of the equipment in each Traffic Systems Center cabinet. He shall also furnish the operating and maintenance instructions for all equipment supplied. One copy of the wiring diagrams for each cabinet shall be retained in each field cabinet. Wiring diagram shall be contained in a plastic pouch that shall be permanently mounted to the door of each cabinet. Contractor shall permanently mark the cabinet for each termination and each terminal connection as to loop, tone, closure, phone, and lane function of each termination in the cabinet.

Incidental to the cost of each cabinet, the Contractor shall construct 5" (127mm) P.C.C. sidewalk of a rectangular area 3' x 4' (1 meter by 1.2m) immediately adjacent to the cabinet foundation on the same side of the foundation as the cabinet door, with the 4' (1.2m) dimension of the rectangle parallel to the cabinet door when closed. If the width of the required cabinet foundation is greater than the 3 feet (1 meter) width of the standard concrete foundation. Type D, the 4' (1.2m) dimension of the sidewalk area shall be increased to equal the width of the foundation plus 1ft (30 cm), the area to extend 6" (15cm) beyond each side of the foundation. This paragraph shall be applicable at all cabinet locations included in this Section. The only situations where this paragraph shall not apply are as follows: When the foundation is immediately adjacent to or within a paved sidewalk or shoulder area and no further surfacing is required. The Engineer shall be the sole judge as to the applicability of this paragraph in all questions arising therefrom.

No raceways shall be allowed to enter cabinet through the sides, top or back walls.

Anchor bolts shall be installed for pedestal and base mounted cabinets. These shall be considered as incidental to the cost of the cabinets.

Cable harnesses, terminal boards, and mounting hardware shall be installed as needed. These items shall be considered as incidental to the cost of the contract.

Terminal blocks provided in field cabinets shall be the heavy duty barrier type. The terminal block shall be a minimum of 2" (50.8mm) wide and 1-3/16" (30.2mm) deep. Center to center of the terminal screws or studs shall be a minimum of 21/32" (16 mm) with barriers in-between. Terminal blocks shall be rated at 45 amps 600 volts breakdown RMS line to line 11,000 V. and breakdown RMS line to ground 13,800 V. A marking strip shall be provided with each terminal block.

Method Of Measurement.

Cabinets will be accepted as concrete foundation mounted, pole mounted, pedestal mounted, or attached to structure. Each cabinet installed complete and in place will be counted as a single unit.

Basis Of Payment.

This work will be paid for at the contract price each for CABINET HOUSING EQUIPMENT, mounting and size specified, installed complete and in place.

CONCRETE FOUNDATION (TSC T 427#01)

Effective: June 1, 1994 Revised: Sept. 15, 2010

Description.

This item shall consist of constructing a concrete foundation for the installation of a traffic signal, cabinet, and cabinet with pedestal, anchor bolt, and ground rod in accordance with the following requirements and conforming in all respects to the lines, grades and dimensions shown on the plans or as directed by the Engineer and in applicable portions of Section 878 of the Standard Specifications and the Bureau of Design and Environment Concrete Foundation Detail #878001-08.

Materials.

The materials shall conform to the specifications of Class SI concrete and concrete Reinforcement Bars in the Standard Specifications for Road and Bridge Construction. The conduit and fittings within the limits of the foundation shall conform to the same requirements as that specified for the conduit outside these limits.

Anchor bolts shall meet the requirements of Section 505 of the Standard Specifications and the material shall conform to the requirements of Article 1006.09 of the Standard Specifications for Road and Bridge Construction. A ground rod shall be installed in each foundation and shall conform to Section 806. Unless otherwise indicated in plans, ground rods shall be one piece copper-clad steel rods 3/4" x 10' (2cm x 3 m).

Construction Details.

Concrete foundations shall be Type A or Type D and location as specified on the plans. The top of the foundation shall be finished level. Shimming will not be permitted. All edges along the top of the foundation shall be given a 1 inch (25mm) bevel. A form extending a minimum of 9 inches (225mm) below the top surface of the foundation is required. The form shall be set level and means shall be provided for holding same rigidly in place while the concrete is being deposited. Whenever the excavation is irregular, a form shall be used to provide the proper dimension of the entire foundation below the ground surface. Where a concrete foundation is contiguous to a sidewalk, preformed joint filler of 1/2 inch (12mm) thickness shall be placed between the foundation and the sidewalk.

All conduit in the foundation shall be installed rigidly in place before concrete is deposited in the form. Insulated bushings shall be provided at the ends of conduit. Anchor bolts shall be set in place before the concrete is deposited by means of a template constructed to space the anchor bolts in accordance with the pattern of the bolt holes in the base. After installation of cables, all conduit openings in foundations shall be sealed with an approved mastic. The required number and size of galvanized steel conduits shall be installed in every concrete foundation as shown on the plans. An excess of galvanized steel conduits shall be installed in every concrete foundation. These excess stubs shall be 2 inches (50 mm) in diameter. Placement and quantity shall be determined by the Engineer, and the ends of the stubs shall be capped.

Incidental to the cost of each control box foundation, the Contractor shall construct a 5" (125 mm) P.C.C. sidewalk of a rectangular area 3 ft (1 mm.) by 4 ft (1.2 meter.) immediately adjacent to the cabinet door, with the 4' (1.2 meter) dimension of the rectangle parallel to the cabinet door when closed. This paragraph shall be applicable at all cabinet foundation locations included in this Section. The only situations where this paragraph shall no apply are as follows: When the foundation is immediately adjacent to or within a paved sidewalk or shoulder area and no further surfacing is require. The Engineer shall be the sole judge as to the applicability of this paragraph in all questions arising therefrom.

Basis Of Payment.

This work will be paid for at the contract unit price per meter/foot for CONCRETE FOUNDATION of the type specified, which price shall be payment in full for all necessary excavating, backfilling, disposal of surplus material and formwork and furnishing all materials, anchor bolts, stubs and ground rod within the limits of the foundation.

DIGITAL LOOP DETECTOR SENSOR UNIT (TSC T638#1)

Effective: June 1, 1994 Revised: May 19, 2009

1.0 Scope

- 1.1 This item shall consist of furnishing digital four or two channel loop detector sensor units complete with associated enclosures, cable harness, quick disconnect plugs, and operation manuals in strict accordance with these specifications.

2.0 Functional Requirements

- 2.1 The sensor unit shall operate on a regulated 117 VAC. The sensor unit shall be of solid state design throughout. Each sensor unit shall include four or two complete loop detector channels in the space that is normally occupied by an INDUCTION LOOP DETECTOR SENSOR UNIT.
- 2.2 The loop connected to each of the four channels or two shall be sequentially scanned at a rate of not less than 148 times per second. Only one loop shall operate at a time in the system to eliminate cross-talk.
- 2.3 The digital loop sensor unit shall be automatically and instantaneously self-tuning requiring no burn-in or warm-up time. Then it shall also track environmental changes.
- 2.4 The digital loop sensor unit shall be self-tracking and fully automatic in its recovery from power failure.
- 2.5 The digital loop sensor unit shall be of sufficient sensitivity to detect the smallest licenseable motor vehicle, including motorbikes. The sensor unit shall detect a Honda CT-170 and hold the detection for minimum of four minutes.
- 2.6 The sensor unit shall be designed to operate in conjunction with three turns of a loop of wire embedded up to 3" (76.2mm) deep in a reinforced concrete roadway. The loop and lead-ins will measure at least 100 megohms above ground and have a minimum inductance of 50 microhenries and a continuity resistance of not more than 2 ohms. Digital sensor unit shall be capable of tuning to an inductance range of 0 to 2000 microhenries.
- 2.7 Vehicle detection shall be indicated by a single optically isolated solid state output per channel.
- 2.8 Output circuit shall be an optically coupled output. It shall be a 2N37. Polarity of interface between telemetry and sensor unit must be observed.
- 2.9 Any size or type of motor vehicle from motorcycle to a high bed tractor-trailer moving over the loop shall be detected and each vehicle shall produce only one output for the length of time the vehicle is over the loop.

- 2.10 Detection shall be positive for all vehicle speeds 0 to 129km (80 mi.) per hour.
- 2.11 The sensor unit shall be capable of reliable operations when placed up to 1000 ft. (304.8m) away from loops and connected with type No. 14 AWG, stranded copper wire. The loops will vary in size from 5 ft. x 6 ft. (1.52m by 1.83m) up to 18 ft. x 6 ft. (5.49m by 1.83m). Loop system with 1000 ft (304.8m.) of lead-in shall perform with sensitivity to detect and hold the smallest motorbike.
- 2.12 Each detection channel shall have its own output incandescent indicator lamp and 16 position thumbwheel switch. The thumbwheel switch shall select the sensitivity and mode. The thumbwheel switch shall provide eight sensitivities, .0025% to .33% and 3 modes: off, pulse, and presence.
- 2.13 In the pulse mode each new vehicle shall produce an output pulse of 225 milliseconds duration. A vehicle remaining on a loop for more than two seconds shall be "tuned out" allowing operation of the loop to other vehicles.
- 2.14 In the presence mode output duration shall be equal to the percent of time the vehicle is present on the loop. Vehicle detection and hold times shall not be less than 30 minutes.
- 2.15 Electrical connections from the sensor unit to incoming and outgoing circuits shall be made by one MS type multiple positive connection plug and jack, or equivalent arrangement, to permit rapid replacement with similar existing units without disconnecting or reconnecting individual wires.
- 2.16 All the tuning adjustments shall be made with controls provided on the sensor unit without requiring movement of the sensor unit.
- 2.17 These controls shall be identified and it shall not be necessary to remove or change wires or contacts nor to use any tools other than a screw driver in tuning or making sensitivity adjustments.
- 2.18 A properly tuned sensor unit shall detect all high vehicles (truck) with chassis 4 feet (1.22m) above pavement surface with one contact closure and yet shall not detect vehicles passing in lanes adjacent to loop installation.
- 2.19 All transistors shall be silicon type. The main logic of the unit shall be a single MOS-LSI chip to simplify the electronics, increase reliability and improve maintainability.
- 2.20 The sensor unit shall be contained in a rigid high quality metal enclosure providing complete protection to all components and electrical connections.
- 2.21 During normal detection operation the state of the output indicator shall correspond exactly to the state of the optically coupled output.

- 2.22 A frequency switch shall be provided to raise or lower the loop oscillator frequency for the elimination of cross-talk between sensor unit, should it ever occur.
- 2.23 The digital sensor unit shall be provided with a circuit breaker.
- 2.24 Special circuitry shall be provided so that the sensor unit shall continue in proper operation even though the induction loop is shorted or leaking to ground.
- 2.25 Induction loops shall be coupled to a transformer to provide for rejection of induction loop lead-in cable noise and shall allow low inductance operation (0 to 50 microhenries).
- 2.26 A reset shall be provided to reset all channels.
- 2.27 There shall be a write-on pad mounted on sensor to identify traffic lane with channel indication.

3.0 Basis Of Payment.

This item will be paid for at the contract unit price each for DIGITAL LOOP DETECTOR SENSOR UNIT, channels specified, installed, operating and completely in place.

Terminal boards, cable harness wiring and miscellaneous will not be paid for separately, but shall be considered as incidental to the cost of the item.

INTERCEPT EXISTING CONDUIT

Description. This item consists of intercepting an existing conduit or raceway for the purpose of installing a new light tower foundation and making a connection to a new conduit.

General Requirements. Work under this item shall be performed in accordance with Sections 800, 810 and 1088 of the Standard Specifications.

Construction Requirements.

The Contractor shall pull back the existing lighting cables and carefully cut the conduit or raceway so that the cut conduit ends can be installed in the foundation conduit sleeves into the light tower. This item shall include all work necessary to bring the conduit and cables into the foundation. All new conduit required to intercept the existing conduit and make the necessary connections to install the conduit run into the light tower will not be paid for separately and shall be included in this item. The Contractor shall furnish and install all materials for a complete installation.

Method of Measurement. This work will be measured on a per each basis each for conduit end cut.

Basis of Payment. This work will be paid for at the contract unit price per each for INTERCEPT EXISTING CONDUIT, which will be payment in full for the material and work described herein. No additional payment will be allowed for excavation, backfilling, and restoration of a parkway.

STEP-DOWN TRANSFORMER INSTALLATION IN SURVEILLANCE CABINET

DESCRIPTION

This item shall consist of furnishing and installing a step-down voltage transformer to be attached to the structure, as shown on plans, to furnish 120 V.A.C. service for the surveillance control equipment. The source shall be an existing circuit, as shown in the plans.

The functional requirements for the transformer are as follows:

- A. The line voltage to the transformer will be 480 V.A.C. 60 cycle, AC Source from the Main Distribution Panel.
- B. The transformer shall reduce the voltage to 120/240 V.A.C., 60 cycle, which is the voltage required to operate surveillance equipment.
- C. The transformer shall be required to have a minimum rating of 15 KVA
- D. The transformer shall be enclosed in a NEMA 3R Encapsulated enclosure. The transformer shall be corrosion-proof.

INSTALLATION

- a. The transformer shall be permanently attached to the structure at the location as shown in the plans.
- b. The installation shall include conduits necessary to route cables in to and out of an adjacent junction box attached to the structure for power distribution.

BASIS OF PAYMENT

This item will be paid for at the contract unit price, each, for STEP-DOWN TRANSFORMER, all equipment, breakers and systems operating and completely in place. Cable harness, wire, lug ends, mounting brackets, conduits and miscellaneous hardware shall be included in this pay item.

FIBER OPTIC CABLE, SINGLE MODE

Description. The Contractor shall furnish and install loose-tube, single-mode, fiber optic cable of the number of fibers specified as shown in the plans and as directed by the Engineer. Other ancillary components, required to complete the fiber optic cable plant, including but not limited to, moisture and water sealants, cable caps, fan-out kits, etc., shall be included in the cost of fiber optic cable and will not be paid for separately.

Materials. The single-mode, fiber optic cable shall incorporate a loose, buffer-tube design. The cable shall be an accepted product of the United States Department of Agriculture Rural Utilities Service (RUS) 7 CFR 1755.900 and meet the requirements of ANSI/ICEA Standard for Fiber Optic Outside Plant Communications Cable, ANSI/ICEA S-87-640-1999 for a single sheathed, non-armored cable, and shall be new, unused and of current design and manufacture.

Fibers

The cables shall use dispersion unshifted fibers. The optical and physical characteristics of the un-cabled fibers shall include:

The single-mode fiber shall meet EIA/TIA-492CAAA, "Detail Specification for Class Iva Dispersion-Unshifted Single-Mode Optical Fibers," and ITU recommendation G.652.D, "Characteristics of a single-mode optical fiber cable."

Physical Construction			
Requirement		Units	Value
Cladding Diameter		(μm)	125.0 ± 0.7
Core-to-Cladding Concentricity		(μm)	≤ 0.5
Cladding Non-Circularity			$\leq 0.7 \%$
Mode Field Diameter	1310 nm	(μm)	9.2 ± 0.4
	1550 nm		10.4 ± 0.5
Coating Diameter		(μm)	245 ± 5
Colored Fiber Nominal Diameter		(μm)	253 - 259
Fiber Curl radius of curvature		(m)	$> 4.0 \text{ m}$

Optical Characteristics			
Requirement		Units	Value
Cabled Fiber Attenuation	1310 nm	(dB/km)	≤ 0.4
	1550 nm		≤ 0.3
Point discontinuity	1310 nm	(dB)	≤ 0.1
	1550 nm		≤ 0.1
Macrobend Attenuation	Turns	Mandrel OD	
	1	32 ± 2 mm	< 0.05 at 1550 nm
	100	50 ± 2 mm	< 0.05 at 1310 nm
	100	50 ± 2 mm	< 0.10 at 1550 nm
	100	60 ± 2 mm	< 0.05 at 1550 nm
	100	60 ± 2 mm	< 0.05 at 1625 nm
Cable Cutoff Wavelength (λ_{ccf})		(nm)	< 1260
Zero Dispersion Wavelength (λ_0)		(nm)	1302 ≤ λ_0 ≤ 1322
Zero Dispersion Slope (S_0)		(ps/(nm ² •km))	≤ 0.089
Total Dispersion	1550 nm	(ps/(nm•km))	≤ 3.5
	1285-1330 nm		≤ 17.5
	1625 nm		≤ 21.5
Cabled Polarization Mode Dispersion		(ps/km ⁻²)	≤ 0.2
IEEE 802.3 GbE - 1300 nm Laser Distance		(m)	up to 5000
WaterPeak Attenuation: 1383 ± 3 nm		(dB/km)	≤ 0.4

Cable Construction

The number of fibers in each cable shall be as specified on the plans.

Optical fibers shall be placed inside a loose buffer tube. The nominal outer diameter of the buffer tube shall be 3.0 mm. Each buffer tube shall contain up to 12 fibers. The fibers shall not adhere to the inside of the buffer tube.

Each fiber shall be distinguishable by means of color coding in accordance with TIA/EIA-598-B, "Optical Fiber Cable Color Coding." The fibers shall be colored with ultraviolet (UV) curable inks.

Buffer tubes containing fibers shall be color coded with distinct and recognizable colors in accordance with TIA/EIA-598-B, "Optical Fiber Cable Color Coding." Buffer tube colored stripes shall be inlaid in the tube by means of co-extrusion when required. The nominal stripe width shall be 1 mm.

For cables containing more than 12 buffer tubes, standard colors are used for tubes 1 through 12 and stripes are used to denote tubes 13 through 24. The color sequence applies to tubes containing fibers only, and shall begin with the first tube. If fillers are required, they shall be placed in the inner layer of the cable. The tube color sequence shall start from the inside layer and progress outward.

In buffer tubes containing multiple fibers, the colors shall be stable across the specified storage and operating temperature range and shall not be subject to fading or smearing onto each other. Colors shall not cause fibers to stick together.

The buffer tubes shall be resistant to external forces and shall meet the buffer tube cold bend and shrink back requirements of 7 CFR 1755.900.

Fillers may be included in the cable core to lend symmetry to the cable cross-section where needed. Fillers shall be placed so that they do not interrupt the consecutive positioning of the buffer tubes. In dual layer cables, any fillers shall be placed in the inner layer. Fillers shall be nominally 2.5 mm or 3.0 mm in outer diameter.

The central member shall consist of a dielectric, glass reinforced plastic (GRP) rod (optional steel central member). The purpose of the central member is to provide tensile strength and prevent buckling. The central member shall be overcoated with a thermoplastic when required to achieve dimensional sizing to accommodate buffer tubes/fillers.

Each buffer tube shall contain a water-swellaable yarn for water-blocking protection. The water-swellaable yarn shall be non-nutritive to fungus, electrically non-conductive, and homogeneous. It shall also be free from dirt or foreign matter. This yarn will preclude the need for other water-blocking material; the buffer-tube shall be gel-free. The optical fibers shall not require cleaning before placement into a splice tray or fan-out kit.

Buffer tubes shall be stranded around the dielectric central member using the reverse oscillation, or "S-Z", stranding process.

Water swellaable yarn(s) shall be applied longitudinally along the central member during stranding.

Two polyester yarn binders shall be applied contrahelically with sufficient tension to secure each buffer tube layer to the dielectric central member without crushing the buffer tubes. The binders shall be non-hygroscopic, non-wicking, and dielectric with low shrinkage.

For single layer cables, a water swellaable tape shall be applied longitudinally around the outside of the stranded tubes/fillers. The water swellaable tape shall be non-nutritive to fungus, electrically non-conductive, and homogenous. It shall also be free from dirt and foreign matter.

For dual layer cables, a second (outer) layer of buffer tubes shall be stranded over the original core to form a two layer core. A water swellaable tape shall be applied longitudinally over both the inner and outer layer. The water swellaable tape shall be non-nutritive to fungus, electrically non-conductive, and homogenous. It shall also be free from dirt and foreign matter.

The cables shall contain one ripcord under the sheath for easy sheath removal.

Tensile strength shall be provided by the central member, and additional dielectric yarns as required.

The dielectric yarns shall be helically stranded evenly around the cable core.

The cables shall be sheathed with medium density polyethylene (MDPE). The minimum nominal jacket thickness shall be 1.4 mm. Jacketing material shall be applied directly over the tensile strength members (as required) and water swellable tape. The polyethylene shall contain carbon black to provide ultraviolet light protection and shall not promote the growth of fungus.

The MDPE jacket material shall be as defined by ASTM D1248, Type II, Class C, Category 4 and Grades J4, E7 and E8.

The jacket or sheath shall be free of holes, splits, and blisters.

The cable jacket shall contain no metal elements and shall be of a consistent thickness. Cable jackets shall be marked with the manufacturer's name, month and year of manufacture, sequential meter or foot markings, a telecommunication handset symbol as required by Section 350G of the National Electrical Safety Code (NESC), fiber count, and fiber type. The actual length of the cable shall be within -0/+1% of the length markings. The print color shall be white, with the exception that cable jackets containing one or more co-extruded white stripes, which shall be printed in light blue. The height of the marking shall be approximately 2.5 mm.

The maximum pulling tension shall be 2700 N (608 lbf) during installation (short term) and 890 N (200 lbf) long term installed. The shipping, storage, and operating temperature range of the cable shall be -40°C to +70°C. The installation temperature range of the cable shall be -30°C to +70°C.

General Cable Performance Specifications

The fiber optic cable manufacturer shall provide documentation and certify that the fiber optic cable complies with the following EIA-455-xxx Fiber Optic Test Procedures (FOTP):

When tested in accordance with FOTP-3, "*Procedure to Measure Temperature Cycling Effects on Optical Fibers, Optical Cable, and Other Passive Fiber Optic Components*," the change in attenuation at extreme operational temperatures (-40°C and +70°C) shall not exceed 0.15 dB/km at 1550 nm for single-mode fiber and 0.3 dB/km at 1300 nm for multimode fiber.

When tested in accordance with FOTP-82, "*Fluid Penetration Test for Fluid-Blocked Fiber Optic Cable*," a one meter length of unaged cable shall withstand a one meter static head or equivalent continuous pressure of water for one hour without leakage through the open cable end.

When tested in accordance with FOTP-81, "*Compound Flow (Drip) Test for Filled Fiber Optic Cable*," the cable shall exhibit no flow (drip or leak) of filling and/or flooding material at 70°C.

When tested in accordance with FOTP-41, "*Compressive Loading Resistance of Fiber Optic Cables*," the cable shall withstand a minimum compressive load of 220 N/cm (125 lbf/in) applied uniformly over the length of the sample. The 220 N/cm (125 lbf/in) load shall be applied at a rate of 2.5 mm (0.1 in) per minute. The load shall be maintained for a period of 1 minute. The load shall then be decreased to 110 N/cm (63 lbf/in). Alternatively, it is acceptable to remove the 220 N/cm (125 lbf/in) load entirely and apply the 110 N/cm (63 lbf/in) load within five minutes at a rate of 2.5 mm (0.1 in) per minute. The 110 N/cm (63 lbf/in) load shall be maintained for a period of 10 minutes. Attenuation measurements shall be performed before release of the 110 N/cm (63 lbf/in) load. The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fibers and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-104, "*Fiber Optic Cable Cyclic Flexing Test*," the cable shall withstand 25 mechanical flexing cycles around a sheave diameter not greater than 20 times the cable diameter. The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-25, "*Repeated Impact Testing of Fiber Optic Cables and Cable Assemblies*," except that the number of cycles shall be two at three locations along a one meter cable length and the impact energy shall be at least 4.4 Nm (in accordance with ICEA S-87-640)", the change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber. When tested in accordance with FOTP-33, "*Fiber Optic Cable Tensile Loading and Bending Test*," using a maximum mandrel and sheave diameter of 560 mm, the cable shall withstand a rated tensile load of 2670N (601 lbf) and residual load of 30% of the rated installation load. The axial fiber strain shall be $\leq 60\%$ of the fiber proof level after completion of 60 minute conditioning and while the cable is under the rated installation load. The axial fiber strain shall be $\leq 20\%$ of the fiber proof level after completion of 10 minute conditioning and while the cable is under the residual load. The change in attenuation at residual load and after load removal shall not exceed 0.15 dB at 1550 nm for single mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-85, "*Fiber Optic Cable Twist Test*," a length of cable no greater than 2 meters shall withstand 10 cycles of mechanical twisting. The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-37, "*Low or High Temperature Bend Test for Fiber Optic Cable*," the cable shall withstand four full turns around a mandrel of ≤ 20 times the cable diameter after conditioning for four hours at test temperatures of -30°C and $+60^{\circ}\text{C}$. Neither the inner or outer surfaces of the jacket shall exhibit visible cracks, splits, tears, or other openings. The change in attenuation shall not exceed 0.30 dB at 1550 nm for single mode fiber and 0.50 dB at 1300 nm for multimode fiber.

Quality Assurance Provision

All cabled optical fibers > 1000 meters in length shall be 100% attenuation tested. The attenuation of each fiber shall be provided with each cable reel. The cable manufacturer shall be TL 9000 registered.

Packaging

Top and bottom ends of the cable shall be available for testing. Both ends of the cable shall be sealed to prevent the ingress of moisture. Each reel shall have a weather resistant reel tag attached identifying the reel and cable. The reel tag shall include the following information:

- Cable Number
- Gross Weight
- Shipped Cable Length in Meters
- Job Order Number
- Product Number
- Customer Order Number
- Date Cable was Tested
- Manufacturer Order Number
- Cable Length Markings
 - a: Top (inside end of cable)
 - b: Bottom (outside end of cable)

The reel (one flange) marking shall include:

- Manufacturer
- Country of origin
- An arrow indicating proper direction of roll when handling
- Fork lift-handling illustration
- Handling Warnings.

Each cable shall be accompanied by a cable data sheet. The cable data sheet shall include the following information:

- Manufacturer Cable Number
- Manufacturer Product Number
- Manufacturer Factory Order Number
- Customer Name
- Customer Cable Number
- Customer Purchase Order Number
- Mark for Information
- Ordered Length
- Maximum Billable Length
- Actual Shipped Length
- Measured Attenuation of Each Fiber

The cable shall be capable of withstanding a minimum-bending radius of 20 times its outer diameter during installation and 10 times its outer diameter during operation without changing the characteristics of the optical fibers.

The cable shall meet all of specified requirements under the following conditions:

- Shipping/storage temperature: -58° F to +158° F (-50° C to +70° C)
- Installation temperature: -22° F to +158° F (-30° C to +70° C)
- Operating temperature: -40° F to +158° F (-40° C to +70° C)
- Relative humidity from 0% to 95%, non-condensing

Optical Patch Cords and Pigtails

The optical patch cords and pigtails shall comply with the following:

- The optical patch cords shall consist of a section of single fiber, jacketed cable equipped with optical connectors at both ends.
- The factory installed connector furnished as part of the optical patch cords and pigtails shall meet or exceed the requirements for approved connectors specified herein.
- The fiber portion of each patch cord and pigtail shall be a single, jacketed fiber with optical properties identical to the optical cable furnished under this contract.
- The twelve fiber single-mode fiber optic cable shall be installed as a pigtail with factory installed ST compatible connectors.
- The patch cords shall comply with Telcordia GR-326-CORE

Connectors

The optical connectors shall comply with the following:

- All connectors shall be factory installed ST compatible connectors. Field installed connectors shall not be allowed.
- Maximum attenuation 0.4dB, typical 0.2dB.
- No more than 0.2dB increase in attenuation after 1000 insertions.
- Attenuation of all connectors will be checked and recorded at the time of installation with an insertion test minimum 5 times checked with an OTDR.
- All fibers shall be connectorized at each end.
- All fibers shall terminate at a fiber patch panel
- Unused fibers will be protected with a plastic cap to eliminate dust and moisture.
- Termination shall be facilitated by splicing factory OEM pigtails on the end of the bare fiber utilizing the fusion splicing method. Pigtails shall be one meter in length.

CONSTRUCTION REQUIREMENTS

Experience Requirements

Personnel involved in the installation, splicing and testing of the fiber optic cables shall meet the following requirements:

- A minimum of three (3) years experience in the installation of fiber optic cables, including fusion splicing, terminating and testing single mode fibers.
- Install two systems where fiber optic cables are outdoors in conduit and where the systems have been in continuous satisfactory operation for at least two years. The Contractor shall submit as proof, photographs or other supporting documents, and the names, addresses and telephone numbers of the operating personnel who can be contacted regarding the installed fiber optic systems.
- One fiber optic cable system (which may be one of the two in the preceding paragraph), which the Contractor can arrange for demonstration to the Department representatives and the Engineer.

Installers shall be familiar with the cable manufacturer's recommended procedures for installing the cable. This shall include knowledge of splicing procedures for the fusion splicer being used on this project and knowledge of all hardware such as breakout (furcation) kits and splice closures. The Contractor shall submit documented procedures to the Engineer for approval and to be used by Construction inspectors.

Personnel involved in testing shall have been trained by the manufacturer of the fiber optic cable test equipment to be used, in fiber optic cable testing procedures. Proof of this training shall be submitted to the Engineer for approval. In addition, the Contractor shall submit documentation of the testing procedures and a copy of the test equipment operation manual for approval by the Engineer.

Installation in Raceways

The Contractor shall provide a cable-pulling plan, identifying where the cable will enter the underground system and the direction of pull. This plan will address locations where the cable is pulled out of a handhole, coiled in a figure eight, and pulled back into the hand hole. The plan shall address the physical protection of the cable during installation and during periods of downtime. The cable-pulling plan shall be provided to the Engineer for approval a minimum of 15 working days prior to the start of installation. The Engineer's approval shall be for the operation on the freeway and does not include an endorsement of the proposed procedures. The Contractor is responsible for the technical adequacy of the proposed procedures.

During cable pulling operations, the Contractor shall ensure that the minimum bending of the cable is maintained during the unreeling and pulling operations. Entry guide chutes shall be used to guide the cable into the handhole conduit ports. Lubricating compound shall be used to minimize friction. Corner rollers (wheels), if used, shall not have radii less than the minimum installation-bending radius of the cable. A series array of smaller wheels can be used for accomplishing the bend if the cable manufacturers specifically approve the array.

The pulling tension shall be continuously measured and shall not be allowed to exceed the maximum tension specified by the manufacturer of the cable. Fuse links and breaks can be used to ensure that the cable tensile strength is not exceeded. The pulling system shall have an audible alarm that sounds whenever a pre-selected tension level is reached. Tension levels shall be recorded continuously and shall be given to the Engineer.

The cable shall be pulled into the conduit as a single component, absorbing the pulling force in all tension elements. The central strength member and Aramid yarn shall be attached directly to the pulling eye during cable pulling. "Basket grip" or "Chinese-finger type" attachments, which only attach to the cable's outer jacket, shall not be permitted. A breakaway swivel, rated at 95% of the cable manufacturer's approved maximum tensile loading, shall be used on all pulls. When simultaneously pulling fiber optic cable with other cables, separate grooved rollers shall be used for each cable.

To minimize the exposure of the backbone cable and to facilitate the longer lengths of fiber optic cable, the Contractor shall use a "blown cable" (pneumatically assisted) technique to place the fiber optic cable.

Where cable is to be pulled through existing conduit which contains existing cables, optical or other, the existing cables shall be removed and reinstalled with the fiber optic cable as indicated on the plans. The removal of the cable(s) shall be paid for separately. Reinstallation of the existing cables, if indicated on the plans, along with the fiber optic cable shall be included in this item for payment.

Tracer Wire

A tracer wire shall be installed with all fiber optic cable runs. One tracer wire shall be installed along with the fiber optic cable in each raceway. If a raceway has more than one fiber optic cable, only one tracer wire per raceway is required. If there are parallel raceways, a tracer wire is required in each raceway that contains a fiber optic cable. Tracer wire shall be installed in raceway segments which are metallic to provide a continuous tracer wire system.

The tracer wire shall be a direct burial rated, number 12 AWG (minimum) solid (.0808" diameter), steel core soft drawn high strength tracer wire. The wire shall have a minimum 380 pound average tensile break strength. The wire shall have a 30 mil high density yellow polyethylene (HDPE) jacket complying with ASTM-D-1248, and a 30 volt rating.

Connection devices used shall be as approved by the tracer wire manufacturer, except wire nuts of any type are not acceptable and shall not be used.

The cost of the tracer wire shall be included in the cost of the fiber optic cable and not paid for separately.

Aerial Fiber Optic Cable

Aerial fiber optic cable assemblies shall be of a self-supporting figure-8 design. The fiber optic cable shall be as described herein and shall be waterblocked utilizing water-swellaable materials. The cable assembly shall be designed and manufactured to facilitate midspan access.

The fiber optic cable, 24 FO SM self supporting cable is required at locations shown on the plans since the cable will be exposed to weather and capable of being relocated in the future during the Congress Parkway Bridge rehabilitation/reconstruction traffic staging. The submittal information must include a copy of the standard installation instructions for the proposed cable.

Fiber Optic Cable Attached to Steel Beam

The 24 aerial fiber optic cable, single mode aerial self supporting cable attached to the steel beam (bottom flange), as shown on the plans, shall be secured/clamped to the beam with hardware that will not impede the optical characteristics of the cable.

The aerial fiber optic cable or fiber optic cable and power cable attached to the beam as shown on the plans will be secured to the steel beam with PVC coated clamps or approved device at 6'-0" intervals and a maximum of 2'-0" from any change in direction or prior to entering conduit.

Along steel beams no welding shall be allowed to secure the clamp to the steel beam. In addition along steel beams, should the clamping device require drilling holes in the steel beam/bottom flange, drill holes shall not extend through the full thickness of the steel beam, i.e. bottom flange.

The submittal information must include a copy of the standard installation instructions for the proposed cable attachment to steel beam. The cost of the attaching the cable to steel beam as shown on the plans shall be included in the cost of the 24 fiber optic, single mode, self-supporting cable.

Construction Documentation Requirements

Installation Practices for Outdoor Fiber Optic Cable Systems. The Contractor shall examine the proposed cable plant design. At least one month prior to starting installation of the fiber optic cable plant, the Contractor shall prepare and submit to the Engineer for review and approval, ten (10) copies of the Contractor's "Installation Practices for Outdoor Fiber Optic Cable Systems" manual. This manual shall address the Contractor's proposed practices covering all aspects of the fiber optic cable plant. This submittal shall include all proposed procedures, list of installation equipment, and splicing and test equipment. Test and quality control procedures shall be detailed as well as procedures for corrective action.

Operation and Maintenance Documentation

After the fiber optic cable plant has been installed, ten (10) complete sets of Operation and Maintenance Documentation shall be provided. The documentation shall, as a minimum, include the following:

- Complete and accurate as-built diagrams showing the entire fiber optic cable plant including locations of all splices.
- Final copies of all approved test procedures
- Complete performance data of the cable plant showing the losses at each splice location and each terminal connector.
- Complete parts list including names of vendors.

Testing Requirements

The Contractor shall submit detailed test procedures for approval by the Engineer. All fibers (terminated and unterminated) shall be tested bi-directionally at both 1310 nm and 1550 nm with both an Optical Time Domain Reflectometer (OTDR) and a power meter with an optical source.

For testing, intermediate breakout fibers may be concatenated and tested end-to-end. Any discrepancies between the measured results and these specifications will be resolved to the satisfaction of the Engineer.

Fibers which are not to be terminated shall be shall be tested with a temporary fusion spliced pigtail fiber. Mechanical splice or bare fiber adapters are not acceptable.

The Contractor shall provide the date, time and location of any tests required by this specification to the Engineer at least 5 days before performing the test. Upon completion of the cable installation, splicing, and termination, the Contractor shall test all fibers for continuity, events above 0.1 dB, and total attenuation of the cable. The test procedure shall be as follows:

A Certified Technician utilizing an Optical Time Domain Reflectometer (OTDR) and Optical Source/Power Meter shall conduct the installation test. The Technician is directed to conduct the test using the standard operating procedures defined by the manufacturer of the test equipment. All fibers installed shall be tested in both directions.

A fiber ring or fiber box shall be used to connect the OTDR to the fiber optic cable under test at both the launch and receive ends. The tests shall be conducted at 1310 and 1550 nm for all fibers.

All testing shall be witnessed by the IDOT Engineer and a copy of the test results (CD ROM or USB Drive) shall be submitted on the same day of the test. Hardcopies shall be submitted as described herein with copies on CD ROM.

At the completion of the test, the Contractor shall provide two copies of documentation of the test results to the Project Engineer. The test documentation shall be submitted as both a bound copy and a CDRom and shall include the following:

Cable & Fiber Identification:

- | | |
|---|---|
| <input type="checkbox"/> Cable ID | <input type="checkbox"/> Operator Name |
| <input type="checkbox"/> Cable Location - beginning and end point | <input type="checkbox"/> Date & Time |
| <input type="checkbox"/> Fiber ID, including tube and fiber color | <input type="checkbox"/> Setup Parameters |
| <input type="checkbox"/> Wavelength | <input type="checkbox"/> Range (OTDR) |
| <input type="checkbox"/> Pulse width (OTDR) | <input type="checkbox"/> Scale (OTDR) |
| <input type="checkbox"/> Refractory index (OTDR) | <input type="checkbox"/> Setup Option chosen to pass OTDR "dead zone" |

Test Results shall include:

- OTDR Test results
- Total Fiber Trace
- Splice Loss/Gain
- Events > 0.10 dB
- Measured Length (Cable Marking)
- Total Length (OTDR)
- Optical Source/Power Meter Total Attenuation (dB/km)

Sample Power Meter Tabulation:

Power Meter Measurements (dB)									
Location		Fiber No.	Cable Length (km)	A to B		B to A		Bidirectional Average	
A	B			1310 nm	1550 nm	1310 nm	1550 nm	1310 nm	1550 nm
		1							
		2							
		Maximum Loss							
		Minimum Loss							

The OTDR test results file format must be Bellcore/Telcordia compliant according to GR-196-CORE Issue 2, OTDR Data Standard, GR 196, Revision 1.0, GR 196, Revision 1.1, GR 196, Revision 2.0 (SR-4731) in a ".SOR" file format. A copy of the test equipment manufacturer's software to read the test files, OTDR and power, shall be provided to the Department. These results shall also be provided in tabular form, see sample below:

Sample OTDR Summary					
Cable Designation:	<i>TCF-IK-03</i>	OTDR Location:	<i>Pump Sta. 67</i>	Date:	<i>1/1/00</i>
Fiber Number	Event Type	Event Location	Event Loss (dB)		
			1310 nm	1550 nm	
<i>1</i>	<i>Splice</i>	<i>23500 Ft.</i>	<i>.082</i>	<i>.078</i>	
<i>1</i>	<i>Splice</i>	<i>29000 Ft.</i>	<i>.075</i>	<i>.063</i>	
<i>2</i>	<i>Splice</i>	<i>29000 Ft.</i>	<i>.091</i>	<i>.082</i>	
<i>3</i>	<i>Splice</i>	<i>26000 Ft.</i>	<i>.072</i>	<i>.061</i>	
<i>3</i>	<i>Bend</i>	<i>27000 Ft.</i>	<i>.010</i>	<i>.009</i>	

The following shall be the criteria for the acceptance of the cable:

The test results shall show that the dB/km loss does not exceed +3% of the factory test or 1% of the cable's published production loss. However, no event shall exceed 0.10 dB. If any event is detected above 0.10 dB, the Contractor shall replace or repair the fiber including that event point.

The total loss of the cable (dB), less events, shall not exceed the manufacturer's production specifications as follows: 0.5 dB/km at both 1310 and 1550 nm.

If the total loss exceeds these specifications, the Contractor shall replace or repair that cable run at the no additional cost to the state, both labor and materials. Elevated attenuation due to exceeding the pulling tension during installation shall require the replacement of the cable run at no additional cost to the State, including labor and materials.

Splicing Requirements

Splices shall be made at locations shown on the Plans. Any other splices shall be permitted only with the approval of the Engineer. Splices will be paid for separately. All splice locations must be identified in the Record Drawings. Cable runs which dead-end at a handhole, communications vault, interconnect cabinet, or any other type of enclosure, shall be dead ended in a splice enclosure.


Slack Storage of Fiber Optic Cables

Included as a part of this item, slack fiber shall be supplied as necessary to allow splicing the fiber optic cables in a controlled environment, such as a splicing van or tent. After splicing has been completed, the slack fiber shall be stored underground in handholes or in the raised base adapters of ground mounted cabinets in accordance with the fiber optic cable manufacturer's guidelines. Fiber optic cable slack shall be 100 feet for each cable at each splice location, above or below ground. Fiber optic cable slack shall be 50 feet for each cable at access points, above or below ground, where splicing is not involved. This slack shall be measured for payment.

A fiber optic cable support assembly shall be recommended and approved by the Engineer at fiber optic cable slack locations as required herein and shown on the plans. Each support assembly shall consist of multiple brackets, racks, and/or rails required to suspend the required surplus cabling and any splice enclosures required. The support assembly shall be made from or coated with weather resistant material such that there is no corrosion of the supports. The support assemblies shall be anchored using stainless steel hardware.

The fiber optic cable support assemblies shall be provided where slack cable is required as stipulated herein and included in the contract unit price for fiber optic cable.

Fiber optic cable shall be tagged inside handholes with yellow tape containing the text: "CAUTION - FIBER OPTIC CABLE." In addition, permanent tags, as approved by the engineer, shall be attached to all cable in a hand hole or other break-out environment. These tags shall be stainless steel, nominally 0.75" by 1.72", and permanently embossed. These tags shall be attached with stainless steel straps, and shall identify the cable number, the number of fibers, and the specific fiber count. Tags and straps shall be Panduit or approved equal. See figure below:

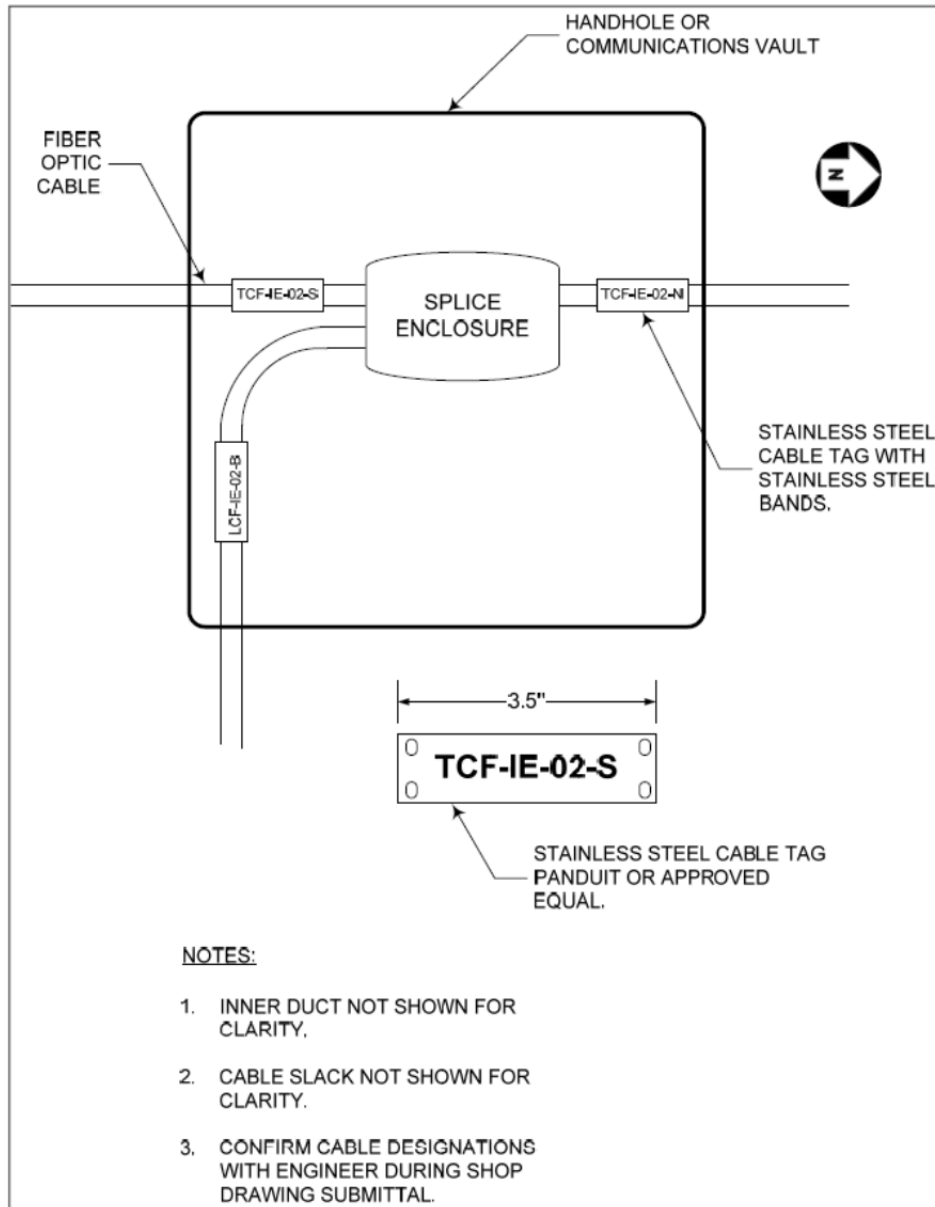

Label the destination of each trunk cable onto the cable in each handhole, vault or cable termination panel.

Method of Measurement. Fiber optic cable will be measured for payment in feet in place installed and tested. Fiber optic cable will be measured horizontally and vertically between the changes in direction, including slack cable. The entire lengths of cables installed in buildings will be measured for payment

Basis of Payment. This work will be paid for at the contract unit price per foot for FIBER OPTIC CABLE, SINGLE MODE of the type and number of fibers specified. Payment shall not be made until the cable is installed, spliced and tested in compliance with these special provisions.

FIBER OPTIC SPLICE

Effective: April 1, 2005

Description. The Contractor will splice optical fibers from different cable sheaths and protect them with a splice closure at the locations shown on the Plans. Fiber splicing consists of in-line fusion splices for all fibers described in the cable plan at the particular location. Two splices are identified. A mainline splice includes all fibers in the cable sheath. In a lateral splice, the buffer tubes in the mainline cable are dressed out and those fibers identified on the plans are accessed in and spliced to lateral cables.

Materials.

Splice Closures. Splice Closures shall be designed for use under the most severe conditions such as moisture, vibration, impact, cable stress and flex temperature extremes as demonstrated by successfully passing the factory test procedures and minimum specifications listed below:

Physical Requirements. The closures shall provide ingress for up to four cables in a butt configuration. The closure shall prevent the intrusion of water without the use of encapsulates. The closure shall be capable of accommodating splice organizer trays that accept mechanical, or fusion splices. The splice closure shall have provisions for storing fiber splices in an orderly manner, mountings for splice organizer assemblies, and space for excess or un-spliced fiber.

Splice organizers shall be re-enterable. The splice case shall be UL rated.

Closure re-entry and subsequent reassembly shall not require specialized tools or equipment.

Further, these operations shall not require the use of additional parts.

The splice closure shall have provisions for controlling the bend radius of individual fibers to a minimum of 38 mm (1.5 in.).

Factory Testing

Compression Test. The closure shall not deform more than 10% in its largest cross-sectional dimension when subjected to a uniformly distributed load of 1335 N at temperatures of -18 and 38 degrees Celsius (0 and 100 degrees Fahrenheit). The test shall be performed after stabilizing at the required temperature for a minimum of two hours. It shall consist of placing an assembled closure between two flat parallel surfaces, with the longest closure dimension parallel to the surfaces. The weight shall be placed on the upper surface for a minimum of 15 minutes. The measurement shall then be taken with weight in place.

Impact Test. The assembled closure shall be capable of withstanding an impact of 28 N-M at temperatures of -18 and 38 degrees Celsius (0 and 100 degrees Fahrenheit). The test shall be performed after stabilizing the closure at the required temperature for a minimum of 2 hours.

The test fixture shall consist of 9 kg (20 lb) cylindrical steel impacting head with a 50 mm (2 in.) spherical radius at the point where it contacts the closure. It shall be dropped from a height of 305 mm (12 in.). The closure shall not exhibit any cracks or fractures to the housing that would preclude it from passing the water immersion test. There shall be no permanent deformation to the original diameter or characteristic vertical dimension by more than 5%.

Cable Gripping and Sealing Testing. The cable gripping and sealing hardware shall not cause an increase in fiber attenuation in excess of 0.05 dB/fiber @ 1550 nm when attached to the cables and the closure assembly. The test shall consist of measurements from six fibers, one from each buffer tube or channel, or randomly selected in the case of a single fiber bundle. The measurements shall be taken from the test fibers before and after assembly to determine the effects of the cable gripping and sealing hardware on the optical transmission of the fibers.

Vibration Test. The splice organizers shall securely hold the fiber splices and store the excess fiber. The fiber splice organizers and splice retaining hardware shall be tested per EIA Standard FOTP-II, Test Condition 1. The individual fibers shall not show an increase in attenuation in excess of 0.1 dB/fiber.

Water Immersion Test. The closure shall be capable of preventing a 3 m (10 ft) water head from intruding into the splice compartment for a period of 7 days. Testing of the splice closure is to be accomplished by the placing of the closure into a pressure vessel and filling the vessel with tap water to cover the closure. Apply continuous pressure to the vessel to maintain a hydrostatic head equivalent 3 m (10 ft) on the closure and cable. This process shall be continued for 30 days. Remove the closure and open to check for the presence of water. Any intrusion of water in the compartment containing the splices constitutes a failure.

Certification. It is the responsibility of the Contractor to insure that either the manufacturer, or an independent testing laboratory has performed all of the above tests, and the appropriate documentation has been submitted to the Department. Manufacturer certification is required for the model(s) of closure supplied. It is not necessary to subject each supplied closure to the actual tests described herein.

Construction Requirements. The closure shall be installed according to the manufacturer's recommended guidelines. For mainline splices, the cables shall be fusion spliced. 45 days prior to start of the fiber optic cabling installation, the Contractor shall submit the proposed locations of the mainline splice points for review by the Department.

The Contractor shall prepare the cables and fibers in accordance with the closure and cable manufacturers' installation practices. A copy of these practices shall be provided to the Engineer 21 days prior to splicing operations.

Using a fusion splicer, the Contractor shall optimize the alignment of the fibers and fuse them together. The Contractor shall recoat the fused fibers and install mechanical protection over them.

Upon completing all splicing operations for a cable span, the Contractor shall measure the mean bi-directional loss at each splice using an Optical Time Domain Reflectometer. This loss shall not exceed 0.1 dB.

The Contractor shall measure the end-to-end attenuation of each fiber, from connector to connector, using an optical power meter and source. This loss shall be measured at from both directions and shall not exceed 0.5 dB per installed kilometer of single mode cable. Measurements shall be made at both 1300 and 1550 nm for single mode cable. For multimode cable, power meter measurements shall be made at 850 and 1300 nm. The end-to-end attenuation shall not exceed 3.8 dB/installed kilometers at 850nm or 1.8 dB per installed kilometer at 1300nm for multimode fibers.

As directed by the Engineer, the Contractor at no additional cost to the Department shall replace any cable splice not satisfying the required objectives.

The Contractor shall secure the Splice Closure to the side of the splice facility using cable support brackets. All cables shall be properly dressed and secured to rails or racks within the manhole. No cables or enclosures will be permitted to lie on the floor of the splice facility.

Cables that are spliced inside a building will be secured to the equipment racks or walls as appropriate and indicated on the Plans.

Method of Measurement. Fiber optic splice of the type specified will be measured as each, completely installed and tested with all necessary splices completed within the enclosure, and the enclosure secured to the wall of the splice facility.

Basis of Payment. This item shall be paid at the contract unit price each for FIBER OPTIC SPLICE-LATERAL or FIBER OPTIC SPLICE-MAINLINE of the type specified, which shall be payment in full for the work, complete, as specified herein.

MAINTAINING ITS DURING CONSTRUCTION

Description. Intelligent Transportation Systems (ITS) references IDOT traffic surveillance infrastructure. These elements include, but are not limited to, the following: induction loops, ramp meters, closed circuit television cameras, dynamic message signs, highway advisory radios, Radar Vehicle Sensing Devices (RVSDs), copper and fiber optic communication cables, power cables, cabinets, and communication equipment.

General Requirements. Effective the date the Contractor's activities (ITS or otherwise) begin at the job site, the Contractor shall be responsible for the proper operation and maintenance of ITS elements that are part of, or that may be affected by, the work until final acceptance by the Engineer or as otherwise determined by the Engineer.

Before performing any excavation, removal, or installation work (ITS or otherwise) at the site, the Contractor shall initiate a request for a maintenance transfer and preconstruction inspection to be held in the presence of the Engineer and a representative of the party or parties responsible for maintenance of any ITS systems that may be affected by the work. This includes co-ordination with adjacent projects that may have an effect on the ITS infrastructure. The request for the maintenance preconstruction inspection shall be made no less than seven (7) calendar days prior to the desired inspection date.

Existing ITS elements, when depicted on the plans, are intended only to indicate the general equipment installation of the systems involved and shall not be construed as an exact representation of the field conditions. It remains the Contractor's responsibility to visit the site to confirm and ascertain the exact condition and location of the ITS components and systems to be maintained and installed.

Existing ITS components shall be defined as any ITS component or device in service at the time of the commencement of construction activities. The contract drawings indicate the general extent of any existing ITS elements, but whether indicated or not, it remains the Contractor's responsibility to ascertain the extent of effort required for compliance with these specifications, and failure to do so will not be justification for extra payment or reduced responsibilities.

Maintaining ITS During Construction - It is the Contractor's responsibility to maintain vehicle detection, which includes speed and volume data, in all lanes within the construction limits for this project, on all roadway segments and ramps that will be open to traffic. Where the existing detection cannot be maintained, the Contractor shall provide a temporary detection system, approved by IDOT, at no additional cost to the contract. The Contractor's responsibility shall include protection or removal and storage of any ITS/Communication cabinets and protecting in place any cables, conduits and ITS devices in or adjacent to the work zone. This work may also include the abandonment of the existing device and communication pathway and the installation of a temporary device such as a RVSD with a wireless communication.

The Contractor is responsible for the disconnection, rerouting, and reconnection of all fiber and copper communication cables currently located in existing conduits as indicated in the plans. The disconnection and reconnection must be made at an existing splice point or communication cabinet where a connection is made, or as otherwise indicated in the plans. The existing communication and infrastructure must be properly maintained for the duration of construction activities and the Contractor must coordinate the disconnection and reconnection activities with the Engineer.

All work required to maintain, relocate or provide temporary ITS infrastructure as depicted in the plans or otherwise necessary and as provided for in this special provision shall be paid for under the Maintaining ITS During Construction pay item. No component items germane to this work shall be paid for separately.

Once construction activities are complete, all temporary equipment installed will become the property of the Department and shall remain in place, except where a proposed location has been identified in the plans. All final locations and installations of ITS devices, communication cabinets, junction boxes, conduit, fiber optic, copper cable, wireless equipment and associated infrastructure shall be protected, secured and have the Engineer's approval. Proper documentation, to include latitude and longitude for all equipment locations and communication pathway must be turned over to the Department. The proposed plan for this work must be presented to the Engineer for approval prior to the commencement of the work.

Method of Measurement. The contractor shall demonstrate to the satisfaction of the Engineer that the ITS components, devices and infrastructure have been properly installed, protected and maintained and that the appropriate data is being transmitted to the Traffic Management Center prior to submitting a pay request. In order for final payment to be released the contractor must demonstrate that the equipment is working as intended following inspection by the Engineer. Failure to do so will be grounds for denying the pay request.

Basis of Payment. Maintaining ITS During Construction and Rerouting ITS Communication shall be paid for at the contract unit price per calendar month (Cal Mo) for MAINTAINING ITS DURING CONSTRUCTION, which shall include all work as described herein.

REMOVE EXISTING TRAFFIC SURVEILLANCE EQUIPMENT

Description This work shall consist of the removal and disposal of existing traffic surveillance equipment and their foundations.

General Requirements No removal work will be permitted without approval from the Engineer. Removal shall start as soon as the temporary ITS or permanent ITS, as applicable, is placed in approved operation. An inspection and approval by the Engineer will take place before any associate proposed permanent or temporary ITS is approved for operation.

Removal of Traffic Surveillance Equipment: Any damage resulting from the removal and/or transportation of the Traffic Surveillance Equipment and associated hardware, shall be repaired or replaced in kind. The Engineer will be the sole judge to determine the extent of damage and the suitability of repair and/or replacement.

Abandoned underground Traffic Surveillance cables shall be removed with conduit to a depth of 1 ft (300 mm) below ground level and the hole shall be backfilled.

Conduit hangers, straps, and supports shall be removed from bridge steel as directed by the Engineer. Where the conduit system is removed from parapet walls and other concrete surfaces, the Contractor shall cut off the anchor device 1 in. (25 mm) below the surface of the concrete, and fill all voids with portland cement concrete mortar, making a smooth finish to the concrete surface.

Unprotected bridge steel which is exposed by the removal of the conduit system shall be touched up using a paint and procedure approved by the Engineer.

(a) Removal of Traffic Surveillance Equipment, No Salvage. When indicated, Traffic Surveillance Equipment and all associated hardware and appurtenances shall become the property of the Contractor and shall be disposed of according to Article 202.03.

(b) Removal of Traffic Surveillance Equipment, Salvage. When indicated, Traffic Surveillance Equipment, and all associated hardware and appurtenances shall remain the property of the Department and shall be delivered to a Department facility within the District and unloaded and stacked there, as directed by the Engineer. Wood blocking, banding, or other appurtenant items required for proper stacking and protection shall be included.

Traffic Surveillance Equipment shall be removed, boxed in new containers, approved by the Engineer, and delivered to a Department facility, as designated by the Engineer. The contractor is responsible for paying for the shipping of Traffic Surveillance Equipment included in this special provision and will not be paid separately for shipping costs.

Removal of Traffic Surveillance Equipment Foundation: Concrete foundations shall be removed to at least 2 ft (600 mm) below grade, with removed material disposed of according to Article 202.03. The removal shall extend deeper where required to facilitate roadway construction at no additional cost to the Department. Underground conduits and cables shall be separated from the foundation at 2.5 ft (750 mm) below grade and shall be abandoned or re-used as indicated.

The void caused by the removal of the foundations shall be backfilled according to Article 841.02.

Basis of Payment. Removal of existing Traffic Surveillance Equipment shall be paid for at the contract lump sum (L SUM) price for REMOVE EXISTING TRAFFIC SURVEILLANCE EQUIPMENT.

REMOVE AND REINSTALL FIBER OPTIC CABLE IN CONDUIT

Description This work shall consist of removing an existing fiber optic cable from a conduit then reinstalling it in a new conduit. The conduit shall be cleaned and swabbed prior to the reinstalling of the cable.

Method of Measurement Removal and removal and installation of existing fiber optic cable will be measured for payment in place in feet. If two or more cables in a conduit are to be removed, or removed and installed, each cable will be measured for payment separately.

Basis of Payment This work will be paid for at the contract unit price per foot for REMOVE AND REINSTALL FIBER OPTIC CABLE IN CONDUIT as shown on the plans. Payment shall not be made until the cable is installed, spliced and tested in compliance with the FIBER OPTIC CABLE special provisions.

DRILL EXISTING HANDHOLE, HEAVY DUTY HANDHOLE OR MEDIAN WALL JUNCTION BOX

Description This work will consist of drilling a hole in an existing handhole heavy duty handhole or median wall junction box for the installation of a new conduit for the temporary connection of communication and/or electrical service. The conduit required to make the connection from the existing handhole, heavy duty handhole or median wall junction box to the conduit riser attached to the temporary wood pole shall be considered incidental to this pay item. This item must meet the requirements of Article 879 of the Standard Specifications. This work also includes the removal of this conduit and the proper sealing of this hole as to not allow the entry of water.

Construction The size of the hole must be as close as possible to the size of the conduit to be installed. The conduit must be installed in the drilled hole with a bushing before the hole is grouted. The space between the conduit and the existing handhole, heavy duty handhole or median wall junction box wall must be caulked with a waterproof grout.

Method of Measurement This work will be measured per each hole drilled.

Basis of Payment This work will be paid for at the contract unit price each for DRILL EXISTING HANDHOLE, HEAVY DUTY HANDHOLE OR MEDIAN WALL JUNCTION BOX, which price will be payment in full for drilling the hole, conduit, grouting, and any additional work required to accomplish this task.

TEMPORARY WOOD POLE, 40 FT., CLASS 4

Description This item shall consist of furnishing, installing and removing a temporary wood pole, as specified herein and all hardware and accessories required for the intended temporary use of the pole.

Materials Materials shall be according to the following Articles of Section 1000 - Materials

Item	Article/Section
(a) Light Pole Identification.....	1069.06
(b) Wood Pole.....	1069.04

CONSTRUCTION REQUIREMENTS

Installation Installation shall be as described in Article 830.03(c).

Wood poles may be used poles as approved by the Engineer as described in Article 830.04. The wood pole shall remain the property of the Contractor and shall be removed when directed by the Engineer.

The void caused by the removal of the wood pole shall be backfilled according to Article 819.04.

Method of Measurement Wood poles shall be counted as, each installed.

Basis of Payment This item shall be paid at the contract unit price each for TEMPORARY WOOD POLE, of the class and length indicated.

REMOVAL OF AERIAL CABLE

Description This work shall consist of removing temporary installed aerial Fiber Optic Cable, Communication Cable, Electrical Cable and Span Wire, from temporary installed Wood poles. This work includes cable installed in conduit risers.

Method of Measurement Removal of temporary Fiber Optic cable, Communication cable, Electrical cable and Span Wire will be measured for payment in feet removed. If two or more cables in a span are to be removed, each cable will be measured for payment separately.

Basis of Payment This work will be paid for at the contract unit price per foot for REMOVAL OF AERIAL CABLE as shown on the plans.

REMOVAL OF CABLE IN CONDUIT

Description This work shall consist of removal of existing Fiber Optic Cable, Communication Cable, Electrical Cable installed in conduit, underground or attached to structure.

Method of Measurement Removal of Fiber Optic cable, Communication cable, Electrical cable will be measured for payment in feet removed. If two or more cables are to be removed in a single conduit, each cable will be measured for payment separately.

Basis of Payment This work will be paid for at the contract unit price per foot for REMOVAL OF CABLE IN CONDUIT as shown on the plans.

ELECTRIC CABLE, AERIAL INSTALLATION, NO. 19, 25-PAIR AND NO. 19, 6/C

Description This work shall consist of installing aerial Electric Cable NO. 19, 25-PAIR AND NO. 19, 6/C, on temporary installed Wood poles. This work includes cable installed aerially attached to the temporary wood poles, in conduit risers and underground to the device cabinet. These cable runs shall be continuous.

Extra cable or slack cable at a length of 20 feet shall be coiled and attached to each wood pole at a sufficient height utilizing the manufactures recommended minimum bending radius, so that it cannot be accessed by the general public.

Method of Measurement Installation of Electric Cable NO. 19, 25-PAIR AND NO. 19, 6/C, will be measured for payment in place in feet. If two or more cables in are installed, each cable will be measured for payment separately.

Basis of Payment This work will be paid for at the contract unit price per foot for ELECTRIC CABLE, AERIAL INSTALLATION, NO.19, 25-PAIR AND NO. 19, 6/C as shown on the plans

BUDGETARY ALLOWANCE FOR TIME-LAPSE CAMERA

October 1, 2014

Description . This item is to establish a budget account to allocate funds for the payment of providing continuous operation of an existing Time-Lapse Camera System for the documentation of the Circle Interchange Construction Project. A budgetary allowance has been established since the final cost of this work is unknown at the time of Letting.

The work under this Special Provision includes the coordination with camera equipment provided under a previous contract (60W49), recurring charges to provide the same level of current service, adjacent contract(s), and coordination with existing CCTV equipment as describe herein, including adjustments of or supplements to the equipment as may be required.

The existing camera system consists of a 12 megapixel camera furnished, installed and hosted by EARTHCAM. The contractor shall coordinate the continuation of payments for the camera system with the existing contractor for contract 60W49.

The contractor shall be responsible for making payments to EARTHCAM beginning with the October 2015 payment.

This item shall be bid at a price of \$17,000.00

Basis of Payment This item shall be paid for at the contract lump sum price or fraction thereof for BUDGETARY ALLOWANCE FOR TIME-LAPSE CAMERA, which shall include all work as described herein.

FIBER OPTIC INNERDUCT 1 1/4" DIA.

Description This work shall consist of furnishing, installing, innerduct in accordance with this Special Provision and as shown on the Plans. It includes all materials associated with the installation of innerduct conduit, bends, and terminations.

Materials Innerduct shall be fabricated using either High Density Polyethylene (HDPE) or PVC for straight sections, and either HDPE or nylon for bends. Innerducts shall contain, or be factory treated with a friction reducing material that is dry-to-the-touch. Innerducts shall meet the requirements of Bellcore GR-356-CORE.

Innerducts shall have a nominal inside diameter of 1.38 inch, minimum and a nominal outside diameter of 1.65 inches. Each length of innerduct shall be colored innerduct, unless otherwise approved. Innerduct colors shall be consistent throughout the Project.

Installation If multiple Innerducts are required they shall be held together in a square configuration by a system of spacers that shall provide a rigid internal system to hold the innerducts in formation, without twists and sags.

Coupling bodies shall be incorporated in all lengths of multiduct, bends, and fittings to seal between the outerduct and innerducts. Coupling bodies shall facilitate field assembly of the multiduct sections without the use of lubricants. Sealing components within the coupling bodies shall be of an anti-reversing design to keep the multiduct conduits together without the use of cement. Coupling bodies shall allow for innerduct movement due to expansion/contraction without affecting the innerduct sealing.

Multiduct terminations used at end of multiduct runs at junction boxes, cabinets, etc. to seal the innerduct to the outerduct shall be durable and fabricated from no metallic parts except nuts, bolts, washers and fasteners which shall be stainless steel. Terminations shall provide a watertight and airtight seal of at least 20 psi.

Conduit plugs, caps, or sealing fittings for sealing empty conduit and occupied conduit shall be durable and easily removable and reusable and produce a watertight seal. Plugs, caps, and sealing fittings shall be designed for the diameter of the conduit and cable, shall cause no damage to the cable when installed, and shall have a rope tie on the inside end for connection of a pull rope. Plugs, caps, or sealing fittings used for fiber optic conduit or conductor conduit shall provide a watertight and airtight seal of at least 20 psi. Plugs that seal conduits containing fiber optic cable or conductor cable shall be of the split design to allow installation and removal around in-place cables. Plugs, caps, and sealing fittings shall be approved by the ENGINEER.

If the CONTRACTOR encounters conditions where the innerduct must be installed with existing cable, the CONTRACTOR must use caution to avoid damaging the existing cables. Any damage to these cables will be replaced immediately at the CONTRACTOR's expense.

Method of Measurement The conduit will be measured by the amount of conduit in feet furnished and installed. Measured from center-to center of pull boxes, foundation, etc., and will include all fitting and appurtenances, joints, bends, grounds, and concrete encasement where specified.

Basis of Payment This work will be paid for at the contract unit price accepted per linear foot for FIBER OPTIC INNERDUCT 1 1/4" DIA.

CDOT TRAFFIC SIGNAL SPECIFICATIONS

The specifications included in this section are for Chicago Department of Transportation (CDOT) traffic signal items of work. These will include all pay items used for work on plan sheets for CDOT Traffic Signals. The Material Specifications referred to within these specifications refer to CDOT Material Specifications which can be found in the CDOT Material Specifications section of the Contract Specifications. The Standard Drawings referred to within these specifications refer to the CDOT Standard Specification Drawings which can be found in the Contract Plans.

TEMPORARY TRAFFIC SIGNAL INSTALLATION

Revise Section 890 of the Standard Specifications to read:

Description This work shall consist of furnishing, installing, maintaining, and removing a temporary traffic signal installation as shown on the plans, including but not limited to temporary signal heads, emergency vehicle priority systems, interconnect, vehicle detectors, uninterruptible power supply, and signing. Temporary traffic signal controllers and cabinets interconnected to railroad traffic control devices shall be new. When temporary traffic signals will be operating within a county or local agency Traffic Management System, the equipment must be NTCIP compliant and compatible with the current operating requirements of the Traffic Management System.

General.

Only an approved equipment vendor will be allowed to assemble the temporary traffic signal cabinet. Also, an approved equipment vendor shall assemble and test a temporary railroad traffic signal cabinet. (Refer to the "Inspection of Controller and Cabinet" specification). A representative of the approved control equipment vendor shall be present at the temporary traffic signal turn-on inspection.

Construction Requirements.

(a) Controllers.

1. Only controllers supplied by one of the District approved closed loop equipment manufacturers will be approved for use at temporary signal locations. All controllers used for temporary traffic signals shall be fully actuated NEMA microprocessor based with RS232 data entry ports compatible with existing monitoring software approved by IDOT District 1, installed in NEMA TS2 cabinets with 8 phase back panels, capable of supplying 255 seconds of cycle length and individual phase length settings up to 99 seconds. On projects with one lane open and two way traffic flow, such as bridge deck repairs, the temporary signal controller shall be capable of providing an adjustable all red clearance setting of up to 30 seconds in length. All controllers used for temporary traffic signals shall meet or exceed the requirements of Section 857 of the Standard Specifications with regards to internal time base coordination and preemption. All railroad interconnected temporary controllers and cabinets shall be new and shall satisfy the requirements of Article 857.02 of the Standard Specifications as modified herein.
2. Only control equipment, including controller cabinet and peripheral equipment, supplied by one of the District approved closed loop equipment manufacturers will be approved for use at temporary traffic signal locations. All control equipment for the temporary traffic signal(s) shall be furnished by the Contractor unless otherwise stated in the plans. On projects with multiple temporary traffic signal installations, all controllers shall be the same manufacturer brand and model number with current software installed.

(b) Cabinets. All temporary traffic signal cabinets shall have a closed bottom made of aluminum alloy. The bottom shall be sealed along the entire perimeter of the cabinet base to ensure a water, dust and insect-proof seal. The bottom shall provide a minimum of two (2) 4 inch (100 mm) diameter holes to run the electric cables through. The 4 inch (100 mm) diameter holes shall have a bushing installed to protect the electric cables and shall be sealed after the electric cables are installed.

(c) Grounding. Grounding shall be provided for the temporary traffic signal cabinet meeting or exceeding the applicable portions of the National Electrical Code, Section 806 of the Standard Specifications and shall meet the requirements of the District 1 Traffic Signal Specifications for "Grounding of Traffic Signal Systems."

(d) Traffic Signal Heads. All traffic signal sections and pedestrian signal sections shall be 12 inches (300 mm). Traffic signal sections shall be LED with expandable view, unless otherwise approved by the Engineer. Pedestrian signal heads shall be Light Emitting Diode (LED) Pedestrian Countdown Signal Heads except when a temporary traffic signal is installed at an intersection interconnected with a railroad grade crossing. When a temporary traffic signal is installed at an intersection interconnected with a railroad grade crossing, Light Emitting Diode (LED) Pedestrian Signal Heads shall be furnished. The temporary traffic signal heads shall be placed as indicated on the temporary traffic signal plan or as directed by the Engineer. The Contractor shall furnish enough extra cable length to relocate heads to any position on the span wire or at locations illustrated on the plans for construction staging. The temporary traffic signal shall remain in operation during all signal head relocations. Each temporary traffic signal head shall have its own cable from the controller cabinet to the signal head.

(e) Interconnect.

1. Temporary traffic signal interconnect shall be provided using fiber optic cable or wireless interconnect technology as specified in the plans. The Contractor may request, in writing, to substitute the fiber optic temporary interconnect indicated in the contract documents with a wireless interconnect. The Contractor must provide assurances that the radio device will operate properly at all times and during all construction staging. If approved for use by the Engineer, the Contractor shall submit marked-up traffic signal plans indicating locations of radios and antennas and installation details. If wireless interconnect is used, and in the opinion of the engineer, it is not viable, or if it fails during testing or operations, the Contractor shall be responsible for installing all necessary poles, fiber optic cable, and other infrastructure for providing temporary fiber optic interconnect at no cost to the contract.
2. The existing system interconnect and phone lines are to be maintained as part of the Temporary Traffic Signal Installation specified for on the plan. The interconnect shall be installed into the temporary controller cabinet as per the notes or details on the plans. All labor and equipment required to install and maintain the existing interconnect as part of the Temporary Traffic Signal Installation shall be included in the item Temporary Traffic Signal Installation. When shown in the plans, temporary traffic signal interconnect equipment shall be furnished and installed. The temporary traffic signal interconnect shall maintain interconnect communications throughout the entire signal system for the duration of the project.

3. Temporary wireless interconnect, complete. The radio interconnect system shall be compatible with Eagle or Econolite controller closed loop systems. This item shall include all temporary wireless interconnect components, complete, at the adjacent existing traffic signal(s) to provide a completely operational closed loop system. This item shall include all materials, labor and testing to provide the completely operational closed loop system as shown on the plans. The radio interconnect system shall include the following components:
 - a. Rack or Shelf Mounted RS-232 Frequency Hopping Spread Spectrum (FHSS) Radio
 - b. Software for Radio Configuration (Configure Frequency and Hopping Patterns)
 - c. Antennas (Omni Directional or Yagi Directional)
 - d. Antenna Cables, LMR400, Low Loss. Max. 100-ft from controller cabinet to antenna
 - e. Brackets, Mounting Hardware, and Accessories Required for Installation
 - f. RS232 Data Cable for Connection from the radio to the local or master controller
 - g. All other components required for a fully functional radio interconnect system

All controller cabinet modifications and other modifications to existing equipment that are required for the installation of the radio interconnect system components shall be included in this item.

The radio interconnect system may operate at 900Mhz (902-928) or 2.4 Ghz depending on the results of a site survey. The telemetry shall have an acceptable rate of transmission errors, time outs, etc. comparable to that of a hardwire system.

The proposed master controller and telemetry module shall be configured for use with the radio interconnect at a minimum rate of 9600 baud.

The radio interconnect system shall include all other components required for a complete and fully functional telemetry system and shall be installed in accordance to the manufacturers recommendations.

The following radio equipment is currently approved for use in Region One/District One: Encom Model 5100 and Intuicom Communicator II.

- (f) Emergency Vehicle Pre-Emption. All emergency vehicle preemption equipment (light detectors, light detector amplifiers, confirmation beacons, etc.) as shown on the temporary traffic signal plans shall be provided by the Contractor. It shall be the Contractor's responsibility to contact the municipality or fire district to verify the brand of emergency vehicle preemption equipment to be installed prior to the contract bidding. The equipment must be completely compatible with all components of the equipment currently in use by the Agency. All light operated systems shall operate at a uniform rate of 14.035 hz \pm 0.002, or as otherwise required by the Engineer, and provide compatible operation with other light systems currently being operated in the District. All labor and material required to install and maintain the Emergency Vehicle Preemption installation shall be included in the item Temporary Traffic Signal Installation.
- (g) Vehicle Detection. All temporary traffic signal installations shall have vehicular detection installed as shown on the plans or as directed by the Engineer. Pedestrian push buttons shall be provided for all pedestrian signal heads/phases as shown on the plans or as directed by the Engineer. All approaches shall have vehicular detection provided by vehicle detection system as shown on the plans or as directed by the Engineer. Microwave vehicle sensors or video vehicle detection system shall be approved by IDOT prior to Contractor furnishing and installing. The Contractor shall install, wire, and adjust the alignment of the microwave vehicle sensor or video vehicle detection system in accordance to the manufacturer's recommendations and requirements. The Contractor shall be responsible for adjusting the alignment of the microwave vehicle sensor or video vehicle detection system for all construction staging changes and for maintaining proper alignment throughout the project. A representative of the approved control equipment vendor shall be present and assist the contractor in setting up and maintaining the microwave vehicle sensor or video vehicle detection system. An in-cabinet video monitor shall be provided with all video vehicle detection systems and shall be included in the item Temporary Traffic Signal Installation.
- (h) Uninterruptible Power Supply. All temporary traffic signal installations shall have Uninterruptible Power Supply (UPS). The UPS cabinet shall be mounted to the temporary traffic signal cabinet and meet the requirements of Uninterruptible Power Supply in Divisions 800 and 1000 of these specifications.
- (i) Signs. All existing street name and intersection regulatory signs shall be removed from existing poles and relocated to the temporary signal span wire. If new mast arm assembly and pole(s) and posts are specified for the permanent signals, the signs shall be relocated to the new equipment at no extra cost. Any intersection regulatory signs that are required for the temporary traffic signal shall be provided as shown on the plans or as directed by the Engineer. Relocation, removing, bagging and installing the regulatory signs for the various construction stages shall be provided as shown on the plans or as directed by the Engineer.

- (j) Energy Charges. The electrical utility energy charges for the operation of the temporary traffic signal installation shall be paid for by others if the installation replaces an existing signal. Otherwise charges shall be paid for under 109.05 of the Standard Specifications.
- (k) Maintenance. Maintenance shall meet the requirements of the Standard Specifications and MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION in Division 800 of these specifications. Maintenance of temporary signals and of the existing signals shall be included in the cost of the TEMPORARY TRAFFIC SIGNAL INSTALLATION pay item. When temporary traffic signals are to be installed at locations where existing signals are presently operating, the Contractor shall be fully responsible for the maintenance of the existing signal installation as soon as he begins any physical work on the Contract or any portion thereof. In addition, a minimum of seven (7) days prior to assuming maintenance of the existing traffic signal installation(s) under this Contract, the Contractor shall request that the Resident Engineer contact the Bureau of Traffic Operations (847) 705-4424 for an inspection of the installation(s).
- (l) Temporary Traffic Signals for Bridge Projects. Temporary Traffic Signals for bridge projects shall follow the State Standards, Standard Specifications, District One Traffic Signal Specifications and any plans for Bridge Temporary Traffic Signals included in the plans. The installation shall meet the Standard Specifications and all other requirements in this TEMPORARY TRAFFIC SIGNAL INSTALLATION specification. In addition all electric cable shall be aurally suspended, at a minimum height of 18 feet (5.5m) on temporary wood poles (Class 5 or better) of 45 feet (13.7 m) minimum height. The signal heads shall be span wire mounted or bracket mounted to the wood pole or as directed by the Engineer. The Controller cabinet shall be mounted to the wood pole as shown in the plans, or as directed by the Engineer. Microwave vehicle sensors or video vehicle detection system may be used in place of detector loops as approved by the Engineer.

(m) Temporary Portable Traffic Signal for Bridge Projects.

1. Unless otherwise directed by the Engineer, temporary portable traffic signals shall be restricted to use on roadways of less than 8000 ADT that have limited access to electric utility service, shall not be installed on projects where the estimated need exceeds ten (10) weeks, and shall not be in operation during the period of November through March. The Contractor shall replace the temporary portable traffic signals with temporary span wire traffic signals noted herein at no cost to the contract if the bridge project or Engineer requires temporary traffic signals to remain in operation into any part of period of November through March. If, in the opinion of the engineer, the reliability and safety of the temporary portable traffic signal is not similar to that of a temporary span wire traffic signal installation, the Contractor shall replace the temporary portable traffic signals with temporary span wire traffic signals noted herein at no cost to the contract.
2. The controller and LED signal displays shall meet the Standard Specifications and all other requirements in this TEMPORARY TRAFFIC SIGNAL INSTALLATION specification.
3. Work shall be according to Article 701.18(b) of the Standard Specifications except as noted herein.
4. General.
 - a. The temporary portable bridge traffic signals shall be trailer-mounted units. The trailer-mounted units shall be set up securely and level. Each unit shall be self-contained and consist of two signal heads. The left signal head shall be mounted on a mast arm capable of extending over the travel lane. Each unit shall contain a solar cell system to facilitate battery charging. There shall be a minimum of 12 days backup reserve battery supply and the units shall be capable of operating with a 120 V power supply from a generator or electrical service.
 - b. All signal heads located over the travel lane shall be mounted at a minimum height of 17 feet (5m) from the bottom of the signal back plate to the top of the road surface. All far right signal heads located outside the travel lane shall be mounted at a minimum height of 8 feet (2.5m) from the bottom of the signal back plate to the top of the adjacent travel lane surface.
 - c. The long all red intervals for the traffic signal controller shall be adjustable up to 250 seconds in one-second increments.

- d. As an alternative to detector loops, temporary portable bridge traffic signals may be equipped with microwave sensors or other approved methods of vehicle detection and traffic actuation.
- e. All portable traffic signal units shall be interconnected using hardwire communication cable. Radio communication equipment may be used only with the approval of the Engineer. If radio communication is used, a site analysis shall be completed to ensure that there is no interference present that would affect the traffic signal operation. The radio equipment shall meet all applicable FCC requirements.
- f. The temporary portable bridge traffic signal system shall meet the physical display and operational requirements of conventional traffic signals as specified in Part IV and other applicable portions of the currently adopted version of the Manual on Uniform Traffic Control Devices (MUTCD) and the Illinois MUTCD. The signal system shall be designed to continuously operate over an ambient temperature range between -30 °F (-34 °C) and 120 °F (48 °C). When not being utilized to inform and direct traffic, portable signals shall be treated as nonoperating equipment according to Article 701.11.
- g. Basis of Payment. This work will be paid for according to Article 701.20(c).

Basis of Payment. This work shall be paid for at the contract unit price each for TEMPORARY TRAFFIC SIGNAL INSTALLATION, TEMPORARY BRIDGE TRAFFIC SIGNAL INSTALLATION, or TEMPORARY PORTABLE BRIDGE TRAFFIC SIGNAL INSTALLATION, the price of which shall include all costs for the modifications required for traffic staging, changes in signal phasing as required in the Contract plans, microwave vehicle sensors, video vehicle detection system, any maintenance or adjustment to the microwave vehicle sensors/video vehicle detection system, the temporary wireless interconnect system complete, temporary fiber optic interconnect system complete, all material required, the installation and complete removal of the temporary traffic signal. Each intersection will be paid for separately.

TEMPORARY TRAFFIC SIGNAL INSTALLATION (SPECIAL)

Description This work shall consist of furnishing, installing, maintaining, and removing a temporary traffic signal installation to modify and enhance an existing traffic signal installation on an intersection affected due to a detour route under this Contract. The location and specific scope of work shall be performed as required by the Engineer and in coordination with the Chicago Department of Transportation (CDOT), though the work is anticipated to include improvements to the eastbound approach on Roosevelt Road at Jefferson Street. The work shall include, but is not limited to removal and storage of existing signal heads, supplying and installing temporary signal heads, emergency vehicle priority systems, signing, modifications to existing traffic signal controllers and cabinets and any other tasks to ensure traffic signals are fully operational. After the completion of the need for the temporary traffic signal installation improvements, the temporary signal heads shall be removed, the existing stored signal heads shall be reinstalled and all timing modifications shall be made to restore the intersection to the pre-construction condition.

It is anticipated that two existing 3-section signal heads will need to be removed and stored and two temporary 5-section signal heads will need to be installed. Video vehicle detection for at least one approach to the intersection may be required by the Engineer and CDOT.

General.

Only an approved equipment vendor will be allowed to make modifications to IDOT or CDOT owned and managed equipment, including all controller cabinets, signal heads, mast arms, signal poles and other traffic signal infrastructure.

Construction Requirements.

All traffic signal sections and pedestrian signal sections shall be 12 inches (300 mm). Traffic signal sections shall be LED with expandable view, unless otherwise approved by the Engineer. Pedestrian signal heads shall be Light Emitting Diode (LED) Pedestrian Countdown Signal Heads. The temporary traffic signal heads shall be placed as directed by the Engineer. The Contractor shall furnish enough extra cable length to relocate heads to any position on the existing mast arm or at locations required for the installation of all equipment. The temporary traffic signal shall remain in operation during all signal head relocations. Each temporary traffic signal head shall have its own cable from the controller cabinet to the signal head.

Maintenance. Maintenance shall meet the requirements of the Standard Specifications and MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION in Division 800 of these specifications. Maintenance of temporary signals and of the existing signals shall be included in the cost of the TEMPORARY TRAFFIC SIGNAL INSTALLATION (SPECIAL) pay item. When temporary traffic signals are to be installed at locations where existing signals are presently operating, the Contractor shall be fully responsible for the maintenance of the existing signal installation as soon as he begins any physical work on the Contract or any portion thereof. In addition, a minimum of seven (7) days prior to assuming maintenance of the existing traffic signal installation(s) under this Contract, the Contractor shall request that the Resident Engineer contact the Bureau of Traffic Operations (847) 705-4424 for an inspection of the installation(s).

Basis of Payment. This work shall be paid for at the contract unit price each for TEMPORARY TRAFFIC SIGNAL INSTALLATION (SPECIAL) the price of which shall include all costs for traffic control during the installation, maintenance and removal of all work under this item, changes in signal phasing as required by the Engineer, removal, storage and reinstallation of the existing signal heads, installation and removal of temporary signal heads, any required video vehicle detection system, any all material required, the installation and complete removal of the temporary traffic signal. Each intersection will be paid for separately.

MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION

Description. This work will consist of maintaining an existing traffic signal installation that has been designated to remain in operation during construction of the new traffic signals. If during the course of construction it becomes necessary to use temporary aerial cable to keep the intersection functioning, this work will be performed at no additional cost. However, the need for temporary traffic signals and controllers will be paid for under separate items, as shown on the plans or as directed by the Engineer.

Maintenance Procedures. Before taking over maintenance of the existing traffic signal installation, the Contractor must arrange to make an inspection with the Engineer to determine if any corrective action needs to be done, and to mutually agree on a date for transferring maintenance. The contractor should normally begin maintaining the existing traffic signals as soon as he begins any work at the site.

The contractor will be responsible for maintaining the traffic signal installation in proper operating condition. The contractor must perform the maintenance procedures as outlined in Section 802.07 of the Standard Specifications.

The traffic controller must be maintained as outlined in Section 850.03 of the Standard Specifications.

Method of Measurement. This work will be measured per each. The time frame will begin at the mutually agreed date for taking over maintenance. The time frame will end upon the issuance of a Signal Acceptance Notice from the Engineer. Before such notice is given, a final inspection must be performed with the contractor, the Engineer, and a representative from the Chicago Department of Transportation. The time frame may be measured in full weeks and fractions thereof.

Basis of Payment. This work will be paid for at the contract unit price per EACH, or fraction thereof, for MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION, which payment will be in full for maintaining the traffic signals during said time frame. If for any reason the contractor fails to properly maintain the traffic installation, leading to and requiring a response from the City maintenance forces, the cost of such a response will be charged to the contractor.

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, BRACKET MOUNTED
SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, BRACKET MOUNTED

Description. This item will consist of furnishing and installing a traffic signal head or combination of heads on a street light pole, a traffic signal pole, or a traffic signal post as shown on the plans, as specified herein, or as directed by the Engineer. Specific installations and configurations are shown on Drawing Numbers 834 and 835, entitled "Standard Traffic Signal Mounting Details".

The type of installation will be as indicated on the plans. The number of signal faces, the number of signal sections in each signal face, any dual-indication sections, and the method of mounting will be as indicated in the plans and in the standard drawings.

Each signal face must be pointed in the direction of the approaching traffic that it is to control and must be aimed to have maximum effectiveness for an approaching driver located at a distance from the stop line equal to the normal distance traversed while stopping.

During construction and until the installation is placed in operation, all signal faces must be hooded. The hooding material must be securely fastened so it will not be disturbed by normal inclement weather or wind.

Material. The traffic signal must meet the requirements of Material Specification 1493 for LED signals. The mounting brackets must meet the requirements of Material Specification 1495.

Installation. The signals must be mounted using pole mounting brackets banded to the pole with two strips of 3/4" stainless steel banding single wrapped, one at the top and one at the bottom of the brackets, each secured with a stainless steel banding clip. The banding and clips will be coated with a baked-on black finish. The mounting configuration connecting the signals to the mounting bracket must consist of polycarbonate brackets specifically made for mounting signal heads to the side of poles, to create the designated structure. When the signals are to be mounted on a square pole or flat surface, the bracket used will be bolted to the flat pole or surface using 3/8" drive studs where permissible or using a 3/8" studs in a tapped hole.

The bottom mounting bracket must be accurately located to cover an opening 1" in diameter, for cable entrance, drilled into the pole or standard at a calculated height to position the bottom signal face at a standard height of 10 feet, or a height indicated on the plans. The opening must be reamed or filed to remove all sharp edges or burrs which might damage cable during installation or through vibration when the signals are in operation.

Cable. The Contractor must provide and install a length of 8/C #16 AWG, as per Specification 1475, flexible electrical cord, medium duty, of sufficient length to extend without strain or stress from the terminal strip in the "Green" section of the signal head to the terminal strip in the junction box mounted on the pole. The number of conductors in the cord, and the color coding of the conductors, must be sufficient to match the requirements of the signal head being installed, and must be connected in accordance with Specification 1493. Both ends of the cable length must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned. The service cable from the signal heads must enter the pole through the bottom mounting bracket and enter the long sweep elbow to terminate by attachment to the terminal strip in the junction box in accordance with connector schematic, Drawing Number 12268-A

Method of Measurement. This work will be measured per each unit installed, complete.

Basis of Payment. This work will be paid for at the contract unit price for each SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, BRACKET MOUNTED and SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, BRACKET MOUNTED which price will be payment in full for furnishing and installing the signal head complete, including all necessary wiring.

SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, MAST ARM MOUNTED
SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, MAST ARM MOUNTED

Description. This item will consist of furnishing and installing a traffic signal head on a traffic signal monotube mast arm, as shown on the plans, as specified herein, or as directed by the Engineer. Specific installations and configurations are shown on Drawing 834 entitled "Standard Traffic Signal Mounting Details".

Each signal face must be pointed in the direction of the approaching traffic that it is to control and must be aimed to have maximum effectiveness for an approaching driver at a distance from the stop equal line to the normal distance traversed while stopping. The optically programmed signal face must be programmed in accordance with the visibility requirements of the Traffic Engineer.

During construction, and until the installation is placed in operation, all signal faces must be hooded. The hooding material must be securely fastened so it will not be disturbed by normal inclement weather or wind.

Material. The traffic signal head construction must meet the requirements of Material Specification 1493 for LED traffic signals. The mast arm bracket must meet the requirements of Material Specification 1463. The cable must meet the requirements of Material Specification 1475.

Installation. The signal must be mounted on the mast arm at the position indicated on the drawing in the manner shown on Drawing 834. The bracket must be banded to the mast arm with the 5/8" banding as shown on Drawing Number 834. The banding and clips must have a baked-on black finish. The bracket must be located over a hole drilled into the mast arm for the installation of cable. The hole must be reamed or filed to remove any sharp edges or burrs which might damage cable during installation or through vibration when the signals are in operation.

Cable. The contractor must provide and install a length of 8/C #16 flexible electrical cord, of sufficient length to extend without strain or stress from the terminal strip in the "Green" section of the signal head to the terminal strip in the junction box mounted on the pole. The number of conductors in the cord, and the color coding of the conductors, must be sufficient to match the requirements of the signal head being installed, and must be connected in accordance with Material Specification 1493 for LED traffic signals.

Both ends of the cable length must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned. The service cable from the signal heads must enter the traffic signal mast arm through the hole from the mounting bracket, whence it will continue and enter the pole through the hole for mast arm wiring, then extend downward through the pole to enter the long sweep elbow to terminate by attachment to the terminal strip in the junction box in accordance with the terminal strip connector schematic, Drawing Number 12268-A.

The mast arm brackets must be painted gloss black or another color as indicated in the plans.

Method of Measurement. This work will be measured per each signal unit installed, completely wired and operational.

Basis of Payment. This work will be paid for at the contract unit price for each SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 3-SECTION, MAST ARM MOUNTED or SIGNAL HEAD, POLYCARBONATE, LED, 1 FACE, 5-SECTION, MAST ARM MOUNTED of the type specified which price will be payment in full for furnishing and installing the signal head, or the optically programmed signal head, complete.

PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, BRACKET MOUNTED WITH COUNT DOWN TIMER

Description. This item will consist of furnishing and installing a pedestrian signal on a street light pole, a traffic signal pole or a traffic signal post as shown on the plans, as specified herein, or as directed by the Engineer. The signal may be installed as a single unit on a pole or in combination with other pedestrian signals or with traffic signals of various types and sizes. Specific installations and configurations are shown on Drawing Numbers 834 and 835 entitled "Standard Traffic Signal Mounting Details".

The method of mounting will be indicated on the plans, or as directed by the engineer. Each signal face must be pointed in the direction of the marked cross-walk area for the pedestrians it is intended to control.

Material. The pedestrian signal head material must be consistent with the requirements of Bureau of Electricity Material Specification 1494. The countdown pedestrian signal must meet the requirements of Material Specification 1545. All housing units must be made of polycarbonate. The light source must be LED. Mounting hardware must meet the requirements of Material Specification 1495. Cable must meet the requirements of Material Specification 1475.

Installation. The signal must be mounted using pole mounting brackets banded to the pole with two strips of 3/4" stainless steel banding, single wrapped, one at the top and one at the bottom of the bracket, each secured with a stainless steel banding clip. The banding and clips must have a baked-on black finish. The mounting configuration connecting the signals to the mounting bracket must consist of polycarbonate brackets specifically made for mounting signal heads to the side of poles, to create the designated structure.

The bottom mounting bracket must be accurately located to cover a hole 1" in diameter for the cable entrance drilled into the pole at a height calculated to position the bottom signal face at a standard height of 10 feet, or a height indicated on the plans. The hole must be reamed or filed to remove all sharp edges or burrs which might damage cable during installation, or through vibration when the signals are in operation.

When the pedestrian signal is attached below a traffic signal head, the separate opening for cable may be omitted to eliminate additional weakening of the pole and the pedestrian signal cord will be installed using the same opening as the traffic signal cord.

Cable. The Contractor must provide and install a length of 8/C #16 AWG flexible electric cord, of sufficient length to extend without strain or stress from the terminal strip in the signal head to the terminal strip in the junction box mounted on the pole. The number of conductors in the cord, and the color coding of the conductors, must be sufficient to match the requirements of the signal head being installed, and must be so connected in accordance with Material Specification 1494. Both ends of the cable must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned. The service cord from the signal head must enter the pole through the bottom mounting bracket and enter the long sweep elbow to terminate by attachment to the terminal strip in accordance with the terminal strip connector schematic, Bureau of Electricity Drawing Number 12268-A.

During construction and until the installation is placed in operation, all signal faces must be hooded. The hooding material must be securely fastened so it will not be disturbed by inclement weather or wind

Method of Measurement. This work will be measured per each signal unit installed, completely wired and operational.

Basis of Payment. This work will be paid for at the contract unit price each for PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, BRACKET MOUNTED WITH COUNT DOWN TIMER, which price will be payment in full for furnishing and installing the signal head complete.

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT

Description. This work will consist of removing all the existing traffic signal equipment at the intersections listed on the plans.

Removal. The items to be removed will include traffic signal arms, traffic signal poles, traffic signal heads, non-illuminated and illuminated traffic signs, traffic signal controllers, street lighting mast arm and luminaire on combination poles and all associated equipment and cable.

The traffic signal items, except for traffic signal cable, are to remain the property of the City of Chicago. The Contractor must deliver the obsolete traffic signal equipment to the City of Chicago Yard at 4101 South Cicero Avenue, Chicago, Illinois. Twenty four hour advance notice is necessary before delivery. The traffic signal cable must be removed and become the property of the Contractor and must be disposed of by him, outside the right-of-way, at his sole expense.

The Contractor must provide three (3) copies of a list of equipment that is to remain the property of the City, including model and serial numbers where applicable. He must also provide a copy of the contract plan, or special provisions, showing the quantities and type of equipment. The Contractor will be responsible for the condition of the traffic control equipment from the time of removal until its acceptance by a receipt drawn by the City indicating that the items have been returned.

Method of Measurement. This item will be measured as one unit per project contract, or per signalized intersection. The breaking down of foundations and manholes will not be considered part of this item.

Basis of Payment. This work will be paid for REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT lump sum per intersection. This price will be payment in full for removing the equipment and disposing of it as required. The salvage value of the cable retained by the Contractor must be reflected in this contract lump sum price.

REMOVE EXISTING HANDHOLE

Description. Work under this item will include breaking down an existing handhole or manhole and filling in the affected area to grade.

Demolition. This work will consist of removing the frame and cover of an existing handhole or manhole, breaking down the handhole/manhole walls, removing large debris, and backfilling the hole with screenings or other approved material. Backfill must be installed in 6 inch layers and tamped. If the handhole/manhole is in a parkway, the hole must be filled level to the existing grade. The top six inches of fill must be of an approved soil mixture. If the handhole/manhole is in sidewalk or in pavement, the sidewalk or pavement must be restored under a different pay item. If the frame or cover is deemed re-useable by the Engineer, the frame and/or cover must be delivered to the CDOT at a location identified by the Engineer. Any debris, including the frame and cover must be disposed of off-sight in an approved manner. The contractor will pay for all disposal fees.

Method of Measurement. This work will be paid for per each manhole or handhole removed. All backfill will be considered as part of the manhole breakdown.

Basis of Payment. This work will be paid for at the contract unit price per each for REMOVE EXISTING HANDHOLE which price will be payment in full for all labor and materials necessary to complete the work as described. Salvaging of the frame and cover will be considered incidental to this item.

REMOVE EXISTING CONCRETE FOUNDATION

Description. The work will consist of removing a concrete foundation for the specific item referenced. The foundation must be completely removed or broken down to a point three feet below grade, disposing of the debris off-sight in an approved manner, backfilling the excavation with screenings or other approved backfill material, and reconstructing the surface area. If the foundation is in a parkway, the parkway must be properly restored with dirt to the existing level. If the foundation is in sidewalk, the sidewalk must be restored under a different pay item and will not be considered as part of this work. Debris must be disposed of according to Section 202.03 of the Standard Specifications. Backfill must meet the requirements of Section 1003.04 of the Standard Specifications.

Method of Measurement. This work will be measured per each foundation removed, which will also include proper disposal and backfill.

Basis of Payment. This work will be paid for at the contract unit price each for REMOVE EXISTING CONCRETE FOUNDATION, of the type specified, which price will be payment in full for all labor and materials necessary to complete the work as described above. No additional payment will be made for backfill or disposal of debris.

POLE, STEEL, ANCHOR BASE, 10" DIAMETER, 7 GAUGE, 34'-6" (CDOT) POLE, STEEL, ANCHOR BASE, 12.5" DIAMETER, 3 GAUGE, 34'-6" (CDOT)

Description. This item will consist of furnishing, installing, and setting plumb a steel anchor base pole to which equipment may be attached for the extension of the City street light and traffic signal systems.

Material. The material of the pole must meet the requirements of Material Specification 1447.

Installation. The pole must be installed on the concrete foundation designed for the particular pole usage as indicated on the plans or as directed by the Engineer. Double nut construction must be used as shown on Drawing 837. Double nut construction provides the proper ventilation, as well as providing a way to plumb the pole. Any exposed portions of anchor rods extending above the nuts which interfere with the installation of the bolt covers must be cut off to provide the necessary clearance. The excess must not be burned off. The pole must be set secure, properly orientated, and plumb using the nuts and washers provided with the anchor bolts. The bolt covers, handhole cover, and pole cap must be securely attached.

The contractor will utilize non-abrasive slinging materials and will otherwise exercise due care in erecting the pole and mast arm to minimize any possible damage to the finish. When necessary, the contractor will utilize, at his own expense, factory approved touch-up materials and methods to restore the finish to like new appearance and durability.

Method of Measurement. This item will be measured per each unit installed, complete with anchor bolt covers, pole cap, and handhole cover.

Basis of Payment. This work will be paid for at the Contract unit price each for a POLE STEEL, ANCHOR BASE, 34'-6, of diameter and guage specified which will be payment in full for furnishing and installing the pole complete in place. Light standard foundations, mast arms, and luminaires will not be included in this pay item but will be paid for separately.

JUNCTION BOX, POLE OR POST MOUNTED

Description. This item will consist of furnishing and installing a Junction Box on each traffic signal post, traffic signal pole, or street light pole on which a signal head is mounted, as shown on the plans, specified herein, or directed by the Engineer.

Material. The Junction Box must conform to the requirements of Material Specification Number 1407 and to Drawing Number 954. The box will contain a 20 conductor terminal strip, Marathon Special Products Corporation Catalog Number 36002, or equivalent, securely fastened to an Aluminum Terminal Block "Z" Bracket, Leitelt Brother Company Item Number LB-16-6-4B, or equivalent, mounted with two Number 8-24 x 1/2" stainless steel machine screws in tapped holes in the mounting bosses, and located 3/4 inches from the right side facing the open box.

Installation. The junction box must be mounted to the side of the pole away from the roadway, or as directed by the Engineer. The center of the box must be located approximately fifty-eight inches (58") above the adjacent sidewalk. Two long sweep elbows must be attached to the box, one to the top and one to the bottom, unless otherwise directed by the Engineer. Each will be attached with four (4) #10-24x3/4" stainless steel screws. The elbows will be equivalent to Leitelt Brothers Company Item Number LB-16-64-A-2. The lower long sweep elbow will be properly positioned over a hole 1 1/2 inches in diameter drilled in the pole approximately 48" above the sidewalk, for the installation of cable. Another 1 1/2 inch hole must be drilled for the upper elbow. The holes must be reamed or filed to remove all sharp edges or burrs which might damage cable during installation, or through vibration when the signals are in operation. A stainless steel, banding bracket, Drawing Number 11984, must be attached to the center of the back of the box with a 5/16"-18 x 1" stainless steel machine screw. The entire unit must be banded to the pole with five (5) 3/4" stainless steel bands, one through the banding bracket and one each at the top and bottom of each elbow. The banding and clips must have a baked-on black finish.

Method of Measurement. This work will be measured per each junction box unit installed, complete with elbow(s).

Basis of Payment. This work will be paid for at the contract unit price each for a JUNCTION BOX, POLE OR POST MOUNTED, which price will be payment in full for furnishing and installing the junction box complete with its component parts and appurtenances. Connection of cables and wires to the terminal strip will not be part of the cost of the junction box but will be considered part of the installation of the underground cable and the installation of signal heads.

CONCRETE FOUNDATION FOR TYPE "P" BASE MOUNTED TRAFFIC SIGNAL CONTROLLER (CDOT)

Description. This item will be for all work necessary for installing a foundation for a "P" cabinet.

Material. Concrete will be Portland cement concrete, SI Class, meeting the requirements of Article 1020 of the Standard Specifications. Ground rods will meet the requirements of Material Specification 1465. Conduit will be PVC meeting the requirements of Material Specification 1533. Anchor rods will meet the applicable requirements of Material Specification 1467.

Construction. The Contractor will install a concrete foundation for a base mounted traffic signal controller cabinet, as shown on City of Chicago Drawing Number 888 for a "P" cabinet. Work under this item will be performed in accordance with Article 800 of the Standard Specifications.

The foundation will have a minimum depth of at least forty inches (40") below grade and must have large radius conduit elbows in quantity, size and type shown. The elbow ends above ground will be capped with standard conduit bushings. The ground rod will be installed adjacent to the foundation, and will be driven straight down with the top to be no higher than 30 inches below finished grade. The Contractor will furnish anchor bolts, hardware, conduit elbows, and all other material shown on the foundation construction drawing.

All excavation and restoration of parkway will be considered as part of this item. If the foundation is in sidewalk, an expansion joint will be required between the sidewalk and the foundation.

Method of Measurement. This work will be measured as CONCRETE FOUNDATION FOR TYPE "P" BASE MOUNTED TRAFFIC SIGNAL CONTROLLER for each unit installed complete.

CONCRETE FOUNDATION, 24" DIAMETER, 1 1/4" ANCHOR RODS, 15" BOLT CIRCLE, 9 FEET (CDOT)

CONCRETE FOUNDATION, 30" DIAMETER, 1 1/2" ANCHOR RODS, 16 1/2" BOLT CIRCLE (CDOT)

Description. The foundation will be a poured in place concrete structure used for structurally supporting street light poles or traffic signal poles.

Material. Every foundation will be installed at the location designated and in the manner herein specified or in special cases as specifically directed. The contractor will locate foundations as per plan or as directed by the Resident Engineer. A hole must be augered for placement of the concrete form.

CONCRETE FOUNDATION, 24" DIAMETER, 1 1/4" ANCHOR RODS, 15" BOLT CIRCLE, 9 FEET (CDOT) is a foundation for arterial street light pole; either steel or aluminum, conventional or davit (Standard Drawing 818).

CONCRETE FOUNDATION, 30" DIAMETER, 1 1/2" ANCHOR RODS, 16 1/2" BOLT CIRCLE (CDOT) is a foundation for a traffic pole which can accommodate a 35, 40, or 44 foot monotube mast arm (Standard Drawing 817).

Top surface of these foundations in parkway will be at an elevation of two inches (2") above grade or as required by the Engineer. Care must be taken to install a level foundation and to ensure adequate anchor rod projections for double nut installation. The foundations must be centered back from the face of the curb in accordance with dimensions shown on the construction plans. Foundation raceways must consist of large radius conduit elbow(s) in quantity, size and type as specified on the corresponding standard drawing or in the construction plans. Any number of elbows in excess of the number shown on the standard drawing must be paid for under a separate pay item. The elbow ends above ground will be capped with standard conduit bushings. The Contractor must furnish anchor rods, a ground rod, hardware, conduit elbow(s) and all other material shown on applicable foundation construction drawings. Depth of foundation will be as shown on the appropriate drawing. The foundation top must be chamfered 3/4 of an inch. When the foundation is installed in a sidewalk, the foundation must be installed level, with the height of the foundation as close to the height of the sidewalk as possible, or as directed by the Engineer. A proper expansion joint will be installed between the sidewalk and the foundation.

Anchor rods must be set in accordance with applicable construction plans so that when poles are mounted on the foundations, the street lighting mast arm will be properly oriented as indicated on the construction plans. The anchor rods will be set by means of a metal template which shall be submitted for approval before any foundation work is begun. The template must hold the rods vertical, and in proper position. Anchor rods must conform in all respects to the appropriate drawing.

Method of Measurement. This item will be measured per each foundation installed complete.

Basis of Payment. Payment will be made for foundations installed in place, including elbows, in accordance with construction drawings, construction plans and these specifications. All necessary excavation and restoration of pavement, sidewalk and fill to their original conditions will be included in the unit price. This work will be paid for at the contract unit price per each for CONCRETE FOUNDATION of the diameter and size specified.

ELECTRIC CABLE IN CONDUIT, NO. 14, 19/C (CDOT)

Description. This work will consist of furnishing and installing electric cable for traffic signals of the type, size and number of conductors as specified on the plans. The cable will be rated 600 volts and comply with the following requirements.

Traffic Signal Cable. All cable must conform to the requirements of Material Specification number 1537, for Traffic Signal Cable.

Installation. All cable must be installed in conduit, as indicated on the plans, with care to prevent damage to the insulation or cable. Suitable devices must be used in pulling the cable, and only approved lubricants should be used. All cables installed in conduit will be from the power source to the traffic signal controller cabinet, from the traffic controller cabinet to the traffic signal junction box, or from junction box to junction box. For cable terminating in a traffic signal controller cabinet or traffic signal junction box the following procedures must be followed:

a. Controllers.

1. Remove thirty six inches (36") of neoprene jacket.
2. Wrap vinyl electrical tape on two inches (2") of the neoprene jacket and two inches (2") on the exposed conductors.
3. Remove one inch (1") of insulation and scrape copper conductor.
4. Train cables neatly along the base and back of cabinet.
5. Connect conductors to proper terminal lugs.

b. Traffic Signal Junction Box.

1. Remove twenty four inches (24") of neoprene jacket.
2. Wrap vinyl electrical tape on two inches (2") of neoprene jacket and two inches (2") on the exposed conductors.
3. Remove one inch (1") of insulation and scrape copper conductor.
4. Train cables neatly along the side and back of the box.
5. Connect all conductors to terminal strip.

Cable Slack. The length of cable slack that must be provided will be in accordance with the following schedule:

Location	Length of Slack Cable (feet)
Base of Controller	7
Detector, Junction Box	1
Base of Traffic Signal Post or Traffic Signal Pole	4
City Handhole	6
City Manhole	12
Commonwealth Edison Manhole	25

Cable slack in manholes/handholes must be trained and racked in the holes. If racks are non-existent, racks must be provided, and considered incidental and a part of this pay item.

No cable splices will be allowed for traffic signal cable, with the exception of 7 conductor interconnect cable. These splices must be indicated on the plans.

Method of Measurement. The length of measurement must be the distance horizontally measured between changes in direction, and will include cable slack. All vertical cables will not be measured for payment.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for ELECTRIC CABLE IN CONDUIT, NO. 14, 19/C (CDOT). This price will be payment in full for furnishing, installing, connecting, splicing, and testing of cable, and will include all labor, materials, equipment, tools, and incidentals necessary to complete the work, as specified herein, and as shown on the plans.

MANHOLE, ELECTRIC, 3'X4'X4', WITH 24" FRAME AND LID

Description. This item will consist of furnishing and installing an electrical manhole of the dimensions indicated with a 24" frame and lid.

Material. The concrete manhole must meet the applicable requirements of Material Specification 1528. The frame and lid must meet the requirements of Material Specification 1458. A 24" frame and lid must meet the requirements of Standard Drawing 872. Bricks must meet the requirements of Article 1041 of the Standard Specifications. All other materials used must meet the appropriate material requirements of the Standard Specifications.

Method of Construction. The manhole will be a precast concrete structure, or, if conditions merit, a cast in place concrete structure, complete with cast iron frame and lid. A 3'X4'X4' manhole with a 24" frame and lid must conform to the requirements of Drawing 730. The number and size of conduit openings will be as shown on the construction plans.

Each manhole will be installed in paved sidewalk, earth parkway, or in pavement at the location specified on the construction plans or at a location as directed by the Resident Engineer.

The area where the manhole is to be placed must be properly excavated. All disposable material will be properly disposed of per Section 202.03 of the Standard Specifications. Each manhole must be set or constructed to conform with the appropriate City of Chicago drawings, except that the number and size of conduit openings will be in accordance with the construction plans. The frame casting must be accurately set on a full bed of mortar to the finished elevation so that no subsequent adjustment will be necessary. Mortar and brick, or mortar and concrete rings, may be used to adjust to the proper grade. Adjustment rings, bricks, and frames must be set in a full mortar bed. Use of partial bricks will not be allowed. Bricks must be laid in full header courses only. In no instance will the neck of the manhole exceed two (2) feet in height. Mortar will be mixed in a proportion of one (1) part cement to three (3) parts sand by volume of dry materials. After entering laterals have been installed in place in the manhole, the openings in the wall must be plugged in an approved manner flush with the inner surface. If backfill is required, screenings must be used and properly compacted. Parkway must be restored to the proper grade. Pavement must be restored to the correct grade. Patching of the pavement must be done with high early strength concrete meeting the requirements of Articles 1001 and 1020 of the Standard Specifications. Sidewalks must be restored to the proper grade using a 5 inch thickness of concrete. The inside of the manhole must be clean of all debris.

Method of Measurement. This item will be measured per each unit installed.

Basis of Payment. The unit price for installing manholes will include necessary excavation, backfilling and restoration of parkway and pavement in accordance with the foregoing specifications. No additional payment will be allowed for restoring parkway or the restoration of sidewalk or pavement. Removal of sidewalk or pavement will be covered by separate pay items. New conduit, if necessary, will also be paid for separately. The unit cost will be for complete installation for each unit for MANHOLE, ELECTRIC, 3' X 4' X 4', WITH 24" FRAME AND LID.

HARNESS CABLE, NO. 16, 8/C (CDOT)

Description. This item will consist of furnishing and installing cable in traffic signal poles to connect traffic signals or illuminated signs to a junction box on the pole.

Material. The cable must meet the requirements of Material Specification 1475.

Installation. The contractor must install the cable from the required signal or sign terminal strip through the pole and mast arm to the terminal strip in the junction box. The contractor must properly terminate the cable at the terminal strips as directed by the Engineer. Sufficient cable will be provided so as not to unduly strain the cable during installation, and to provide sufficient cable for easy termination.

Method of Measurement. This work will be measured per lineal foot of cable installed. Cable terminations will be considered incidental to this pay item.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for HARNESS CABLE, NO. 6, 8/C (CDOT), which payment will be in full for furnishing and installing the cable.

ADVANCED TRANSPORTATION CONTROLLER, TRAFFIC, 16 LOAD BAY, “P” CABINET (CDOT)

Description. This work will consist of furnishing and installing an Advanced Transportation Controller (ATC) and associated equipment in a cabinet onto a foundation and making all necessary connections.

Material. The material must meet the requirements of Material Specification 1558C, “Advanced Transportation Controller and Cabinet”. The cabinet will be a P cabinet 55 inches high by 44 inches wide by 26 inches deep with 16 load bays. Each load bay must include a load switch. No communications interface equipment will be included.

Procurement. The contractor must provide Request for Inspection of Material forms for traffic signal controllers and cabinets at the Preconstruction Meeting. The CDOT will review and comment on the submitted material. The CDOT will approve the purchase of the material from a supplier. Final material approval will be made in accordance with CDOT specifications. The Contractor must provide proof of purchase to the Resident Engineer within seven (7) days following approval by the CDOT or within seven (7) days of the contract Notice To Proceed, whichever is later. Payment will be withheld in accordance with the terms and conditions of this contract, until such time that the Engineer determines the requirements are met.

The controllers and cabinets are to be delivered to the CDOT within ninety (90) days of purchase. If the controllers and cabinets are not delivered, payment will be withheld until such time that the controllers and cabinets are delivered.

The CDOT will notify the Contractor when the material has been inspected and approved. Within forty-eight (48) hours of notification, the Contractor will pick-up the controllers and cabinets from the CDOT. The controllers and cabinets will be stored at a facility, approved by the Commissioner, at the contractor’s expense.

Installation. The controller will be programmed to provide the sequencing and timing of operation as shown on the plans. The controller must be enclosed in housing and installed in a completely wired cabinet. The model and serial numbers of the controller must be affixed on the front of the controller housing and be readily visible.

The cabinet must be set onto a pad foundation designed specifically for the cabinet, and affixed with four bolts provided with the foundation. Electric cables inside the cabinet must be neatly trained along the base and back of the cabinet. Each conductor used must be connected individually to the proper terminal, and the spare conductors must be insulated and bound into a neat bundle. Each cable must be marked with suitable identification and recorded on a copy of the plans for the intersection and submitted to the Engineer. Signal indications for each direction must be wired to a separate circuit whether or not the signal plans call for a split movement. The absolute zero for the time- base coordinator will be set in the field by City personnel after obtaining the appropriate City time-tone reference.

When properly installed, all signals will be connected and controlled by the controller, and the sequencing and timing of the signals will be as set forth in the plans.

All conduit entrances into the cabinet must be sealed with a pliable waterproof material to restrict moisture entrance into the cabinet.

CDOT and Office of Emergency Management and Communications (OEMC) personnel must be present when the new signal equipment is put into operation.

Basis of Payment. This work will be paid for at the contract unit price for each ADVANCED TRANSPORTATION CONTROLLER, TRAFFIC, 16 LOAD BAY, "P" CABINET, which price will be payment in full for furnishing and installing the controller complete and operational, with all wiring and connections as specified.

ELECTRIC CABLE IN CONDUIT, NO. 42/C (CDOT)

Description. This work will consist of furnishing and installing electric cable as specified. The cable will be installed in conduit underground.

Material. The cable must meet all requirements of Material Specification 1534.

Construction Method. All cables must be installed with care to prevent damage to the cable. Any defects found in the cable must be reported to the resident engineer.

Damaged cable must be replaced. The cable must be pulled into the conduit with a minimum of dragging on the ground or pavement. This will be accomplished by means of reels mounted on jacks or other suitable devices located for unreeling cable directly into duct. Lubricants must be used to facilitate installation if deemed necessary by the contractor.

Bends in the cable will conform to the recommended minimum radii as outlined in the National Electric Code.

Cable passing through manholes must be trained and racked around the sides of the manhole into a permanent position. If racks are non-existent or in poor condition, the contractor must install racks. The material must be approved by the resident engineer. Any material and labor involved in training and racking the cable will be considered incidental to the cost of this pay item.

Where cable runs continue from manhole to manhole without tapping within a light pole, they will be continuous without splices unless authorized by the resident engineer.

All wire or cable in the distribution panels and control cabinets must be properly trained and have sufficient slack provided for any rearrangement of equipment or future additions. There must be at least two feet of slack in a street light pole base or street light controller base. A handhole must have at least five feet of slack and a manhole at least ten feet of slack.

Method of Measurement. The length of cable furnished and installed will be measured as the length of conduit plus three feet for cable entering and leaving a light pole or street light control cabinet, plus any slack in manholes or handholes.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for ELECTRIC CABLE IN CONDUIT, NO. 42/C (CDOT). Such price will be payment in full for furnishing, installing, and testing the cable, and will include all material, labor, terminations, and incidentals necessary to complete the work as per the contract plans.

MAST ARM, STEEL, MONOTUBE, 35 FOOT (CDOT)
MAST ARM, STEEL, MONOTUBE, 40 FOOT (CDOT)
MAST ARM, STEEL, MONOTUBE, 44 FOOT (CDOT)

Description. This item will consist of furnishing and installing a steel, monotube, mast arm for the purpose of supporting traffic signals, and/or illuminated signs on an anchor base pole at the locations shown on the plans, or as specified or directed by the Engineer. The length of the mast arm and the angular orientation of the arm relative to the centerline of the roadway will be as indicated on the plans.

A mast arm must be installed only on a 3 gauge pole, and the length of the mast arm will govern the minimum base diameter of the pole on which the arm is to be installed, in accordance with the following chart:

MAST ARM LENGTH (feet)	POLE BASE DIAMETER (inches)
16	10
20 10	10
26 10	10
30 11	11
35 12.5	12.5
40 12.5	12.5
44 12.5	12.5

Material. The mast arm must be 7 gauge steel meeting the requirements of Standard Drawing 870 and Material Specification 1454.

Installation. The mast arm must be mounted on the pole at the height specified on Drawing 834, or at a different height if specified on the plans, or as directed by the Engineer. A one inch (1") diameter opening for the installation of cable must be field drilled in the pole in line with the orientation of the mast arm. The hole must be reamed or filed to remove all sharp edges or burrs which might damage cable during installation, or through vibration when the signals are in operation. A neoprene grommet must be inserted into the finished hole prior to the installation of the cable.

Two holes must be field drilled in the pole at 180 degrees relative to the orientation of the pole for installation of locator shear pins, provided with the back plate, to prevent rotation of the mast arm. These holes must be drilled after the mast arm is in place in order that the position of the holes will match the location of the locator bushings attached to the back half of the clamp.

All signals, signs, and electrical equipment must be attached in the correct relative position to the mast arm, with service cord in place, prepared to be installed on the pole, prior to the attachment of the mast arm to the pole. The installation of the cord in the pole must be coordinated with the attachment of the mast arm to the pole. The clamp bolts must be tightened securely so that there is no slippage of the mast arm either upward or downward to exert a vertical force on the shear pins. The end cap must be secured in place with the attachment screws provided.

The mast arm must be delivered completely finished with a factory applied black powder coat per Material Specification 1454. The contractor must utilize non-abrasive slinging materials and must otherwise exercise due care in erecting the pole and mast arm to prevent any damage to the finish.

Method of Measurement. This work will be measured per each monotube arm installed on a traffic pole.

Basis of Payment. This work will be paid for at the contract unit price for each of MAST ARM, STEEL, MONOTUBE, 35 FT. (CDOT); MAST ARM, STEEL, MONOTUBE 40 FT. (CDOT); and MAST ARM, STEEL, MONOTUBE, 44 FT. (CDOT), and will be payment in full for furnishing and installing a steel mast arm in place, complete. Attachment of signals and signs will not be part of this pay item.

ELECTRICAL HANDHOLE, 30", 24" FRAME AND LID (CDOT)

Description. This item is for supplying and installing an electrical handhole 30" in diameter with a 24" frame and lid or a handhole 36" in diameter with a 24" frame and lid in a parkway or sidewalk, or a handhole 36" in diameter with a 30" frame and lid in pavement or in a driveway.

Material. The frame and lid must meet the requirements of Material Specification 1458. The handhole must meet the requirements of Material Specification 1528. A 24" frame and lid must also meet the requirements of Standard Drawing 872. Bricks must meet the requirements of Article 1041 of the Standard Specifications. All other materials used must meet the appropriate material requirements of the Standard Specifications.

Method of Construction. The handhole will be a precast concrete structure, or, if conditions merit, a cast in place concrete structure, complete with cast iron frame and cover, and conforming in detail with either Drawing Number 866, or Drawing 867, except that the number of conduit openings must be as shown on the construction plans.

Each handhole must be installed at the location specified on the plans or at the location identified by the Resident Engineer.

The area where the handhole is to be placed must be properly excavated. All disposable material must be properly disposed of per Section 202.03 of the Standard Specifications. Each handhole must be set or constructed on a foundation of loose stone not less than eight inches (8") deep. The 36" handhole for pavement installation must have a floor as shown in Drawing Number 871. The frame casting must be accurately set on a full bed of mortar to the finished elevation so that no subsequent adjustment will be necessary. It is desirable not to use a neck for the frame. However, if approved by the Resident Engineer, mortar and brick, or mortar and concrete rings, may be used to adjust to the proper grade. Adjustment rings, bricks, and frames must be set in a full mortar bed. Use of partial bricks will not be allowed. Bricks must be laid in full header courses only.

Mortar must be mixed in a proportion of one (1) part of cement to three (3) parts sand by volume of dry materials. After entering laterals have been installed in place in the handhole, the openings in the wall must be plugged in an approved manner flush with the inner surface. If backfill is required, screenings must be used and properly compacted. Parkway must be restored to the proper grade. Pavement must be properly restored to the correct grade. Patching of the pavement must be done with high early strength concrete meeting the requirements of Articles 1001 and 1020 of the Standard Specifications. Sidewalks must be restored to the proper grade using a 5 inch thickness of concrete. The inside of the handhole must be clean of all debris.

Method of Measurement. This item will be paid for at the contract unit price per each unit installed.

Basis of Payment. The necessary excavation, backfilling and restoration of parkway and pavement must be made in accordance with the foregoing specifications, and the cost thereof must be included in the unit price each for installing ELECTRICAL HANDHOLE 30", 24" FRAME AND LID (CDOT). No additional payment will be allowed for restoring parkway, sidewalk, or pavement. Removal of sidewalk or pavement will be paid for separately under a different pay item.

ROD AND CLEAN DUCT IN EXISTING CONDUIT SYSTEM (CDOT)

Description and Scope. This work will consist of inserting a duct rod or electrical fish rod or tape of sufficient length and rigidity into an electrical conduit opening in one electrical manhole or handhole, and pushing the said rod through the conduit to emerge at the next or subsequent manhole in the conduit system at the location shown on the plans.

The duct rod may be inserted and removed by any standard construction method which causes no damage to the conduit system. The size of the conduit may vary from two inch (2") to four inch (4"), but there will be no differentiation in cost for the size of the conduit.

The conduit system which is to be rodded and cleaned may exist with various amounts of standing water in the manholes. The contractor must pump the water or sufficient water from the manholes to drain the conduit and to afford compatible working conditions for the installation of the duct rods and/or cables. The pumping of the manholes will be incidental to the work of rodding and cleaning of the conduit.

Any manhole which, in the opinion of the Resident Engineer contains excessive debris, dirt or other materials to the extent that conduit rodding and cleaning is not feasible, will be cleaned at the Engineer's order and payment approved as a separate pay item, and not a part of this specification.

Prior to removal, of the duct rod, a duct cleaning attachment such as a properly sized wire brush or cleaning mandrel must be attached to the duct rod, which by removal of the duct rod will be pulled through the conduit to remove sand, grit, or other light obstructions from the duct to provide a clean, clear passage for the installation of cable. Whenever the installation of cables is not performed as an adjunct to or immediately following the cleaning of the duct, a light weight pulling line such as a 1/8" polyethylene line or conduit measuring tape must be placed and will remain in the conduit to facilitate future work. When great difficulty of either inserting the duct rod or removal of the cleaning mandrel is encountered, the duct may require further cleaning by use of a compressed air gun, or a low pressure water hose. In the case of a broken duct line, the conduit must be excavated and repaired. The existence and location of breaks in the duct line may be determined by rodding, but the excavation and repair work required will not be a part of this pay item.

Method of Measurement. This work will be measured per lineal foot for each conduit cleaned. Measurements will be made from point to point horizontally. No vertical rises will count in the measurement.

Basis of Payment. This work will be paid for at the contract unit price per lineal foot for ROD AND CLEAN DUCT IN EXISTING CONDUIT SYSTEM (CDOT) for the installation of new electric cables. Such price will include the furnishing of all necessary tools, equipment, and polyethylene line as required to prepare a conduit for the installation of cable. When the number of cables to be installed requires the use of more than one conduit in the same run, each additional conduit required will be rodded and cleaned as a separate unit and paid for at the contract unit price.

DRILL MANHOLE OR HANDHOLE (CDOT)

Description. This item consists of core drilling or opening a hole in an existing handhole or manhole for the installation of a new conduit(s).

Materials. Materials must be according to the following Bureau of Electricity (BOE) Specifications and Articles of Standard Specifications Section 1000 - Materials:

<u>Item</u>	<u>Requirement</u>
(a) Epoxy Mortar	Standard Specifications, Article 1025.02
(b) Rigid Nonmetallic Conduit	Standard Specifications, Article 1088.01(b)
(c) Rigid Steel Conduit	BOE Specification 1462

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, in accordance with ComEd Standards for ComEd handholes or manholes, and in accordance with Bureau of Electricity Standards and the City of Chicago Electrical Code for City electric handholes or manholes, except as herein modified.

Installation. The size of the hole must be as close as possible to the size of the conduit. A conduit stub-out of the size required must be installed in the drilled hole. A bushing must be provided at the end of the conduit. The space between the conduit and the handhole or manhole must be sealed with a waterproof, epoxy mortar. The type and orientation of the conduit must be as shown on the Plans.

If a brick manhole or hand hole is found where core drilling is not possible, then the Contractor must break a hole using low impact pneumatic hammers so as to not damage the remaining structure. Conduit openings in the wall must be plugged with mortar. The mortar must seal the conduit openings effectively and as directed by the Commissioner, and must be finished flush with the inner surfaces of the wall.

Coordination with ComEd for ComEd handholes or manholes, and coordination with the Bureau of Electricity for city electric handholes or manholes must be performed by the Contractor prior to starting any Work. Coordination must be included in this item; separate or additional payment will not be made.

Cleaning the existing manhole or handhole will not be included in this item and must be paid for under a separate pay item.

Method of Measurement. Each hole that is drilled for a conduit, or hole that is made for a bank of conduits (drilling the hole, furnishing and installing the conduit(s) and bushing(s), and including all necessary excavation and backfilling outside of the hand hole or manhole) as indicated will be counted as a unit for payment.

Basis of Payment. This work will be paid for at the contract unit price each for DRILL MANHOLE OR HANDHOLE (CDOT), which will be payment in full for performing the work described herein.

CLEAN MANHOLE OR HANDHOLE (CDOT)

Description. This item consists of cleaning an existing handhole or manhole for the installation of new conduit(s) and cable(s).

General Requirements. General requirements must be in accordance with Section 801 of the Standard Specifications, and in accordance with Bureau of Electricity Standards and the City of Chicago Electrical Code, except as herein modified.

Installation. Existing cable hooks must be relocated and existing cables must be retrained as required prior to drilling the existing manhole or handhole. Existing and new debris must be removed and disposed of off-site by the Contractor. Existing and new gas and water must be pumped out as directed by the Commissioner. Debris removal, de-gassing and water pumping must be included in this item; separate payment will not be made.

The Contractor must furnish and install cable racks and/or cable hooks for new and existing cables in all manholes and handholes as required to facilitate new cable installation. This Work must be included in this item and separate payment will not be made.

Coordination with ComEd for ComEd handholes or manholes, and coordination with the Bureau of Electricity for city electric handholes or manholes must be performed by the Contractor prior to starting any Work. Coordination must be included in this item; separate or additional payment will not be made.

Drilling the existing manhole or handhole will not be included in this item and will be paid for under a separate pay item.

Method of Measurement. Each manhole or handhole that is cleaned (relocating existing cable hooks, installing new cable hooks, retraining cables, removing debris, and pumping out gas and water) as indicated will be counted as a unit for payment. Each manhole or handhole that is drilled will be measured for payment for cleaning, and will be measured for cleaning only once.

Basis of Payment. This work will be paid for at the contract unit price each for CLEAN MANHOLE OR HANDHOLE (CDOT), which will be payment in full for performing the work described herein.

CIRCUIT BREAKER, 1 POLE, 70 AMPERE, 600 VOLT IN STREET LIGHT CONTROLLER

Description. This item will consist of furnishing and installing a single pole or double pole thermal magnetic circuit breaker in an existing arterial street light controller at the designated location creating a controlled power source to supply a proposed traffic signal controller or other electrical device or circuit.

Material. The material of the circuit breaker must meet the requirements of Specification 1428.

Installation. The circuit breaker must be mounted on a 3/8" thick phenolic linen base bakelite panel 3" x 8" which will be attached on the inside of the lower left hand side of the controller cabinet with 4 1/4" 20x7/8" brass screws in holes which will be drilled and tapped into the side of the cabinet for this purpose. The ends of any screws protruding through the side of cabinet wall must be filed or ground off flush with the face of the cabinet. The bakelite panel shall be set out from the wall of the controller cabinet using four 1/4" bakelite spacer washers, one at each mounting screw position.

The line side terminal of the circuit breaker must be connected to one of the line side terminals of the main circuit breaker with a 1/C #4 600V 90 degree C. insulated copper cable trained around the cabinet in a neat and workman like manner. This cable will be a part of the installation of the circuit breaker and will not be a separate pay item. The installation and connection of the load side cables servicing the traffic signal controller will be a part of the installation of service cable and not a part of the installation of the circuit breaker.

Basis of Payment. This item will be paid for at the contract unit price each for a CIRCUIT BREAKER IN STREET LIGHT CONTROLLER complete in place which will constitute payment in full for furnishing, installing and making line side connections of the circuit breaker.

APPENDIX A – CITY OF CHICAGO DEPARTMENT OF TRANSPORTATION DIVISION OF ELECTRICAL OPERATIONS

SUMMARY

This Appendix includes copies of technical documents which are made available to the Contractor as a convenience for informational purposes. The material specifications within this section apply only to the Chicago Department of Transportation (CDOT) Specifications which reference them.

<i>Document</i>	<i>Pages</i>
ITEM NO. 108, TRENCH AND BACKFILL WITH SCREENS January 1, 2002, City of Chicago, Department of Electrical Operations.....	2
ITEM NO. 110, TRENCH AND BACKFILL FOR 2 TO 4 DUCTS April 2, 2001, City of Chicago, Department of Electrical Operations.....	2
ITEM 112, ELECTRICAL HANDHOLE, 30", 24" FRAME AND LID ITEM 113, ELECTRICAL HANDHOLE, 36", 24" FRAME AND LID ITEM 113A, ELECTRICAL HANDHOLE, 36", 30" FRAME AND LID January 1, 2002, City of Chicago, Department of Electrical Operations.....	2
ITEM 117, ELECTRICAL MANHOLE 3'X4'X4' WITH 24" FRAME AND LID ITEM 118, ELECTRICAL MANHOLE 3'X4'X4' WITH 30" FRAME AND LID ITEM 119, ELECTRICAL MANHOLE 4'X6'X6' WITH 24" FRAME AND LID ITEM 119A, ELECTRICAL MANHOLE 4'X6'X6' WITH 30" FRAME AND LID April 4, 2001, City of Chicago, Department of Electrical Operations.....	2
SPECIFICATION NO. 1385, PEDESTAL WITH BASE: ALUMINUM, FOR TRAFFIC SIGNALS revised July 1, 2008, City of Chicago, Department of Electrical Operations.....	4
SPECIFICATION NO. 1407, POLE MOUNTED CAST ALUMINUM JUNCTION BOX FOR TRAFFIC SIGNALS revised June 27, 2006, City of Chicago, Department of Electrical Operations	3
SPECIFICATION NO. 1454, MAST ARM: TRAFFIC SIGNAL MONO-TUBE revised April 20, 2007, City of Chicago, Department of Electrical Operations.....	7
SPECIFICATION NO. 1457, CABLE: SERVICE ENTRANCE, THREE INSULATED CONDUCTORS IN ONE OVERALL JACKET, 600 VOLT revised August 3, 2006 City of Chicago, Department of Electrical Operations.....	6

SPECIFICATION NO. 1463, TRAFFIC SIGNAL MOUNTING BRACKETS FOR MONOTUBE ARMS
revised June 22, 2001, City of Chicago, Department of Electrical Operations 3

SPECIFICATION NO. 1475, CORD: TRAFFIC SIGNAL, EIGHT CONDUCTOR NO. 16 AWG, 600 VOLT
revised September 26, 2006, City of Chicago, Department of Electrical Operations..... 5

SPECIFICATION NO. 1493, TRAFFIC SIGNAL: VEHICULAR, TWELVE INCH SINGLE FACE, SINGLE OR MULTIPLE SECTION, POLYCARBONATE, LED OR INCANDESCENT
revised March 20, 2000, City of Chicago, Department of Electrical Operations 8

SPECIFICATION NO. 1494, PEDESTRIAN TRAFFIC SIGNAL, 16 INCH WITH SYMBOLIC LED WALK/DON'T WALK LENSES POLYCARBONATE HOUSING
revised July 10, 2006, City of Chicago, Department of Electrical Operations..... 6

SPECIFICATION NO. 1495, TRAFFIC SIGNAL MOUNTING BRACKET POLYCARBONATE, SIDE OF POLE
revised March 20, 2000, City of Chicago, Department of Electrical Operations 3

SPECIFICATION NO. 1505, CHICAGO 2000 LIGHT POLE: ANCHOR BASE, 32'-6", 7 GAUGE FLUTED, TAPERED STEEL FOR 15" BOLT CIRCLE
revised July 17, 2006, City of Chicago, Department of Electrical Operations..... 12

SPECIFICATION NO. 1513, SPLIT PEDESTAL BASE: FOR CHICAGO 2000 LIGHT POLE
revised July 17, 2006, City of Chicago, Department of Electrical Operations..... 11

SPECIFICATION NO. 1537, CABLE: TRAFFIC SIGNAL, MULTIPLE CONDUCTOR, COPPER WIRE, 600 VOLT
revised September 26, 2006, City of Chicago, Department of Electrical Operations..... 7

SPECIFICATION NO. 1545, PEDESTRIAN COUNTDOWN TRAFFIC SIGNAL, LED, 16 INCH WITH SYMBOLIC WALK/DON=T WALK LENSES
revised August 31, 2005, City of Chicago, Department of Electrical Operations 7

ITEM 108, TRENCH AND BACKFILL WITH SCREENINGS

1. **DESCRIPTION** This work will consist of excavating a trench for the installation of conduit and backfilling with limestone screenings as a portion of the total backfill of the trench, all as shown in Bureau of Electricity Standard Drawings No. 579 and No. 813. This work must meet all applicable requirements of Article 815 of the Standard Specifications.
2. **MATERIAL**. Underground Cable Marking Tape must meet the requirements of Section 1066.05 of the Standard Specifications. Backfill must meet the requirements of Section 1003.04 of the Standard Specifications.
3. **CONSTRUCTION REQUIREMENTS**. The trench must be deep enough to provide thirty inches (30") of cover over the conduit to be installed. The trench must not exceed twelve inches (12") in width unless approved by the Resident Engineer. The bottom of the trench must be tamped, and the trench inspected by the Resident Engineer before conduit is installed. All trenches must be backfilled as soon as possible after the installation of the conduit or cable. Any material excavated from the trenches that in the opinion of the Resident Engineer is satisfactory backfill, may be used for backfill above the layer of screenings. The limestone screenings must be used to fill the bottom of the trench to a depth of one foot above the top of the conduit or duct encasement. Cinders, rocks, or other inappropriate materials will not be permitted to be used as backfilling material. Backfilling material, beginning with limestone screenings must be deposited in the trench in layers not to exceed six inches (6") in depth, and must be thoroughly compacted with a mechanical tamper before the next layer is deposited in the trench. All trenches for conduit must be backfilled as per this specification. Unsuitable material must be disposed of according to the requirements of Section 202.03 of the Standard Specifications. Underground cable marking tape must be installed twelve inches (12") below the finished grade for all conduit runs.
4. **METHOD OF MEASUREMENT**. This work will be measured in feet along the centerline of the trench. Trench and backfill will not be measured for payment for conduit which is installed by pushing or by directional boring. Where more than one (1) conduit is installed in a single trench, only one run will be measured for payment.
5. **BASIS OF PAYMENT**. This work will be paid for at the contract unit price per lineal foot, measured with conduit in place, for TRENCH AND BACKFILL WITH SCREENINGS. Such price will include the cost of all excavation, furnishing and placing all backfill material, and disposal of all surplus excavated material. If sidewalk, driveway pavement or pavement must be removed and replaced, such work will be paid for separately.

MATERIAL SPECIFICATION

DRAWINGS

813

579

ITEM 110, TRENCH AND BACKFILL FOR 2 TO 4 DUCTS

1. **DESCRIPTION** This work will consist of excavating a trench for the installation of a two 3 inch or a two 4 inch or a four 3 inch or a four 4 inch duct conduit package, encased in concrete, and backfilling with limestone screenings as a portion of the total backfill of the trench. This work will meet all applicable requirements of Article 815 of the Standard Specifications.
2. **MATERIAL**. Underground Cable Marking Tape must meet the requirements of Section 1066.05 of the Standard Specifications. Backfill must meet the requirements of Section 1003.04 of the Standard Specifications.
3. **CONSTRUCTION REQUIREMENTS**. The trench must not be less than three feet ten inches (3'10") deep to provide a minimum thirty inches (30") of cover over the concrete encased conduit to be installed in the trench. The trench must be between eighteen and twenty-four inches (18"-24") in width and must not exceed twenty-four inches (24") in width unless approved by the Resident Engineer. The bottom of the trench must be tamped, and the trench inspected by the Resident Engineer before conduit is installed. All trenches must be backfilled as soon as possible after the installation of the conduit. Any material excavated from the trenches that in the opinion of the Resident Engineer is satisfactory backfill, may be used for backfill above the layer of screenings. The limestone screenings must be used to fill the bottom of the trench to a depth of one foot above the top of the conduit or duct encasement. Cinders, rocks, or other inappropriate materials will not be permitted to be used as backfilling material. Backfilling material, beginning with limestone screenings will be deposited in the trench in layers not to exceed six inches (6") in depth, and must be thoroughly compacted with a mechanical tamper before the next layer is deposited in the trench. All trenches for conduit must be backfilled as per this specification. Unsuitable material must be disposed of according to the requirements of Section 202.03 of the Standard Specifications. Underground cable marking tape must be installed twelve inches (12") below the finished grade for all conduit runs.
4. **METHOD OF MEASUREMENT**. This work will be measured in feet along the centerline of the trench. Trench and backfill will not be measured for payment for conduit which is installed by pushing or by directional boring. Only one measurement will be made for the trench regardless of the number of conduit in the trench.

5. **BASIS OF PAYMENT.** This work will be paid for at the contract unit price per lineal foot, measured with duct in place, for TRENCH AND BACKFILL FOR 2 TO 4 DUCT. Such price will include the cost of all excavation, furnishing and placing all backfill material, and disposal of all surplus excavated material. Conduit and encasement will be paid for separately and are not included in this pay item. If sidewalk, driveway pavement or pavement must be removed and replaced, such work will be paid for separately.

Item 110
Page 2

April 2, 2001

ITEM 112, ELECTRICAL HANDHOLE, 30", 24" FRAME AND LID
ITEM 113, ELECTRICAL HANDHOLE, 36", 24" FRAME AND LID
ITEM 113A, ELECTRICAL HANDHOLE, 36", 30" FRAME AND LID

1. **DESCRIPTION.** This item is for supplying and installing an electrical handhole 30" in diameter with a 24" frame and lid or a handhole 36" in diameter with a 24" frame and lid in a parkway or sidewalk, or a handhole 36" in diameter with a 30" frame and lid in pavement or in a driveway.

6. **MATERIAL.** The frame and lid must meet the requirements of Material Specification 1458. The handhole must meet the requirements of Material Specification 1528. A 24" frame and lid must also meet the requirements of Standard Drawing 872. A 30" frame and lid must also meet the requirements of Standard Drawings 874 and 10927. Bricks must meet the requirements of Article 1041 of the Standard Specifications. All other materials used must meet the appropriate material requirements of the Standard Specifications.

3. **METHOD OF CONSTRUCTION.** The handhole will be a precast concrete structure, or, if conditions merit, a cast in place concrete structure, complete with cast iron frame and cover, and conforming in detail with either Drawing Number 867, Drawing Number 866, or Drawing 871, except that the number of conduit openings must be as shown on the construction plans.

Each handhole must be installed at the location specified on the plans or at the location identified by the Resident Engineer.

The area where the handhole is to be placed must be properly excavated. All disposable material must be properly disposed of per Section 202.03 of the Standard Specifications. Each handhole must be set or constructed on a foundation of loose stone not less than eight inches (8") deep. The 36" handhole for pavement installation must have a floor as shown in Drawing Number 871. The frame casting must be accurately set on a full bed of mortar to the finished elevation so that no subsequent adjustment will be necessary. It is desirable not to use a neck for the frame. However, if approved by the Resident Engineer, mortar and brick, or mortar and concrete rings, may be used to adjust to the proper grade. Adjustment rings, bricks, and frames must be set in a full mortar bed. Use of partial bricks will not be allowed. Bricks must be laid in full header courses only. Mortar must be mixed in a proportion of one (1) part of cement to three (3) parts sand by volume of dry materials. After entering laterals have been installed in place in the handhole, the openings in the wall must be plugged in an approved manner flush with the inner surface. If backfill is required, screenings must be used and properly compacted. Parkway must be restored to the proper grade. Pavement must be properly restored to the correct grade. Patching of the pavement must be done with high early strength concrete meeting the requirements of Articles 1001 and 1020 of the Standard Specifications. Sidewalks must be restored to the proper grade using a 5 inch thickness of concrete. The inside of the handhole must be clean of all debris.

4. **METHOD OF MEASUREMENT.** This item will be paid for at the contract unit price per each unit installed.

5. **BASIS OF PAYMENT.** The necessary excavation, backfilling and restoration of parkway and pavement must be made in accordance with the foregoing specifications, and the cost thereof must be included in the unit price each for installing ELECTRICAL HANDHOLE 30" IN DIAMETER WITH 24" FRAME AND LID, ELECTRICAL HANDHOLE.36" IN DIAMETER WITH 24" FRAME AND LID, or ELECTRICAL HANDHOLE 36" IN DIAMETER WITH 30" FRAME AND LID. No additional payment will be allowed for restoring parkway, sidewalk, or pavement. Removal of sidewalk or pavement will be paid for separately under a different pay item.

MATERIAL SPECIFICATION
1458
1528

DRAWING
866 874 871
867 872 10927

January 1, 2002

Item 112, 113, 113a Page 2

ITEM 117, ELECTRICAL MANHOLE 3'X4'X4' WITH 24" FRAME AND LID
ITEM 118, ELECTRICAL MANHOLE 3'X4'X4' WITH 30" FRAME AND LID
ITEM 119, ELECTRICAL MANHOLE 4'X6'X6' WITH 24" FRAME AND LID
ITEM 119A, ELECTRICAL MANHOLE 4'X6'X6' WITH 30" FRAME AND LID

1. **DESCRIPTION.** This item will consist of furnishing and installing an electrical manhole of the dimensions indicated with either a 24" or 30" frame and lid.
2. **MATERIAL.** The concrete manhole must meet the applicable requirements of Material Specification 1528. The frame and lid must meet the requirements of Material Specification 1458. A 24" frame and lid must meet the requirements of Standard Drawing 872. A 30" frame and lid must meet the requirements of Standard Drawings 874 and 10927. Bricks must meet the requirements of Article 1041 of the Standard Specifications. All other materials used must meet the appropriate material requirements of the Standard Specifications.
3. **METHOD OF CONSTRUCTION.** The manhole will be a precast concrete structure, or, if conditions merit, a cast in place concrete structure, complete with cast iron frame and lid. A 3'X4'X4' manhole with a 24" frame and lid must conform to the requirements of Drawing 730. A 3'X4'X4' manhole with a 30" frame and lid must conform to Drawing 729. A 4'X6'X6' manhole with a 24" frame and lid must conform to Drawing 732. A 4'X6'X6' manhole with a 30" frame and lid must conform to Drawing 733. The number and size of conduit openings will be as shown on the construction plans.

Each manhole will be installed in paved sidewalk, earth parkway, or in pavement at the location specified on the construction plans or at a location as directed by the Resident Engineer.

The area where the manhole is to be placed must be properly excavated. All disposable material will be properly disposed of per Section 202.03 of the Standard Specifications. Each manhole must be set or constructed to conform with the appropriate City of Chicago drawings, except that the number and size of conduit openings will be in accordance with the construction plans. The frame casting must be accurately set on a full bed of mortar to the finished elevation so that no subsequent adjustment will be necessary. Mortar and brick, or mortar and concrete rings, may be used to adjust to the proper grade. Adjustment rings, bricks, and frames must be set in a full mortar bed. Use of partial bricks will not be allowed. Bricks must be laid in full header courses only. In no instance will the neck of the manhole exceed two (2) feet in height. Mortar will be mixed in a proportion of one (1) part cement to three (3) parts sand by volume of dry materials. After entering laterals have been installed in place in the manhole, the openings in the wall must be plugged in an approved manner flush with the inner surface. If backfill is required, screenings must be used and properly compacted. Parkway must be restored to the proper grade. Pavement must be restored to the correct grade. Patching of the pavement must be done with high early strength concrete meeting the requirements of Articles 1001 and 1020 of the Standard Specifications. Sidewalks must be restored to the proper grade using a 5 inch thickness of concrete. The inside of the manhole must be clean of all debris.

Replacing Handhole with Manhole. When a present handhole is to be replaced with a new manhole, the handhole must be broken down and all debris removed. This will be paid for as a separate pay item. The present laterals and cables must be maintained during breakdown of a present handhole and construction of a new manhole. Present laterals must be cut back to terminate at a distance from the inner face of the new manhole wall, as directed by the Resident Engineer. The cost of cutting back the present laterals will be included in the cost of the new manhole. New laterals terminating in the manhole must be included in the cost of installing new lateral. The new manhole must be installed in accordance with the appropriate City of Chicago drawings. All other work associated with this replacement will be considered incidental to this pay item.

4. **METHOD OF MEASUREMENT.** This item will be measured per each unit installed.
5. **BASIS OF PAYMENT.** The unit price for installing manholes will include necessary excavation, backfilling and restoration of parkway and pavement in accordance with the foregoing specifications. No additional payment will be allowed for restoring parkway or the restoration of sidewalk or pavement. Removal of sidewalk or pavement will be covered by separate pay items. New conduit, if necessary, will also be paid for separately. The unit cost will be for complete installation for each unit for ELECTRICAL MANHOLE 3'X 4'X 4' WITH 24" FRAME AND LID, or ELECTRICAL MANHOLE 3'X 4'X 4' WITH 30" FRAME AND LID, or ELECTRICAL MANHOLE 4'X6'X6' WITH 24" FRAME AND LID, or ELECTRICAL MANHOLE 4'X6'X6' WITH 30" FRAME AND LID.

MATERIAL SPECIFICATION
1458 1528

DRAWING
730 872
874 10927
729 733
732

April 4, 2001
Item 117 118 119 119a
Page 2

SPECIFICATION 1385
DEPARTMENT OF STREETS AND SANITATION
BUREAU OF ELECTRICITY
CITY OF CHICAGO
REVISED JULY 1, 2008

PEDESTAL WITH BASE: ALUMINUM, FOR TRAFFIC SIGNALS

SUBJECT

1. The specification states the requirements of an aluminum pedestal and base with handhole and door for supporting a traffic signal.

GENERAL

2. (a) Specifications. The pedestal base must conform to the requirements herein stated, to the specifications and methods of test of the American Society for Testing and Materials (ASTM), to the requirements of the Society of Protective Coatings (SSPC), and to the requirements of the American Welding Society (AWS), of which the most recently published revisions will govern.
- (b) Acceptance. Pedestal bases not conforming to this specification will not be accepted.
- (c) Drawing. The drawing mentioned herein is a drawing of the Department of Streets and Sanitation. It is an integral part of this specification cooperating to state the necessary requirements.
- (d) Workmanship. All pedestal bases must be free of casting flaws and must have neat, smooth exterior surfaces. All holes must be accurately located and drilled. The bottom surface of the base must be ground smooth.
- (e) Sample. One complete pedestal of the manufacture intended to be furnished must be submitted within fifteen (15) business days upon receipt of a request from the Chief Procurement Officer.

DETAIL REQUIREMENTS

3. (a) Design. The pedestal base must conform to the design shown on Drawing Number 526. All bases must be of the same dimensions, and all doors must be interchangeable.

- (b) Base. The base must be cast of aluminum alloy 319 meeting the requirements of ASTM B26 with a minimum wall thickness of 9/32". The handhole opening must have a recessed lip along the entire length of both sides and the bottom such that with the door in place the exterior surface of the door is flush with the exterior surface of the base. The door must have the same curvature as the base. The door must be locked in place by means of two fingers located on its top edge which bear against the inside surface of the base, and a stainless steel Allen head locking screw which fastens to the base. The locking screw must be protected by a C-shaped drip edge protruding approximately 5/8" and concentrically encircling the screw head. The clearance between the inner surface of the drip edge and the outer surface of the screw head must be no greater than 1/8". The drip edge must encircle the screw head by a minimum of 300° with the opening in the drip edge centered at the bottom of the screw head. A continuous pipe stop must be integrally cast along the inside of the base 2.5" below the top edge.
- (c) Pedestal. The pedestal must be aluminum-alloy extruded round tube conforming to the requirements of ASTM B221, alloy 6063-T6. The aluminum pedestal must be flash anodized in accordance with Aluminum Association designation C22A21 or Alcoa designation 202-R1. Its outside diameter must be 5.563"; its wall thickness must be not less than 0.187", and its length must be as required to furnish the overall height specified in the order. The round tube must be inserted not less than two and one-half inches (2.5") into the base and welded with four (4) butt welds each not less than one (1) inch long on the inside and a continuous seam weld around the outside. Aluminum alloy pipe in lieu of aluminum alloy tube is acceptable.
- (d) Welding. The welds must be made by the inert gas metal welding process. Filler wire must conform to chemical composition requirements of AWS Alloy Number A5.10-69.

PAINTING

- 4. (a) Facility. All surface preparation and painting must be done indoors at a single facility specifically set up for painting purposes.
- (b) Surface preparation. Exterior surfaces must be prepared by solvent cleaning per SSPC – SP 1 (Surface Preparation Specification 1). The solvent used must be recommended for aluminum surfaces, such as Sherwin Williams MEK #R6K10. The solvent must be used according to the manufacturer's instructions to remove all oil, grease, dirt, and contaminants.

(c) Primer Coat.

1. Within one hour of surface preparation, surfaces must be primed using a primer specifically recommended for aluminum surfaces such as Sherwin Williams Industrial Wash Primer #P60G2.

(d)

1. Aluminum surface temperature must be at least 60° Fahrenheit and relative humidity must be less than 80% at time of primer application.
2. A minimum wet thickness must be applied to provide a 2mil dry thickness.
3. The primer must be dry for a period of 24 hours after which a second primer coat must be applied. The second coat must also have a dry thickness of 2 mils.

(e) Finish Coat.

1. The primer must be dry for a period of 24 hours before a finish coat can be applied.
2. The finish coat must be a polyurethane enamel specifically recommended for use over a primed aluminum surface.
3. Two coats of finish must be applied. Each must have a dry thickness of 1.5 mils.
4. Color will be gloss black unless otherwise specified. Paint samples must be approved before painting can commence.

(e) Alternate Coating Methods. Alternate coating methods, such as electrostatic powder coating, may be considered. However, no coating method will be accepted without the Commissioner's or his representative's approval.

(f) Durability. The paint coating must be capable of passing 1000 hours of salt spray exposure as per ASTM B117 in a 5% NaCl (by weight) solution at 95° Fahrenheit and 95% relative humidity without blistering. Before testing, a coated aluminum panel must be scribed with an "X" down to bare metal.

(g) Coating Measurement. Measurement of coating thickness must be done in accordance with SSPC – Pa 2-73T, "Measurement of Dry Paint Thickness with Magnetic Gauges".

PACKING

5. Each pedestal must be individually wrapped to prevent damage to the paint surface. Each pedestal must be suitably packed or blocked to prevent damage during shipment and handling.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1407
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED JUNE 27, 2006**

**POLE MOUNTED CAST ALUMINUM JUNCTION BOX FOR TRAFFIC
SIGNALS**

SCOPE

1. This specification states the requirements for pole mounted, cast aluminum junction boxes to be used as enclosures for traffic signal multiple cable terminals.

GENERAL

2. (a) Specifications. The junction boxes must conform in detail to the requirements herein stated, and to the specifications and methods of test of the American Society for Testing and Materials cited by ASTM Designation Number, of which the most recently published revisions will govern.
- (b) Drawing. The drawing mentioned herein is a drawing of the Department of Streets and Sanitation, Bureau of Electricity, and will be interpreted as part of these specifications.
- (c) Acceptance. Junction boxes not conforming to this specification will not be accepted.
- (d) Sample. One complete junction box of the manufacture intended to be furnished must be submitted within fifteen (15) business days after receipt of a request from the Chief Procurement Officer. The box must be delivered to the Bureau of Electricity.
- (e) Workmanship. All junction boxes must be free of casting flaws and must have neat, smooth exterior surfaces. All holes must be accurately located and drilled to ensure interchangeability of all components.

DESIGN

3. (a) Drawing. The junction box must conform in detail to the dimensions and requirements shown on drawing number 954.
- (b) Material. The body door and plate must be castings of non-heat treated aluminum silicon alloy conforming to ANSI alloy 443.0 of ASTM B26.

DETAIL REQUIREMENTS

4. (a) Assembly. Each junction box must consist of the body, door with its gasket, flat plate with its gasket, terminal block mounting bracket and bottom gasket with its stainless steel hardware furnished as described below, all completely assembled, painted and ready for installation.
- (b) Body. The body must be cast as shown in drawing number 954. The top and bottom sides of the box where flat plates, or other fittings, will be attached, must be identically cast, machined flat, and drilled and tapped in accordance with dimensions shown. All fittings which fit on the top side must fit on the bottom side.
- (c) Door. The door must be cast as shown in drawing number 954. The door must be hinged at the left with stainless steel hinge pins and must open not less than 180° to permit complete access to the interior of the junction box. Two stainless steel Allen head machine screws, undercut and held captive, must hold the door closed and maintain positive pressure against a sponge neoprene gasket cemented in place completely around the door jamb. The door must be finished and painted prior to cementing the gasket into its groove in the door.
- (d) End Plate. A flat end plate must be furnished with each body casting. The plate must be drilled to align with tapped holes in the body casting and have a flush match with the periphery of the top and bottom body casting pads. The plate must have a properly fitted gasket and be held in place by four (4) stainless steel machine screws.
- (e) Mounting Bracket. A terminal block mounting bracket, as shown on Drawing Number 954, must be furnished and installed in each junction box. The bracket must be cast from ANSI alloy 443.0 per ASTM B26.
- (f) Gaskets. The gasketing between the body and the door must be of sponge neoprene and must be cemented in place after painting of the door. A cork gasket, 1/8 inch thick, must be used between the end plate and the body of the junction box on the top end and held in place by four (4) stainless steel screws. An identical cork gasket and four (4) stainless steel screws must be placed within the box before shipping. This gasket with its screws will be used with the fitting used on the bottom end of the box.
- (g) Hardware. The hinge pins and all screws required for assembly of this junction box must be of stainless steel.
- (h) Painting. The exterior surfaces of the junction box must be properly cleaned and given one (1) coat of zinc chromate primer containing ten percent (10%) iron oxide and one (1) coat of enamel. The color of the enamel must be gloss black or as ordered. A color sample must be submitted and approved before manufacturing commences. The primer and enamel must be of an approved grade and quality.

- (i) Packing. After the paint is completely dry, and the junction boxes have been assembled, they must be suitably packed to prevent damage to painted surfaces during shipping and handling. All shipments must be fastened to, and shipped on, 48" x 48" hardwood, 4 way, non-returnable pallets. Total height must not exceed 64" and total weight must not exceed 2,000 pounds.

INSPECTION

5. An inspector representing the City of Chicago must have free access, at all times while work on these junction boxes is being performed, to all parts of the manufacturer=s work which are concerned with their manufacture. The manufacturer must afford the inspector, without charge, all reasonable facilities to satisfy him that the junction boxes are being furnished in accordance with this specification. The final inspection must be made at the point of delivery. Any junction boxes rejected must be removed and disposed of by the Contractor at his sole expense.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1454
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
APRIL 20, 2007**

MAST ARM: TRAFFIC SIGNAL MONO-TUBE

SUBJECT

1. This specification states the requirements for tapered, tubular, 7 gauge steel mono-tube arm with mounting brackets. The arm will support traffic signals and signs.

GENERAL

2. (a) Specifications. The arms must conform in detail to the requirements herein stated, and to the Specifications and Methods of Test of the American Society for Testing and Materials cited by ASTM Designation Number of which the most recently published revisions will govern.
- (b) Acceptance. Arms not conforming to this specification will not be accepted.
- (c) Bidders Drawings. Bidders must submit with their bids detailed scale drawings of the mast arm showing actual dimensions, details, and welds. Shop drawings must be original engineering drawings created by the manufacturer. The drawings must show every dimension necessary to show how all parts will fit each other and be properly held in assembly. These drawings must also be submitted in electronic format, preferably Microstation 95, if so requested by the City.
- (d) Drawings. The drawings mentioned herein are drawings of the Department of Streets and Sanitation being an integral part of this specification cooperating to state necessary requirements.
- (e) Sample. If requested by the Chief Procurement Officer, one complete mast arm of the manufacture intended to be furnished must be submitted for review by the Commissioner within fifteen (15) business days of receiving such request.

- (f) Warranty. The manufacturer must warrant the performance and construction of the mast arms to meet the requirements of this Specification and must warrant all parts, components, and appurtenances against defects due to design, workmanship, or material developing within a period of five years after the mast arms have been delivered. This will be interpreted particularly to mean structural or mechanical failure of any element or weld, or failure of any portion of the painting system. The warranty must be furnished in writing guaranteeing material replacement including shipment, free of charge to the City. The Commissioner will be the sole judge in determining which replacements are to be made and the Commissioner's decision will be final.

STANDARDS

3. (a) Assembly. Each arm must consist of a tubular tapered steel shaft, mounting brackets, an aluminum cap, and all mounting hardware.
- (b) Interchangeability. Members of each arm type must be mutually interchangeable for assembly, so that no reworking will be required to make any member fit properly in the place of any other similar member of any other similar arm.
- (c) Design. Each arm must meet the requirements as shown on Standard Drawing 870.

ARMS

4. (a) Arm Size. The outside diameters of the arm of each size must be as listed in Standard Drawing 870.
- (b) Material. The arm must be fabricated from one length of No. 7 Standard gauge steel meeting the requirements of ASTM A606 for low alloy high strength coil steel, which, after fabrication, must possess an ultimate tensile strength of not less than 70,000 psi and a yield strength of not less than 60,000 psi, in accordance with ASTM A595, Grade C. Chemistry of the steel must be such as to insure resistance to atmospheric corrosion superior to that of ordinary copper bearing steel. Material certification is required. Manufacturer's steel meeting the specified physical and chemical requirements, and approved by the Commissioner, will be accepted.
- (c) Fabrication. The arm must be fabricated with not more than one (1) longitudinal weld. The weld must be ground smooth so that it is virtually invisible. There must be no lateral welds in the arms other than where the arms are welded to the steel clamp. Each arm must be straight and centered on its longitudinal axis. Each arm must be formed on a mandrel and worked to form a round cross-section. The completed, unpainted arms must have smooth external surfaces free from protuberances, dents, cracks or other imperfections marring their appearance.

- (d) Clamp. The arm clamp must be of low alloy, high strength steel as noted in Section 4 (b). The clamp must be constructed as shown on Standard Drawing 870.
- (e) Structural Requirements. The mast arm must be manufactured in accordance with AASTHO's 1994 version of the Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals. The arm assembly must be designed to meet AASTHO's 1994 criteria for 80 MPH wind loading with a 30% gust factor. The arms must be designed appropriately for traffic signal applications within the City of Chicago.

CAP

- 5. (a) Design. The arm cap must be essentially conical with a globe-shaped upper-end and having a minimum wall thickness throughout of not less than 5/32 inches. The cone portion must meet the skirted portion of the arm in a smooth fillet, the skirt must enclose the top 7/8" inches of the arm. Three stainless steel, or other similar approved material, set screws not less than 3/4 inches long must be equally spaced in tapped holes around the skirt and must hold the cap securely in place on the arm.
- (b) Material. The cap must be of aluminum alloy 356-F per ASTM B108. It must have smooth surfaces, neat edges and corners and be free from fins, holes or other casting flaws.
- (c) Finish. Tops must be painted as herein specified.

HARDWARE

- 6. All the hardware necessary to complete the assembly of the arm must be furnished. All hardware must be stainless steel, or equal corrosion-resistant non-seizing metal, subject to approval.

WELDING

- 7. (a) General. Every welded joint must be made in conformity with the proper interpretation of the standard welding symbols of the American Welding Society as indicated on the drawings; however, each bidder must submit with his proposal a drawing showing the sizes and types of welds, must state the type of electrode, and must describe the welding methods, he proposes to use in fabricating the arm.
- (b) Testing. All welds of the first three (3) arms of the first fifty (50) arms in every lot must be inspected for penetration and soundness of the welds by the magnetic particle inspection method or by radiography. Acceptance or rejection must be governed by the same conditions as in Section 9. If the magnetic inspection process be used, the dry method with the direct current must be employed. All transverse welds must be magnetized by the "prod" (Circular magnetization) method. Longitudinal welds may be magnetized by either circular or longitudinal magnetization.

PAINTING

8. (a) Oil and Grease Removal. All metal surfaces must be washed with an alkaline detergent to remove any oils or grease.
- (b) Metal Cleaning. All exterior metal surfaces must be cleaned by blasting with a combination of shot and grit to remove all dirt, mill scale, rust, corrosion, oxides and foreign matter and provide a "near white" surface in accordance with SSPCS-SP 10.
- (c) Chemical Pretreatment. The cleaned metal surfaces must then be treated with a hot, pressurized iron phosphate wash and must be dried by convection heat.
- (d) Primer Coat. All exterior surfaces are to be coated with Tnemec 90-97 corrosion-inhibiting zinc-rich aromatic urethane to a minimum dry film thickness of 2.5 mils (.0025"). The aromatic urethane is to consist of a zinc dust content not less than 83% by weight in dried film. The coating must be airless-spray applied and moisture cured.
- (e) Finish Coat. All exterior surfaces are to be subsequently coated with Tnemec Endura-Shield II 1074 aliphatic acrylic polyurethane to a minimum dry film thickness of 3.0 mils (.003"). The coating must be airless-spray applied and cured in an oven by heating the steel substrate to between 150° Fahrenheit and 220° Fahrenheit.
- (f) Interior Coat. Interior surfaces are to be coated with red oxide rust inhibitive alkyd primer to a dry film thickness of 1.5 mils.
- (g) Durability. Both the exterior and interior coats must be capable of passing 1,000 hours of salt spray exposure as per ASTM B117 in a five percent (5%) Na Cl (by weight) solution at 95°F and 95% relative humidity without blistering. Before test, the panel must be scribed with an "X" down to bare metal.
- (h) Coating Measurement. Measurement of coating thickness must be done in accordance with SSPC-Pa 2-73T, "Measurement of Dry Paint Thickness with Magnetic Gauges," except that the lowest "single spot measurement" in an area of two square inches must not be less than 5.5 mils.
- (i) Color. Color must be gloss black unless noted otherwise in the order. A paint chip must be submitted for approval prior to fabrication.
- (j) Alternate Methods. Alternate coating methods may be reviewed and tested on a case by case basis. However, no coating method will be accepted unless the Commissioner judges such alternate to be equal to the coating herein specified.

ARM TEST

9. (a) General. All completed arms must be available for testing for maximum deflection and set. Unless specifically authorized in writing, all tests must be made at the works of the manufacturer. An engineer from the Bureau of Electricity must be present to witness and certify the tests. If an engineer from the Bureau is unavailable, an independent consultant, approved by the Bureau, must witness and certify the tests. There will be no cost to the City for this. A record of every test must be made and a certified copy of the test record must be submitted to the Engineer of Electricity before the arms are shipped.
- (b) Lot. Tests for deflection and set must be made upon the first three (3) arms in the first fifty (50) arms in the lot. An additional one (1) arm must be tested for each additional fifty (50) arms. If any of the arms in any lot fail to meet the test, an additional three (3) arms of the same lot must be tested. If any of these arms fail to meet the test requirements, the entire lot will be subject to rejection, except that the manufacturer may subject each arm in the lot to the test, and those which fulfill the requirement will be accepted. After testing, each weld must be inspected by the magnetic particle method to determine that the welds have not been affected.
- (c) Requirements. With arm rigidly anchored, a test load as indicated in the table in Standard Drawing 870 must be applied at a point approximately two feet (2'0") from the free end. The load must be applied at right angles to the center line of the arm and in the same vertical plane. The deflection must not be greater than that indicated. Within one (1) minute after the test load is released, measurement must be made of the set taken by the arm. The deflection measurement device must be reset to zero and the test load must be reapplied. The deflection must not change from the deflection noted in the first test by more than $\pm 5\%$. No measurable set must be noted within one (1) minute after test load is released.
- (d) The contractor must include in his bid, the cost of travel, food and lodging for one (1) engineer. Travel for 150 miles or greater must utilize a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. The engineer must be given ten (10) working days notice of travel arrangements.

PACKAGING

10. (a) General. The arms must be shipped in twelve (12) arm bundles. Each arm must be individually wrapped so that the arm can be bundled for shipping and unbundled for delivery to the job site without damaging the arm or its finish.
- (b) Bundles. The bundles must consist of twelve (12) arms laid base to top to form an approximately rectangular cylinder. Materials such as lumber (2" x 4" min.), non-marring banding, and other appropriate bundling materials must be used to make a rigid, long lasting, bundle capable of being handled, shipped and stored without shifting of contents or breaking, subject to approval. Any bundles, in which either arms or packaging is received broken, damaged or with contents shifted, will not be accepted and it will be the responsibility of the supplier to return the bundle to its original destination at no cost to the City of Chicago. The bundles should be capable of being stacked two (2) high without breaking, or shifting of the contents. Each bundle must be capable of being lifted by a fork lift truck or crane and the bundles must be shipped on a flat bed truck to facilitate unloading. Each arm wrapping must be clearly labeled indicating the mast size, i.e. 30' SIGNAL MAST ARM.
- (c) Hardware. The hardware must be shipped with each bundle and packaged in twelve (12) sets of four (4) each. The package must be placed in a prominent position to facilitate accessibility, and must be attached to, or within, the bundle in such a manner as to assure safe delivery. Payment will be withheld for any bundle delivered without the accompanying hardware. Arm caps must be attached at the manufacturer's facilities, or be packed separately in a manner similar to the other hardware, and the same payment conditions will prevail. Cracked, broken or chipped parts will be considered as an incomplete delivery as regards payment.
- (d) Delivery. All mast arms will be delivered to the Bureau of Electricity storage yard at 4101 South Cicero Avenue in Chicago, or to another location within the City as indicated on the order.

INSPECTION

11. An inspector representing the City must have free entry at all times, while the work on the contract is being performed, to all parts of the manufacturer's works which concern the manufacture of arms. The manufacturer must afford the inspector, without charge, all reasonable facilities to satisfy him that the arms are being furnished in accord with these specifications. The final inspection must be made at point of delivery. Any arms rejected as defective must be removed and disposed of by the contractor at his sole cost.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1457
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED AUGUST 3, 2006**

**CABLE: SERVICE ENTRANCE, THREE INSULATED CONDUCTORS IN ONE OVERALL
JACKET, 600 VOLT**

SUBJECT

1. This specification states the requirements for a three conductor (two power conductors and one neutral conductor) Ethylene Propylene Rubber (EPR) insulated, chlorosulfonated polyethylene (CSPE) or polyvinyl chloride (PVC) jacketed cable for installation on Commonwealth Edison service poles for the purpose of providing secondary power feeds from Commonwealth Edison to a City disconnect mounted on the pole for street lighting or traffic signal circuits.

GENERAL

2. (a) Specifications. The cable must conform in detail to the requirements herein stated, and to the applicable portions of the specifications and methods of test of the following agencies:
- (1) ICEA Specification S-95-658
 - (2) IEEE Standard 383
 - (3) ASTM Standard E-662-79
 - (4) ASTM Standard D-470-81
 - (5) U.L. 44
 - (6) U.L. 854
- (b) Acceptance. Cable not conforming to this specification will not be accepted.
- (c) Sample. A three (3) foot sample of the cable intended to be provided under this contract must be submitted to the Engineer of Electricity within fifteen (15) business days after receipt of such a request from the Chief Procurement Officer.
- (d) Warranty. The manufacturer must warranty the cable to be first class material throughout. If the cable is installed within one year of the date of shipment, the manufacturer must replace any cable failing during normal and proper use within two years of installation. The cable length to be replaced will be the entire unspliced length where the fault has been located. The Commissioner will be the sole judge in determining if a cable has failed and should be replaced. All replacements under this warranty must be made free of charge F.O.B. delivery point of the original contract

CABLE

- 3. (a) Construction. The cable must consist of three (3) conductors separately insulated and color coded. Suitable fillers must be used to produce essentially a round cross section in the completed cable. The insulated conductors must be cabled with a suitable left hand lay in conformance with the latest revision of ICEA S-95-658. A binder tape must be used over the cabled conductor assembly and a jacket applied overall.
- (b) Sealing. The ends of each length of cable must be sealed against the entrance of moisture.
- (c) Marking. The color of the neutral conductor must be white; that of the phase conductors must be black and red, respectively. The jacket must be black.
- (d) Each conductor must consist of a round copper wire with a tight fitting, free stripping, concentric layer of Ethylene Propylene insulation. The cable must be rated for continuous duty at 90°C operating temperature, wet or dry, 130°C emergency overload temperature and 250°C short circuit temperature.

CONDUCTOR

- 4. (a) Material. The conductor must either be soft or annealed round copper wire, tin coated.
- (b) Specifications. The conductor must meet the requirements of ASTM B3, and B8 for stranded Class B copper.
- (c) Size. The conductor size must be as stated in the proposal or on the plans.

INSULATION

- 5. (a) Type. The insulation must be Ethylene Propylene compound meeting the physical and electrical requirements specified herein.
- (b) Thickness. The insulation must be circular in cross-section, concentric to the conductor, and must have an average thickness not less than 30 mils (.030") for #14 AWG, 55 mils (.055") for #4 AWG, 65 mils (.065") for #2 AWG, 80 mils (.080") for #1/0 AWG, 80 mils (.080") for #2/0 AWG ,and a spot thickness not less than ninety percent (90%) of the average thickness.
- (c) Initial Physical Requirements:
 - (1) Tensile Strength, min., psi. 1200
 - (2) Elongation at Rupture, min. % 250

- (d) Air Oven Exposure Test. After conditioning in an air oven at $121 \pm 1^{\circ}\text{C}$ for 168 hours using methods of test described in ASTM-D 573:
 - (1) Tensile strength, min% of unaged value 75
 - (2) Elongation, min % of unaged value at rupture 75
- (e) Mechanical Water Absorption:
 - (1) Gravimetric Method: After 168 hours in water at $70 \pm 1^{\circ}\text{C}$:

Water absorption, maximum (Mg. per sq. in)	5.0
---	-----
- (f) Cold Bend Test Requirements. The completed cable must pass the "Cold-Bend, Long-Time Voltage Test on Short Specimens" of ASTM D-470 except that the test temperature must be minus (-) 25°C .
- (g) Electrical Requirements.
 - (1) Voltage Test. The completed cable must meet an A.C. and D.C. voltage test in accordance with ASTM- D-470 and D-2655.
 - (2) Insulation Resistance. The completed cable must have an insulation resistance constant of not less than 20,000 when tested in accordance with methods shown in ASTM D-470.

JACKET

- 6. (a) Type. The jacket must be either a chlorosulfonated polyethylene (CSPE) or a polyvinylchloride (PVC) compound meeting the physical and electrical requirements specified herein. CSPE must meet the environmental requirements of CFR Title 40, Part 261 for leachable lead content.
- (b) Thickness. The jacket must be circular in cross-section, concentric with the insulation, must have an average thickness not less than 45 mils (.045") for #14 AWG, 80 mils (.080") for #2 and #4 AWG, and not less than 95 mils (.095") for #1/0 and #2/0 AWG, and a spot thickness not less than ninety percent (90%) of the average thickness.
- (c) Initial Physical Requirements:
 - (1) Tensile strength minimum PSI..... 1800
 - (2) Elongation at rupture, minimum percent 300
- (d) Air Oven Exposure Test. After conditioning in an air oven at $121 \pm 1^{\circ}\text{C}$ for 168 hours:
 - (1) Tensile strength, minimum percent of unaged value 75
 - (2) Elongation at rupture, minimum percent of unaged value 60

(e) Mechanical Water Absorbtion. After 168 hours at $70 \pm 1^{\circ}\text{C}$:

(1) Milligrams per square inch, maximum 20

1. TESTING

7. (a) General. Tests must be performed on insulation, jacket and completed cables in accordance with the applicable standards as listed in these specifications. Included in these tests will be a 70,000 BTU per hour flame test in accordance with IEEE 383. Where standards are at variance with each other or with other portions of this specification, the most stringent requirements, as determined by an engineer from the Bureau of Electricity, will apply. All tests must be conducted on cable produced for this order.
- (b) Number of Tests. Insulation and jacket tests must be conducted on samples taken every 5,000 feet or fraction thereof of each conductor size. In no case must less than two (2) samples be taken. Approximately five percent (5%) of the cable must be tested. Where the cable fails to conform to any of the tests specified herein, samples must be taken from each reel and must successfully conform to all tests specified herein. Reels from which samples fail to conform, will be rejected.
- (c) Witness Tests. If requested by the City, an engineer from the Bureau of Electricity must be present for testing. The contractor must include in his bid, the cost of travel, food and lodging for one (1) engineer. Travel for 150 miles or greater must utilize a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. The engineer must be given ten (10) working days notice of all travel arrangements.
- (d) Test Reports. No cable may be shipped until certified copies of all factory tests have been reviewed and approved by the engineer.

PACKAGING

8. (a) Cable Marking. The cable must be identified by a permanently inscribed legend in white lettering as follows:
- 3/C - No. (conductor size)AWG-600V-90°C-EPR/CSPE or EPR/PVC- manufacturers name- month-year of manufacture
- The legend must be repeated at approximately eighteen (18) inch intervals on the outside surface of the cable parallel to the longitudinal axis of the conductor.
- (b) Reels. The completed cable must be delivered on sound substantial, non-returnable reels. Both ends of each length of cable must be properly sealed against the entrance of moisture and other foreign matter by the use of clamp-on cable caps. The ends must be securely fastened so as not to become loose in transit. Before shipment, all reels must be wrapped with cardboard or other approved wrapping.

- (c) Footage. Each reel must contain 1,000 foot of cable for either #4 AWG or #2 AWG and 500 feet of cable for #1/0 AWG or #2/0 AWG. A tolerance limit of plus or minus ten percent ($\pm 10\%$) must be adhered to.
- (d) Reel Marking. A metal tag must be securely attached to each reel indicating the reel number, contract number, date of shipment, gross and tare weights, description of the cable and the total footage. Directions for unrolling the cable must be placed on the reel with an approved permanent marking material such as oil-based paint or a securely attached metal tag.

TABLE 1 - THREE CONDUCTOR SERVICE ENTRANCE CABLE

Size (AWG)	Overall Diameter (mils)	No. Of Strands	Test Volts (KV)	Footage per Reel	Insulation (mils)	Jacket (mils)
4	950	7	4.5	1000	55	80
2	1100	7	4.5	1000	65	80
1/0	1400	19	5.5	500	80	95
2/0	1800	19	5.5	500	80	95

THIS SPECIFICATION MUST NOT BE ALTERED

SPECIFICATION 1463
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED JUNE 22, 2001

**TRAFFIC SIGNAL MOUNTING BRACKETS FOR
MONOTUBE ARMS**

SUBJECT

1. This specification states the requirements for mounting brackets which will be used to secure traffic signals and illuminated signs to steel monotube mast arms.

GENERAL

2. (a) Specifications. The mounting brackets must conform in detail to the requirements herein stated and to the specifications and methods of test of the American Society for Testing and Materials cited by ASTM Designation number of which the most recently published revision will govern.
- (b) Acceptance. Mounting brackets not conforming to these specifications will not be accepted.
- (c) Sample. If requested by the Chief Procurement Officer, one complete mounting bracket must be submitted within fifteen (15) business days upon receipt of such a request. It must be delivered to the Engineer of Electricity, 2451 South Ashland Avenue, Chicago, Illinois 60608.
- (d) Experience. The manufacturer must demonstrate a knowledge of past production of the brackets herein described, as demonstrated by a submittal list of comparable projects.
- (e) Warranty. Bracket must have a minimum three (3) year warranty. The warranty must cover the material and workmanship. Any structural flaws or inability to maintain alignment will be deemed a failure and result in the warranty being invoked. The manufacturer will supply a new bracket for each failed bracket, at no cost to the City.

DESIGN

3. (a) General. The mounting bracket must be designed such that no portion of the bracket is put into tension when it is attached to the mast arm with banding. The signal support tube will be attached to the bracket using compression type attachments. All materials must be corrosion resistant and designed to be structurally sound. The bracket will be equivalent to an Olson Sky Bracket in design and function. The signal support tube will be a slotted aluminum pipe of sufficient length to hold either a 3, 4, or 5 section signal head, or an illuminated sign. The slot must have a neoprene gasket to protect the cable. There must also be top and bottom brackets that hold the signal head assembly at each end to the tube. The bottom bracket will also be used as a cable runway.
- (b) Hardware. All components of the mounting brackets must be held firmly in place with stainless steel hardware.
- (c) Adjustments. Bracket must allow for mounting and adjustment of signal faces in any direction desired on a fixed mast arm. Adjustments must be made using standard hand tools. Neither mounting nor adjusting the bracket should require the use of a torque wrench.
- (d) Signal Mounting. Mounting hardware must be available for use with standard two, three and five signal head configurations; for use with optically programmed signal heads; and with signs.
- (e) Wiring. Bracket design must allow for ease of installation of components and wiring. All wiring troughs and nipples must provide smooth, burr-free surfaces and adequate space for facile movement of nominal 2" diameter cable between the mast arm and the signal face.
- (f) Banding. Where banding is used to attach the mounting bracket to the mast arm, the banding must be 3/4" x 42" stainless steel.
- (g) Castings. Where castings are used for the brackets, they must be smooth and free of defects.

TESTING

4. (a) General. One Percent (1%) of the traffic signal mounting brackets in each order must be tested for rigidity and structural integrity.
- (b) Re-testing. If any mounting bracket fails any portion of the test, an additional three percent (3%) of the brackets must be tested. If an additional bracket fails, the entire lot will be rejected.

- (c) Witness Tests. If so requested by the City, tests will be witnessed by a representative of the Bureau of Electricity. The contractor must include in his bid, the cost of travel, food and lodging for one (1) representative. Travel for 150 miles or greater must utilize a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. The representative must be given ten (10) working days notice of all travel arrangements.
- (d) Tests.
1. With five (5), twelve inch (12") signal head sections attached to the bracket, the assembly must be mounted to a suitable and proper supporting structure.
 2. Using a calibrated dynamometer, a one hundred pound force must be applied for sixty seconds at the center of the bracket in the horizontal plane. At the completion of the test, there must be no movement of the assembly or deterioration of the bracket or appurtenant hardware.
 3. Using a calibrated dynamometer, a one hundred pound force must be applied to the top signal head section for sixty seconds in a direction which will pull the head away from the mounting post in the mounting post plane. During this time period, the mounting bracket castings must be struck ten times with an eight once flat head hammer at the point(s) which appear to be most vulnerable to stress. At the completion of the test, no movement of the assembly must have been observed and there must be no cracking of the castings or deterioration of the appurtenant hardware.
 4. The above test must be repeated except that the force must be applied in a plane which is perpendicular to the mounting post plane.

INSPECTION

5. An inspector representing the City must have free entry at all times while the work on the contract is being performed, to all parts of the manufacturer's works which concern the manufacture of these mounting brackets. The manufacturer must afford the inspector, without charge, all reasonable facilities to satisfy him that the mounting brackets are being furnished in accord with this specification. The final inspection must be made at point of delivery. Any mounting brackets rejected as defective must be removed and disposed of by the contractor at his sole cost.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1475
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED SEPTEMBER 26, 2006**

CORD: TRAFFIC SIGNAL, EIGHT CONDUCTOR NO. 16 AWG, 600 VOLT

SUBJECT

1. This specification states the requirements for an eight (8) conductor number 16 AWG, electrical cable, to be installed in poles and conduit and used to electrically energize traffic signal faces at street intersections within the City of Chicago. The cable must be flame retardant, have low acid gas content, good resistance to oil, moisture and mechanical abuse, and exhibit excellent heat aging and electrical characteristics.

GENERAL

2. (a) Specifications. The cable must conform in detail to the requirements herein stated, and to the Specifications and Methods of Test of the American Society for Testing and Materials cited by ASTM Designation Number, the Underwriters Laboratories, Inc. Standard or Style number and any other recognized Standardization group=s specifications referred to by the appropriate designation, of which the most recently published revision will govern.
- (b) Acceptance. Cable not conforming to this specification will not be accepted.
- (c) Warranty. The manufacturer must warrant the cable to be first class material throughout. In addition to any other claims against them, if the cable is installed within six months of date of shipment, the manufacturer must replace any cable failing during normal and proper use within two years of date of installation. All replacements under this warranty must be made free of charge F.O.B. delivery point of the original contract.
- (d) Sample. If requested by the Chief Procurement Officer, a three (3) foot sample of the cable intended to be provided under this specification must be submitted to the attention of the Engineer of Electricity within fifteen (15) business days after receipt of such request.

CABLE

3. (a) Construction. This cable must consist of stranded, coated, conductors each concentrically encased with a "free stripping," ethylene propylene rubber insulation. Suitable fillers must be used to produce an essentially round cross-section. The insulated conductors and the fillers must be cabled with a suitable left-hand lay as close together as is consistent with forming a core of minimum diameter. A Mylar tape must be wrapped over the conductor assembly, and a jacket applied overall.
- (b) Outer Diameter. The maximum allowable outer diameter must be one-half (0.50) inch.
- (c) Sealing. Both ends of each length of cable must be thoroughly sealed to prevent the entrance of moisture or other foreign matter.

MARKING

4. (a) Conductors. Identification must be provided by colors in accordance with I.M.S.A. Standards.
- (b) Jacket. The outer jacket must be marked as follows: "8/C 16 AWG 600V 90°C LSZH, name of manufacturer and date of manufacture. The height of letters must not be less than 1/8 inch in height and the message must repeat at approximately two (2) foot intervals. A sequential footage marking must be located on the opposite side of the jacket. All marking must be perfectly legible with permanent white ink.

CONDUCTOR

5. (a) Material. Round, Soft or annealed, stranded copper wire in accordance with ASTM B-3 and B-8, and coated in accordance with ASTM B33 (tin coated) , must be furnished.
- (b) Size. The stranded conductor must consist of stranded wires twisted with an appropriate lay to form a No. 16 AWG conductor with an approximate diameter of 0.048 inches.

INSULATION

6. (a) Type. The insulation must be an easily strippable low smoke zero halogen (LSZH) thermosetting polyolefin compound or ethylene propylene rubber (EPR), or equal meeting or exceeding the requirements of ICEA S-95-658 and the additional requirements of this specification.
- (b) Rating. The insulation must be rated for continuous duty at 90°C in accordance with U.L. AWM Style 3400.
- (c) Thickness. The insulated conductor must be circular in cross-section, concentric to the conductor, with a nominal insulation thickness of 0.031 inches (2/64") and a minimum spot thickness of 90% of the nominal thickness.

(d) Initial Physical Requirements:

- | | |
|----------------------------------|-------|
| 1. Tensile strength, min., PSI | 1,600 |
| 2. Elongation at rupture, min. % | 250 |

(e) Air Oven Exposure Test. After conditioning in an air oven at $158 \pm 1^\circ\text{C}$ for 168 hours using methods of test described in ASTM-D 573:

Tensile strength, minimum percent of unaged value85

Elongation at rupture, minimum percent of unaged value65

(f) Mechanical Water Absorption:

1. Gravimetric Method. After 168 hours in water at $70 \pm 1^\circ\text{C}$:

Water absorption, maximum, milligrams per square inch . . .5.0

(g) Cold Bend Test Requirements. The completed cable must pass the "Cold-Bend," Long-Time Voltage Test on Short Specimens of ASTM D-470 except that the test temperature must be minus (-) 25°C .

(h) Electrical Requirements:

1. Voltage Test. The completed cable must meet an A.C. and D.C. voltage test in accordance with ASTM D-470 and D-2655.

2. Insulation Resistance. The completed cable must have an insulation resistance constant of not less than 20,000 when tested in accordance with methods shown in ASTM D-470.

(i) Flexibility Tests. A sample length of insulated conductor must be formed in a loose coil, placed in a circulating air oven, and aged for 168 hours at $158^\circ\text{C} \pm 1^\circ\text{C}$. The sample must then be allowed to cool to room temperature for one (1) hour and tightly wrapped around a 3X metal mandrel. The sample must show no cracks and must pass the same voltage test specified for the "Cold-Bend Test."

JACKET

7. (a) Type. The jacket must be a thermosetting low smoke zero halogen (LSZH) polyolefin compound or chlorinated polyethylene (CPE), or equal meeting the physical and electrical requirements specified herein.

- (b) Rating. The jacket must be rated for continuous duty at 90°C .

- (c) Thickness. The jacket must be circular in cross-section, concentric with the insulation, must have an average thickness not less than 45 mils and a spot thickness not less than ninety percent (90%) of the average thickness.

- (d) Initial Physical Requirements:
- | | | |
|----|--|------|
| 1. | Tensile strength minimum PSI | 1800 |
| 2. | Elongation at rupture, minimum percent | 300 |
- (e) Air Oven Exposure Test. After conditioning in an air oven at $121 \pm 1^\circ\text{C}$ for 168 hours for LSZH or $136 \pm 1^\circ\text{C}$ for CPE:
- | | | |
|----|---|----|
| 1. | Tensile strength, minimum percent of unused value | 75 |
| 2. | Elongation at rupture, minimum percent of unaged valued | 55 |
- (f) Mechanical Water Absorption. After 168 hours at $70 \pm 1^\circ\text{C}$:
- | | | |
|----|-------------------------------------|----|
| 1. | Milligrams per square inch, maximum | 20 |
|----|-------------------------------------|----|

TESTING

8. (a) General. Tests must be performed on insulation, jacket and completed cables in accordance with applicable standards as listed in this specification. Where standards are at variance with each other or with other portions of this specification, the most stringent requirements, as determined by an engineer from the Bureau of Electricity will apply.
- All tests must be conducted on cable produced for this order. Where cable insulation and/or jacket thickness preclude obtaining samples of sufficient size for testing, special arrangements must be made with the engineer to obtain samples of unprocessed materials directly from the extrusion feed bins which will be separately processed and prepared for tests.
- (b) Number of Tests. Insulation and jacket tests must be conducted on samples taken every 25,000 feet or fraction thereof of each conductor size. In no case must samples be taken closer than 15,000 feet apart.
- (c) Witness Tests. Where the quantity of cable on a single purchase order is 100,000 feet or more, all insulation and jacket tests must be witnessed by an engineer from the Bureau of Electricity, if so requested by the City. Reels to be tested will be selected at random. The contractor must include in his bid, the cost of travel, food and lodging for one (1) engineer. Travel for 150 miles or greater must utilize a major airline. Lodging accommodations must be equal to those provided at a Holiday, Inn. The engineer must be given ten (10) working days notice of all travel arrangements.

- (d) Test Reports. No cable must be shipped until certified copies of all factory tests, including witness tests where applicable, have been reviewed and approved by the engineer.
- (e) Acceptance. Samples must be taken from each reel and must successfully conform to all tests specified herein. Reels from which samples fail to conform, will be rejected.

PACKAGING

- 9. (a) Reels. The completed cord must be delivered on sound, substantial reels. The ends of the cable must be securely fastened so that they will not become loose during shipment and handling.
- (b) Footage. The number of feet per reel must be five hundred (500) feet plus or minus ten percent ($\pm 10\%$).
- (c) Marking. A metal tag, or an approved indelible marking material such as alkyd enamel paint, must be used to mark the reel. The marking information must include, but not be limited to, the following: reel number, contract number, a description of the cord, and the footage of that particular reel.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1493
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
MARCH 20, 2000**

**TRAFFIC SIGNAL: VEHICULAR, TWELVE-INCH
SINGLE FACE, SINGLE OR MULTIPLE-SECTION,
POLYCARBONATE, LED OR INCANDESCENT**

GENERAL REQUIREMENTS

- 1.1 This specification states the requirements for twelve-inch, single face, single and multiple-section, traffic signals with polycarbonate housings, using LED or incandescent light source, for use in the traffic control system of the City of Chicago. Units include red ball, yellow ball, green ball, red arrow, yellow arrow, and green arrow.
- 1.2 Sample and Certified Test Reports. One complete signal, fully assembled and wired, of the manufacture proposed to be furnished, must be submitted along with the required certified test reports, within fifteen (15) business days upon request of the Chief Procurement Officer. The sample must be delivered to the Engineer of Electricity, Bureau of Electricity, 2451 South Ashland Avenue, Chicago, Illinois 60608.
- 1.3 Standards. Equipment furnished under this specification must meet the appropriate requirements of the following standards, as required within the body of this specification:
 - American Association of State Highway and Transportation Officials (AASHTO)
 - American Society for Testing and Materials (ASTM)
 - Institute of Transportation Engineers (ITE)
 - National Electrical Manufacturers Association (NEMA)
 - Underwriters Laboratories (UL)
- 1.4 Approval. Approval will mean approval in writing by the Commissioner or his/her duly authorized representative.

1.5 Warranty. The manufacturer must warrant the signals to meet the requirements of this specification, and must warrant all equipment, components, parts and appurtenances against defective design, material and workmanship for a period of three (3) years from date of acceptance. In addition, LED optical units must carry a seven (7) year warranty against failure or loss of color (chromaticity) and signal brightness (luminance) below minimum acceptable VTCSH standard levels from date of final acceptance for contract construction, or date of delivery on a specific order. In the event defects or failures occur in the LED units during the warranty period, the manufacturer must replace all defective units, at no expense to the City. This warranty must be evidenced by a letter or certificate of warranty submitted to the City at the time delivery is made. The LED warranty must cover all units delivered in an order or installed by contract, and must include unit serial numbers. The warranty must be signed and dated by an official of the manufacturer who is empowered by the manufacturer to enter into such a warranty.

2. MATERIALS AND EQUIPMENT REQUIREMENTS

2.1 The traffic signal heads must conform to ITE Standard "Vehicle Traffic Control Signal Heads" (VTCSH), in which the most recently published revision will govern.

2.2 Housing. The housing of each section must be one piece, ultraviolet stabilized polycarbonate resin of the specified color, injection molded complete with integral top, bottom, and sides, having a minimum thickness of 0.1 inch.

(a) The polycarbonate must meet or exceed the following tests:

TEST	REQUIRED	METHOD
Specific gravity	1.17 minimum	ASTM D 792
Vicat Softening temp	310-320° F	ASTM D 1525
Brittleness temp.	-200° F	ASTM D 746
Flammability	Self-extinguishing	ASTM D 635
Tensile strength, yield	8,500 PSI	ASTM D 638
Elongation at yield	5.5-8.5%	ASTM D 638
Shear strength, yield	5,500 PSI min.	ASTM D 732
Izod impact strength (notched, 1/8" thick)	12-16 ft-lbs/in.	ASTM D 256
Fatigue strength (at 2.5 mm cycles)	950 PSI min.	ASTM D 671

(b) Assembly. A traffic signal section must be comprised of, but not limited to, the housing, hinged door, visor, optical unit and all necessary gaskets and hardware. The multi-section, single face, traffic signal must be comprised of single face single sections assembled together, containing an internally mounted terminal block. Arrow indications must be shipped as single sections. The traffic signals must be designed and constructed to permit sections to be assembled together, one above the other, forming a weatherproof and dust-tight unit.

- (c) Individual sections must be fastened together with a coupling washer assembly composed of two washers, three zinc plated bolts, nuts, and lock washers which lock the individual sections together. As an alternative, individual sections may be fastened together with four cadmium plated bolts, lock washers, and nuts. The hole in the coupling washer assembly must accommodate three 3/4 inch cables.
- (d) Height. The overall height of an assembled traffic signal must be fourteen (14) inches for a single-section signal, forty-two (42) inches for a three-section signal, and seventy (70) inches for a five-section, plus or minus one (1) inch.
- (e) Mounting. The traffic signal must be designed for mounting with standard traffic signal brackets using 1-1/2 inch pipe size fittings.
- (f) Positioning Device. The top and bottom opening of each housing must have integral serrated bosses that will provide positive positioning of the signal head in five degree increments. A total of 72 teeth must be provided in the serrated bosses to allow the signal face to be rotated 360 degrees about its axis. The teeth must be clean and well defined to provide positive positioning.
- (g) Hinges. The signal housing must be sectional; one section for each optical unit. Each housing must have four integral hinge lugs, with stainless steel hinge pins (AISI 304 or equivalent), located on the left side for mounting the door. The hinge pins must be straight and not protrude past the outside of the housing lugs. The housing must have two integral latching bolt lugs on the right side each with a stainless steel hinge pin to which a latching bolt (AISI 304 or equivalent), washer, and wing nut will be attached. The wing nuts must be captive. Each housing must be equipped with holes to be used for mounting backplates.
- (h) Door. The door must be a one piece ultraviolet stabilized polycarbonate resin of the specified color, injection molded complete with a minimum thickness of 0.1 inch. Two (2) hinge lugs on the left side and two (2) sets of latch screw jaws centered on the right side, as viewed from the front of the signal, must be integrally cast with the housing door. The door must be hinged to the housing with two (2) stainless steel hinge pins, drive fitted. Two (2) stainless steel latch screws and wing nut and washer assemblies on the latch side of the housing body must provide for opening and closing the door without the use of tools. The door must have eight (8) holes with threaded metal inserts for stainless steel machine screws to secure the visor(4 holes) and the lens(4 holes). The inside of the door must be grooved to accommodate a one piece, air-cored EPDM (ethylene propylene diene monomer) gasket to provide a weatherproof and dust proof seal when the door is closed. The inside of the door must have four equally spaced threaded metal inserts for the lens attachment. The outside of the door must have an integral rim completely encircling the lens opening to prevent leakage between the door and the lens. The rim must have four equally spaced tabs around the circumference with threaded metal inserts for the visor.

- (i) Visor Each traffic signal must have a visor for each signal indication (section). The visor must be the tunnel type, nine and one-quarter inches (9-1/4") long, fabricated of ultraviolet stabilized polycarbonate resin of the specified color, injection molded. The visor must fit tightly against the door and not permit any light leakage between the door and visor. All hardware necessary for, but not limited to, attachment of the visor must be of stainless steel. The visor must have four mounting lugs for attaching the visor to the door. Screws must go through the visor lugs into the metal inserts in the door to secure the visor.

2.3 The traffic signal heads must be provided with incandescent or LED optical units as specified in the line item or Contract Plans.

2.3.1 INCANDESCENT OPTICAL UNITS

- (a) Incandescent Optical Unit. The incandescent optical unit consists of the lens, reflector and lamp holder. The optical unit and visor must be designed as a whole so as to eliminate the return of outside rays entering the unit from above the horizontal (known as sun phantom). The optical unit must be designed and assembled so that no light can escape from one indication to another.
- (b) Lenses. The red, yellow and green polycarbonate lenses must be round with a nominal twelve (12) inch diameter and must conform to all requirements set forth under the heading "Traffic Signal Lenses" in the ITE standard. The red, green or yellow arrow lenses must be round with a nominal twelve (12) inch diameter and the outside surface must be covered, except for the arrow, with a dull or dark grey opaque material of a thickness sufficient to totally hide the light from a 2000-lumen lamp placed behind it operating at rated voltage. The opaque material must be hard and durable and must be bonded such that it will not peel or flake when subject to the heat of a signal lamp or when the lens is washed. The shape and size of the arrow must be of an approved design with a minimum stroke of fifteen-sixteenths (15/16) inch. The arrow must appear uniformly illuminated when viewed from angles usually encountered in service, whatever may be the angular position of the lens in the signal section. The lens must be enclosed by an air-cored EPDM (ethylene propylene diene monomer) gasket providing a weather proof and dust proof seal between the lens, door, and reflector assembly. The gasketed lens must be secured to the housing door by four (4) stainless steel screws (AISI 304 or equivalent) and clamps equally spaced around the lens opening. The door must have threaded metal inserts to receive the screws.

- (c) Reflector. The reflector must be fabricated of high-purity, clad-type aluminum sheet formed to a parabolic shape and cut to fit in a circular polycarbonate, hinged frame for rigid mounting within the housing. The circular rim of the reflector must be mounted in such a way as to seal the internal optical system by being compressed against the lens gasket when the signal door is closed. The reflecting surface must be an "ALZAK" class SI specular finish having a minimum reflectivity of eighty-two (82) percent and a protective oxide coating of 7.5 milligrams per square inch, minimum. The reflectivity must be determined with a Taylor-Baugartner Reflectometer, and the weight of the protective oxide coating by the method of test outlined in ASTM B 137. The reflecting surface must be tested for proper sealing by applying one (1) drop of a water solution (1 gram per 50 cc) of Anthraquinone Violet R at a room temperature. After five (5) minutes, the dye must be washed from the surface with running water. No stain must remain after the surface is lightly rubbed with a soft cloth wet with mild soap and water, and rinsed with water. The reflector must have an opening in the back to accommodate the lamp holder.
- (d) Lamp Holder. The lamp holder must have a heat, moisture and weatherproof molded phenolic housing designed to accommodate a standard 133 watt, 3 inch light center length, incandescent lamp. The lamp holder must be so designed that it can be readily rotated and positively positioned to provide proper lamp filament orientation and focus. The inner brass shell, or ferrule, of the lamp holder must have a grip to prevent the lamp from working loose due to vibration. A gasket must be furnished at the junction of the lamp holder and the reflector.

2.3.2 LIGHT EMITTING DIODE (LED) OPTICAL UNITS

- (a) Light emitting diode (LED) optical units must consist of an integral unit containing the following components: power leads, housing, integral lens, matrix of light emitting diodes (LEDs) emitting monochromatic light of desired signal color, and electronic and electrical components necessary to permit operation at nominal 120 volt, 60 hertz power.
- (b) The LED unit must be of such dimensions as to permit mounting in any standard traffic signal housing, be interchangeable with incandescent optical units, and must include appropriate gasket for this purpose. Gasketing provided must provide a watertight seal meeting existing ITE standard for signal heads, and exclude the infiltration of moisture into either the signal housing or into the LED optical unit case.
- (c) The LED unit must meet the applicable requirements of the ITE standards for Vehicle Traffic Control Signal Heads(VTCSH) Part 2: LED Vehicle Signal Modules, for color (chromaticity), signal brightness (luminance), and beam spread (luminance at various vertical and horizontal angles). Yellow LED modules must meet the green module requirements for brightness.

- (d) Minimum brightness of LED signal units must be in accordance with the luminous requirements in a standard testing procedure as defined by Section 4 of the VTCSH Part 2: LED Vehicle Signal Modules. During the required operating life of LED signal units, the luminance output of the units must not be less than 60 percent (.60) of the values specified in the standard.
- (e) Unit lenses must be twelve inches in diameter and be constructed of ultraviolet (UV) stabilized , impact resistant polycarbonate, acrylic or other approved material. Lenses must be clear or tinted.
- (f) Units must consist of LEDs uniformly distributed to present a homogeneous appearance on the face of the lens from a wide viewing angle.
- (g) LEDs must be wired so that the loss of a single LED or a string of LEDs will not reduce the luminescence below the minimum requirement.
- (h) For purposes of this specification, failure of a single unit is defined as an occurrence where the luminescence of the signal measured in candela in standard test procedures is less than the required initial luminance or luminance at time points and conditions specified; or where minimum required brightness is achieved, but two or more series strings of LEDs or in excess of twenty percent of 20% of LEDs are not operable.
- (i) Unit power supply must be constant current regulated and filtered to provide instant on indications, and to prevent momentary signal outages or flicker. Units must be fully operable over a range of 90 volts to 130 volts at 60 hertz, plus or minus 3 hertz.
- (j) Surge protection: Each unit must be provided with integral surge protection to withstand transient of 600 volt, 100 microsecond rise and 1 millisecond pulse width. The surge protector must provide full electrical and physical protection to all unit components.
- (k) Maximum permissible power consumption at ambient conditions (nominal 120 volts, 60 hertz, 70 degrees F.) must be 30 watts at a minimum 90 percent power factor. Power consumed must not vary by more than ten (10) percent from nominal power consumption over voltage range of 105 volts to 125 volts, and over permissible environmental ranges.
- (l) Units must be fully operable at temperature ranges of -40 degrees F. (-40 deg C) to +165 degrees F. (+74 deg C) at up to 100 percent relative humidity.
- (m) Units must be clearly marked on the back surface of the unit in a permanent manner showing information required for warranty and long term performance. Information to be shown must include manufacturer name, date of manufacture, electric power requirements, signal model type including color and indication type, and signal serial number.

- (n) The LED unit must be compatible with the traffic signal controller equipment currently in use by the City of Chicago, and meeting the City=s latest specifications for traffic signal control equipment. In particular the LED unit must be compatible with the NEMA TS-1 and later traffic signal load switches and conflict monitors.
- (o) Units must meet applicable sections of Title 47, SubPart B, Section 15 of the Federal Communications Commission (FCC) rules as applies to electronic noise limitation and electromagnetic interference.
- (p) Total harmonic distortion (THD) induced into the voltage and current AC power line sine waves must not exceed 20 percent.
- (q) LED optical units must meet the requirements of VTCSH Part 2: LED Vehicle Signal Modules Section 6.3.1 for signal burn-in.

2.4 Wiring. Each lamp holder must be furnished with two (2) leads color coded as follows:

White	Common
Red	Red Lens Section
Yellow	Yellow Lens Section
Green	Green Lens Section
Green with Black Tracer	Green Arrow Lens Section
Yellow with Black Tracer	Yellow Arrow Lens Section
Red with Black Trace	Red Arrow Lens Section

The lead must be type TEW No. 18 AWG stranded copper wire with 2/64 inch thick, 600 volt, 105 degree centigrade rated, thermo-plastic insulation meeting MIL-W-76A specifications. The lead must connect to the terminal strip without being spliced. The ends of the lamp leads must be stripped of one-half inch (2") of insulation and tinned.

2.5 Terminal Strip. A dual-point, barrier type terminal strip with a solid base and pressure plate type connectors (Marathon Special Products Corporation Catalog No. TB-305-SP, or equal) must be securely attached at both ends to the housing body inside the "Green" section of the signal head.

2.6 Cable. One, eleven foot (11') length of flexible electric cord, medium duty, type SO, No. 16 AWG stranded copper conductor, color coded, rubber insulated, neoprene jacketed, must be furnished with each signal head. The number of conductors must include neutral, ground, and one switch leg for each section. Both ends of each cable length must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned.

2.7 Gaskets. Wherever necessary to make a completely dustproof, moistureproof and weatherproof assembly of the housing and optical system, approved type gaskets of neoprene or silicone rubber must be provided.

3. TESTING AND DOCUMENTATION REQUIREMENTS

3.1 Documentation. The contractor must provide certified manufacturing and testing documentation to demonstrate that the traffic signals being supplied meet or exceed the specification requirements. The LED Optical Units must be tested by an independent and certified testing laboratory.

3.2 Inspection. The signals will be subject to inspection at the discretion of the Commissioner. Final inspection must be made at point of delivery. Any signal rejected must be removed and disposed of by the contractor at his sole cost.

4. PACKING

- 4.1 Packing. Each traffic signal assembly must be packed in a suitable carton so secured that the signal will not be damaged during shipment, handling or storage.
- 4.2 Marking. Each carton containing a traffic signal must be clearly marked on the outside in letters not less than three-eighths (3/8) inch tall with the legend: "TRAFFIC SIGNAL, TWELVE-INCH, POLYCARBONATE@ or ATRAFFIC SIGNAL, TWELVE INCH, POLYCARBONATE, LED OPTICS@and the number of Sections as required, the color and indication types, the name of the manufacturer, the date of manufacture, the pertinent Contract Number and the appropriate City Commodity Code Number.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1494
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
MARCH 20, 2000**

**PEDESTRIAN TRAFFIC SIGNAL, 16 INCH
WITH SYMBOLIC LED WALK/DON'T WALK LENSES
POLYCARBONATE HOUSING**

SCOPE

1. This specification states the requirements for a single section pedestrian signal with light emitting diode (LED) symbolic messages on nominal sixteen inch by eighteen inch lenses and enclosed in a polycarbonate housing.

GENERAL REQUIREMENTS

2. (a) Sample and Certified Test Reports. One complete pedestrian signal, fully assembled and wired, of the manufacture proposed to be furnished, must be submitted along with the required certified test reports, within fifteen (15) business days upon request of the Chief Procurement Officer. The sample must be delivered to the Engineer of Electricity, Bureau of Electricity, 2451 South Ashland Avenue, Chicago, Illinois 60608.
- (b) Standards. Equipment furnished under this specification must meet the appropriate requirements of the following standards, as required within the body of this specification:

American Association of State Highway and Transportation Officials (AASHTO)
American Society for Testing and Materials (ASTM)
Institute of Transportation Engineers (ITE)
National Electrical Manufacturers Association (NEMA)
Underwriters Laboratories (UL)
- (c) Approval. Approval will mean approval in writing by the Commissioner or his/her duly authorized representative.

- (d) Warranty. The manufacturer must warrant the signals to meet the requirements of this specification, and must warrant all equipment, components, parts and appurtenances against defective design, material and workmanship for a period of three (3) years from date of acceptance. In addition, LED optical units must carry an additional warranty against failure or loss of color (chromaticity) and signal brightness (luminance) below minimum acceptable VTCSH standard levels for a period of seven (7) years from date of final acceptance for contract construction, or date of delivery on a specific order. In the event defects or failures in the LED units occur during the warranty period, the manufacturer must replace all defective units at no expense to the City. This warranty must be evidenced by a letter or certificate of warranty submitted to the City at the time final delivery is made. The warranty must cover all units delivered in an order or installed by contract, and must include unit serial numbers for all LED units. The warranty must be signed by an official of the manufacturer who is empowered by the manufacturer to enter into such an agreement.

MATERIAL

3. (a) The pedestrian signal heads must conform to ITE Standard "Pedestrian Traffic Control Signal Indications" (PTCSI), in which the most recently published revisions will govern.
- (b) Housing Design. The housing must be one piece, ultra violet stabilized polycarbonate resin of the specified color, injection molded complete with integral top, bottom, and sides, having a minimum thickness of 0.100 inches.
- (c) The polycarbonate formulation used must provide these physical properties in the housing (Tests may be performed on separately molded specimens).

<u>TEST</u>	<u>REQUIRED</u>	<u>METHOD</u>
Specific gravity	1.17 minimum	ASTM D 792
Vicat Softening temp	310-320° F	ASTM D 1525
Brittleness temp.	-200° F	ASTM D 746
Flammability	Self-extinguishing	ASTM D 635
Tensile strength, yield	8,500 PSI	ASTM D 638
Elongation at yield	5.5-8.5%	ASTM D 638
Shear strength, yield	5,500 PSI min.	ASTM D 732
Izod impact strength (notched, 1/8" thick)	12-16 ft-lbs/in.	ASTM D 256
Fatigue strength (at 2.5 mm cycles)	950 PSI min.	ASTM D 671

EQUIPMENT REQUIREMENTS

4. (a) Positioning Device. The top and bottom opening of each housing must have integral serrated bosses that will provide positive positioning of the signal head in five degree increments to eliminate undesirable rotation or misalignment of the signal head between sections. A total of 72 teeth must be provided in the serrated bosses to allow the signal face to be rotated 360 degrees about its axis. The teeth must be clean and sharp to provide positive positioning with the grooves of the mating section or framework. Each opening must accommodate standard 1 2" pipe fittings and brackets.
- (b) Hinges. The housing must have four integral hinge lugs, with stainless steel hinge pins (AISI 304 or equivalent), located on the left side for mounting the door. The hinge pins must be straight and not protrude past the outside of the housing lugs. The housing must have two integral latching bolt lugs on the right side each with a stainless steel hinge pin to which a latching bolt (AISI 304 or equivalent), washer, and wing nut will be attached. The wing nuts must be captive.
- (c) Door. The door must be a one piece ultraviolet stabilized polycarbonate resin of the specified color, injection molded complete with a minimum thickness of 0.1 inch. Two (2) hinge lugs on the left side and two (2)sets of latch screw jaws centered on the right side, as viewed from the front of the signal, must be integrally cast with the housing door. The door must be hinged to the housing with two (2) stainless steel hinge pins, drive fitted. Two (2) stainless steel latch screws and wing nuts and washer assemblies on the latch side of the housing body must provide for opening and closing the door without the use of tools. The door must have four (4) holes with threaded metal inserts for stainless steel machine screws to secure the lens.

The inside of the door must be grooved to accommodate a one piece, air-cored EPDM (ethylene propylene diene monomer) gasket to provide a weatherproof and dust proof seal when the door is closed. The inside of the door must have four equally spaced threaded metal inserts for the lens attachment. The outside of the door must have an integral rim completely encircling the lens opening to prevent leakage between the door and the lens. The rim must have equally spaced tabs around the circumference with threaded metal inserts for the visor attachment.

LED OPTICAL UNIT

5. (a) LED Optical Unit. The light emitting diode (LED) optical unit must consist of a lens, reflector and lamp holder. All units must form a neat compact unit within the housing body with no light leakage between the door and the housing body, and the signal indication and the visor.

- (b) Light emitting diode (LED) optical units must consist of an integral unit containing the following components: power leads, housing, integral lens, matrix of light emitting diodes (LEDs) emitting monochromatic light of desired colors, and electronic and electrical components necessary to permit operation at nominal 120 volt, 60 hertz power.
- (c) The LED unit must meet the applicable requirements of the VTCSH standards for color (chromaticity) and brightness (luminance). During the required operating life of LED signal units, the luminance output of the units must not be less than 60 percent (.60) of the values specified in the standard.
- (d) Unit power supply must be constant current regulated and filtered to provide instant on indications, and to prevent momentary signal outages or flicker.
- (e) Units must consist of LEDs uniformly distributed to present a homogeneous appearance on the face of the lens from a wide viewing angle.
- (f) LEDs must be wired so that the loss of a single LED or a string of LEDs will not reduce the luminescence below the minimum requirement.
- (g) For purposes of this specification, failure of a single unit is defined as an occurrence where the luminescence of the signal measured in candela in standard test procedures is less than the required initial luminance or luminance at time points and conditions specified; or where minimum required brightness is achieved, but two or more series strings of LEDs or in excess of twenty percent of 20% of LEDs are not operable.
- (h) Units must be fully operable over a range of 90 volts to 130 volts at 60 hertz, plus or minus 3 hertz.
- (i) Surge protection. Each unit must be provided with integral surge protection to withstand transient of 600 volt, 100 microsecond rise and 1 millisecond pulse width. The surge protector must provide full electrical and physical protection to all unit components.
- (j) Maximum permissible power consumption at ambient conditions (nominal 120 volts, 60 hertz, 70° F.) must be 18 watts at a minimum 90% power factor. Power consumed must not vary by more than ten (10%) percent from nominal power consumption over voltage range of 105 volts to 125 volts, and over permissible environmental ranges.
- (k) Units must be fully operable at temperature ranges of -40° F. (-40° C) to +165° F. (+74° C) at up to 100% relative humidity.
- (l) Units must be clearly marked on the back surface of the unit in a permanent manner showing information required for warranty and long term performance. Information to be shown must include manufacturer name, date of manufacture, electric power requirements, signal model type, and signal serial number.

- (m) The LED unit must be compatible with the traffic signal controller equipment currently in use by the City of Chicago, and meeting the City's latest specifications for traffic signal control equipment. In particular the LED unit must be compatible with the NEMA TS-1 and later traffic signal load switches and conflict monitors.
- (n) Units must meet applicable sections of Title 47, SubPart B, Section 15 of the Federal Communications Commission (FCC) rules as applies to electronic noise limitation and electromagnetic interference.
- (o) Total harmonic distortion (THD) induced into the voltage and current AC power line sine waves must not exceed 20 percent.
- (p) Burn-in. LED Optical units must be energized for a minimum 24 hour burn-in at 100% on-time duty cycle.

SYMBOLIC MESSAGE

- 6. Symbols for "Walk" (Man) and "Don't Walk" (Hand) must conform in style and color to those of the "Institute of Transportation Engineers" (I.T.E.). The messages must be approximately 16 inches square and display the "Don't Walk" and "Walk" symbols. The symbols must be applied in such a manner as to provide an opaque polycarbonate background and illuminated legends. The symbols must be not less than nine and one-half inches (9 2") tall with proportional width. The "Don't Walk" symbol must be Portland Orange, and the "Walk" symbol must be of lunar white, conforming to the specifications of the PTCSI.

LENS

- 7. The unit lenses must be constructed of ultraviolet (UV) stabilized , impact resistant polycarbonate, acrylic or other approved material. Lenses must be anti-glare, smooth texture, and clear.

WIRING

- 8. (a) Each lamp holder must have three (3) leads color coded as follows:
 - White - Common
 - Red - "Don't Walk" Indication
 - Green - "Walk" Indication

The leads must be TEW, number 18 AWG, stranded copper wire with 2/64 inch thick, 600 volt, 105 degree C, thermo-plastic insulation meeting MIL-W-76A specifications. The ends of the lamp leads must be stripped of one-half inch (2") of insulation and tinned. The leads must be splice-free and connected to one side of the terminal strip.

- (b) Terminal Strip. A four terminal, eight point, barrier type terminal strip with solid base and pressure plate type connectors, such as Marathon Special Products Corporation Catalog Number TB-304-SP, must be securely attached at each end to the housing body inside the walk section.
- (c) Cable. One eleven foot (11') length of flexible electric cord, medium duty, type SO, 3-conductor No. 16 AWG stranded copper, color coded, rubber insulated, neoprene jacketed, must be furnished with each two (2) section signal. Both ends of each cable length must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned.

TESTING AND DOCUMENTATION REQUIREMENTS

- 9. (a) Documentation. The contractor must provide certified manufacturing and testing documentation to demonstrate that the pedestrian signals being supplied meet or exceed the specification requirements. Testing must be conducted by an independent and certified testing laboratory.
- (b) Inspection. The signals must be subject to inspection at the discretion of the Commissioner. Final inspection must be made at point of delivery. Any signal rejected must be removed and disposed of by the contractor at his sole cost.

PACKING

- 10. (a) Each pedestrian signal assembly must be packed in a suitable carton so secured that the signal will not be damaged during shipment, handling, or storage.
- (b) Marking. Each carton containing a pedestrian signal must be clearly marked on the outside in letters not less than three-eighths inch (3/8") tall with the legend: "PEDESTRIAN SIGNAL, SIXTEEN-INCH, SYMBOLIC LED WALK-DON'T WALK," the appropriate City Commodity Code Number, the name of the manufacturer, the date of manufacture, and the pertinent contract number.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1495
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
MARCH 20, 2000**

**TRAFFIC SIGNAL MOUNTING BRACKET
POLYCARBONATE, SIDE OF POLE**

SCOPE

1. This specification states the requirements for polycarbonate brackets designed for mounting 12 inch traffic and pedestrian signal heads from the side of poles.

GENERAL REQUIREMENTS

2. (a) Sample and Certified Test Reports. One complete signal bracket of the manufacture proposed to be furnished, must be submitted along with the required certified test reports, within fifteen (15) business days upon request of the Chief Procurement Officer. The sample must be delivered to the Engineer of Electricity, Bureau of Electricity, 2451 South Ashland Avenue, Chicago, Illinois 60608.
- (b) Standards. Equipment furnished under this specification must meet the appropriate requirements of the following standards, as required within the body of this specification:

American Association of State Highway and Transportation Officials (AASHTO)
American Society for Testing and Materials (ASTM)
Institute of Transportation Engineers (ITE)
National Electrical Manufacturers Association (NEMA)
- (c) Approval. Approval will mean approval in writing by the Commissioner or his/her duly authorized representative.

- (d) Warranty. The manufacturer must warrant the signal bracket to meet the requirements of this specification, and must warrant all equipment, components, parts and appurtenances against defective design, material and workmanship for a period of three (3) years from date of acceptance. In the event defects and failures become apparent during this period, the manufacturer must repair or replace such defects and failures at no expense to the City. This warranty must be evidenced by a letter or certificate of warranty submitted to the City at the time final delivery is made.

MATERIAL

3. (a) The bracket must be one piece, ultra violet stabilized polycarbonate resin of the specified color, injection molded complete with integral top, bottom, and sides.
- (b) The polycarbonate formulation used must provide these physical properties in the bracket (Tests may be performed on separately molded specimens).

<u>TEST</u>	<u>REQUIRED</u>	<u>METHOD</u>
Specific gravity	1.17 minimum	ASTM D 792
Vicat Softening temp	310-320° F	ASTM D 1525
Brittleness temp.	-200° F	ASTM D 746
Flammability	Self-extinguishing	ASTM D 635
Tensile strength, yield	8,500 PSI	ASTM D 638
Elongation at yield	5.5-8.5%	ASTM D 638
Shear strength, yield	5,500 PSI min.	ASTM D 732
Izod impact strength (notched, 1/8" thick)	12-16 ft-lb/in.	ASTM D 256
Fatigue strength (at 2.5 mm cycles)	950 PSI min.	ASTM D 671

- (c) Glass. The polycarbonate must be glass impregnated between 30% and 40% to increase strength.

POSITIONING DEVICE

4. The top and bottom opening of the bracket must have integral serrated bosses that will provide positive positioning of the signal head in five degree increments to eliminate undesirable rotation or misalignment of the signal head between sections. A total of 72 teeth must be provided in the serrated bosses to allow the signal head to be rotated 360 degrees about its axis. The teeth must be clean and sharp to provide positive positioning with the grooves of the signal head.

HARDWARE

5. The mounting brackets must be provided complete with one (1) polycarbonate shim, 1/4" thick, one (1) 1-1/2" chase nipple with rubber gasket, and one (1) pinnacle cap with rubber gasket.

DIMENSIONS

6. The bracket must have nominal dimensions of 12 inches long, by 6 inches high, by 3 inches wide, plus or minus 1/4 inch.

WIRING SPACE

7. The bracket must have an integral molded wireway with a minimum 1-1/2 inch diameter opening suitable for installation of multi-conductor cables.

DESIGN STRENGTH

8. The bracket must be designed to support a 12 inch, single face, five-section, polycarbonate signal head with a 100 mile-per-hour wind.

TESTING AND DOCUMENTATION REQUIREMENTS

9. (a) Documentation. The contractor must provide certified manufacturing and testing documentation to demonstrate that the brackets being supplied meet or exceed the specification requirements.
- (b) Inspection. The brackets will be subject to inspection at the discretion of the Commissioner. Final inspection must be made at point of delivery. Any bracket rejected must be removed and disposed of by the contractor at his sole cost.

PACKING

10. (a) Each bracket must be packed in a suitable carton so secured that the bracket will not be damaged during shipment, handling, or storage.
- (b) Marking. Each carton containing brackets must be clearly marked on the outside in letters not less than three-eighths inch (3/8") tall with the legend: "POLYCARBONATE SIGNAL BRACKET, SIDE OF POLE" the appropriate City Commodity Code Number, the name of the manufacturer, the date of manufacture, and the pertinent contract number.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1505
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED JULY 17, 2006**

**CHICAGO 2000 LIGHT POLE: ANCHOR BASE, 32'-6", 7 GAUGE FLUTED,
TAPERED STEEL FOR 15" BOLT CIRCLE**

SUBJECT

1. This specification states the requirements for an Anchor Base Chicago 2000 Light Pole. The pole must support single or twin, simplex mounted mast arm(s) and teardrop luminaire(s). A split pedestal base will be provided to cover the bottom nominal 40" of the pole. A finial will be mounted at the top of the pole. This pole will be served by underground cables.

SUBMITTAL INFORMATION REQUIRED

2. (a) Manufacturer's Certification of Compliance. The submittal information must include a written certification of compliance with this Specification from the Manufacturer.
- (b) Manufacturer's Shop Drawings. Scaled manufacturer's shop drawings showing actual light pole dimensions, details, and welds. Shop drawings must be original engineering drawings created by the manufacturer; photocopied or scanned copies of the Standard Drawings will not be accepted, and will be rejected as an incomplete submittal. These drawings must also be submitted in electronic format in Microstation 95, if requested; failure to provide drawings in this format will be cause for rejecting the submittal.

Dimensions must include but will not be limited to: mast height, width, taper, and fluting; base plate length, width, thickness, and bolt circle; handhole length, width, and height above base plate; component attachment plan locations and heights above baseplate including simplex brackets, finial top, banner arms, and flower basket rosettes; and all decorative bracelet heights above base plate.

Details must include scaled and dimensioned plan views, front elevations, side elevations, and section views as required for components including but not limited to: handhole; simplex brackets; finial top; banner arm attachments and finials; flower basket rosettes; and all decorative bracelets. All components must be clearly identified on the drawings.

Welds must include but will not be limited to: locations, sizes, and types of welds in accordance with the WELDING Section of this Specification.

- (c) Manufacturer's catalog cut sheets showing light pole designation(s), characteristics, and catalog number(s).
- (d) Manufacturer's specifications including fabricating materials and processes.
- (e) Manufacturer's written installation instructions and maintenance manuals including recommendations and/or procedures for storage, assembly, orientation, installation, component access and wiring, and numeric tolerances for torquing the foundation anchor bolts to the light pole base plate.
- (f) Sample. If requested by the Chief Procurement Officer, one completely assembled anchor-base pole with integral components, or one mast head and finial, or ornamental bracelets, of the manufacture intended to be furnished, must be submitted for review within fifteen (15) business days from receipt of notice.
- (g) Warranty. The manufacturer must warrant the performance and construction of these light poles to meet the requirements of this Specification and must warrant all parts, components, and appurtenances against defects due to design, workmanship, or material developing within a period of three years after the light poles have been delivered. This will be interpreted particularly to mean structural or mechanical failure of any component, failure of any weld, or failure of any portion of the painting system. The warranty must be furnished in writing guaranteeing replacement, including shipment, free of charge to this Contract and to the City, of any light pole assembly, or any component parts thereof, which, as determined by the Commissioner, would develop aforesaid failures. The warranty must accompany submittal information. Any light pole or part thereof not performing as required or developing defects within this period, must be replaced by the manufacturer at no cost to the City. The Commissioner will be the sole judge in determining which replacements are to be made and the Commissioner's decision will be final. Any cost for the warranty as specified will be incidental to this contract.

GENERAL

- 3. (a) Products. Light pole masts and component equipment must be the products of a single, established manufacturer, and must be suitable for the service required. Light pole masts or component equipment items which are proposed as similar or identical must be the products of a single manufacturer. Masts will be manufactured by Union Metal Corporation, Valmont Industries Incorporated, or an approved equal.

- (b) Specifications. The pole must conform in detail to the requirements herein stated, and to the Specifications and Methods of Test of the American Society for Testing and Materials cited by ASTM Designation Number, of which the most recently published revisions will govern. The pole must be manufactured in accordance with AASHTO's 1994 version of the "Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals." The shaft and base plate assembly must be designed to meet AASHTO's 1994 criteria for 80 MPH wind loading with a 30% gust factor, for: twin gateway mast arms; twin gateway luminaires of not less than 65 pounds each and having an effective projected area (EPA) of not less than 1.70 square feet each; twin gateway luminaire fitters of not less than 50 pounds each and having an EPA of not less than 0.73 square feet each; twin banners 6 feet high by 1.5 feet wide each; and twin flower baskets weighing 75 pounds each and having an EPA of not less than 3.0 square feet each.
- (c) Drawings. The drawings mentioned herein are drawings of the Department of Streets and Sanitation, Bureau of Electricity (BOE) being an integral part of this specification cooperating to state the necessary requirements.
- (d) Design. The pole must conform in design and dimensions to corresponding Bureau of Electricity Standard Drawings 930, 930C, and 724.
- (e) Approval. Whenever "approval" and "approved" are used in this specification they will mean a written approval by the Commissioner to be secured prior to proceeding with manufacture of these light poles.
- (f) Commissioner's Review. The Commissioner will be the sole judge in determining the submitted light pole compliance with this Specification. The Commissioner's decision will be final.

MAST

- 4. (a) Mast Size. The mast size must be nominally 32'-6" as shown on the Bureau of Electricity Standard Drawing 930. The mast diameter at the bottom must be 10".

- (b) Mast Design. The mast must be tapered at 0.14" per foot. The 32'-6" long mast must be of monotube construction and must be rolled on a mandrel to provide a 16-flute pattern. The flutes must be neat, true to pattern, and free from cracks and flaws. Each mast must be straight and centered on its' longitudinal axis. The mast must utilize a single longitudinal weld, 70% minimum penetration, in accordance with the WELDING Section of this Specification. There must be no lateral welds in the mast other than at the base plate and at the flower basket rosettes.
- (c) Material. The mast must be 7 gauge, high strength low alloy steel in accordance with ASTM A595, Grade A.
- (d) Mast Base. The mast base must be a 1/4" thick steel plate of low alloy, high strength steel conforming to ASTM A 595, Grade C, ASTM A 588 or ASTM A 606.
1. The base must be attached to the mast so that the bearing surface of the base is at right angles to the longitudinal axis of the mast. The vertical center line of the seam must be positioned 135 degrees counter-clockwise from the vertical center line of the mast arm support plates.
 2. The mast must be inserted into the base to a maximum depth which will still allow for an adequate weld to be made between the bottom of the mast and the plate. A circumferential weld must be made between the mast and the base at both the top and underside of the plate.
 3. The base plate must have four (4) 1 1/2" wide slots to accommodate 1 1/4" diameter anchor bolts. The slots must be a total of three inches long measured along the circumference. The mast must provide for mounting on a 15" bolt circle using 1 1/4" anchor bolts, nuts and washers provided by others. Any special hardware required to facilitate installation must be provided under this contract.
- (e) Provision for Ground. A 1/2" - 13 square nut must be welded to the inside of the mast on the handhole entry frame for a ground connection.

- (f) Entry. A vertical doorframe carrying a removable door providing access to the interior of the mast must be welded into a close fitting opening centered approximately 24" above the bottom of the base. The doorframe must be formed and welded of steel with cross section not less than 1-1/2" wide by 1/4" inch thick so as to adequately reinforce the opening of the mast. The internal horizontal clearance of the doorframe must be 4"; its internal vertical height must be 8". Its upper and lower ends must be semi-circular meeting its straight sides tangentially. The frame must have two welded tabs; one at the top and one at the bottom of the door frame. The top hole must be located 13/16 of an inch from the top of the opening. The bottom hole must be located 13/16 of an inch from the bottom of the opening. These tabs must be drilled to accept a 1/4 inch screw. Stainless steel spring clips must be mounted to the tabs. These clips must be made to accept 1/4"-20 machine screws. The entry must in all respects be identical to handhole openings on poles that have already been installed and accepted by the City.
- (g) Door. The removable door must be formed of sheet steel approximately 1/8" thick. It must fit the doorframe closely and be dished so that it will stay in proper position even if its locking screws become slightly loosened. The door must be drilled top and bottom to accept the 1/4" - 20 hex head stainless steel screws which will fasten the door to the doorframe. All doors must be interchangeable. Doors must fit pole handholes of like poles that have already been installed and accepted by the City. Alternate methods will be subject to approval by the Commissioner or his fully authorized representative.
- (h) Tag. A stainless steel tag must be attached to each pole immediately below the handhole by mechanical means and not by adhesive. The stainless steel tag must have an embossed legend which must include the pole outside diameter at the base, the overall length, and the gauge; i.e. 10" x 32'-6" - 7 gauge.
- (i) Interchangeability. Each member including the handhole doors in the pole and all component equipment must be mutually interchangeable for assembly, so that no work will be required to make any member fit properly in the place of any other similar member of any other similar pole.

- (j) Simplex Brackets. Two simplex mast arm support plates must be provided opposite each other as shown on the Drawings, and in accordance with Bureau of Electricity Standard Drawing No. 659. The mast arm support plates must be made of cast steel conforming to the requirements for Grade 65-35 cast steel of ASTM A27, or equivalent, subject to approval. They must neatly fit the external surfaces of the fluted mast. Each mast arm support plate must have a hollow protuberance, the hole of which must be approximately equivalent to two (2) inches in diameter, extending into the interior of the pole providing a smooth surface for the lamp cables to rest upon. Each mast arm support plate must be designed so that it will carry the mast arm and hold it in the proper position for fastening the mast arm to the mast. The design of the mast arm support plates must be a two (2) bolt type as shown on Drawing No. 659. The brackets must be factory assembled to the mast. The finished mast must give the appearance of a single, homogeneous mast and the entire assembly must be structurally sound so that with the weight of the mast arm(s) and luminaire(s), the mast will not twist, rack, vibrate or otherwise deform when subjected to the severe vibrations of wind loading, passing elevated trains or heavily loaded vehicles.
- (k) Flower Basket Rosettes. The pole must be equipped with flower basket rosettes welded to the pole at the factory. Other flower basket attachments are not integral to the pole and are optional.
- (l) Luminaire Mounting Height. The luminaire mounting height indicates the height necessary to provide a distance of 30.0 feet from the top of the light pole foundation to the light source center of the luminaire.

BANNER AND BASKET ATTACHMENTS (Optional)

- 5. (a) Optional Attachments. Banner arm attachments and flower basket attachments must be provided as an option. These items must be provided only if ordered as a separate line item. All attachments must be manufactured to properly fit the pole shaft. All castings and parts must be permanently labeled on the back. The label must clearly identify the part and the pole it is to be used for.
- (b) Banner Arms. Banner arms, bracelets, couplings, and hardware necessary to attach banners must be provided. The appearance and dimensions of these items are shown on Standard Drawings 930, 930B, and 930C. Unless otherwise noted, the banner arms must be constructed of a light weight material flexible enough to withstand the loads presented by the appropriate size banners under ASSTHO wind loadings. The banner arms must have an approximate outside diameter of 1-3/4".
- (c) Flower Basket Attachments. The bracelet and all necessary hardware for attaching a flower basket must be provided. The appearance and dimensions of these items are shown on the Standard Drawings.

FINIAL TOP(Optional)

6. (a) Design. The finial mast top must include different pieces assembled together to resemble a single, uniform casting. The pieces must include a top, two side pieces and a side finial ball as shown on Standard Drawings 930, 930B, and 930C. Two sets of end covers for the arms should be included to accommodate the possible use of two arms. The top must be essentially conical with a globe-shaped lower-end and have a minimum wall thickness throughout of not less than 5/32 inches. The cone portion must meet the skirted portion of the top in a smooth filet, and the skirt must enclose the top 7/8 inches of the mast. Three stainless steel, or other similar approved material, set screws not less than 5/16 inches long must be equally spaced in tapped holes around the skirt and must hold the top securely in place atop the mast. The design of the top must be as shown on the Standard Drawings. All castings and parts must be permanently labeled on the back of the part. The part label must clearly identify the part and the pole it is intended for.
- All mast heads and finials must have the appearance as shown on the Standard Drawings. The dimensions on the drawings are for attachment to the Chicago 2000 Gateway pole. Mast heads and finials for combination traffic poles, 11" or 12.5" poles, must be sized accordingly.
- (b) Material (Aluminum Option) The top finial must be made of aluminum alloy 356-F per ASTM B108. The top must have smooth surfaces, neat edges and corners and be free of fins, holes or other casting flaws.
- (c) Material (Fiberglass Option) The top finial must be fiberglass. The mast heads and finial must be manufactured by Shakespeare Company, W.J. Whatley, or an approved equal. Each piece must be formed of a fiberglass composite consisting of a polyester resin and containing a minimum of 65% fiberglass by weight. The resin must contain no clay fibers. The composite must be UV and weather resistant. The color must be gloss black. The resin must contain color pigment throughout. A finish coat of urethane enamel must be applied to the surfaces to a minimum dry thickness of 1.5 mils. All pieces must be assembled using stainless steel screws. The fiberglass must have stainless inserts for the screws. Alternate non-metallic materials may be considered.
- (c) Finish. Tops must be painted as herein specified.

HARDWARE

7. All the hardware necessary to complete the assembly of the pole must be furnished. All hardware must be stainless steel, or equal corrosion-resistant metal, subject to approval.

WELDING

8. (a) General. Where welds are required and approved, each welded joint must be thoroughly cleaned of flux and spatter, and must be made in conformity with the standards of the American Welding Society. Each bidder must submit with his proposal a drawing showing the sizes and types of welds, in conformity with the proper interpretation of the standard welding symbols of the American Welding Society. The bidder's proposal must state the type of electrode and must describe the welding methods proposed for use in fabricating the pole.
- (b) Certifications. Welders must have proper certification for the welding operations required. Welding by non-certified personnel will not be allowed. Certifications for welding personnel must be included with the submittal information package for review.
- (c) Testing. All welds of 5% of the poles in every lot must be inspected for penetration and soundness of the welds by the magnetic particle inspection method or by radiography. Acceptance or rejection will be governed by the same conditions as in the TESTING Section. If the magnetic inspection process is used, the dry method with direct current must be employed. All transverse welds must be magnetized by the "prod" (Circular Magnetization) method. Longitudinal welds may be magnetized by either circular or longitudinal magnetization. Proposed weld inspection method must be included with the submittal information package for review.

PAINTING

9. (a) Oil and Grease Removal. All metal surfaces must be washed with an alkaline detergent to remove oils and grease.
- (b) Metal Cleaning. All exterior metal surfaces must be cleaned by blasting with a combination of shot and grit to remove all dirt, mill scale, rust, corrosion, oxides and foreign matter and provide a "near white" surface in accordance with SSPCS-SP10. Included in this process, the pretreatment process and the painting process must be the interior base section of the mast to a minimum height of 12".
- (c) Chemical Pretreatment. The cleaned metal surfaces must then be treated with a hot, pressurized iron phosphate wash and must be dried by convection heat.
- (d) Exterior Coat. A thermosetting, weathering, Polyester powder coat must be applied electrostatically to all cleaned and treated surfaces to a uniform 8 mil thickness in a one coat application. This powder coat must be cured in a convection oven at a minimum temperature of 400°F to form a high molecular weight fusion bonded finish.

- (e) Alternate Methods. Alternate powder coat methods may be reviewed and tested on a case by case basis. However, no coating method will be accepted unless the Commissioner judges such alternate to be equal to the coating herein specified.
- (f) Interior Coat. The interior metal surfaces must be powder coated with a thermoplastic hydrocarbon resin containing corrosion inhibitors. The resin must be formulated for full application over untreated metal surfaces. The resin must be applied at a temperature of approximately 200°F to a minimum thickness of 3 mils. The interior thermoplastic coat must overlap the interior, thermosetting base coat by approximately 6". Alternate interior coatings may be used subject to prior approval of the Commissioner.
- (g) Durability. Both the exterior and interior coats must be capable of passing 1,000 hours of salt spray exposure per ASTM B117 in a 5% Na Cl (by weight) solution at 95°F and 95% relative humidity without blistering. Before test, the panel must be scribed with an "X" down to bare metal.
- (h) Coating Measurement. Measurement of coating thickness must be done in accordance with SSPC-Pa 2-73T, "Measurement of Dry Paint Thickness with Magnetic Gauges," except that the lowest "single spot measurement" in an area of two square inches must be not less than 7.0 mils.
- (i) Color. Color must be gloss black unless noted otherwise in the order. A 4" square color chip sample must be submitted for approval prior to fabrication. The chip sample must be of the same material as the pole mast, and must include the manufacturer's name and the manufacturer's color name as well. The sample must also include any other information required to purchase the same color for the mast arm(s), flower baskets, and the cast aluminum finial and split pedestal base.

STRUCTURAL REQUIREMENTS

- 10. (a) Calculations: The manufacturer must provide certified pole deflection calculations showing compliance with 1994 AASHTO wind loading requirements for 80 mph winds with 30% gusts. The calculations must be performed based on a completely assembled mid-block historic gateway lighting unit including shaft, mast arm(s), finial, luminaire(s), fitter(s), banners, and flower baskets, as specified herein. The structural calculations must be signed and sealed by a registered structural engineer.

- (b) Parameters. The manufacturer must demonstrate that the light poles will meet or exceed the specified structural requirements under the following set of conditions. The manufacturer must provide structural calculations using published loading data as part of the submittal package, and must perform structural testing using actual completed light pole masts from the specific order as part of the testing. The responsible material proposal must contain verification of structural performance with results equal to or better than those listed in these Specifications. Submittal information must include computer calculations based on the controlling given conditions which demonstrate achievement of all listed performance requirements. Computer calculations must be done in accordance with both 1994 AASHTO recommendations and the City of Chicago requirements. The program(s) used to perform the calculations must be identified in the submittal. The structural testing must include maximum deflection and set as well as listings of all indicated test loads.

- (c) Verification of Data. All structural data must be based on the parameters listed above. This data must be verified by an independent testing laboratory or manufacturer's laboratory as approved by the Commissioner. All testing must be performed on completed light pole masts. Where this data causes the structural integrity to fall below the values required by this specification, additional masts must be tested in a manner acceptable to the Commissioner.

TESTING

- 11. (a) Witness Testing. Structural testing must be conducted on five percent of the manufacturer's production masts for each order in which the quantity of masts is 20 or more. If requested by the City, all testing will be witnessed by a representative of the Bureau of Electricity. The Contractor must include in his bid the cost of travel, food, and lodging for one representative. Travel for 150 miles or more must be on a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. The testing must include coupon tests, load tests, and weld tests. All testing must be certified by the manufacturer, or an independent lab.

- (b) The selection of pole masts must be a random selection from the entire completed lot of pole masts required for the Contract. Selections from partial lots will not be allowed.

- (c) Coupon tests as outlined in ASTM A53 and A 595, A588, or A606.

- (d) Load tests for masts. With base rigidly anchored, a test load of 1500 pounds must be applied at a point approximately two feet (2' - 0") from the free end. The load must be applied at right angles to the center line of the mast and in the same vertical plane. The deflection must not be greater than 30". Within one (1) minute after the test load is released, measurement must be made of the set taken by the mast. This set must not be greater than 2.5". The deflection measurement device must be reset to zero and the test load must be reapplied. The deflection must not change from the deflection noted in the first test by more than $\pm 5\%$. No measurable set must be noted within one (1) minute after test load is released. The mast must then be checked to insure that it is still securely fastened, that it is plumb, and that no cracks have developed in either the mast or base plate.
- (e) Load tests for masts arm supports. With gateway mast arms rigidly anchored, a test load of 300 pounds must be applied to each mast arm at a point approximately seven feet (7' - 0") from the pole mast. The load must be applied at right angles to the center line of the mast arm and in the same vertical plane. Each mast arm support must then be checked to insure that it is still securely fastened and that no cracks have developed in either mast arm support bracket or the weld.
- (f) Load tests for flower basket rosettes. With base rigidly anchored, a test load of 150 pounds must be applied to each rosette ring. The load must be applied at right angles to the center line of the mast and in the same vertical plane. Each rosette must then be checked to insure that it is still securely fastened and that no cracks have developed in either the ring, rosette, or rosette weld.
- (g) Weld tests as described in the WELDING Section of this Specification.
- (h) Acceptance of Alternate or Corrected Equipment. Tests must be made on 5% of all masts in the order. If any of the masts fail to meet these specifications, an additional three masts must be tested for each failed mast. Should any of these additional masts fail to meet these specifications, the entire lot will be subject to rejection. The Commissioner will then decide, based on the nature of the failure, whether the entire lot will be rejected outright or whether the manufacturer may subject each mast in the order to testing. If each mast in the order is tested, those masts which fulfill the specified requirements may be accepted at the discretion of the Commissioner.

SHIPMENT AND DELIVERY

12. (a) General. The poles must be carefully inspected at the factory prior to shipment to assure that the poles are complete and free of defects. When poles are stacked together, they must be supported with suitable spacers or must otherwise be protected from dents and other potential shipping damage. The spacing and protective materials must be suitable for and usable in the storage of the poles. All pole hardware must be packaged in a clear container and labeled. Castings and parts must be packaged in clearly labeled boxes. Parts hardware must be packaged in clear containers, properly labeled.
- (b) Pole Packaging. The poles must be shipped in bundles weighing a maximum of 5,000 pounds. Each pole must be individually wrapped and protected so that it can be bundled and unbundled without damage to the pole or its finish. Each pole wrapping must be labeled using permanent ink in two inch letters identifying the pole type, height, and gauge. Specific instructions must be securely attached to each bundle indicating the proper methods of storage. In addition, each bundle must contain specific instructions on unbundling and erection of poles. Instructions must be printed on a fibre based paper with a permanent ink so that instructions will be completely legible after weathering outdoors for a minimum of 5 years.
- (c) Pole Bundles. The bundles must consist of poles laid base to top to form an approximately rectangular cylinder. Materials such as lumber (2" x 4" min.) non-marring banding, and other appropriate bundling materials must be used to make a rigid, long lasting bundle capable of being handled, shipped and stored without shifting of contents or breaking. Bundling procedure will be subject to approval. Any bundles, in which either poles or packaging is received broken, damaged or with contents shifted, will not be accepted and it will be the responsibility of the supplier to return the bundle to its original destination at no cost to the City of Chicago. The bundles should be capable of being stacked two high without breaking, or shifting of the contents. Each bundle must be capable of being lifted by a fork lift truck or crane and the bundles must be shipped on a flat bed truck to facilitate unloading.
- (d) Pole Hardware. Any appurtenant devices and hardware not attached to the pole must be carefully wrapped and securely attached to each bundle. Payment will be withheld for any units provided without the appropriate appurtenant devices and hardware. Cracked, broken, chipped or damaged units will also be considered as incomplete quantities as regards payment.

- (e) Castings and Parts. Castings and parts, such as the finial, banner brackets, etcetera, must be individually wrapped and packaged in boxes. Hardware must be packaged in a clear package, clearly labeled. The label must identify each piece of hardware and the quantity of each, as well as what part the hardware is intended for. An individual box must contain like part types and the related hardware(i.e. the upper banner bracelet halves and hardware must be boxed separately from the lower banner bracelet halves and hardware). Each box must be labeled with 3/8" letters identifying the manufacturer, the casting or part numbers, the part name, the date of manufacture, the City contract number, and the City Commodity code.

- (f) Delivery. Light poles must be delivered to the Bureau of Electricity storage yard at 4101 South Cicero in Chicago, or as indicated on the order. Light pole information submitted for approval must include any recommendations of the Manufacturer for storage.

INSPECTION

- 13. (a) An inspector representing the City must have free entry at all times, while the work on the contract is being performed, to all parts of the manufacturer's plant which concern the manufacture of poles. The manufacturer must afford the inspector, without charge, all reasonable facilities to satisfy the inspector that the poles are being furnished in accord with these specifications.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1513
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED JULY 17, 2006**

SPLIT PEDESTAL BASE: FOR CHICAGO 2000 LIGHT POLE

SUBJECT

1. This specification states the requirements for a split pedestal base (Clamshell) for installation on a 10" x 32'-6" fluted, tapered steel Chicago 2000 light pole. This specification will address the requirements for a split aluminum base with aluminum doors, a split fiberglass base without doors, and non-metallic doors only.

SUBMITTAL INFORMATION REQUIRED

2. (a) Manufacturer's Certification of Compliance. The submittal information must include a written certification of compliance with this Specification from the Manufacturer
- (b) Manufacturer's Shop Drawings. Scaled manufacturer's shop drawings showing actual split pedestal base and/or door dimensions, details, and welds. Shop drawings must be original engineering drawings created by the manufacturer; photocopied or scanned copies of the Standard Drawings will not be accepted, and will be rejected as an incomplete submittal. These drawings will also be submitted in electronic format in Microstation 95, if requested by the City; failure to provide drawings in this format will be cause for rejecting the submittal.

Dimensions must include but will not be limited to: base height, width, pattern, and fluting; access door opening length, width, plan location, and height above base bottom.

Details must include scaled and dimensioned plan views, front elevations, side elevations, and section views as required for components including but not limited to: base, access doors and door attachments.

Welds must include but will not be limited to: locations, sizes, and types of welds in accordance with the WELDING Section of this Specification.

- (c) Manufacturer's catalog cut sheets showing split pedestal base and/or door designation(s), characteristics, and catalog number(s).
- (d) Manufacturer's specifications including fabricating materials and processes.
- (e) Manufacturer's written installation instructions and maintenance manuals including recommendations and/or procedures for storage, assembly, orientation, installation, and numeric tolerances for torquing the access door bolts to the split pedestal base.
- (f) Sample. If requested by the Chief Procurement Officer, one completely assembled split pedestal base and/or doors with hardware and all components, of the manufacture intended to be furnished, will be submitted for review within fifteen (15) business days from the receipt of notice. The sample base must be coordinated with an existing Chicago 2000 light pole for accuracy of fit. The sample door must be coordinated with an existing base for accuracy of fit.
- (g) Warranty. The manufacturer must warrant the performance and construction of these split pedestal bases and/or doors to meet the requirements of this Specification and must warrant all parts, components, and appurtenances against defects due to design, workmanship, or material developing within a period of three years after the bases and/or doors have been delivered. This will be interpreted particularly to mean structural or mechanical failure of any component, failure of any weld, or failure of any portion of the painting system. The warranty must be furnished in writing guaranteeing replacement, including shipment, free of charge to this Contract and to the City, of any split pedestal base or door assembly, or any component parts thereof, which, as determined by the Commissioner, would develop aforesaid failures. The warranty must accompany submittal information. Any split pedestal base, door, or part thereof not performing as required or developing defects within this period, must be replaced by the manufacturer at no cost to the City. The Commissioner will be the sole judge in determining which replacements are to be made and the Commissioner's decision will be final. Any cost for the warranty as specified will be incidental to this contract.

GENERAL

3. (a) Products. Split pedestal bases and/or doors and component equipment must be the products of established manufacturers, and must be suitable for the service required. Split pedestal bases or component equipment items which are proposed as similar or identical must be the products of a single manufacturer. Aluminum Bases and/or doors may be manufactured by Union Metal Corporation, Holophane Corporation, or an approved equal. Fiberglass bases or doors may be manufactured by Shakespeare Company, W.J. Whatley, Incorporated, or an approved equal.
- (b) Specifications. The split pedestal bases and/or doors must conform in detail to the requirements herein stated, and to the Specifications and Methods of Test of the American Society for Testing and Materials cited by ASTM Designation Number, of which the most recently published revision will govern.
- (c) Drawings. The drawings mentioned herein are drawings of the Department of Streets and Sanitation, Bureau of Electricity (BOE) being an integral part of this specification cooperating to state the necessary requirements.
- (d) Design. The base and/or doors must conform in design and dimensions to corresponding Bureau of Electricity Standard Drawings 930 and 930A.
- (e) Approval. Whenever “approval” and “approved” are used in this specification they will mean a written approval by the Commissioner to be secured prior to proceeding with manufacture of these split pedestal bases and/or doors.
- (f) Commissioner’s Review. The Commissioner will be the sole judge in determining the submitted split pedestal bases and/or doors compliance with this Specification. The Commissioner’s decision will be final.

OPTION 1. ALUMINUM BASE WITH DOORS

4. (a) Each split pedestal base must be cast aluminum conforming to ASTM B26/B26M, Grade 356. Each base must be certified as pure #356 alloy, free of foreign materials or cosmetic fillers.
- (b) The split pedestal base must conform in detail and dimensions to the Bureau of Electricity Standard Drawings 930 and 930A.
- (c) All castings must be done in a workmanlike manner which will result in uniform casting without warping or mold shifting. Castings must have smooth external surfaces free from protuberances, dents, cracks or other imperfections marring their appearance. Welding or plugging of casting defects is prohibited. All castings and parts must be permanently labeled for easy identification.

- (d) The two halves of the split base casting must be perfectly matched to each other and to the poles such that when they are attached to the mast, the base and mast assembly must appear as a one piece unit. No tolerance greater than 0.125" will be accepted.
- (e) The split pedestal base attachment to the mast must provide the structural integrity to ensure the base will not vibrate, twist or bounce during the sidewalk movement experienced when an elevated train or heavily loaded vehicle passes. Where set screws are used to secure the split pedestal base to the mast, a minimum of 3/8" thickness of metal must be provided where the set screws are inserted to minimize the possibility of stripping the threads when the set screws are tightened into place. The set screws will be 3/8"-16 steel allen head screws and a minimum of four set screws must be provided, two per base half. The set screws must be black.
- (f) The split pedestal base must provide two entry doors, opposite each other, whose appearance and fit are in consonance with the mast and base design both aesthetically and structurally. The doors must be of the same material as the base.
 - 1. The doors must be securely fastened in place with four 1/4"-20 hex head stainless steel screws which will thread into a rigid door frame. The door frame must be drilled and tapped. The door must be drilled only.
 - 2. All doors must be interchangeable with any other base, including bases of like design which have already been installed and accepted by the City. Bases whose doors are matched to a single base will be rejected.
 - 3. The doors must be positioned in the base such that the base can be attached to the mast with the base doors in perfect alignment with the mast handhole door.
 - 4. The doors must provide ample room for a worker to reach into the base with hand tools, open the mast handhole door, splice wires, change connectors and read the identification tag on the mast.
- (g) Interchangeability. Each member including the access doors in the base and all component equipment must be mutually interchangeable for assembly, so that no work will be required to make any member fit properly in the place of any other similar member of any other similar base.
- (h) Fabrication. It is preferred that the split pedestal base is cast as a single unit and sawcut into identical halves.
- (i) Standards. Each split pedestal base must be made in conformity with the proper interpretation of the applicable ASTM Standards, and as indicated on the drawings.

- (j) Certification. All split pedestal bases must be made by personnel who are certified for that type of work. Work must be performed in accordance with NIST Certification.
- (k) Finishing. Finishing work must be performed at the manufacturer's facility. All work must be inspected for shop finish, soundness and appearance by the Commissioner.

OPTION 2. FIBERGLASS BASE WITHOUT DOORS

- 5. (a) Each pedestal base must be formed of a fiberglass composite consisting of a polyester resin and containing a minimum of 65% fiberglass by weight. The resin must contain no clay fibers. The composite must be UV and weather resistant. Alternate materials may be considered. Each base half must be permanently marked on the inside identifying it as a base for a pedestrian pole.
- (b) The split pedestal base must conform in detail and dimensions to Bureau of Electricity Standard Drawings 930 and 930A.
- (c) The two halves of the clamshell must be identical to each other. They must be perfectly matched and when installed there must be no more than a 0.125 inch gap between the inside top of the assembled base and the outside surface of the mast.
- (d) Set screws must be used at the top of the base to attach the base to the mast, giving the base some rigidity and allowing the base to be positioned level. There must be four set screws (two in each half) evenly spaced at 90 degrees. The set screws will be 5/16"-18 allen head steel screws. The set screws must be black.
- (e) The color of the base must be gloss black and must match the color of existing and proposed Chicago 2000 poles. The resin must contain color pigment throughout. The pigment must be even throughout the thickness of the base. A finish coat of urethane enamel must be applied to the surface of the base to a minimum dry thickness of 1.5 mils. The resin color must match the enamel color. A paint sample on fiberglass must be submitted for approval prior to production. The paint manufacturer's name and any information necessary to acquire the same color for the pole must be provided. The contractor must supply one quart of touch-up paint for every 50 bases ordered.
- (f) The texture of the fiberglass base exterior must be equal to that of the aluminum cast base. Acceptance of the aesthetic appearance of the base will be by the Commissioner.

- (g) The two halves of the clamshell must be affixed by means of screws as shown on Standard Drawing 930A. The screws must fit so that the halves of the base are drawn together so that the edges of the base fit snug against each other. Threaded stainless steel inserts in the base must be used to affix the screws. The screws must be flush with the surface of the base and must not detract from the appearance of the base. Other methods of attachment may be considered. Any method of attachment must be approved by the Commissioner.

OPTION 3. NON-METALLIC DOORS

- 6. (a) Each base door must be formed of fiberglass (as described in Section 5.) or from another non-metallic material. The material must be UV and weather resistant. Any material other than fiberglass must be approved by the Commissioner. Each door must have a permanent marking on the back describing the part as a door for a Chicago 2000 light pole base.
- (b) The door must conform to the detail and dimensions of Standard drawings 930 and 930A. All doors must be interchangeable in both existing and proposed Chicago 2000 light poles bases.
- (c) The color of the door must be gloss black and must match the color of existing and proposed Chicago 2000 light poles and bases. The non-metallic door must be pigmented throughout the material. The pigment must be even throughout the thickness of the door. A finish of urethane enamel must be applied to the door surface to a minimum dry thickness of 1.5 mils. A sample of the door with paint must be submitted for approval prior to production.
- (d) The door appearance must be of a texture and of a fit that it will appear to be part of the original base. Acceptance of the aesthetic appearance and fit of the door will be by the Commissioner.
- (e) The doors must be securely fastened in place with four 1/4"-20 hex head stainless steel screws which will thread into the base frame. The door will be properly drilled to accept the screws. The holes must not be tapped. The screws must have a stainless steel core within a threaded nylon body. Screws must be supplied with the doors.

OPTION 4. ALUMINUM BASE WITH NON-METALLIC DOORS

- 7. Each aluminum base must meet the requirements of Option 1, with the exception of the doors. Each door must be non-metallic meeting the requirements of Option 3.

WELDING FOR ALUMINUM BASES

8. (a) General. Where welds are required and approved, each welded joint must be thoroughly cleaned of flux and spatter, and must be made in conformity with the standards of the American Welding Society. Each bidder must submit with his proposal a drawing showing the sizes and types of welds, in conformity with the proper interpretation of the standard welding symbols of the American Welding Society. The bidder's proposal must state the type of electrode and must describe the welding methods proposed for use in fabricating the base.
- (b) Certifications. Welders must have proper certification for the welding operations required. Welding by non-certified personnel will not be allowed. Certifications for welding personnel must be included with the submittal information package for review.
- (c) Testing. All welds of 5% of the bases in every lot must be inspected for penetration and soundness of the welds by the magnetic particle inspection method or by radiography. Acceptance or rejection must be governed by the same conditions as in the testing section. If the magnetic inspection process is used, the dry method with direct current must be employed. All transverse welds must be magnetized by the "prod" (Circular Magnetization) method. Proposed weld inspection method must be included with the submittal information package for review.

PAINTING OF ALUMINUM BASES

9. (a) Oil and Grease Removal. All metal surfaces must be washed with an alkaline detergent to remove oils and grease.
- (b) Chemical Pretreatment. The cleaned metal surfaces must then be treated with a hot, pressurized phosphate wash and must be dried by convection heat.
- (c) Exterior and Interior Coat. A thermosetting, weathering, Polyester powder coat must be applied electrostatically to all cleaned and treated surfaces to a uniform eight mil thickness in a one coat application. This powder coat must be cured in a convection oven at a minimum temperature of 400°F to form a high molecular weight fusion bonded finish.
- (d) Alternate Methods. Alternate powder coat methods may be reviewed and tested on a case by case basis. However, no coating method will be accepted unless the Commissioner judges such alternate to be equal to the coating herein specified.
- (e) Durability. Both the exterior and interior coats must be capable of passing 1,000 hours of salt spray exposure as per ASTM B117 in a 5% Na Cl (by weight) solution at 95°F and 95% relative humidity without blistering. Before test, the panel must be scribed with an "X" down to bare metal.

- (f) Coating Measurement. Measurement of coating thickness must be done in accordance with SSPC-Pa 2-73T, "Measurement of Dry Paint Thickness with Magnetic Gauges," except that the lowest "single spot measurement" in an area of two square inches must be not less than 7.0 mils.
- (g) Color. Color must be gloss black unless noted otherwise in the order. A 4" square color chip sample must be submitted for approval prior to fabrication. The chip sample must be of the same material as the split pedestal base, and must include the manufacturer's name and the manufacturer's color name as well. The sample must also include any other information required to purchase the same color for the pole, mast arm(s), and the cast aluminum finial.
- (h) Field Touch-up. Any minor damage to the split pedestal base surfaces must be touched-up in a professional manner as recommended by the paint manufacturer, with protective coating solutions as provided by the split pedestal base manufacturer at no additional cost to the City. Any major damage to the split pedestal base or components surfaces must be repaired at the manufacturer's place of business, or must be replaced as directed by the Commissioner. The Commissioner will be the sole judge of the extent of any such damage and the adequacy of repair. The Contractor must supply a field touch-up kit for every 20 bases or fraction thereof. Each kit must consist of a highly legible instruction sheet, one gallon of the recommended touch-up paint and all other materials required to touch-up 20 bases.

FABRICATION REQUIREMENTS FOR ALUMINUM BASES

- 10. (a) Foundry Qualifications. The manufacturer must demonstrate that the foundry proposed to fabricate the split pedestal bases must meet or exceed the specified qualification requirements under the following set of conditions. The manufacturer must provide foundry qualifications using published capacity data as part of the submittal package, and must include the actual molding and core equipment proposed for use in fabricating the split pedestal bases for the specific order. The responsible material proposal must contain verification of production capacity including the number of shifts per day running in the plant. Submittal information must include the foundry's written Quality Assurance Plan which demonstrates achievement of the latest industry technology in testing requirements. Submittal information must demonstrate that the work performed by the foundry will be done in accordance with both ASTM Standards and NIST Certification. Further, the foundry must be a domestic facility, unless proven to be directly owned and operated by the manufacturer.

- (b) Verification of Data. All foundry qualifications must be based on the parameters listed above. This data must be verified by an independent witness or representative as approved by the Commissioner. All verification must be performed on site at the foundry. The cost of verification must be included in this item. Should the foundry be deemed incapable of meeting this Specification after verification, the Contractor must provide an alternate foundry as approved by and at no additional costs to the Commissioner. The foundry qualifications and verification process must be repeated in its entirety.

TESTING

11. (a) Witness Testing. Testing must be conducted on five percent of the manufacturer's production bases or doors for each order in which the quantity is 20 or more. If requested by the City, testing will be witnessed by a representative of the Bureau of Electricity. The Contractor must include in his bid the cost of travel, food, and lodging for one representative. Travel for 150 miles or more must be on a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. Where more than one testing location is to be used, the Contractor must provide for witness testing at each location. All testing must be certified by the manufacturer, or by an independent lab.
- (b) The selection of bases or doors must be a random selection from the entire completed lot ordered.
- (c) Requirements for Aluminum Bases. All completed aluminum bases must be available for testing. The following tests must be included in the testing procedure:
1. Bar tests as outlined in ASTM B26.
 2. Weld tests as described in the WELDING Section of this Specification.
- (d) Requirements for Fiberglass Bases and Non-Metallic Doors. All completed fiberglass bases and non-metallic doors must be available for testing. The manufacturer must provide evidence that the bases and doors are structurally sound and are able to withstand the normal abuse of salt spray, freeze-thaw cycles, and exposure to moisture. The bases and doors must be impact resistant and must be resistant to UV damage.
- (e) The summary report and the test results must be certified by the independent test laboratory or the manufacturer's laboratory, as applicable, and must be sent directly to the Commissioner before the bases and/or doors are shipped.

- (f) Acceptance of Equipment. Tests must be made on 5% of all bases or doors in the order. If any of the bases or doors fail to meet these specifications, an additional three bases or doors must be tested for each failed unit. Should any of these additional units fail to meet these specifications, the entire lot will be subject to rejection. The Commissioner will then decide, based on the nature of the failure, whether the entire lot will be rejected outright or whether the manufacturer may subject each base or door in the order to testing. If each base or door in the order is tested, those units which fulfill the specified requirements may be accepted at the discretion of the Commissioner.

SHIPMENT AND DELIVERY

12. (a) General. The split pedestal bases and/or doors must be carefully inspected at the factory prior to shipment to assure that the bases and/or doors are complete and free of defects. When bases or doors are stacked together, they must be supported with suitable spacers or must otherwise be protected from dents and other potential shipping damage. The spacing and protective materials must be suitable for and usable in the storage of the bases and doors. All hardware must be packaged in a clear container and labeled as to size, quantity, and part association.
- (b) Packaging. The split pedestal bases must be shipped on pallets with at least six units per pallet. Each base must be individually wrapped and protected so that it can be bundled and unbundled without damage to the base or its finish. Each base wrapping must be labeled to identify the base. Specific instructions must be securely attached to each pallet indicating the proper methods of storage. In addition, each pallet must contain specific instructions on the installation of the split pedestal bases. Instructions must be printed on a fibre based paper with a permanent ink so that instructions will be completely legible after weathering outdoors for a minimum of 5 years. Doors must be individually wrapped and packaged in cartons. The cartons must be labeled in 3/8 inch high lettering indicating the type of door (i.e. FIBERGLASS DOOR FOR CHICAGO 2000 POLE BASE), the part number, the manufacturer, the date of manufacture, and the contract number.
- (c) Appurtenant Devices and Hardware. Any appurtenant devices and hardware not attached to the bases must be carefully wrapped, labeled, and securely attached to each pallet. Hardware for doors must be packaged in a clear bag with a label indicating the type of hardware, the quantity of hardware, and the associated door type. Hardware for doors must be in the same carton as the doors. Payment will be withheld for any units provided without the appropriate appurtenant devices and hardware, or for any missing or improper packaging or labeling. Cracked, broken, chipped or damaged units will also be considered as incomplete quantities as regards payment.
- (d) Touch-up Paint. Touch-up paint and appurtenant materials must be packaged in units sufficient for the number of bases on each pallet. These units will be securely attached to each pallet.

- (e) Delivery. Split pedestal bases and/or doors will be delivered to the Bureau of Electricity storage yard at 4101 South Cicero in Chicago, or as indicated on the order. Split pedestal base information submitted for approval will include any recommendations of the Manufacturer for storage.

INSPECTION

13. An inspector representing the City will have free entry at all times, while the work on the contract is being performed, to all parts of the manufacturer's plant which concern the manufacture of split pedestal bases or doors. The manufacturer must afford the inspector, without charge, all reasonable facilities to satisfy the inspector that the bases are being furnished in accord with these specifications.

THIS SPECIFICATION MUST NOT BE ALTERED

**SPECIFICATION 1537
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
SEPTEMBER 26,2006**

CABLE: TRAFFIC SIGNAL, MULTIPLE CONDUCTOR, COPPER WIRE, 600 VOLT

SUBJECT

1. This specification states the requirements for a multiple cable to be installed in underground conduits and used to distribute electrical energy to operate automatic traffic control equipment at street intersections within the City of Chicago. The cable will be used between the traffic controller cabinet and the junction boxes on the traffic signal poles.

GENERAL

2. (a) Specification. The cable must conform in detail to the requirements herein stated, and to the specifications and methods of test of the following:

ASTM - American Society for Testing and Materials
ICEA - Insulated Cable Engineers Association
IEEE - Institute of Electrical and Electronic Engineers
UL - Underwriters Laboratories
- (b) Acceptance. Cable not conforming to this specification will not be accepted.
- (c) Sample. If requested by the Chief Procurement Officer, a three (3) foot sample of the cable intended to be furnished under this specification must be submitted to the attention of the Engineer of Electricity within fifteen (15) business days of receipt of such request.
- (d) Warranty. The manufacturer must warrant the cable to be first class material throughout. In addition to any other claims against them, if the cable is installed within six months of date of shipment, the manufacturer must replace any cable failing during normal and proper use within two years of date of installation. All replacements under this warranty must be made free of charge F.O.B. delivery point of the original contract.

CABLES

3. (a) Construction. The cable must meet the requirements of ICEA standard S-95-658 and UL 44 for cable. The cable must consist of coated conductors each concentrically encased with a “free- stripping”, ethylene propylene, insulation. In two-conductor cables, the insulated and covered conductors must be parallel and not twisted, with suitable filler, as necessary, to produce a flat core of minimum practicable dimensions. In the larger count cables suitable fillers must be used to produce an essentially round cross-section. A Mylar tape must be wrapped over the conductor assembly, and a low smoke zero halogen polyolefin (LSZH) or chlorosulfonated polyethylene (CSPE) jacket applied overall.

(b) Outer Diameter. The maximum allowable outer diameter for round cables must be as follows:

<u>No. Of Conductors</u>	<u>Outer Diameter</u>
	(inches)

<u>E.</u> Seven	0.49
<u>F.</u> Ten	0.69
<u>G.</u> Nineteen	0.90

(c) Sealing. Both ends of each length of cable must be thoroughly sealed to prevent the entrance of moisture and other foreign matter.

I.COLOR CODE

4. Conductor identification must be provided by color synthetic-resin coverings, or an approved equal. Table A sets forth the color code for the various conductor arrangements.

CONDUCTOR

5. (a) Material. Round, soft or annealed, copper wire, meeting the requirements of ASTM B-3 and B-8, and coated in accordance with ASTM B33.

(b) Size. Cables must be made up of conductor sizes as set forth in this specification. The Number 14 AWG will be solid. Number 4 AWG conductors will be stranded.

INSULATION

6. (a) Type. The insulation must be an ethylene propylene compound meeting the physical and electrical requirements herein specified when tested in accordance with ASTM D-470-81.

(b) Thickness. The insulation must be circular in cross-section and have the following minimum thicknesses.

<u>H.</u> Conductor Size. AWG	stranding (No. Of Wires)	No. of Conductors	Insulation Thickness (mils)
#4	7	2	45
#14	1	7	30
#14	1	10	30
#14	1	19	30

(c) Physical Properties. Initial Value.

<u>I.</u> Tensile Strength	1200 psi minimum
<u>J.</u> Elongation at Rupture	250% minimum

(d) Physical Properties. After Aging.

After 168 hours in air oven at 121° Centigrade:

Tensile Strength	75% of initial value
<u>K.</u> Elongation	75% of initial value

(e) Accelerated Water Absorption Characteristics. Test must be made in accordance with methods discussed ASTM D470.

Gravimetric Method. The insulation must not absorb more than five (5) milligrams of water per square inch of exposed surface area after immersion in distilled water at 70° Centigrade for a period of seven (7) days.

(f) Cold-Bend Test Requirements. The completed cable must pass the “Cold”B end, Long-Time Voltage Test on Short Specimens” of ASTM D470 except that the test temperature must be minus (-) 25⁰Centigrade.

(g) Electrical Requirements.

- (1) Voltage Test. The completed cable must meet an A.C. and D.C. voltage test in accordance with ASTM D470 and D2655.
- (2) Insulation Resistance. The completed cable must have an insulation resistance constant of not less than 20,000 when tested in accordance with methods shown in ASTM D470.

CABLE TAPE

7. The assembled and cabled conductor core must be wrapped with a one mil (0.001 inch) thick Mylar tape allowing a minimum of ten percent (10%) overlap.

JACKET

8. (a) Material. The jacket must be either a heavy duty low smoke zero halogen (LSZH) polyolefin or low lead chlorosulfonated polyethylene (CSPE) meeting the physical and electrical requirements specified herein. CSPE must meet the requirements of CFR Title 40, Part 261 for leachable lead.

- (b) Workmanship. The jacket must have a smooth exterior surface free from holes, cracks and splits, and must be tough, elastic, homogeneous in composition, and properly vulcanized.

- (c) Thickness. Average thicknesses of the jacket must be not less than that given below. Minimum thickness must be not less than ninety percent (90%) of the average thickness.

(1)	Two-Conductor # 4 AWG	5/64 inch
(2)	Seven-Conductor	3/64 inch
(3)	Ten-Conductor	4/64 inch
(4)	Nineteen-Conductor	4/64 inch

- (d) Initial Physical Requirements:

1.	Tensile strength minimum PSI	1800
2.	Elongation at rupture, minimum percent	300

- (e) Air Oven Exposure Test. After conditioning in an air oven at $121^{\circ} \pm 1^{\circ}\text{C}$ for 168 hours:

1.	Tensile strength minimum percent of unaged value	75
2.	Elongation at rupture, minimum percent of unaged value	65

- (f) Mechanical Water Absorption. After 168 hours at $70^0 \pm 1^0\text{C}$: one (1) milligram per square inch, maximum
- (g) Cable Marking. Outer Jacket must be embossed or printed with the manufacturer's name, year of manufacture, insulation and jacket materials, conductor number, conductor size, at approximately 18" intervals. On the side opposite, the cable must be sequentially marked in one (1) foot increments.

TESTING

- 9. (a) General. Tests must be performed on insulation, jacket and completed cables in accordance with applicable standards as listed in these specifications. Where standards are at variance with each other or with other portions of this specification, the most stringent requirements, as determined by an engineer from the Bureau of Electricity, will apply.
- (b) Number of Tests. Insulation and jacket tests must be conducted on samples taken every 25,000 feet or fraction thereof of each conductor size. In no case must samples be taken closer than 15,000 feet apart.
- (c) Witness Tests. Where the quantity of cable on a single purchase order is 250,000 feet or more, all insulation and jacket tests must be witnessed by an engineer from the Bureau of Electricity, if so requested by the City. Included in these tests will be a 70,000 BTU per hour flame tests in accordance with IEEE 383. Reels to be tested will selected a random. The contractor must include in his bid, the coast of travel, food and lodging for one (1) engineer. Travel for 150 miles or greater must utilize a major airline. Lodging accommodations must be equal to those provided at a Holiday Inn. The engineer must be given ten (10) working days notice of all travel arrangements.
- (d) Test Reports. No cable may be shipped until certified copies of all factory tests, including witness tests where applicable, have been reviewed and approved by the engineer.
- (e) Acceptance. Samples must be taken from each reel and must successfully conform to all tests specified herein. Reels from which samples fail to conform, will be rejected.

PACKAGING

10. (a) Reels. The completed cable must be delivered on sound substantial, nonreturnable reels. Both ends of each length of cable must be properly sealed against the entrance of moisture and other foreign matter by the use of clamp-on cable caps, such as the Reliable Electric Company neoprene cable cap No. 1405, or equal. The ends must be securely fastened so as not to become loose in transit. Before shipment, complete 2 x 4 lagging must be applied to all reels.
- (b) Footage. Each reel must contain the length of cable as set forth below. A tolerance limit of plus or minus five percent ($\pm 5\%$) must be adhered to.
- | | |
|------------------------|-----------|
| (1) Two-Conductor | 2000 feet |
| (2) Seven-Conductor | 2000 feet |
| (3) Ten-Conductor | 2000 feet |
| (4) Nineteen-Conductor | 1000 feet |
- (c) Marking. A metal tag must be securely attached to each reel indicating the reel number, contract number, date of shipment, gross and tare weights, the appropriate City commodity Code Number as set forth below, and a description of the cable. Also, each reel must have permanent marking on it indicating directions for unrolling the cable and the footage of cable contained in the reel. Indelible ink or other such material susceptible to washing off or fading will not be permitted; and approved permanent marking material such as paint or a securely attached metal tag is required.
- (d) Commodity Code Number.
- | | |
|-----------------------------|--------------|
| (1) Two-conductor No. 4 AWG | 31-4686-5826 |
| (2) Seven-Conductor | 31-4682-5620 |
| (3) Ten-Conductor | 31-4682-5630 |
| (4) Nineteen-Conductor | 31-4682-5645 |

TABLE A COLOR CODE CONDUCTOR IDENTIFICATION

Base Color	First Tracer	Second Tracer	2 (# 4)	7	10	19
White	Black	Red	--	--	--	14
White	Red	Green	--	--	--	14
Black	--	--	4	14	14	14
White	--	--	4	14	14	14
Red	--	--	--	14	14	14
Green	--	--	--	14	14	14
Orange	--	--	--	14	14	14
Blue	--	--	--	14	14	14
White	Black	--	--	14	--	--
Red	Black	--	--	--	14	14
Green	Black	--	--	--	14	14
Orange	Black	--	--	--	14	14
Blue	Black	--	--	--	14	--
Black	White	--	--	--	--	--
Red	White	--	--	--	--	14
Green	White	--	--	--	--	14
Blue	White	--	--	--	--	14
Orange	White	--	--	--	--	14
White	Red	--	--	--	--	--
Blue	Orange	--	--	--	--	14
Red	Blue	--	--	--	--	14
Green	Blue	--	--	--	--	14
Orange	Blue	--	--	--	--	14

**SPECIFICATION 1545
BUREAU OF ELECTRICITY
DEPARTMENT OF STREETS AND SANITATION
CITY OF CHICAGO
REVISED AUGUST 31 , 2005**

**PEDESTRIAN COUNTDOWN TRAFFIC SIGNAL, LED, 16 INCH WITH SYMBOLIC
WALK/DON=T WALK LENSES**

1. GENERAL REQUIREMENTS

- 1.1 This specification states the requirements for a single section pedestrian countdown signal with light emitting diode (LED) symbolic messages on nominal sixteen inch by eighteen inch lenses and enclosed in a polycarbonate housing.
- 1.2 Sample and Certified Test Reports. One complete pedestrian countdown signal, fully assembled and wired, of the manufacture proposed to be furnished, must be submitted along with the required certified test reports, within fifteen (15) business days upon request of the Chief Procurement Officer. The sample must be delivered to the Engineer of Electricity, Bureau of Electricity, 2451 South Ashland Avenue, Chicago, Illinois 60608.
- 1.3 Standards. Equipment furnished under this specification must meet the appropriate requirements of the following standards, as required within the body of this specification:
- American Association of State Highway and Transportation Officials (AASHTO)
 - American Society for Testing and Materials (ASTM)
 - Institute of Transportation Engineers (ITE)
 - National Electrical Manufacturers Association (NEMA)
 - Underwriters Laboratories (UL)
- 1.4 Approval. Approval will mean approval in writing by the Commissioner or his/her duly authorized representative.

2. MATERIAL AND EQUIPMENT REQUIREMENTS

- 2.1 The pedestrian signal heads must conform to ITE Standard "Pedestrian Traffic Control Signal Indications" (PTCSI), in which the most recently published revisions will govern.

2.2 Housing Design. The housing must be one piece, ultra violet stabilized polycarbonate resin of the specified color, injection molded complete with integral top, bottom, and sides, having a minimum thickness of 0.100 inches.

(a) The polycarbonate formulation used must provide these physical properties in the housing (Tests may be performed on separately molded specimens).

<u>TEST</u>	<u>REQUIRED</u>	<u>METHOD</u>
Specific gravity	1.17 minimum	ASTM D 792
Vicat Softening temp	310-320° F	ASTM D 1525
Brittleness temp.	Below-200° F	ASTM D 746
Flammability Self-extinguishing		ASTM D 635
Tensile strength, yield	8,500 PSI	ASTM D 638
Elongation at yield	5.5-8.5%	ASTM D 638
Shear strength, yield	5,500 PSI min.	ASTM D 732
Izod impact strength (notched, 1/8" thick) lbs./in.	12-16 ft.	ASTM D 256
Fatigue strength (at 2.5 mm cycles)	950 PSI min.	ASTM D 671

(b) Positioning Device. The top and bottom opening of each housing must have integral serrated bosses that will provide positive positioning of the signal head in five degree increments to eliminate undesirable rotation or misalignment of the signal head between sections. A total of 72 teeth must be provided in the serrated bosses to allow the signal face to be rotated 360 degrees about its axis. The teeth must be clean and sharp to provide positive positioning with the grooves of the mating section or framework. Each opening must accommodate standard 1 2" pipe fittings and brackets.

(c) Hinges. The housing must have four integral hinge lugs, with stainless steel hinge pins (AISI 304 or equivalent), located on the left side for mounting the door. The hinge pins must be straight and not protrude past the outside of the housing lugs. The housing must have two integral latching bolt lugs on the right side each with a stainless steel hinge pin to which a latching bolt (AISI 304 or equivalent), washer, and wing nut will be attached. The wing nuts must be captive.

(d) Door. The door must be a one piece ultraviolet stabilized polycarbonate resin of the specified color, injection molded complete with a minimum thickness of 0.1 inch. Two (2) hinge lugs on the left side and two (2)sets of latch screw jaws centered on the right side, as viewed from the front of the signal, must be integrally cast with the housing door. The door must be hinged to the housing with two (2) stainless steel hinge pins, drive fitted. Two (2) stainless steel latch screws and wing nuts and washer assemblies on the latch side of the housing body must provide for opening and closing the door without the use of tools. The door must have four (4) holes with threaded metal inserts for stainless steel machine screws to secure the lens.

The inside of the door must be grooved to accommodate a one piece, air-cored EPDM (ethylene propylene diene monomer) gasket to provide a weatherproof and dust proof seal when the door is closed. The inside of the door must have four equally spaced threaded metal inserts for the lens attachment. The outside of the door must have an integral rim completely encircling the lens opening to prevent leakage between the door and the lens. The rim must have equally spaced tabs around the circumference with threaded metal inserts for the visor attachment.

2.3 LED Optical Unit

2.3.1 LED Optical Unit. The light emitting diode (LED) optical unit must consist of a lens, reflector and lamp holder. All units must form a neat compact unit within the housing body with no light leakage between the door and the housing body, and the signal indication and the visor.

- (a) Light emitting diode (LED) optical units must consist of an integral unit containing the following components: power leads, housing, integral lens, matrix of light emitting diodes (LEDs) emitting monochromatic light of desired colors, and electronic and electrical components necessary to permit operation at nominal 120 volt, 60 hertz power.
- (b) The LED unit must meet the applicable requirements of ITE standards for color (chromaticity) and brightness (luminance). During the required operating life of LED signal units, the luminance output of the units must not be less than 60 percent (.60) of the values specified in the standard.
- (c) Unit power supply must be constant current regulated and filtered to provide instant on indications, and to prevent momentary signal outages or flicker.
- (d) Units must consist of LEDs uniformly distributed to present a homogeneous appearance on the face of the lens from a wide viewing angle.
- (e) LEDs must be wired so that the loss of a single LED or a string of LEDs will not reduce the luminescence below the minimum requirement.
- (f) For purposes of this specification, failure of a single unit is defined as an occurrence where the luminescence of the signal measured in candela in standard test procedures is less than the required initial luminance or luminance at time points and conditions specified; or where minimum required brightness is achieved, but two or more series strings of LEDs or in excess of twenty percent of 20% of LEDs are not operable.
- (g) Units must be fully operable over a range of 90 volts to 130 volts at 60 hertz, plus or minus 3 hertz.

- (h) Surge protection. Each unit must be provided with integral surge protection to withstand transient of 600 volt, 100 microsecond rise and 1 millisecond pulse width. The surge protector must provide full electrical and physical protection to all unit components.
- (i) Maximum permissible power consumption at ambient conditions (nominal 120 volts, 60 hertz, 70 degrees F.) must be 18 watts at a minimum 90 percent power factor. Power consumed must not vary by more than ten (10) percent from nominal power consumption over voltage range of 105 volts to 125 volts, and over permissible environmental ranges.
- (j) Units must be fully operable at temperature ranges of -40 degrees F. (-40 deg C) to +165 degrees F. (+74 deg C) at up to 100 percent relative humidity.
- (k) Units must be clearly marked on the back surface of the unit in a permanent manner showing information required for warranty and long term performance. Information to be shown must include manufacturer name, date of manufacture, electric power requirements, signal model type, and signal serial number.
- (l) The LED unit must be compatible with all traffic signal controller equipment currently in use by the City of Chicago, and meeting the City=s latest specifications for traffic signal control equipment. In particular the LED unit must be compatible with the NEMA TS-1 and later traffic signal load switches and conflict monitors.
- (m) Units must meet applicable sections of Title 47, SubPart B, Section 15 of the Federal Communications Commission (FCC) rules as applies to electronic noise limitation and electromagnetic interference.
- (n) Total harmonic distortion (THD) induced into the voltage and current AC power line sine waves must not exceed 20 percent.
- (o) Burn-in. LED Optical units must be energized for a minimum 24 hour burn-in at 100% on-time duty cycle.

- 2.3.2 Display. The message area must be approximately 16 inches square and display the double overlay "Don't Walk" and "Walk" symbols immediately adjacent to the countdown digits. The symbols must be applied in such a manner as to provide an opaque polycarbonate background and illuminated legends.

Symbolic Messages. Symbols for "Walk" (Man) and "Don't Walk" (Hand) must conform in style and color to those of ITE. The symbols must be not less than nine and one-half inches (9 2") tall with proportional width. The "Don't Walk" symbol must be Portland Orange, and the "Walk" symbol must be of lunar white, conforming to the specifications of the ITE/PTCSI.

Countdown Digits. Countdown digits must be Portland Orange and not less 9" high with proportional width and shall be compliant with latest ITE standards.

- 2.4 Lens. The unit lenses must be constructed of ultraviolet (UV) stabilized , impact resistant polycarbonate, acrylic or other approved material. Lenses must be anti-glare, smooth texture, and clear.

- 2.5 Wiring. Each lamp holder must have three (3) leads color coded as follows:

White - Common
Red - "Don't Walk" Indication
Green - "Walk" Indication

The leads must be TEW, number 18 AWG, stranded copper wire with 2/64 inch thick, 600 volt, 105 degree C, thermoplastic insulation meeting MIL-W-76A specifications. The ends of the lamp leads must be stripped of one-half inch (2") of insulation and tinned. The leads must be splice-free and connected to one side of the terminal strip.

- 2.6 Terminal Strip. A four terminal, eight point, barrier type terminal strip with solid base and pressure plate type connectors, such as Marathon Special Products Corporation Catalog Number TB-304-SP, must be securely attached at each end to the housing body inside the walk section.

- 2.7 Cable. One eleven foot (11') length of flexible electric cord, medium duty, type SO, 3-conductor No. 16 AWG stranded copper, color coded, rubber insulated, neoprene jacketed, must be furnished with each two (2) section signal. Both ends of each cable length must be carefully stripped of six inches (6") of jacket and one inch (1") of insulation, and each conductor properly tinned.

3. COUNTDOWN FUNCTIONALITY

- 3.1 The countdown module must be compatible with all traffic signal controller equipment currently in use by the City of Chicago, and meeting the City's latest specifications for traffic signal control equipment.
- 3.2 The countdown timer must have a micro-processor capable of recording its own time when connected to a traffic controller.
- 3.3 The countdown timer module must continuously monitor the traffic controller for any changes to the pedestrian phase time and re-program itself automatically as needed.
- 3.4 The countdown module must register the time for the walk and clearance intervals individually and must begin counting down at the beginning of the pedestrian change interval (flashing Hand).
- 3.5 At the end of the pedestrian change interval, the module must display "0" and the blank out. The display must remain dark until the beginning of the next countdown.
- 3.6 In the event of a preemption sequence, the countdown module must skip the pre-empted clearance time and reach 0 at the end of the pedestrian change interval.
- 3.7 The countdown must remain synchronized with signal indications and always reach "0" at the end of the pedestrian change interval.
- 3.8 The countdown must not display an erroneous or conflicting time when subjected to defective load switches.

4. TESTING AND DOCUMENTATION REQUIREMENTS

- 4.1 Documentation. The contractor must provide certified manufacturing and testing documentation to demonstrate that the pedestrian signals being supplied meet or exceed the specification requirements. Testing must be conducted by an independent and certified testing laboratory.
- 4.2 Inspection. The signals must be subject to inspection at the discretion of the Commissioner. Final inspection must be made at point of delivery. Any signal rejected must be removed and disposed of by the contractor at his sole cost.

- 4.3 Warranty. The manufacturer must warrant the signals to meet the requirements of this specification, and must warrant all equipment, components, parts and appurtenances against defective design, material and workmanship for a period of three (3) years from date of acceptance. In addition, LED optical units must carry an additional warranty against failure or loss of color (chromaticity) and signal brightness (luminance) below minimum acceptable VTCSH standard levels for a period of seven (7) years from date of final acceptance for contract construction, or date of delivery on a specific order. In the event defects or failures occur in the LED unit during the warranty period, the manufacturer must repair or replace such defects and failures at no expense to the City. This warranty must be evidenced by a letter or certificate of warranty submitted to the City at the time final delivery is made. The warranty must cover all units delivered in an order or installed by contract, and must include unit serial numbers for all LED units. The warranty must be signed by an official of the manufacturer who is empowered by the manufacturer to enter into such an agreement.

5. PACKING

- 5.1 Packing. Each pedestrian signal assembly must be packed in a suitable carton so secured that the signal will not be damaged during shipment, handling, or storage.
- 5.2 Marking. Each carton containing a pedestrian signal must be clearly marked on the outside in letters not less than three-eighths inch (3/8") tall with the legend: "PEDESTRIAN SIGNAL, COUNTDOWN, SIXTEEN-INCH, SYMBOLIC LED WALK-DON'T WALK," the appropriate City Commodity Code Number, the name of the manufacturer, the date of manufacture, and the pertinent contract number.

THIS SPECIFICATION MUST NOT BE ALTERED

APPENDIX B – STORM WATER POLLUTION PREVENTION PLAN

FAI 90/94/290
 (Taylor Street)
 Section 2013-012R
 Cook County
 Contract No. 60W30




Storm Water Pollution Prevention Plan

Route	<u>F.A.I. 90/94</u>	Marked Rte.	<u>Taylor Street Bridge</u>
Section	<u>2013-012R</u>	Project No.	<u></u>
County	<u>Cook County</u>	Contract No.	<u>60W30</u>

This plan has been prepared to comply with the provisions of the National Pollutant Discharge Elimination System (NPDES) Permit No. ILR10 (Permit ILR10), issued by the Illinois Environmental Protection Agency (IEPA) for storm water discharges from construction site activities.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

<u>John Fortmann, PE</u>	
Print Name	Signature
<u>Director of Highways, Region One Engineer</u>	<u>10-14-2014</u>
Title	Date
<u>Illinois Department of Transportation</u>	
Agency	

I. Site Description:

- A. Provide a description of the project location (include latitude and longitude):

Taylor Street Bridge over NB and SB I-90/94 in the City of Chicago, Cook County, Illinois.

Section: 2013-012R
 Town: T 39 N
 Range: R 14 E

Longitude: 87° 38' 41.14" W
 Latitude: 41° 52' 11.03" N

The design, installation, and maintenance of BMPs at these locations are within an area where annual erosivity (R value) is less than or equal to 160. Erosivity is less than 5 in all two-week periods between October 12 and April 15, which would qualify for a construction rainfall erosivity waiver under the US Construction General Permit requirements. At these locations, erosivity is highest in spring to autumn, April 16 - October 11.

- B. Provide a description of the construction activity which is the subject of this plan:

The work consists of the reconstruction of the Taylor Street Bridge (SN 016-1165) over Interstate 90/94 and the NW Flyover Ramp from Union Avenue to Des Plaines Street, along with the repair and resurfacing of the NB Taylor Street Entrance Ramp Bridge (SN 016-2535).

Work includes bridge reconstruction, retaining wall construction, roadway reconstruction, erosion control and protection, special waste excavation, earth excavation and embankment, removal of existing improvements, new storm and combined sewers, curb and gutters, pavements, sidewalks, pavement marking and signage, roadway lighting, traffic signals, concrete abutments, steel furnishing and erection, bridge deck and railings, traffic control

and protection, urban enhancements and all incidental and collateral work necessary to complete the improvements as shown on the Plans and as described herein.

There are a total of three (3) stages for maintenance of traffic. Temporary or permanent stabilization shall be installed on all areas disturbed during each stage of construction prior to switching traffic to begin the subsequent stage. All erosion control measures placed during construction shall remain in place and be maintained until the completion of the project. Inlet filters shall be installed, maintained and cleaned at all existing and proposed drainage structures prior to the start of pre-stage work. Perimeter erosion barrier shall be placed to contain silt and runoff from leaving the site. Mulch, Method 2 and surface roughening shall be used for temporary stabilization during winter instead of temporary erosion control seeding when grading will occur after September 30th. Mulch, Method 2 and temporary erosion control seeding shall be used during all other times. All erosion control work shall be in accordance with the Illinois Urban Manual and IDOT Erosion and Sediment Control Field Guide for Construction Inspection, or as directed by the Engineer. Inlet filters and perimeter erosion barriers shall be removed at the conclusion of construction operations.

The permanent stabilization after construction activities shall consist of erosion control blanket and seeding.

- C. Provide the estimated duration of this project:

20 months

- D. The total area of the construction site is estimated to be 1.02 acres.

The total area of the site estimated to be disturbed by excavation, grading or other activities is 0.31 acres.

- E. The following is a weighted average of the runoff coefficient for this project after construction activities are completed:

Existing C: 0.71 acre (0.9 impervious) + 0.31 acre (0.3 impervious) / 1.02 acre = 0.72
Proposed C: 0.71 acres (0.9 impervious) + 0.31 acre (0.3 impervious) / 1.02 acre = 0.72

- F. List all soils found within project boundaries. Include map unit name, slope information, and erosivity:

Along Taylor Street, the general lithologic succession encountered beneath the pavement includes 1) man-made ground (fill); 2) very soft to stiff clay to silty clay; 3) stiff to hard silty clay loam diamicton; 4) very dense silty loam hardpan; and 5) dolostone bedrock.

NRCS Soil Survey classifies the site soil as urban.

- G. Provide an aerial extent of wetland acreage at the site:

No wetlands were identified on site.

- H. Provide a description of potentially erosive areas associated with this project:

Potentially erosive areas are along the embankments adjacent to SB I-90/94.

- I. The following is a description of soil disturbing activities by stages, their locations, and their erosive factors (e.g. steepness of slopes, length of slopes, etc):

Construction to be Completed in Advance of Stage 1A:

- Taylor Street
 - o Existing grass median between Halsted Street and Union Avenue will be removed and replaced with temporary pavement.

- Taylor Street Exit Ramp
 - o Temporary pavement and curb and gutter will be installed for the Taylor Street Exit Ramp widening of the radius return.

Construction to be Completed in Stage 1A:

- Utilities
 - o ComEd and OEMC utilities will be removed across the bridge prior to construction.
 - o All ComEd, OEMC and 911 emergency unit utilities to be relocated by others. The removal and replacement of the existing utilities shall be coordinated with and at the discretion of utility agencies.
 - o Relocate high mast light tower on the north side of the Taylor Street Bridge.
 - o See structural, traffic signal, lighting, and ITS plans for additional information during staging.
- Taylor Street and I-90/94
 - o Install temporary concrete barrier and temporary impact attenuators on Taylor Street and NB & SB I-90/94 as shown on the plans.
 - o Install all required temporary soil retention systems as shown in the structural plans for the construction of the Taylor Street Bridge substructures.
 - o Remove existing approaches, superstructure, Pier 2, and abutments for the north half of the Taylor Street Bridge as shown in the structural plans. Work includes, but not limited to, removal of substructures, abutments, and approaches as well as removal of all other appurtenance fixtures on the bridge.
 - o Reconstruct of the north half of the West Abutment, Pier 2 and East Abutment of the Taylor Street Bridge (SN 016-1165).
 - o Construct the SB I-90/94 outside shoulder temporary pavement and curb and gutter adjacent to the West Abutment.
 - o Perform structural repair and apply bridge deck overlay of the Taylor Street Entrance Ramp (SN 016-2535).

Construction to be Completed in Stage 1B:

- Utilities
 - o All ComEd, OEMC and 911 emergency unit utilities to be relocated by others. The removal and replacement of the existing utilities shall be coordinated with and at the discretion of utility agencies.
 - o See structural, traffic signal, lighting, and ITS plans for additional information during staging.
- Street and I-90/94
 - o Relocate temporary concrete barrier wall and impact attenuator along SB I-90/94 from adjacent to the west abutment to adjacent to Pier 1.
 - o Remove existing Pier 1 for the north half of the Taylor Street Bridge as shown in the structural plans. Work includes, but not limited to, removal of substructures as well as removal of all other appurtenance fixtures on the bridge.
 - o Begin construction of the north half of the Pier 1 of the Taylor Street Bridge (SN 016-1165).
 - o Construct the SB I-90/94 inside shoulder temporary pavement and barrier wall adjacent to Pier 1.
 - o Perform structural repair and apply bridge deck overlay of the Taylor Street Entrance Ramp (SN 016-2535).
 - o Begin beam erection and superstructure work upon completion of all substructures.
 - o Install City of Chicago ductbanks and conduits across bridge.
 - o Reconstruct WB Taylor Street east of the bridge, along with curb and gutter, sidewalk, driveway, drainage and any other needed appurtenance.

- Reconstruct the east half of the Taylor Street Exit Ramp, along with curb and gutter, drainage and any other needed appurtenance.

Construction to be Completed in Stage 1C:

- Taylor Street and I-90/94
 - Work on WB Taylor Street west of the bridge shall not begin until the north half of the Taylor Street Bridge superstructure is complete.
 - Reconstruct WB Taylor Street west of the bridge, along with curb and gutter, sidewalk, drainage and any other needed appurtenance.
 - Reconstruct the west half of the Taylor Street Exit Ramp, along with curb and gutter, sidewalk, drainage and any other needed appurtenance.

Construction to be Completed in Stage 2A:

- Utilities
 - ComEd and OEMC utilities will be removed across the bridge prior to construction.
 - All ComEd, OEMC and 911 emergency unit utilities to be relocated by others. The removal and replacement of the existing utilities shall be coordinated with and at the discretion of utility agencies.
 - See structural, traffic signal, lighting, and ITS plans for additional information during staging.
- Taylor Street and I-90/94
 - Relocate temporary concrete barrier wall and impact attenuator along SB I-90/94 from adjacent to Pier 1 to adjacent to the west abutment.
 - Install all required temporary soil retention systems as shown in the structural plans for the construction of the Taylor Street Bridge substructures and Retaining Wall 17.
 - Remove existing approaches, superstructure, Pier 2, and abutments for the south half of the Taylor Street Bridge as shown in the structural plans. Work includes, but not limited to, removal of substructures, abutments, and approaches as well as removal of all other appurtenance fixtures on the bridge.
 - Remove existing retaining wall along Union Avenue as shown in the structural plans, along with the existing curb and gutter and bituminous median surface.
 - Reconstruct the south half of the West Abutment, Pier 2 and East Abutment of the Taylor Street Bridge (SN 016-1165).
 - Begin construction of Retaining Wall 17 (SN 016-1806).
 - Construct the SB I-90/94 outside shoulder temporary pavement and curb and gutter adjacent to the West Abutment.
 - Perform structural repair and apply bridge deck overlay of the Taylor Street Entrance Ramp (SN 016-2535).

Construction to be Completed in Stage 2B:

- Utilities
 - All ComEd, OEMC and 911 emergency unit utilities to be relocated by others. The removal and replacement of the existing utilities shall be coordinated with and at the discretion of utility agencies.
 - See structural, traffic signal, lighting, and ITS plans for additional information during staging.
- Taylor Street and I-90/94
 - Relocate temporary concrete barrier wall and impact attenuator along SB I-90/94 from adjacent to the west abutment to adjacent to Pier 1

- Relocate temporary concrete barrier wall and impact attenuator along NB I-90/94 adjacent to Pier 1.
- Remove existing Pier 1 for the south half of the Taylor Street Bridge as shown in the structural plans. Work includes, but not limited to, removal of substructures as well as removal of all other appurtenance fixtures on the bridge.
- Begin construction of the south half of the Pier 1 of the Taylor Street Bridge (SN 016-1165).
- Construct the SB I-90/94 inside shoulder temporary pavement and barrier wall adjacent to Pier 1.
- Construct the NB I-90/94 inside shoulder temporary pavement and barrier wall adjacent to Pier 1.
- Construct the concrete median surface and install sodding between the NB & SB I-90/94 barrier walls.
- Finish construction of Retaining Wall 17 (SN 016-1806).
- Begin beam erection and superstructure work upon completion of all substructures.
- Install the bridge mounted overhead sign supports and install overhead sign panels.
- Reconstruct EB Taylor Street east of the bridge, along with curb and gutter, sidewalk, driveway, drainage and any other needed appurtenance.
- Reconstruct the east half of the Union Avenue, along with curb and gutter, incidental bituminous surface, drainage and any other needed appurtenance.

Construction to be Completed in Stage 2C:

- Taylor Street
 - Work on EB Taylor Street west of the bridge shall not begin until the south half of the Taylor Street Bridge superstructure and Retaining Wall 17 are complete.
 - Reconstruct EB Taylor Street west of the bridge, along with curb and gutter, sidewalk, drainage and any other needed appurtenance.

Construction to be Completed in Stage 3:

- Taylor Street
 - Remove temporary pavement in the median on Taylor Street west of Union Avenue and install Type B Curb (CDOT) and grass median.
- J. See the erosion control plans and/or drainage plans for this contract for information regarding drainage patterns, approximate slopes anticipated before and after major grading activities, locations where vehicles enter or exit the site and controls to prevent offsite sediment tracking (to be added after contractor identifies locations), areas of soil disturbance, the location of major structural and non-structural controls identified in the plan, the location of areas where stabilization practices are expected to occur, surface waters (including wetlands) and locations where storm water is discharged to surface water including wetlands.
- K. Identify who owns the drainage system (municipality or agency) this project will drain into:
IDOT / City of Chicago
- L. The following is a list of General NPDES ILR40 permittees within whose reporting jurisdiction this project is located.
City of Chicago/ Cook County/ IDOT/ Metropolitan Water Reclamation District of Greater Chicago (MWRD)
- M. The following is a list of receiving water(s) and the ultimate receiving water(s) for this site. The location of the receiving waters can be found on the erosion and sediment control plans:
The area of the Taylor Street Bridge will be draining to Pump Station #5 and #26. Pump Station #5 pumps to the South Branch Chicago River. The South Branch Chicago River is impaired for the designated use of fish

consumption due to the PCBs. PCBs are not expected to be a pollutant associated with this contract. The South Branch Chicago River is not a Biologically Significant Stream. Pump Station #26 outfalls at the South Union Avenue interceptor sewer.

- N. Describe areas of the site that are to be protected or remain undisturbed. These areas may include steep slopes, highly erodible soils, streams, stream buffers, specimen trees, natural vegetation, nature preserves, etc.

None. Embankment slopes are to be regraded and vegetation to be re-established.

- O. The following sensitive environmental resources are associated with this project, and may have the potential to be impacted by the proposed development:

- Floodplain
- Wetland Riparian
- Threatened and Endangered Species
- Historic Preservation
- 303(d) Listed receiving waters for suspended solids, turbidity, or siltation
- Receiving waters with Total Maximum Daily Load (TMDL) for sediment, total suspended solids, turbidity or siltation
- Applicable Federal, Tribal, State or Local Programs
- Other

1. 303(d) Listed receiving waters (fill out this section if checked above):

a. The name(s) of the listed water body, and identification of all pollutants causing impairment:

b. Provide a description of how erosion and sediment control practices will prevent a discharge of sediment resulting from a storm event equal to or greater than a twenty-five (25) year, twenty-four (24) hour rainfall event:

c. Provide a description of the location(s) of direct discharge from the project site to the 303(d) water body:

d. Provide a description of the location(s) of any dewatering discharges to the MS4 and/or water body:

2. TMDL (fill out this section if checked above)

a. The name(s) of the listed water body:

b. Provide a description of the erosion and sediment control strategy that will be incorporated into the site design that is consistent with the assumptions and requirements of the TMDL:

c. If a specific numeric waste load allocation has been established that would apply to the project's discharges, provide a description of the necessary steps to meet that allocation:

- P. The following pollutants of concern will be associated with this construction project:

- | | |
|---|--|
| <input checked="" type="checkbox"/> Soil Sediment | <input checked="" type="checkbox"/> Petroleum (gas, diesel, oil, kerosene, hydraulic oil / fluids) |
| <input checked="" type="checkbox"/> Concrete | <input checked="" type="checkbox"/> Antifreeze / Coolants |
| <input checked="" type="checkbox"/> Concrete Truck Waste | <input checked="" type="checkbox"/> Waste water from cleaning construction equipment |
| <input checked="" type="checkbox"/> Concrete Curing Compounds | <input checked="" type="checkbox"/> Other (specify) Drilling mud for jacking |
| <input checked="" type="checkbox"/> Solid Waste Debris | <input type="checkbox"/> Other (specify) |
| <input checked="" type="checkbox"/> Paints | <input type="checkbox"/> Other (specify) |
| <input checked="" type="checkbox"/> Solvents | <input type="checkbox"/> Other (specify) |
| <input checked="" type="checkbox"/> Fertilizers / Pesticides | <input type="checkbox"/> Other (specify) |

II. Controls:

This section of the plan addresses the controls that will be implemented for each of the major construction activities described in I.C. above and for all use areas, borrow sites, and waste sites. For each measure discussed, the Contractor will be responsible for its implementation as indicated. The Contractor shall provide to the Resident Engineer a plan for the implementation of the measures indicated. The Contractor, and subcontractors, will notify the Resident Engineer of any proposed changes, maintenance, or modifications to keep construction activities compliant with the Permit ILR10. Each such Contractor has signed the required certification on forms which are attached to, and are a part of, this plan:

A. Erosion and Sediment Controls: At a minimum, controls must be coordinated, installed and maintained to:

1. Minimize the amount of soil exposed during construction activity;
2. Minimize the disturbance of steep slopes;
3. Maintain natural buffers around surface waters, direct storm water to vegetated areas to increase sediment removal and maximize storm water infiltration, unless infeasible;
4. Minimize soil compaction and, unless infeasible, preserve topsoil.

B. Stabilization Practices: Provided below is a description of interim and permanent stabilization practices, including site- specific scheduling of the implementation of the practices. Site plans will ensure that existing vegetation is preserved where attainable and disturbed portions of the site will be stabilized. Stabilization practices may include but are not limited to: temporary seeding, permanent seeding, mulching, geotextiles, sodding, vegetative buffer strips, protection of trees, preservation of mature vegetation, and other appropriate measures. Except as provided below in II(B)(1) and II(B)(2), stabilization measures shall be initiated **immediately** where construction activities have temporarily or permanently ceased, but in no case more than **one (1) day** after the construction activity in that portion of the site has temporarily or permanently ceases on all disturbed portions of the site where construction will not occur for a period of fourteen (14) or more calendar days.

1. Where the initiation of stabilization measures is precluded by snow cover, stabilization measures shall be initiated as soon as practicable.
2. On areas where construction activity has temporarily ceased and will resume after fourteen (14) days, a temporary stabilization method can be used.

The following stabilization practices will be used for this project:

- | | |
|---|--|
| <input type="checkbox"/> Preservation of Mature Vegetation | <input checked="" type="checkbox"/> Erosion Control Blanket / Mulching |
| <input type="checkbox"/> Vegetated Buffer Strips | <input checked="" type="checkbox"/> Sodding |
| <input checked="" type="checkbox"/> Protection of Trees | <input type="checkbox"/> Geotextiles |
| <input checked="" type="checkbox"/> Temporary Erosion Control Seeding | <input type="checkbox"/> Other (specify) |
| <input type="checkbox"/> Temporary Turf (Seeding, Class 7) | <input checked="" type="checkbox"/> Other (specify) Surface Roughening |
| <input checked="" type="checkbox"/> Temporary Mulching | <input type="checkbox"/> Other (specify) |
| <input checked="" type="checkbox"/> Permanent Seeding | <input type="checkbox"/> Other (specify) |

Describe how the stabilization practices listed above will be utilized during construction:

Refer to the Erosion and Sedimentation Control staging plan sheets for the contract specific stabilization practices

called out for temporary conditions during construction. Temporary and permanent stabilization shall be completed on the current stage prior to switching traffic to the next stage. Stabilization controls runoff volume and velocity, peak runoff rates and volumes of discharge to minimize exposed soil, disturbed slopes, sediment discharges from construction, and provide for natural buffers and minimization of soil compaction. Existing vegetated areas where disturbance can be avoided will not require stabilization.

Protection of Trees - Areas of trees, shrubs and other woody vegetation designated to remain undisturbed during any stage of construction shall be protected. Clearly delineate protected areas prior to clearing/grubbing or other soil disturbing activities.

Temporary Erosion Control Seeding - This item will be applied to all bare areas every seven days to minimize the amount of exposed surface areas. Earth stockpiles shall be temporarily seeded if they are to remain unused for more than 14 days. Within the construction limits, areas which may be susceptible to erosion as determined by the Engineer shall remain undisturbed until full scale construction is underway to prevent unnecessary soil erosion. Bare and sparsely vegetated ground in highly erodible areas as determined by the Engineer shall be temporarily seeded at the beginning of construction where no construction activities are expected within seven days.

Temporary Mulching - Mulch is applied to temporary erosion control seeding to allow for the seeding to take hold in the ground and grow. Without the mulching, the seeding will be displaced by wind and rain and therefore would not grow. Mulch will be paid separately from temporary seeding and shall conform to Section 251 of the Standard Specifications. Mulch Method 2 and surface roughening shall be used for temporary stabilization during winter instead of temporary erosion control seeding when grading will occur after September 30th when temporary seed will not germinate and provide erosion control protection until the following spring.

Surface Roughening: All slopes steeper than 3:1 (horizontal to vertical) shall be surface roughened by either stair-step grading, grooving, or tracking. Areas with slopes flatter than 3:1 shall have the soil surface lightly roughened and loosened to a depth of 2 to 4 inches prior to seeding. Surface roughening is included in the cost of Mulch Method 2.

Describe how the stabilization practices listed above will be utilized after construction activities have been completed:

Refer to the Permanent Erosion and Sedimentation Control plan sheets for the contract specific stabilization practices used for permanent conditions after construction activities. All areas disturbed by construction will be stabilized with permanent seeding with erosion control blanket or mulching. Stabilization controls runoff volume and velocity, peak runoff rates and volumes of discharge to minimize exposed soil, disturbed slopes, sediment discharges from construction, and provides for natural buffers and minimization of soil compaction. Existing vegetated areas where disturbance can be avoided will not require stabilization.

Permanent Seeding - Used at locations where there will be no more disturbances. The seeding will keep the soil from eroding due to natural conditions (wind, rain, etc).

Erosion Control Blanket / Mulching - Erosion Control Blankets will be installed over fill slopes and in high velocity areas (i.e. ditches) and seeded to protect slopes from erosion and allow seeds to germinate. It will be installed over the permanent seeding to allow the seeding to take hold in the ground and grow. Without protection, the seeding will be displaced by wind and rain. Mulch may be applied in relatively flat areas to protect the disturbed areas and prevent further erosion.

Sodding - Sod is a stabilization of fine graded disturbed areas using a continuous cover of grass sod. It shall be applied at disturbed areas where it requires immediate cover for erosion protection or sediment control, residential or commercial areas where quick establishment or aesthetics are factors, locations where surface water concentrates, areas adjacent to drop inlets or in swales, or all other areas where seeding is not appropriate but an immediate vegetative cover is required. Irrigate sod according to Article 252.08.

- C. **Structural Practices:** Provided below is a description of structural practices that will be implemented, to the degree attainable, to divert flows from exposed soils, store flows or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. Such practices may include but are not limited to: perimeter erosion barrier, earth dikes, drainage swales, sediment traps, ditch checks, subsurface drains, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions, and temporary or permanent sediment basins. The installation of these devices may be subject to Section 404 of the Clean Water Act.

The following structural practices will be used for this project:

- | | |
|---|--|
| <input checked="" type="checkbox"/> Perimeter Erosion Barrier | <input type="checkbox"/> Rock Outlet Protection |
| <input type="checkbox"/> Temporary Ditch Check | <input type="checkbox"/> Riprap |
| <input checked="" type="checkbox"/> Storm Drain Inlet Protection | <input type="checkbox"/> Gabions |
| <input type="checkbox"/> Sediment Trap | <input type="checkbox"/> Slope Mattress |
| <input type="checkbox"/> Temporary Pipe Slope Drain | <input checked="" type="checkbox"/> Retaining Walls |
| <input type="checkbox"/> Temporary Sediment Basin | <input type="checkbox"/> Slope Walls |
| <input type="checkbox"/> Temporary Stream Crossing | <input type="checkbox"/> Concrete Revetment Mats |
| <input checked="" type="checkbox"/> Stabilized Construction Exits | <input type="checkbox"/> Level Spreaders |
| <input type="checkbox"/> Turf Reinforcement Mats | <input checked="" type="checkbox"/> Other (specify) Stabilized Flow Line |
| <input type="checkbox"/> Permanent Check Dams | <input type="checkbox"/> Other (specify) |
| <input type="checkbox"/> Permanent Sediment Basin | <input type="checkbox"/> Other (specify) |
| <input type="checkbox"/> Aggregate Ditch | <input type="checkbox"/> Other (specify) |
| <input type="checkbox"/> Paved Ditch | <input type="checkbox"/> Other (specify) |

Describe how the structural practices listed above will be utilized during construction:

Refer to the Erosion and Sedimentation Control staging plan sheets for the contract specific structural practices for temporary conditions during construction.

Perimeter Erosion Barrier - Silt fences shall be placed along the contour at the limits in an effort to contain silt and runoff from leaving the site. Silt fence shall not be installed in areas of concentrated flow such as across ditches. The barrier will be constructed at the beginning of construction. Damage to silt fence by traffic or snow plowing should be immediately fixed by the Contractor.

Storm Drain Inlet - Sediment filters will be placed in all open lid inlets, catch basins and manholes during construction and shall be cleaned on a regular basis.

Stabilized Construction Exits - Stabilized Construction Exits or Entrances will be provided by the Contractor. The entrance shall be maintained in a condition which shall prevent tracking or flowing of sediment onto Public-Right-Of-Way. Periodic Inspection and needed maintenance shall be provided after heavy use and each rainfall event. All work associated with installation and maintenance of Stabilized Construction Entrance and concrete washouts are incidental to the Contract.

Stabilized Flow Line - The Contractor shall provide to the Resident Engineer (RE) a plan to have stabilized conveyance between upstream and downstream ends of storm sewer under construction when rain is forecasted, so that flow will not erode. This is important where new storm sewer connects to an existing storm sewer system. The use of stabilized flow line between an installed storm sewer and open disturbance will reduce the potential for the offsite discharge of sediment-bearing waters. The approved plan provided by the Contractor including the installation and maintenance of the Stabilized Flow Line will be incidental to the Contract.

All erosion control products furnished shall be installed specifically as recommended by the manufacturer for the use specified in the erosion control plan prior to the approval and use of the product. The Contractor shall submit to the Engineer a notarized certification by the producer stating the intended use of the product and that the physical properties required for this application are met or exceeded. The Contractor shall provide manufacturer installation procedures to facilitate the Engineer in construction inspection.

Describe how the structural practices listed above will be utilized after construction activities have been completed:

Once the construction is completed and the vegetation has been established, the perimeter barrier will be removed and areas disturbed by the removal will be stabilized with seeding and erosion control blanket / mulching.

A retaining wall is constructed to retain the embankment along Union Avenue and SB I-90/94.

D. Treatment Chemicals

Will polymer flocculants or treatment chemicals be utilized on this project: Yes No

If yes above, identify where and how polymer flocculants or treatment chemicals will be utilized on this project.

E. Permanent Storm Water Management Controls: Provided below is a description of measures that will be installed during the construction process to control volume and pollutants in storm water discharges that will occur after construction operations have been completed. The installation of these devices may be subject to Section 404 of the Clean Water Act.

1. Such practices may include but are not limited to: storm water detention structures (including wet ponds), storm water retention structures, flow attenuation by use of open vegetated swales and natural depressions, infiltration of runoff on site, and sequential systems (which combine several practices).

The practices selected for implementation were determined on the basis of the technical guidance in Chapter 41 (Construction Site Storm Water Pollution Control) of the IDOT Bureau of Design and Environment Manual. If practices other than those discussed in Chapter 41 are selected for implementation or if practices are applied to situations different from those covered in Chapter 41, the technical basis for such decisions will be explained below.

2. Velocity dissipation devices will be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are maintained and protected (e.g. maintenance of hydrologic conditions such as the hydroperiod and hydrodynamics present prior to the initiation of construction activities).

Description of permanent storm water management controls:

The Phase I Location Drainage Study indicates no modifications are planned for Pump Station #5 and #26. The tailwater conditions representing the South Branch of Chicago River (outfall for Pump Station #5) and the South Union Avenue interceptor sewer (Pump Station #26 outfall) will not be modified from existing to proposed conditions. The drainage area for Pump Station #5 is along I-290 from the western extent at Central Avenue to the eastern extent at Des Plaines Street within the Circle Interchange.

For Pump Station #26, the drainage area is along I-90/94 from the northern extent at the Circle Interchange (Harrison Street) to the southern extent at Roosevelt Road. A proposed detention tank will be constructed in improving water quality in runoff from the 5-year and greater storms, south of the Circle Interchange, discharging to Pump Station #26 in the future.

Phosphorous fertilizer has been eliminated from the project to reduce project impacts on the receiving waters.

- F. **Approved State or Local Laws:** The management practices, controls and provisions contained in this plan will be in accordance with IDOT specifications, which are at least as protective as the requirements contained in the Illinois Environmental Protection Agency's Illinois Urban Manual. Procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials shall be described or incorporated by reference in the space provided below. Requirements specified in sediment and erosion site plans, site permits, storm water management site plans or site permits approved by local officials that are applicable to protecting surface water resources are, upon submittal of an NOI, to be authorized to discharge under the Permit ILR10 incorporated by reference and are enforceable under this permit even if they are not specifically included in the plan.

Description of procedures and requirements specified in applicable sediment and erosion site plans or storm water management plans approved by local officials:

N/A

- G. **Contractor Required Submittals:** Prior to conducting any professional services at the site covered by this plan, the Contractor and each subcontractor responsible for compliance with the permit shall submit to the Resident Engineer a Contractor Certification Statement, BDE 2342a.

1. The Contractor shall provide a construction schedule containing an adequate level of detail to show major activities with implementation of pollution prevention BMPs, including the following items:
 - Approximate duration of the project, including each stage of the project
 - Rainy season, dry season, and winter shutdown dates
 - Temporary stabilization measures to be employed by contract phases
 - Mobilization timeframe
 - Mass clearing and grubbing/roadside clearing dates
 - Deployment of Erosion Control Practices
 - Deployment of Sediment Control Practices (including stabilized construction entrances/exits)
 - Deployment of Construction Site Management Practices (including concrete washout facilities, chemical storage, refueling locations, etc.)
 - Paving, saw-cutting, and any other pavement related operations
 - Major planned stockpiling operations
 - Timeframe for other significant long-term operations or activities that may plan non-storm water discharges such as dewatering, grinding, etc.
 - Permanent stabilization activities for each area of the project
2. The Contractor and each subcontractor shall provide, as an attachment to their signed Contractor Certification Statement, a discussion of how they will comply with the requirements of the permit in regard to the following items and provide a graphical representation showing location and type of BMPs to be used when applicable:

- Vehicle Entrances and Exits – Identify type and location of stabilized construction entrances and exits to be used and how they will be maintained.
- Material Delivery, Storage and Use – Discuss where and how materials including chemicals, concrete curing compounds, petroleum products, etc. will be stored for this project.
- Stockpile Management – Identify the location of both on-site and off-site stockpiles. Discuss what BMPs will be used to prevent pollution of storm water from stockpiles.
- Waste Disposal – Discuss methods of waste disposal that will be used for this project.
- Spill Prevention and Control – Discuss steps that will be taken in the event of a material spill (chemicals, concrete curing compounds, petroleum, etc.)
- Concrete Residuals and Washout Wastes – Discuss the location and type of concrete washout facilities to be used on this project and how they will be signed and maintained.
- Litter Management – Discuss how litter will be maintained for this project (education of employees, number of dumpsters, frequency of dumpster pick-up, etc.).
- Vehicle and Equipment Fueling – Identify equipment fueling locations for this project and what BMPs will be used to ensure containment and spill prevention.
- Vehicle and Equipment Cleaning and Maintenance – Identify where equipment cleaning and maintenance locations for this project and what BMPs will be used to ensure containment and spill prevention.
- Dewatering Activities – Identify the controls which will be used during dewatering operations to ensure sediments will not leave the construction site.
- Polymer Flocculants and Treatment Chemicals – Identify the use and dosage of treatment chemicals and provide the Resident Engineer with Material Safety Data Sheets. Describe procedures on how the chemicals will be used and identify who will be responsible for the use and application of these chemicals. The selected individual must be trained on the established procedures.
- Additional measures indicated in the plan.

III. Maintenance:

When requested by the Contractor, the Resident Engineer will provide general maintenance guides to the Contractor for the practices associated with this project. The following additional procedures will be used to maintain, in good and effective operating conditions, the vegetation, erosion and sediment control measures and other protective measures identified in this plan. It will be the Contractor's responsibility to attain maintenance guidelines for any manufactured BMPs which are to be installed and maintained per manufacture's specifications.

The Contractor will be responsible for the inspection, maintenance and repair of all sedimentation and erosion control measures. If the Engineer notices or is notified of an erosion or sedimentation deficiency, the Engineer will notify the Contractor to correct it. All Offsite Borrow, Waste, and Use areas are part of the construction site and are to be inspected according to the language in this section and Section IV.

Inspection of these areas shall be made at least once every seven days and within 24 hours of the end of each 0.5 inches or greater rainfall, or an equivalent snowfall. Additionally during winter months, all measures should be checked after each significant snowmelt. Any necessary repairs or cleanup to maintain the effectiveness of said measures shall be made immediately. The project shall additionally be inspected by the Construction Field Engineer on a bi-weekly basis to determine that the erosion control efforts are in place and effective and if other erosion control work is necessary.

All erosion and sediment control measures shall be maintained in accordance with the IDOT Erosion and Sediment Control Field Guide for Construction Inspection:

<http://www.idot.illinois.gov/transportation-system/environment/erosion-and-sediment-control>

In additional, the following links may also be useful for maintenance:

Illinois Urban Manual (IUM):

http://www.aiswcd.org/wp-content/uploads/2013/11/IUM_FM_2013_WEBSITE_hyperlinks.pdf

Best Management Practices (BMP):

<http://www.idot.illinois.gov/transportation-system/environment/erosion-and-sediment-control>

Seeding - All erodible bare earth will be temporarily seeded on a weekly basis to minimize the amount of erodible surface within the contract limits. Construction equipment shall be stored and fueled only at designated locations. All necessary measures shall be taken to contain any fuel or pollution runoff in compliance with environmental law and EPA Water Quality Regulations. Leaking equipment or supplies shall be immediately repaired or removed from the site. On a weekly basis, the Engineer shall inspect the project to determine whether erosion control efforts are in place and effective and if additional control measures are necessary. Sediment collected during construction by the various temporary erosion control systems shall be disposed on the site on a regular basis as directed by the Engineer and stabilized accordingly.

Protection of Trees - Replace damaged vegetation with similar species. Restore areas disturbed, disrupted or damaged by the Contractors to pre-construction conditions or better at no additional expense to the contract. Trim any cuts, skins, scrapes or bruises to the bank of the vegetation and utilize local nursery accepted procedures to seal damaged bark. Prune all tree branches broken, severed or damaged during construction. Cut all limbs and branches, one-half inch or greater in diameter, at the base of the damage, flush with the adjacent limb or tree trunk. Smoothly cut, perpendicular to the root, all cut, broken, or severed, during construction, roots 1 inch or greater in diameter. Cover roots exposed during excavation with moist earth and/or backfill immediately to prevent roots from drying.

Temporary Erosion Control Seeding - Reapply seed if stabilization has not been achieved. Apply temporary mulch to hold seed in place if seed has been washed away or found to be concentrated in ditch bottoms. Restore rills, greater than 4 inches deep, as quickly as possible on slopes steeper than 1V:4H to prevent sheet-flow from becoming concentrated flow patterns.

Perimeter Erosion Barrier - This shall be inspected every 7 calendar days and after a storm event of 0.5 inch or greater (including snowfall). Repair when tears, gaps, leaning or undermining occur and restore erosion barrier taut. Repair or replace any missing or broken stakes immediately. Sediment will be removed if the integrity of the fencing is in jeopardy. Remove once permanent stabilization is established since it will no longer be necessary.

Erosion Control Blanket - Repair damage due to water running beneath the blanket and restore when displacement occurs. Reseeding may be necessary. Replace and re-staple all displaced erosion control blankets immediately.

Mulching - Temporary mulch is to be inspected by the Resident Engineer and Contractor every 7 calendar days and after a storm event of 0.5 inch or greater (including snowfall). If straw is blown or washed away, erosion control blanket curls or slides down a slope, or hydraulic mulch washes away, maintenance of this item will be required.

Surface Roughening: The slope shall be inspected after every runoff producing rain and repairs made as needed. Fill any eroded areas to slightly above the original grade, re-roughen the surface, then re-seed and mulch as soon as possible.

Sodding - Limit foot traffic to low use for the first two to three weeks. Ensure irrigation rate does not result in runoff. Install salt-tolerant sod where needed. Replace when >25% of any individual piece of sod is no longer viable. Restore areas where rolling edges are present or sod is displaced.

Storm Drain Inlet Protection - Remove sediment from inlet filter basket when it is 25% full or 50% of the fabric pores are covered with silt. Remove ponded water on road surfaces immediately. Clean filter if standing water is present longer than one hour after a rain event. Remove trash accumulated around or on top of practice. When filter is removed for cleaning, replace filter if any tear is present.

Stabilized Flow Line: Follow approved maintenance plans provided by the Contractor to avoid the flow from eroding at the upstream and downstream ends of storm sewer when it is under construction.

Stabilization Construction Exits - Replenish stone or replace exit if vehicles continue to track sediment onto the roadway from the construction site. Sweep sediment on roadway from construction activities immediately. Use street sweeping in conjunction with this BMP to remove sediment not removed by the stabilized construction exit.

Material Delivery and Storage - Document the various types of materials delivered and their storage locations in the

SWPPP. Update the SWPPP when significant changes occur to material storage or handling locations and when they have been removed. Cleanup spills immediately. Remove empty containers.

IV. Inspections:

Qualified personnel shall inspect disturbed areas of the construction site which have not yet been finally stabilized, structural control measures, and locations where vehicles and equipment enter and exit the site using IDOT Storm Water Pollution Prevention Plan Erosion Control Inspection Report (BC 2259). Such inspections shall be conducted at least once every seven (7) calendar days and within twenty-four (24) hours of the end of a storm or by the end of the following business or work day that is 0.5 inch or greater or equivalent snowfall.

Inspections may be reduced to once per month when construction activities have ceased due to frozen conditions. Weekly inspections will recommence when construction activities are conducted, or if there is 0.5" or greater rain event, or a discharge due to snowmelt occurs.

If any violation of the provisions of this plan is identified during the conduct of the construction work covered by this plan, the Resident Engineer shall notify the appropriate IEPA Field Operations Section office by email at: epa.swnoncomp@illinois.gov, telephone or fax within twenty-four (24) hours of the incident. The Resident Engineer shall then complete and submit an "Incidence of Non-Compliance" (ION) report for the identified violation within five (5) days of the incident. The Resident Engineer shall use forms provided by IEPA and shall include specific information on the cause of noncompliance, actions which were taken to prevent any further causes of noncompliance, and a statement detailing any environmental impact which may have resulted from the noncompliance. All reports of non-compliance shall be signed by a responsible authority in accordance with Part VI. G of the Permit ILR10.

The Incidence of Non-Compliance shall be mailed to the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Attn: Compliance Assurance Section
1021 North Grand East
Post Office Box 19276
Springfield, Illinois 62794-9276

Additional Inspections Required:

All offsite Borrow, Waste and Use areas are part of the construction site and are to be inspected according to the language in this section.

V. Failure to Comply:

Failure to comply with any provisions of this Storm Water Pollution Prevention Plan will result in the implementation of a National Pollutant Discharge Elimination System/Erosion and Sediment Control Deficiency Deduction against the Contractor and/or penalties under the Permit ILR10 which could be passed on to the Contractor.

REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES

This work shall be according to Article 669 of the Standard Specifications and the following:

Qualifications. The term environmental firm shall mean an environmental firm with at least five (5) documented leaking underground storage tank (LUST) cleanups or that is pre-qualified in hazardous waste by the Department. Documentation includes but not limited to verifying remediation and special waste operations for sites contaminated with gasoline, diesel, or waste oil in accordance with all Federal, State, or local regulatory requirements and shall be provided to the Engineer for approval. The environmental firm selected shall not be a former or current consultant or have any ties with any of the properties contained within and/or adjacent to this construction project.

General. This Special Provision will likely require the Contractor to subcontract for the execution of certain activities.

All contaminated materials shall be managed as either “uncontaminated soil” or non-special waste. This work shall include monitoring and potential sampling, analytical testing, and management of a material contaminated by regulated substances. The Environmental Firm shall continuously monitor all soil excavation for worker protection and soil contamination. **Phase I Preliminary Engineering information is available through the District's Environmental Studies Unit.** Soil samples or analysis without the approval of the Engineer will be at no additional cost to the Department. The lateral distance is measured from centerline and the farthest distance is the offset distance or construction limit whichever is less.

The Contractor shall manage any excavated soils and sediment within the following areas:

- Station 7609+50 to Station 7611+00 (Taylor Street) 0 to 150 feet LT (UIC Halsted Street Parking Structure, PESA Site 2615-247, 801 South Halsted Street). This material meets the criteria of Article 669.09(a)(5) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Anthracene, Benzo(a)Pyrene, Benzo(b)Fluoranthene, Dibenzo(a,h)Anthracene, Lead, and Manganese.
- Station 7609+50 to Station 7611+00 (Taylor Street) 0 to 150 feet RT (UIC Plant Research Laboratory, PESA Site 2615-257, 1020 South Union Street). This material meets the criteria of Article 669.09(a)(5) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Pyrene, Benzo(b)Fluoranthene, Dibenzo(a,h)Anthracene, Arsenic, Lead, and Manganese.
- Station 7613+50 to Station 7614+40 (Taylor Street) 0 to 150 feet LT (IDOT Dan Ryan Field Office, PESA Site 2615-252, 900 South Des Plaines Street). This material meets the criteria of Article 669.09(a)(5) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Anthracene, Benzo(a)Pyrene, Benzo(b)Fluoranthene, Dibenzo(a,h)Anthracene, Carbazole, and Indeno(1,2,3-cd)Pyrene.
- Station 7613+50 to Station 7614+00 (Taylor Street) 0 to 150 feet RT (CITGO, PESA Site 2615-258, 1004 South Des Plaines Street). This material meets the criteria of Article 669.09(a)(5) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Anthracene, Benzo(a)Pyrene, Benzo(b)Fluoranthene, Dibenzo(a,h)Anthracene, Indeno(1,2,3-cd)Pyrene, Lead, and Manganese.

- Station 7612+50 to Station 7613+50 (Taylor Street) 0 to 250 feet RT (IDOT ROW, PESA Site 2615-1, I-90/I-94 between Grand Avenue and West 14th Street). This material meets the criteria of Article 669.09(a)(2) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Manganese.
- Station 7613+50 to Station 7614+00 (Taylor Street) 150 to 250 feet RT (CITGO, PESA Site 2615-258, 1004 South Des Plaines Street). This material meets the criteria of Article 669.09(a)(2) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Lead and Manganese.
- Station 7611+00 to Station 7613+50 (Taylor Street) 0 to 150 feet LT (IDOT ROW, PESA Site 2615-1, I-90/I-94 between Grand Avenue and West 14th Street). This material meets the criteria of Article 669.09(a)(3) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Pyrene, Lead, and Manganese.
- Station 7614+00 to Station 7614+40 (Taylor Street) 0 to 250 feet RT (CITGO, PESA Site 2615-258, 1004 South Des Plaines Street). This material meets the criteria of Article 669.09(a)(3) and shall be managed in accordance to Article 669.09. Contaminants of concern sampling parameters: Benzo(a)Pyrene, Lead, and Manganese.

TEMPORARY TRAFFIC SIGNAL TIMING

Description. This work shall consist of developing and maintaining appropriate traffic signal timings for intersections along detour routes associated with this contract and restoration of the original pre-detour timing at the end of the detour route operations. The locations where temporary traffic signal timing adjustments are necessary will be determined and provided by the Engineer.

All timings and adjustments necessary for this work shall be performed by an approved Consultant who has previous experience in optimizing Closed Loop Traffic signal Systems for District One of the Illinois Department of Transportation and Chicago Department of Transportation (CDOT). The Contractor shall contact the Traffic Signal Engineer at (847) 705 4424 for a listing of approved Consultants. The Contractor's Consultant shall be responsible for the development of proposed signal timing along the route and the proposed timings are subject to the approval of the Department.

The following tasks are associated with TEMPORARY TRAFFIC SIGNAL TIMING.

- (a) Consultant shall record and document existing signal timings along detour route and conduct on-site implementation of the proposed temporary traffic signal timings. Make fine-tuning adjustments to the timings in the field to alleviate observed adverse operating conditions and to enhance operations.
- (b) Consultant shall provide bi weekly observation of traffic signal operations in the field.
- (c) Consultant shall provide on-site consultation and adjust timings as necessary for any detour conditions affecting timing and phasing, including lane closures, and other construction activities.
- (d) Consultant shall make timing adjustments and prepare comment responses as directed by the Area Traffic Signal Operations Engineer.
- (e) Consultant shall ensure that the traffic signal timing along detour route is restored to pre-detour timing at the end of detour route operation.

Basis of Payment. The work shall be paid for at the contract unit price each for **TEMPORARY TRAFFIC SIGNAL TIMING**, which price shall be payment in full for performing all work described herein per intersection. When the traffic signal timing is installed along detour route, 50 percent of the bid price will be paid. The remaining 50 percent of the bid price will be paid following the restoration of the timing to original pre detour condition or as directed by the engineer.

CATCH BASINS TO BE RECONSTRUCTED WITH NEW TYPE 1 FRAME, OPEN LID (CITY OF CHICAGO)

Description. Work under this item shall be performed according to Sections 602 and 604 of the IDOT Standard Specifications of Road and Bridge Construction and the current City of Chicago Department of Water Management Standard Specifications for Water and Sewer Main Construction, except as herein modified.

General Requirements. The existing frame and grate or lid shall be removed and a new frame and lid shall be furnished and installed. An ADA compliant open lid shall be placed on the catch basins located within the cross walk or as directed by the Engineer.

Basis of Payment. This work will be paid for at the contract unit price per each for **CATCH BASINS TO BE RECONSTRUCTED WITH NEW TYPE 1 FRAME, OPEN LID (CITY OF CHICAGO)**.

TEMPORARY CHAIN LINK FENCE WITH SCREENING

Description. Work under this item shall consist of furnishing, installing, maintaining, relocating and removing chain link fence with screening, of the height specified on the Plans, or as directed by the Engineer onto the precast temporary concrete barrier. Work under this item shall be performed according to Section 664 of the IDOT Standard Specifications for Road and Bridge Construction, except as herein modified.

General Requirements. The individual fence panels shall be securely fastened together and the stands or other mounting devices shall be permanently installed onto the temporary concrete barrier. The chain link fence shall be anchored sufficiently to resist wind loads of 30 pounds per square foot without deflection of more than three inches between top and bottom fence. The base shall not interfere with pedestrian and/or vehicular traffic, and shall be approved by the Engineer.

Opaque fabric meshing shall be affixed to the chain link fence face. The fabric meshing shall allow passage of air but shall contain dust and dirt. The mesh fabric shall be the full height of the fence and cover the entire length of the fence. The fabric meshing and fence shall not contain any advertisement. The color of the fabric shall be approved by the Engineer.

The Contractor shall submit a catalog cut or details of the fence, mounting stands, hardware, opaque fabric meshing or other appurtenances for approval by the Engineer.

Method of Measurement. Chain link fence will be measured for payment in feet along the top of fence from center to center of end posts.

Basis of Payment. This work will be paid at the contract unit price per foot for TEMPORARY CHAIN LINK FENCE WITH SCREENING, of the height specified, which price shall include furnishing, installing, maintaining, relocating and removing the chain link fence with screening during construction.

FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS

Description. This work shall consist of providing all labor, materials, and equipment necessary to construct Drilled Shafts at locations where man-made obstructions are encountered. The drawings have identified locations where new foundations are anticipated to be in conflict with previously installed steel piles, sheet piling and/or drilled shafts. If additional man-made obstruction locations are encountered, as determined in the field by the Engineer, they shall also be covered by this specification.

Furnishing, fabricating and installing of drilled shafts shall be completed and paid for as described in their respective pay items.

The work under this item is considered additional compensation for the resources required to install drilled shafts through the identified obstructions. The Engineer shall determine applicability of this specification in the field when an obstruction is encountered.

This Special Provision applies to manmade obstructions. Non-manmade obstructions are covered in Standard Specification section 516.14. Obstruction mitigation for non-manmade obstructions is paid for in accordance with Article 109.04 of the Standard Specifications.

Equipment. The Contractor shall be responsible to provide the equipment required to advance the drilled shafts through previously constructed structures such as, but not limited to, tunnels and drilled shafts that are present. The Construction tolerances and requirements for the drilled foundations shall not be relieved due to the presence of an obstruction. The Contractor is cautioned that although a best effort was made to identify the locations of the existing structures, additional obstructions may be found during the construction.

The drilling equipment shall have adequate capacity, including power, torque and down thrust, to create a shaft excavation of the maximum diameter specified to a depth of 20 percent beyond the depths shown on the plans.

The equipment shall be capable of drilling a straight and true shaft as required by the specifications through existing reinforced concrete structures, grouted and bulk-headed tunnels, steel piles, sheet piling, timber piles and other man-made obstructions that are encountered in the drilling.

Construction Requirements. The Contractor is alerted to the following known obstructions:

(c) Existing Reinforced Concrete Sub-Piers/Caissons and Steel Piles. The previously installed sub-piers/caissons and steel piles as identified on the drawings contain the following dimensions:

W. Abut.: 2'-6" dia. sub-pier (approx. 57' length, $f_c = 3,500\text{psi}$ at 14 days) with 5'-3" dia. bell (approx. 3.75' length)

HP14x73 and HP12x53 steel piles

West Abutment and Southwest Retaining Wall:

Existing steel sheet piling and 1'-0" thick concrete mud slab left in place from 1986 construction

Pier 1: 3'-6" dia. sub-pier (approx. 43' length, $f_c = 3,500\text{psi}$ at 14 days) with 9'-9" dia. bell (approx. 7.25' length)

Pier 2: 3'-6" dia. caisson (approx. 40' length, $f_c = 3,500\text{psi}$ at 28 days) with 9'-9" dia. bell (approx. 7.25' length)

The caissons and sub-piers are reinforced with reinforcement bars. The construction was performed in 1960 and 1986. Existing bridge plans are available for reference and were utilized to locate the existing sub-piers/caissons, sheet piling and steel piles in the drawings; however, the Contractor should expect some variances from design which occurred during installation. No additional compensation shall be permitted for such variances from existing plans.

The Contractor shall submit to the Engineer a proposed construction sequence for approval prior to the beginning of this work. It shall include the methods and equipment used in accomplishing the work.

Method of Measurement. The Contractor shall provide equipment, labor and materials as required to install drilled shafts at the locations shown on the drawings. Where existing tunnel, reinforced concrete shaft obstructions, or other man-made obstructions are encountered, as determined by the Engineer, the Contractor will be paid the unit price per each for each shaft affected by obstructions, in addition to the applicable pay items for Drilled Shaft as specified elsewhere.

Basis of Payment. The drilling of foundations through tunnel and existing caisson structures, and other obstructions as described above, will be paid for at the contract unit bid price per each applicable location for FOUNDATION CONSTRUCTION AT EXISTING OBSTRUCTIONS.

REMOVAL OF EXISTING STRUCTURES NO. 1

Description. This item shall consist of furnishing all labor, equipment and materials necessary for the removal and disposal of the existing Taylor Street Bridge over Interstate 90/94 and partial/complete removal and disposal of existing steel sheet piling interfering with new construction. The work shall be done in accordance with the applicable portions of Section 501 of the Standard Specifications.

All structure elements of the Taylor Street Bridge over I-90/94 including, but not limited to, west abutment, west abutment footing, piers, piers' footings, beams, bearings, diaphragms, deck, sidewalk railing and fence, piles and drilled shafts (to a depth as noted on the plans or as directed by the Engineer), and abandoned sheet piling (interfering with new construction) shall be included in Removal of Existing Structures No. 1. Included in this item shall also be removal of the existing vaulted approach span deck, PPC I-beams, diaphragms and portions of vaulted east abutment and approach bent as shown on the Plans (or as directed by the Engineer). Removal of the existing approach slabs shall be included with APPROACH SLAB REMOVAL.

Also included in the Removal of Existing Structures No. 1 shall be the following:

- Complete removal of the southwest wing wall stem/footing and partial removal of existing supporting steel piles (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).
- Complete or partial removal (as required) of any remaining elements of the original 1960 Taylor Street Bridge interfering with new construction, including but not limited to, portions of West Abutment stem, curtain walls and drilled shafts (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).
- Partial removal of the existing vaulted East Abutment and approach bent as noted on the plans. The existing vaulted abutment and approach bent are to remain and support the proposed vaulted span superstructure. All costs associated with partial removal, and cleaning and incorporating existing reinforcement into new construction, shall be included in this item. Any damage to existing abutment, approach bent or reinforcement caused by the Contractor during the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.

- Complete or partial removal, as required, of any abandoned steel sheet piling interfering with new construction or drainage items (to a minimum depth of 1 foot below proposed structure or as noted on the plans or as directed by the Engineer).
- Partial removal of the existing northeast and southeast curtain walls interfering with vaulted east abutment and approach bent modification. Existing reinforcement bars extending from the curtain walls into the removal area shall be cleaned, straightened and incorporated into new construction. Any reinforcement bars that are damaged during concrete removal shall be replaced with an approved bar splicer or anchorage system. The cost of incorporating existing steel reinforcement into new construction shall not be paid separately but shall be included in this Item.

The Contractor is hereby alerted that the existing southeast curtain wall also serves as a support for the adjacent Ruble Street moment slab. All necessary precautions shall be taken during removal/construction activities to avoid damage to the existing curtain walls or Ruble Street moment slab. In addition, the Contractor shall not store excessive amounts of material, nor utilize/store heavy equipment, in the vicinity of the moment slab at the north end of Ruble Street. Any damage to the existing curtain walls, or adjacent Ruble Street moment slab, caused by the Contractor in the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.

- Complete or partial removal (to a minimum depth of 1 foot below proposed structure) of any abandoned structure elements that may interfere with the construction of the new bridge or roadway.
- Removal of items and appurtenances located on, attached to or adjacent to the bridge including, but not limited to, chain link fence and associated sign structures attached to bridge parapet and highway sign structures attached to the fascia of the bridge.
- Coordination with the City of Chicago Department of Electrical Operations (DEO) for the removal of street light and traffic signal poles and equipment by the DEO. The Contractor shall remove all embedded conduits and hand- or manholes. It should be noted that ComEd conduits (and asbestos insulation) attached to the existing structure using supports and hangers are anticipated to be removed by the ComEd Contractor prior to the beginning of work under this item. The work by the ComEd Contractor does not include the City of Chicago existing conduits (and asbestos insulation). It shall be the Contractor's responsibility to remove the City of Chicago existing conduits and asbestos insulation.

- Prior to any removal of conduit material, the existing conduits must be tested for the presence of asbestos content by qualified personnel and/or qualified testing firm. Tests shall be comprehensive, and include detailed visual inspection, sampling as determined by qualified testing firm or personnel and laboratory testing for samples in order to determine if conduits include asbestos cement. Each of the existing conduits should be independently reviewed due to unknown installation or maintenance improvement records. All testing records and results shall be provided to the Engineer prior to any removal of existing City of Chicago conduits. If tests identify that the conduits do contain asbestos, the removal of those conduits shall follow the specification for REMOVAL OF ASBESTOS CEMENT CONDUIT. Otherwise, the conduits shall be removed under the requirements of this section and will not be paid for separately. City of Chicago will remove cables and wire in advance of the conduit removal.
- Existing conduits and wires owned by ComEd will be removed by ComEd. Included in the Removal of Existing Structures No. 1 shall be any coordination with ComEd by the Contractor required for the removal of ComEd's conduits. The removal of the bridge shall be staged and the limits of removal and schedule of removal shall be coordinated with ComEd.

The work shall conform in every respect to all environmental, state and local regulations regarding construction requirements, the protection of adjacent properties, as well as dust and noise control.

Prior to commencing work under this Item, the Contractor shall verify the location of all existing utilities in the area. The Contractor shall submit drawings and written documentation to the Engineer of such verification. All work under this Item shall be executed in such a manner so as not to disturb or damage the existing utilities.

The Contractor shall exercise extreme caution in the performance of his/her work to ensure that all removal activities do not have detrimental effects on adjacent structures, existing 5'-10 $\frac{1}{4}$ "x6'-6" main drain located immediately west of proposed Pier 1, or other utilities. Any damage to these structures/utilities caused by the Contractor in the performance of his/her work shall be repaired by the Contractor, to the satisfaction of the Engineer, at no cost to the Department.

All materials removed by the Contractor under this Item shall become the property of the Contractor and shall be disposed of by the Contractor off the site and in a lawful manner meeting all IDOT Policies and Procedures.

Traffic Operations

The traffic on the Interstate 90/94 must remain open to all lanes of traffic during demolition activities unless the Contractor has secured the necessary permits from the Illinois Department of Transportation to allow for temporary closure of lanes.

Method of Measurement. Removal of Existing Structures No. 1 shall be measured for payment by each of the structure removed including additional elements noted above.

Basis of Payment. The work under this Item will be paid for at the Contract unit price each for REMOVAL OF EXISTING STRUCTURES NO. 1, as indicated on the Plans and as specified herein.

CROSSHOLE SONIC LOGGING

Description. This item shall consist of conducting Crosshole Sonic Logging (CSL) testing on selected drilled shafts to verify concrete quality, providing a report containing the test results and analysis. To facilitate testing, all shafts shall be equipped with access tubes. The Engineer will determine which drilled shaft(s) will have CSL testing and may expand the number of drilled shafts tested, beyond the number indicated in the summary of quantities.

The CSL test shall follow ASTM D6760, and measure the strength and time for an ultrasonic pulse to travel from a signal source in one access tube to a receiver in another access tube.

Pregualification Requirements. The CSL testing consultant shall have a minimum of two years of acceptable experience in CSL drilled shaft testing. No later than thirty (30) days prior to beginning drilled shaft construction, the Contractor shall submit to the Engineer for approval the following information:

- (a) Name, address, and phone number of the CSL testing consultant selected to perform the testing.
- (b) Names and experience of field staff conducting testing and engineer responsible for analyzing the results.
- (c) List of at least two (2) projects on which this consultant has successfully completed CSL testing. The list shall include a brief description of the project, the client or owner name and phone number, and number of shafts tested.

Submittals. No later than thirty (30) days prior to beginning drilled shaft construction, the Contractor shall submit to the Engineer for approval the following information:

- (a) Description of testing equipment and testing sequence on a typical shaft. Any modification or deviation to the testing procedures required by this special provision shall be so indicated.
- (b) The CSL tube size, materials compliance, end and top cap details, couplings, any coupling joints details, and the proposed method of attaching the tubes to the cage.
- (c) An example CSL report showing both sound and defective concrete.

Materials. The materials required for this item shall consist of the following:

- (a) The test equipment access tubes shall be either 1.5 inch (38 mm) or 2 inch (50 mm) inside diameter Schedule 80 or 40 steel pipe conforming to ASTM A53, Grade A or B, Type E, F, or S.
- (b) The grout used to fill the access tubes shall be a non-shrink grout according to Section 1024 with a compressive strength equal to that specified for the drilled shaft in which the grout is used.

Equipment. The minimum requirements of the CSL testing equipment shall be as follows unless otherwise approved as part of the contractor's submittal:

- (a) A microprocessor based CSL system for display of individual CSL records, analog-digital conversion and recording of CSL data, analysis of receiver responses and printing of report quality CSL logs.
- (b) Ultrasonic source and receiver probes must be small enough to travel through 1.5 inch (38 mm) or 2 inch (50 mm) I.D. steel pipe access tubes and extend the full depth of the tube.
- (c) The probes shall be capable of producing records at a minimum frequency of 40,000Hz with good signal amplitude and energy in typical concrete.
- (d) An ultrasonic voltage pulser to excite the source with a synchronized triggering system to start the recording system.
- (e) A depth measurement device to electronically measure and record the source and receiver depths associated with each CSL signal.
- (f) Appropriate filter/amplification and cable systems for CSL testing.
- (g) An acquisition system that stores each log in digital format, with drilled shaft identification, date, time and test details, including the source and receiver gain. Arrival time data shall be displayed graphically during data acquisition.
- (h) 3D tomographic imaging software, or source for completing the work

The equipment shall be capable of providing the test results on thermal or graphical printouts with the vertical scale representing the vertical position along the shaft, and the horizontal scale representing the propagation time.

Construction Requirements

Access tubes. The contractor shall place access tubes in all drilled shafts on the project unless otherwise indicated on the plans or approved by the Engineer. The CSL Consultant shall contact the drilled shaft contractor and provide the technical instruction and guidance on obtaining and installing the access tubes so they will provide adequate bond to the concrete and yield the necessary data.

The tubes shall have a round, regular internal diameter, free of defects or obstructions to permit the free passage of the source and receiver probes. Four access tubes shall be installed in all drilled shafts with a diameter of 4.5 feet (1.4 m) or less, five access tubes are required in shafts between 5 feet (1.5 m) and 6 feet (1.8 m) in diameter, six access tubes shall be used in 6.5 feet (2.0 m) and 7.0 feet (2.1 m) diameter shafts while eight tubes are required on larger shafts.

The Contractor shall install the tubes in each drilled shaft in a regular, symmetric pattern such that each tube is equally spaced from the others around the perimeter of the cage. Tube placement shall be such that large vertical reinforcing bars do not block the direct line between adjacent tubes. The Contractor shall securely attach the tubes to the interior of the reinforcement cage at vertical intervals not to exceed 3 feet (1 m) or otherwise secured such that the tubes remain in position during placement of the rebar cage and the concrete. The tubes shall be vertical and parallel.

The Contractor shall extend the tubes from 6 inches (150 mm) above the shaft tip to at least 3 feet (1 m) above the top of the shaft. If the shaft top elevation is below ground elevation, the Contractor shall extend tubes at least 2 feet (610 mm) above ground surface. If the drilled shaft tip elevation is extended more than 1 foot (305 mm) below the tip elevation shown in the contract plans, the Contractor shall extend the tubes using proper threaded mechanical couplings to within 6 inches (150 mm) of the final tip elevation. Any joints used to construct the full tube length shall be threaded mechanical couplings that produce a smooth interior surface, occur at the same elevation in each tube within the shaft and be watertight. Threaded water tight end caps shall be used at the bottom of each tube and a removable threaded end cap shall be provided on the top of the tubes. Duct tape, other wrapping materials, or butt welding to seal joints will not be allowed. Under no circumstance will the tubes be allowed to rest on the bottom of the shaft excavation.

The Contractor shall take care to not damage the tubes during the placement of reinforcing cage and the concrete. Before placement of the reinforcement cage into the shaft excavation, the Contractor shall record the tube lengths and tube positions along the length of the cage. After placement of concrete, measure the stickup of the tubes above the top of the drilled shaft and verify tube spacing. After placement of the reinforcement cage and within 2 hours after concrete placement, the Contractor shall fill the CSL tubes with clean, potable water, and cap them to keep out debris. The Engineer will reject tubes not filled and capped within 2 hours.

CSL Testing Procedure. The testing shall be conducted between 3 and 40 days after the drilled shaft has been placed and after concrete has attained 2/3 of the specified strength. The contractor shall provide suitable access to the top of the shafts and any electricity, grout, water or other equipment support necessary to satisfy the CSL testing requirements. When removing the access tube caps, the Contractor shall exercise care not to apply excess torque, force or stress, which could break the bond between the tubes and the concrete. The Contractor shall provide the CSL consultant with the as-constructed tube positions in each shaft including each tube length, top of tube elevation, top of shaft elevation, bottom of shaft elevation, and construction dates prior to beginning CSL testing.

The CSL consultant shall conduct CSL tests between each unique pairing of access tubes (i.e. 4 tubes have 6 different combinations, 5 have 10 combinations, 6 have 15, etc.). The CSL consultant shall perform the CSL testing with the source and receiver probes in the same horizontal plane unless test results indicate defects or poor concrete zones, in which case the defect zones shall be further evaluated with angle tests (source and receiver vertically offset in the tubes).

The CSL consultant shall report any defects indicated by decreased signal velocity and lower amplitude/energy signals to the Engineer at the time of testing, and conduct angle tests in the zones of the defects as defined by the Concrete Condition Rating Criteria (CCRC). The CSL consultant shall make CSL measurements at depth intervals of 3 inches (75 mm) or less from the bottom of the tubes to the top of each shaft. The CSL consultant shall pull the probes simultaneously, starting from the bottom of the tubes, using a depth-measuring device to electronically measure and record the depths associated with each CSL signal. The speed of ascent shall be less than 12 inches per second (300 mm/second). The CSL consultant shall remove any slack from the cables before pulling to provide for accurate depth measurements of the CSL records. In the event defects are detected, the CSL consultant shall conduct additional logs, as needed, to fully identify the extent of the anomaly.

If steel tube debonding occurs, a 2 inch (50 mm) diameter hole shall be drilled to below the depth of debonding for each debonded tube in order to perform the CSL testing.

CSL Report: The test results shall be submitted to the Engineer in the form of a report within 7 working days of completion of CSL testing. The CSL report should include but is not limited to the following:

- (a) Project identification.
- (b) Dates of testing.
- (c) Table and a plan view of each shaft tested with accurate identification of tube coordinates and tubes referenced to the site.
- (d) Tube collar elevation.
- (e) Names of personnel that performed the tests/interpretation and their affiliation.
- (f) Equipment used.
- (g) Data Logs, interpretation, analysis, and results.

The Data logs for each tube pair tested shall be included along with an analysis of the initial pulse arrival time, velocity, relative pulse energy/amplitude, and stacked waveform plotted versus depth. The Report shall list all zones defined by the Concrete Condition Rating Criteria (CCRC) in a tabular format including the percent velocity reduction and the velocity values used from the nearby zone of good quality concrete. The Report shall discuss each zone defined by the CCRC as appropriate. The Report shall base the results on the percent reduction in velocity value from a nearby zone of good quality concrete with good signal amplitude and energy as correlated to the following:

Concrete Condition Rating Criteria (CCRC)		
CCRC (Rating Symbol)	Velocity Reduction	Indicative Results
Good (G)	□ 10 %	Good quality concrete
Questionable (Q)	10 % to < 20 %	Minor concrete contamination or intrusion. Questionable quality concrete.
Poor/Defect (P/D)	≥ 20 %	Defects exist, possible water/slurry contamination, soil intrusion, and/or poor quality concrete.
Water (W)	V = 4750 fps (1450 mps) to 5000 fps (1525 mps)	Water intrusion or water filled gravel intrusion with few or no fines present.
No Signal (NS)	No Signal Received	Soil intrusion or other severe defect absorbed the signal (assumes good bond of the tube-concrete interface).

The Contractor shall not grout the CSL tubes or perform any further work on the CSL tested drilled shaft until the Engineer determines whether the drilled shaft is acceptable. Perform tomography in order to further investigate and delineate the boundaries of any defective/unconsolidated zones with 20 percent or more reduction in velocity value as correlated to the CCRC. The Contractor shall process CSL data to construct easy to understand 2D/3D (2D cross-sections between tubes and 3D volumetric images for the entire shaft) color-coded tomographic images indicating velocity variations along the shaft. Location and geometry of defective/unconsolidated zones shall be identified in 3D color images with detailed discussion in the CSL report.

Correction of drilled shaft defect. When the field testing results or report determine that a defect is present, the Engineer will direct the Contractor to submit remedial measures for approval. No compensation will be made for remedial work or losses or damage due to remedial work of drilled shafts found defective or not in accordance with the drilled shaft specifications or the construction plans. Modifications to the drilled shaft design or any load transfer mechanisms required by the remedial action must be designed, plans submitted sealed by an Illinois Licensed Structural Engineer, along with the design computations.

Access tube grouting: After CSL test results have been reviewed and the Engineer has accepted the drilled shaft or approves grouting of the tubes, the tubes and any core holes shall be dewatered filled with a nonshrink grout according to Section 1024. Shafts which are not initially selected for CSL testing shall not be grouted until the results of the tested CSL test shafts have been reviewed and accepted.

Method of Measurement. This work will be measured per each shaft CSL tested.

The furnishing and installing of all access tubes, and their subsequent grouting, will not be measured for payment.

Basis of Payment. This work will be paid at the contract unit price per EACH for CROSSHOLE SONIC LOGGING. This payment will constitute full compensation for furnishing all equipment, testing, analysis, and reporting for cross-hole sonic logging.

The cost for furnishing, installing, and subsequent grouting of all access tubes shall not be included in this item but shall be included in the cost of the applicable drilled shaft pay items involved.

LOUVERS

Description: This item shall consist of furnishing all labor, materials, tools and equipment necessary to furnish and install (2) – E6JP high performance louvers by Architectural Louvers (or approved equal louver by Ruskin Company or Industrial Louvers, Inc.), of the dimensions specified in the plans, in the concrete diaphragm of vaulted East Abutment at the Taylor Street Bridge over I-90/94 (SN 016-1165).

The louver shall be 6” deep (maximum) with standard blades, 4” blade spacing and frame and blade thickness not less than 0.080”. The blade profile shall be plain without center baffle and a flattened, expanded aluminum, 3/4x0.05” thick internal screen shall be provided for protection from birds.

Louvers shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated without permanent deformation of louver components, noise or metal fatigue caused by louver blade rattle or flutter, or permanent damage to fasteners and anchors.

1. Wind Loads: Determine loads based on a uniform pressure of 30 lb./sq. ft., acting outward or inward.

Provide louvers complying with requirements specified, as demonstrated by testing manufacturer’s stock units identical to those provided, except for length and width according to AMCA 500-L.

All work shall be according to the details shown on the plans, as specified herein, and as directed by the Engineer.

The Contractor shall coordinate the louver opening dimensions with the manufacturer, such as Architectural Louvers, or Ruskin Company, or Industrial Louvers Inc., or approved equal. They can be contacted at:

Architectural Louvers
Phone: (888) 568 - 8371
Fax: (888) 568 - 8370
Email: service@archlouvers.com

Ruskin Company
Phone: (816) 761-7476
Fax: (816) 765-8955

Industrial Louvers, Inc.
Phone: (800) 328-3421
Fax: (763) 972-2911
Email: ilinfo@industriallouvers.com

Submittals: The Contractor must submit the louver shop drawing package to the Engineer for review no later than 30 days prior to installation. The submittals must show all material components, material certificates and specifications, product test reports (based on tests performed according to AMCA 500-L), installation methods and sequence, elevations, sections, details (including frame profiles and blade profiles, angles and spacing) and attachments to work. Provide samples for each type of metal finish required. Any variation in materials used for the construction or installation of the louvers shall first be approved by the Department. The Contractor must coordinate the work with all other trades.

Materials:

Aluminum Extrusions: ASTM B 221M, Alloy 6063-T5

Aluminum Sheet: ASTM B 209M, Alloy 3003 with temper as required for forming

Fasteners: Use types and sizes to suit unit installation conditions.

1. For fastening aluminum, use aluminum or 300 series stainless-steel fasteners.

Fabrication, General:

- A. Fabricate frames, including integral sills, to fit in openings of sizes as indicated on plans, with allowances made for fabrication and installation tolerances, adjoining material tolerances, and perimeter sealant joints.
- B. Join frame members to each other and to fixed louver blades with fillet welds concealed from view welds, threaded fasteners, or both, as standard with louver manufacturer unless otherwise indicated or size of louver assembly makes bolted connections between frames necessary.

Installation:

Locate and place louvers and vents level, plumb, and at indicated alignment with adjacent work.

Use concealed anchorages where possible. Provide brass or lead washers fitted to screws where required to protect metal surfaces and to make a weather-tight connection.

Provide perimeter reveals and openings of uniform width for sealants and joint fillers, as indicated.

Repair damaged finishes so no evidence remains of corrective work. Return items that cannot be refinished in the field to the factory and refinish entire unit or provide new units.

Protect galvanized and nonferrous-metal surfaces that will be in contact with concrete, masonry or dissimilar metals from corrosion and galvanic action by applying a heavy coating of bituminous paint.

Caulking Requirements:

- A. Caulk the entire perimeter: Install backer rod and apply caulk between the opening and the louver panels.
- B. Caulk at all exposed horizontal mullions: Install backer rod and apply caulk between the louver panels.
- C. Caulk at all exposed vertical mullions: Apply a bead of caulk at the face of the jamb, so that the entire height of the mullion cover and the adjoining panel are sealed after assembly.

Method of Measurement: This item shall be measured for payment per each louver furnished and successfully installed. The structural steel for the lintel and any additional structural steel framing required for the louver shall not be paid separately and shall be included with LOUVERS.

Basis of Payment: This work shall be paid for at the contract unit price per each for LOUVERS. Payment shall include full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

TEMPORARY SOIL RETENTION SYSTEM

Description. This work shall consist of designing, furnishing, installing, adjusting for stage construction when required and subsequent removal of the temporary soil retention system according to the dimensions and details shown on the Plans and in the approved design submittal, subject to the construction restrictions listed herein and on the drawings.

General. The temporary soil retention system shall be designed by the Contractor to retain, at a minimum, the exposed surface area specified in the Plans or as directed by the Engineer, including all loads as dictated by the site conditions. The design calculations and details for the temporary soil retention system proposed by the Contractor shall be submitted to the Engineer for approval. The calculations shall be prepared and sealed by an Illinois Licensed Structural Engineer. This approval will not relieve the Contractor of responsibility for the safety of the excavation. Approval shall be contingent upon acceptance by all involved utilities and/or agencies.

The design shall consider the restrictions on the installation of all components of the temporary soil retention system. These installation restrictions are listed in the next section of this special provision and in the "CONSTRUCTION VIBRATION MONITORING" special provision.

The proposed Temporary Soil Retention System shown on the plans for the Taylor Street structure (SN 016-1165) West Abutment is in close proximity to an existing 72"/84" diameter combined sewer. The invert elevation of this combined sewer is approximately ± 575.53 . The combined sewer is located on the plans based on the best available information.

Construction. The Contractor shall verify locations of all underground utilities before installing any of the temporary soil retention system components or commencing any excavation. Any disturbance or damage to existing structures, utilities or other property, caused by the Contractor's operation, shall be repaired by the Contractor in a manner satisfactory to the Engineer at no additional cost to the Department. Utility information shown on the drawings was collected from information available at the time of the design. There is no guarantee of complete accuracy with the utility locations.

The temporary soil retention system must be installed without the use of impact-type pile drivers. The location of the temporary soil retention system as shown on the drawings is in a highly sensitive populated area with the potential for damage to adjacent older structures. The proposed equipment and procedures used for installation of sheet piles or other underground support components must be submitted to the Engineer for approval prior to their use. It is anticipated that vibratory equipment may be utilized in performing the work, subject to requirements of other sections of this specification. Contractor shall also submit any documentation available regarding the operating noise levels and operating vibration characteristics of the equipment proposed, prior to approval of the Engineer.

The approval of the equipment and procedure by the Engineer does not guarantee the performance in the field of the equipment will be acceptable. If, in the judgment of the Engineer, the noise and/or vibration effects exceed those required by the local residents, then the Contractor must halt production and find a remedy suitable to the Engineer. Threshold values for vibration monitoring are included in the special provision "CONSTRUCTION VIBRATION MONITORING". The costs incurred finding suitable equipment and procedures shall be included in the cost of this item. No additional costs shall be paid for this effort.

The temporary soil retention system shall be installed according to the Contractor's approved design, or as directed by the Engineer, prior to commencing any related excavation. If unable to install the temporary soil retention system as specified in the approved design, the Contractor shall have the adequacy of the design re-evaluated. Any reevaluation shall be submitted to the Engineer for approval prior to commencing the excavation adjacent to the area in question. The Contractor shall not excavate below the maximum excavation line shown in the approved design without the prior permission of the Engineer. The temporary soil retention system shall remain in place until the Engineer determines it is no longer required.

The temporary soil retention system shall be removed and disposed of by the Contractor when directed by the Engineer. When allowed by the Engineer, the Contractor may elect to cut off a portion of the temporary soil retention system leaving the remainder in place. The remaining temporary soil retention system shall be removed to a depth which will not interfere with the new construction (including drainage and utilities), and as a minimum, to a depth of 2 ft. below the finished grade, or as directed by the Engineer. Removed system components shall become the property of the Contractor.

When an obstruction is encountered, the Contractor shall notify the Engineer and upon concurrence, the Contractor shall begin working to break up, push aside, or remove the obstruction. An obstruction shall be defined as any object (such as but not limited to, boulders, logs, old foundations etc.) where its presence was not obvious or specifically noted on the Plans prior to bidding, that cannot be driven or installed through or around, with normal driving or installation procedures, but requires additional excavation or other procedures to remove or miss the obstruction.

As stated earlier, the proposed Temporary Soil Retention System shown on the plans for the Taylor Street structure (SN 016-1165) West Abutment is in close proximity to an existing 72"/84" diameter combined sewer. The invert elevation of this combined sewer is approximately ± 575.53 . The Contractor shall at all times protect the combined sewer from loads induced by construction activities. The combined sewer is located on the plans based on the best available information. It is the responsibility of the Contractor to locate the combined sewer in the field.

Method of Measurement. The temporary soil retention system furnished and installed according to the Contractor's approved design or as directed by the Engineer will be measured for payment in square feet. The area measured shall be the vertical exposed surface area envelope of the excavation supported by temporary soil retention system. Portions of the temporary soil retention system left in place for reuse in later stages of construction shall only be measured for payment once.

Any temporary soil retention system installed beyond dimensions shown on the Plans or the approved Contractor's design, without the written permission of the Engineer, shall not be measured for payment but shall be done at the Contractor's own expense.

Basis of Payment. This work will be paid for at the contract unit price per square foot for TEMPORARY SOIL RETENTION SYSTEM.

Payment for any excavation, related solely to the installation and removal of the temporary soil retention system and/or its components, shall not be paid for separately but shall be included in the unit bid price for TEMPORARY SOIL RETENTION SYSTEM. Other excavation, performed in conjunction with this work, will not be included in this item but shall be paid for as specified elsewhere in this contract.

Payment for additional work required in design or construction to adequately protect the combined sewer at the West Abutment of the Taylor Street structure (SN 016-1165), and/or other utilities, shall be included in the bid price for TEMPORARY SOIL RETENTION SYSTEM.

Obstruction mitigation shall be paid for according to Article 109.04 of the Standard Specifications.

DECORATIVE RAILING (PARAPET MOUNTED)

The railing shall conform to Section 503 and 509 of the Standard Specifications except as herein modified.

Description: This Work consists of furnishing and installing Chicago Barrier aluminum decorative railing, parapet mounted system of the type specified at locations shown on the Plans or directed by the Engineer, and in accordance with the details shown in the Plans.

Materials: Aluminum alloys 6063-T6 and 6061-T6 can be used interchangeably at the option of the manufacturer, with the requirements that the minimum physical properties must be 2500 PSI yield, 30,000 PSI Ultimate yield, and 10% elongations.

Finish: Clear anodized with minimum 1.0 mil thickness. Color samples are to be submitted to the Engineer for approval.

General: The rail sections must be factory pre-bent into curves to form radii rather than employing angular splices at the expansion joints. Any bending must be done prior to finishing to avoid distortion of the rail and/or damage to the finishing properties of the alloy.

Submittals:

1. Manufactures certification that aluminum rail and connections meet IDOT and CDOT specifications.
2. Shop drawings including parapet wall with the reveal pattern, and railing system.
3. Samples: two pieces of 2 feet long rail with specified finish.
4. Mockup: 2' long section of railing, including rail, one stanchion with thief protection device and anchor plate. All parts to have the final approved finish and be connected.
5. Calculations signed and sealed by an Illinois Registered Professional Structural Engineer.

Coordination: Coordinate with Chicago Wall concrete barrier manufacturer, fence manufacturer, electrical and traffic surveillance requirements to install conduit and junction boxes.

Complete shop drawings and calculations by an Illinois Registered Professional Structural Engineer, and field installation drawings must be submitted to the Engineer for approval prior to ordering materials, commencement of any shop fabrication, and/or finishing.

Aluminum Railing: The aluminum rail system must be in accordance with the Plans and with AASHTO-AGC-ARTBE Joint Committee Task Force 13 Report "A Guide to Standardized Highway Barrier Hardware." This system must meet and match the shape, and composition of the Aluminum Railing as furnished and installed for the North Lake Shore Drive Project. Alternate systems that meet all requirements and specifications will be considered by the Engineer if submitted for approval at the time of the Pre-Bid Conference.

There will be a single source responsibility for the aluminum rail system, which will include but not be limited to the aluminum railing, the aluminum supports (stanchion system), anodizing, splices, color, thief protection system, structural calculations, and the design of all components above the top horizontal plane of the concrete wall system, bolts, fasteners, welding, shop fabrication, field erection, anchoring system, and freight etc. Bolts, studs, and embedment required must also be by the Contractor.

The cross section must conform to an ellipse 4" x 7 7/8".

Exposed fasteners must be stainless steel. All bolts must be A307.

No field welding will be permitted.

Structural Requirements: The aluminum railing system must conform to the requirements of LRFD Bridge Manual

All thickness and material specifications requirements, unless otherwise approved by the Engineer, must be based on certifications based on structural calculations provided by the Contractor.

Acceptable Rail Manufactures:

1. Valentine & Company, Middletown, OH.
2. Midwest Fence
3. Approved Equal.

Method of Measurement: This Work will be measured for payment, complete in place, per foot.

Basis of Payment: This Work will be paid for at the Contract Unit Price per foot for DECORATIVE RAILING (PARAPET MOUNTED) which price includes furnishing and placing all material required, including all labor, equipment and incidentals necessary to complete the Work as herein specified.

DRAINAGE SYSTEM

Effective : June 10, 1994

Revised: January 1, 2007

Description. This work shall consist of furnishing and installing a bridge drainage system as shown on the plans, including all piping, fittings, support brackets, inserts, bolts, and splash blocks when specified.

Material. The pipe and fittings shall be reinforced fiberglass according to ASTM D 2996 RTRP with a 30,000 psi (207 MPa) minimum short-time rupture strength hoop tensile stress. The reinforced fiberglass shall also have an apparent stiffness factor at 5 percent deflection exceeding 200 cu in.-lbf/sq. in. (22.6 cu mm-kPa) and a minimum wall thickness of 0.10 in. (2.54 mm). All pipe supports and associated hardware shall be hot dip galvanized according to AASHTO M 232 (M 232M). The fiberglass pipe and fittings furnished shall be pigmented through out, or have a resin-rich pigmented exterior coat, specifically designed for overcoating fiberglass, as recommended by the manufacturer. The color shall be as specified by the Engineer. The resin in either case shall have an ultraviolet absorber designed to prevent ultraviolet degradation. The supplier shall certify the material supplied meets or exceeds these requirements.

Design. The drainage system shall be designed as an open system with allowances for the differential expansion and contraction expected between the superstructure and the substructure to which the drainage system is attached.

Installation. All connections of pipes and fittings shown on the plans to facilitate future removal for maintenance cleanout or flushing shall be made with a threaded, gasketed coupler or a bolted gasketed flange system. Adhesive bonded joints will be permitted for runs of pipe between such connections. The end run connection shall feature a minimum nominal 6 in. (150 mm) female threaded fiberglass outlet. Straight runs may utilize a 45 degree reducing saddle bonded to the pipe. The female outlet shall be filled with a male threaded PVC plug.

Runs of pipe shall be supported at spacings not exceeding those recommended by the manufacturer of the pipe. Supports that have point contact or narrow supporting areas shall be avoided. Standard slings, clamps, clevis hangers and shoe supports designed for use with steel pipe may be used. A minimum strap width for hangers shall be 1 1/2 in. (40 mm) for all pipe under 12 in. (300 mm) in diameter and 2 in. (50 mm) for diameters 12 in. (300 mm) or greater. Straps shall have 120 degrees of contact with the pipe. Pipes supported on less than 120 degrees of contact shall have a split fiberglass pipe protective sleeve bonded in place with adhesive.

All reinforced fiberglass pipe, fittings, and expansion joints shall be handled and installed according to guidelines and procedures recommended by the manufacturer or supplier of the material.

Basis of Payment. This work will be paid for at the contract lump sum price for DRAINAGE SYSTEM.

CLEANING AND PAINTING EXISTING STEEL STRUCTURES

Effective: October 2, 2001

Revised: April 19, 2012

Description. This work shall consist of the preparation of all designated metal surfaces by the method(s) specified on the plans. This work also includes the painting of those designated surfaces with the paint system(s) specified on the plans. The Contractor shall furnish all materials, equipment, labor, and other essentials necessary to accomplish this work and all other work described herein and as directed by the Engineer.

Materials. All materials to be used on an individual structure shall be produced by the same manufacturer.

The Bureau of Materials and Physical Research has established a list of all products that have met preliminary requirements. Each batch of material, except for the penetrating sealer, must be tested and approved before use. The specified colors shall be produced in the coating manufacturer's facility. Tinting of the coating after it leaves the manufacturer's facility is not allowed.

The paint materials shall meet the following requirements of the Standard Specification and as noted below:

<u>Item</u>	<u>Article</u>
(a) Waterborne Acrylic	1008.04
(b) Aluminum Epoxy Mastic	1008.03
(c) Organic Zinc Rich Primer	1008.05
(d) Epoxy/ Aliphatic Urethane	1008.05
(e) Penetrating Sealer (Note 1)	
(f) Moisture Cured Zinc Rich Urethane Primer (Note 2)	
(g) Moisture Cured Aromatic/Aliphatic Urethane (Note 2)	
(h) Moisture Cured Penetrating Sealer (Note 3)	

Note 1: The Epoxy Penetrating Sealer shall be a cross-linked multi component sealer. The sealer shall have the following properties:

- (a) The volume solids shall be 98 percent (plus or minus 2 percent).
- (b) Shall be clear or slightly tinted color.

Note 2: These material requirements shall be according to the Special Provision for the Moisture Cured Urethane Paint System.

Note 3: The Moisture Cured Penetrating Sealer manufacturer's certification will be required.

Submittals. The Contractor shall submit for Engineer review and acceptance, the following plans and information for completing the work. The submittals shall be provided within 30 days of execution of the contract unless given written permission by the Engineer to submit them at a later date. Work cannot proceed until the submittals are accepted by the Engineer. Details for each of the plans are presented within the body of this specification.

- a) Contractor/Personnel Qualifications. Evidence of Contractor qualifications and the names and qualifications/experience/training of the personnel managing and implementing the Quality Control program and conducting the quality control tests.
- b) Quality Control (QC) Program. The QC Program shall identify the following; the instrumentation that will be used, a schedule of required measurements and observations, procedures for correcting unacceptable work, and procedures for improving surface preparation and painting quality as a result of quality control findings. The program shall incorporate at a minimum, the IDOT Quality Control Daily Report form as supplied by the Engineer.
- c) Inspection Access Plan. The inspection access plan for use by Contractor QC personnel for ongoing inspections and by the Engineer during Quality Assurance (QA) observations.
- d) Surface Preparation/Painting Plan. The surface preparation/painting plan shall include the methods of surface preparation and type of equipment to be utilized for washing, hand/power tool cleaning, removal of rust, mill scale, paint or foreign matter, abrasive blast or water jetting, and remediation of chloride. If detergents, additives, or inhibitors are incorporated into the water, the Contractor shall include the names of the materials and Material Safety Data Sheets (MSDS). The Contractor shall identify the solvents proposed for solvent cleaning together with MSDS.

The plan shall also include the methods of coating application and equipment to be utilized.

If the Contractor proposes to heat or dehumidify the containment, the methods and equipment proposed for use shall be included in the Plan for the Engineer's consideration.

- e) Paint Manufacturer Certifications and Letters. When a sealer is used, the Contractor shall provide the manufacturer's certification of compliance with IDOT testing requirements listed under "Materials" above. A certification regarding the compatibility of the sealer with the specified paint system shall also be included.

When rust inhibitors are used, the Contractor shall provide a letter from the coating manufacturer indicating that the inhibitor is compatible with, and will not adversely affect the performance of the coating system.

If the use of a chemical soluble salt remover is proposed by the Contractor, provide a letter from the coating manufacturer indicating that the material will not adversely effect the performance of the coating system.

The paint manufacturer's application and thinning instructions, MSDS and product data sheets shall be provided, with specific attention drawn to storage temperatures, and the temperatures of the material, surface and ambient air at the time of application.

A letter or written instructions from the coating manufacturer shall be provided indicating the length of time that each coat must be protected from cold or inclement weather (e.g., exposure to rain) during its drying period.

- f) Abrasives. Abrasives to be used for abrasive blast cleaning, including MSDS. For expendable abrasives, the Contractor shall provide certification from the abrasive supplier that the abrasive meets the requirements of SSPC-AB1. For steel grit abrasives, the certification shall indicate that the abrasive meets the requirements of SSPC-AB3.
- g) Protective Coverings. Plan for containing or controlling paint debris (droplets, spills, overspray, etc.). Any tarpaulins or protective coverings proposed for use shall be fire retardant. For submittal requirements involving the containment used to remove lead paint, the Contractor shall refer to Special Provision for Containment and Disposal of Lead Paint Cleaning Residues.
- h) Progress Schedule. Progress schedule shall be submitted per Article 108.02 and shall identify all major work items (e.g., installation of rigging/containment, surface preparation, and coating application).

When the Engineer accepts the submittals, the Contractor will receive written notification. The Contractor shall not begin any paint removal work until the Engineer has accepted the submittals. The Contractor shall not construe Engineer acceptance of the submittals to imply approval of any particular method or sequence for conducting the work, or for addressing health and safety concerns. Acceptance of the programs does not relieve the Contractor from the responsibility to conduct the work according to the requirements of Federal, State, or Local regulations and this specification, or to adequately protect the health and safety of all workers involved in the project and any members of the public who may be affected by the project. The Contractor remains solely responsible for the adequacy and completeness of the programs and work practices, and adherence to them.

Contractor Qualifications. Unless indicated otherwise on the contract plans, for non lead abatement projects, the painting Contractor shall possess current SSPC-QP1 certification. Unless indicated otherwise on the plans, for lead abatement projects the Contractor shall also possess current SSPC-QP2 certification. The Contractor shall maintain certified status throughout the duration of the painting work under the contract. The Department reserves the right to accept Contractors documented to be currently enrolled in the SSPC-QP7, Painting Contractor Introductory Program, Category 2, in lieu of the QP certifications noted above.

Quality Control (QC) Inspections. The Contractor shall perform first line, in process QC inspections. The Contractor shall implement the submitted and accepted QC Program to insure that the work accomplished complies with these specifications. The designated Quality Control inspector shall be onsite full time during any operations that affect the quality of the coating system (e.g., surface preparation and chloride remediation, coating mixing and application, and evaluations between coats and upon project completion). The Contractor shall use the IDOT Quality Control Daily Report form supplied by the Engineer to record the results of quality control tests. The completed reports shall be turned into the Engineer before work resumes the following day. The Engineer or designated representative will sign the report. The signature is an acknowledgment that the report has been received, but should not be construed as an agreement that any of the information documented therein is accurate.

Contractor QC inspections shall include, but not be limited to the following:

- Suitability of protective coverings and the means employed to control project debris and paint spills, overspray, etc.
- Ambient conditions
- Surface preparation (solvent cleaning, pressure washing including chalk tests, hand/power tool or abrasive blast cleaning, etc.)
- Chloride remediation
- Coating application (specified materials, mixing, thinning, and wet/dry film thickness)
- Recoat times and cleanliness between coats
- Coating continuity and coverage (freedom from runs, sags, overspray, dryspray, pinholes, shadow-through, skips, misses, etc.)

The personnel managing the Contractor's QC Program shall possess a minimum classification of Society of Protective Coatings (SSPC) BCI certified, National Association of Corrosion Engineers (NACE) Coating Inspector Level 2 - Certified, or shall provide evidence of successful inspection of 3 projects of similar or greater complexity and scope that have been completed in the last 2 years. Copies of the certification and/or experience shall be provided. References for experience shall be provided and shall include the name, address, and telephone number of a contact person employed by the bridge owner.

The personnel performing the QC tests shall be trained in coatings inspection and the use of the testing instruments. Documentation of training shall be provided. The QC personnel shall not perform hands on surface preparation or painting activities. Painters shall perform wet film thickness measurements, with QC personnel conducting random spot checks of the wet film. The Contractor shall not replace the QC personnel assigned to the project without advance notice to the Engineer, and acceptance of the replacement(s), by the Engineer.

The Contractor shall supply all necessary equipment to perform the QC inspections. Equipment shall include the following at a minimum:

- Psychrometer or comparable equipment for the measurement of dew point and relative humidity, together with all necessary weather bureau tables or psychrometric charts.
- Surface temperature thermometer
- SSPC Visual Standards VIS 1, Guide and Reference Photographs for Steel Surfaces Prepared by Dry Abrasive Blast Cleaning; SSPC-VIS 3, Visual Standard for Power and Hand-Tool Cleaned Steel; SSPC-VIS 4, Guide and Reference Photographs for Steel Prepared by Water Jetting, and/or SSPC-VIS 5, Guide and Reference Photographs for Steel Prepared by Wet Abrasive Blast Cleaning, as applicable.
- Commercially available putty knife of a minimum thickness of 40 mils (1mm) and a width between 1 and 3 in. (25 and 75 mm). Note that the putty knife is only required for projects in which the existing coating is being feathered and must be tested with a dull putty knife.
- Testex Press-O-Film Replica Tape and Spring Micrometer
- Bresle Cell Kits or CHLOR*TEST kits for chloride determinations, or equivalent
- Wet Film Thickness Gage
- Blotter paper for compressed air cleanliness checks
- Type 2 Electronic Dry Film Thickness Gage per SSPC - PA2, Measurement of Dry Coating Thickness with magnetic Gages
- Calibration standards for dry film thickness gage
- Light meter for measuring light intensity during paint removal, painting, and inspection activities
- All applicable ASTM and SSPC Standards used for the work (reference list attached)

The instruments shall be calibrated by the Contractor's personnel according to the equipment manufacturer's recommendations and the Contractor's QC Program. All inspection equipment shall be made available to the Engineer for QA observations on an as needed basis.

Hold Point Notification. Specific inspection items throughout this specification are designated as Hold Points. Unless other arrangements are made at the project site, the Contractor shall provide the Engineer with a minimum 4-hour notification before a Hold Point inspection will be reached. If the 4-hour notification is provided and the Work is ready for inspection at that time, the Engineer will conduct the necessary observations. If the Work is not ready at the appointed time, unless other arrangements are made, an additional 4-hour notification is required. Permission to proceed beyond a Hold Point without a QA inspection will be granted solely at the discretion of the Engineer, and only on a case by case basis.

Quality Assurance (QA) Observations. The Engineer will conduct QA observations of any or all phases of the work. The presence or activity of Engineer observations in no way relieves the Contractor of the responsibility to provide all necessary daily QC inspections of his/her own and to comply with all requirements of this Specification.

The Engineer has the right to reject any work that was performed without adequate provision for QA observations.

Inspection Access and Lighting. The Contractor shall facilitate the Engineer's observations as required, including allowing ample time to view the work. The Contractor shall furnish, erect and move scaffolding or other mechanical equipment to permit close observation of all surfaces to be cleaned and painted. This equipment shall be provided during all phases of the work. Examples of acceptable access structures include:

- Mechanical lifting equipment, such as, scissor trucks, hydraulic booms, etc.
- Platforms suspended from the structure comprised of trusses or other stiff supporting members and including rails and kick boards.
- Simple catenary supports are permitted only if independent life lines for attaching a fall arrest system according to Occupational Safety and Health Administration (OSHA) regulations are provided.

When the surface to be inspected is more than 6 ft. (1.8 m) above the ground or water surface, and fall prevention is not provided (e.g., guardrails are not provided), the Contractor shall provide the Engineer with a safety harness and a lifeline according to OSHA regulations. The lifeline and attachment shall not direct the fall into oncoming traffic. The Contractor shall provide a method of attaching the lifeline to the structure independent of the inspection facility or any support of the platform. When the inspection facility (e.g., platform) is more than 2 1/2 ft. (800 mm) above the ground, the Contractor shall provide an approved means of access onto the platform.

The Contractor shall provide artificial lighting in areas both inside and outside the containment where natural light is inadequate, as determined by the Engineer, to allow proper cleaning, inspection, and painting. Illumination for inspection shall be at least 30 foot candles (325 LUX). Illumination for cleaning and painting, including the working platforms, access and entryways shall be at least 20 foot candles (215 LUX). General work area illumination outside the containment shall be employed at the discretion of the Engineer and shall be at least 5 foot candles. The exterior lighting system shall be designed and operated so as to avoid glare that interferes with traffic, workers, and inspection personnel.

Surface Preparation and Painting Equipment. All cleaning and painting equipment shall include gages capable of accurately measuring fluid and air pressures and shall have valves capable of regulating the flow of air, water or paint as recommended by the equipment manufacturer. The equipment shall be maintained in proper working order.

Diesel or gasoline powered equipment shall be positioned or vented in a manner to prevent deposition of combustion contaminants on any part of the structure.

Hand tools, power tools, pressure washing, water jetting, abrasive blast cleaning equipment, brushes, rollers, and spray equipment shall be of suitable size and capacity to perform the work required by this specification. All power tools shall be equipped with vacuums and High Efficiency Particulate Air (HEPA) filtration. Appropriate filters, traps and dryers shall be provided for the compressed air used for abrasive blast cleaning and conventional spray application. Paint pots shall be equipped with air operated continuous mixing devices unless prohibited by the coating manufacturer.

Test Sections. Prior to surface preparation, the Contractor shall prepare a test section(s) on each structure to be painted in a location(s) which the Engineer considers to be representative of the existing surface condition and steel type for the structure as a whole. More than one test section may be needed to represent the various design configurations of the structure. The purpose of the test section(s) is to demonstrate the use of the tools and degree of cleaning required (cleanliness and profile) for each method of surface preparation that will be used on the project. Each test section shall be approximately 10 sq. ft. (0.93 sq m). The test section(s) shall be prepared using the same equipment, materials and procedures as the production operations. The Contractor shall prepare the test section(s) to the specified level of cleaning according to the appropriate SSPC visual standards, modified as necessary to comply with the requirements of this specification. The written requirements of the specification prevail in the event of a conflict with the SSPC visual standards. Only after the test section(s) have been approved shall the Contractor proceed with surface preparation operations. Additional compensation will not be allowed the Contractor for preparation of the test section(s).

For the production cleaning operations, the specifications and written definitions, the test section(s), and the SSPC visual standards shall be used in that order for determining compliance with the contractual requirements.

Protective Coverings and Damage. All portions of the structure that could be damaged by the surface preparation and painting operations (e.g., utilities), including any sound paint that is allowed to remain according to the contract documents, shall be protected by covering or shielding. Tarpaulins drop cloths, or other approved materials shall be employed. The Contractor shall comply with the provisions of the Illinois Environmental Protection Act. Paint drips, spills, and overspray are not permitted to escape into the air or onto any other surfaces or surrounding property not intended to be painted. Containment shall be used to control paint drips, spills, and overspray, and shall be dropped and all equipment secured when sustained wind speeds of 40 mph (64 kph) or greater occur, unless the containment design necessitates action at lower wind speeds. The contractor shall evaluate project-specific conditions to determine the specific type and extent of containment needed to control the paint emissions and shall submit a plan for containing or controlling paint debris (droplets, spills, overspray, etc.) to the Engineer for acceptance prior to starting the work. Acceptance by the Engineer shall not relieve the Contractor of their ultimate responsibility for controlling paint debris from escaping the work zone.

When the protective coverings need to be attached to the structure, they shall be attached by bolting, clamping, or similar means. Welding or drilling into the structure is prohibited unless approved by the Engineer in writing. When removing coatings containing lead the containment and disposal of the residues shall be as specified in the Special Provision for Containment and Disposal of Lead Paint Cleaning Residues contained elsewhere in this Contract. When removing coatings not containing lead the containment and disposal of the residues shall be as specified in the Special Provision for Containment and Disposal of Non-Lead Paint Cleaning Residues contained elsewhere in this Contract.

The Contractor shall be responsible for any damage caused to persons, vehicles, or property, except as indemnified by the Response Action Contractor Indemnification Act. Whenever the intended purposes of the controls or protective devices used by the Contractor are not being accomplished, as determined by the Engineer, work shall be immediately suspended until corrections are made. Damage to vehicles or property shall be repaired by the Contractor at the Contractor's expense. Painted surfaces damaged by any Contractor's operation shall be repaired, removed and/or repainted, as directed by the Engineer, at the Contractor's expense.

Weather Conditions. Surfaces to be painted after cleaning shall remain free of moisture and other contaminants. The Contractor shall control his/her operations to insure that dust, dirt, or moisture do not come in contact with surfaces cleaned or painted that day.

- a) The surface temperature shall be at least 5°F (3°C) above the dew point during final surface preparation operations. The manufacturers' published literature shall be followed for specific temperature, dew point, and humidity restrictions during the application of each coat.
- b) If the Contractor proposes to control the weather conditions inside containment, proposed methods and equipment for heating and/or dehumidification shall be included in the work plans for the Engineer's consideration. Any heating/dehumidification proposals accepted by the Engineer shall be implemented at no additional cost to the department.
- c) Cleaning and painting shall be done between April 15 and October 31 unless authorized otherwise by the Engineer in writing.

The Contractor shall monitor temperature, dew point, and relative humidity every 4 hours during surface preparation and coating application in the specific areas where the work is being performed. The frequency of monitoring shall increase if weather conditions are changing. If the weather conditions after application and during drying are forecast to be outside the acceptable limits established by the coating manufacturer, coating application shall not proceed. If the weather conditions are forecast to be borderline relative to the limits established by the manufacturer, monitoring shall continue at a minimum of 4-hour intervals throughout the drying period. The Engineer has the right to reject any work that was performed, or drying that took place, under unfavorable weather conditions. Rejected work shall be removed, recleaned, and repainted at the Contractor's expense.

Compressed Air Cleanliness. Prior to using compressed air for abrasive blast cleaning, blowing down the surfaces, and painting with conventional spray, the Contractor shall verify that the compressed air is free of moisture and oil contamination according to the requirements of ASTM D 4285. The tests shall be conducted at least one time each shift for each compressor system in operation. If air contamination is evident, the Contractor shall change filters, clean traps, add moisture separators or filters, or make other adjustments as necessary to achieve clean, dry air. The Contractor shall also examine the work performed since the last acceptable test for evidence of defects or contamination caused by the compressed air. Effectuated work shall be repaired at the Contractor's expense.

Low Pressure Water Cleaning and Solvent Cleaning (HOLD POINT). The Contractor shall notify the Engineer 24 hours in advance of beginning surface preparation operations.

- a) Water Cleaning of Lead Containing Coatings Prior to Overcoating. Prior to initiating any mechanical cleaning such as hand/power tool cleaning on surfaces that are painted with lead, all surfaces to be prepared and painted, and the tops of pier and abutment caps shall be washed. Washing is not required if the surfaces will be prepared by water jetting.

Washing shall involve the use of potable water at a minimum of 1000 psi (7 MPa) and less than 5000 psi (34 MPa) according to "Low Pressure Water Cleaning" of SSPC-SP12. Paint spray equipment shall not be used to perform the water cleaning. The cleaning shall be performed in such a manner as to remove dust, dirt, chalk, insect and animal nests, bird droppings, loose paint and other foreign matter prior to solvent cleaning. The water, debris, and any loose paint removed by water cleaning shall be collected for proper disposal. The washing shall be completed no more than 2 weeks prior to surface preparation.

If detergents or other additives are added to the water, the detergents/additives shall be included in the submittals and not used until accepted by the Engineer. When detergents or additives are used, the surface shall be rinsed with potable water before the detergent water dries.

After washing has been accepted by the Engineer, all traces of asphaltic cement, oil, grease, diesel fuel deposits, and other soluble contaminants which remain on the steel surfaces to be painted shall be removed by solvent cleaning according to SSPC – SP1, supplemented with scraping (e.g., to remove large deposits of asphaltic cement) as required. The solvent(s) used for cleaning shall be compatible with the existing coating system. The Contractor shall identify the proposed solvent(s) in the submittals. If the existing coating is softened, wrinkled, or shows other signs of attack from the solvents, the Contractor shall immediately discontinue their use. The name and composition of replacement solvents, together with MSDS, shall be submitted for Engineer acceptance prior to use.

Under no circumstances shall subsequent hand/power tool cleaning be performed in areas containing surface contaminants or in areas where the Engineer has not accepted the washing and solvent cleaning. Surfaces prepared by hand/power tool cleaning without approval of the washing and solvent cleaning may be rejected by the Engineer. Rejected surfaces shall be recleaned with both solvent and the specified mechanical means at the Contractor's expense.

After all washing and mechanical cleaning are completed, representative areas of the existing coating shall be tested to verify that the surface is free of chalk and other loose surface debris or foreign matter. The testing shall be performed according to ASTM D4214. Cleaning shall continue until a chalk rating of 6 or better is achieved in every case.

- b) Water Cleaning of Non-Lead Coatings Prior to Overcoating. Thoroughly clean the surfaces according to the steps defined above for "Water Cleaning of Lead Containing Coatings Prior to Overcoating," except that the wash water does not need to be collected, and if the shop primer is inorganic zinc, the chalk rating does not apply. All other provisions are applicable.
- c) Water Cleaning/Debris Removal Prior to Total Coating Removal. When total coating removal is specified, water cleaning of the surface prior to coating removal is not required by this specification and is at the option of the Contractor. If the Contractor chooses to use water cleaning, and the existing coating contains lead, all water and debris shall be collected for proper disposal.

Whether or not the surfaces are pre-cleaned using water, the tops of the pier caps and abutments shall be cleaned free of dirt, paint chips, insect and animal nests, bird droppings and other foreign matter and the debris collected for proper disposal.

Prior to mechanical cleaning, oil, grease, and other soluble contaminants on bare steel or rusted surfaces shall be removed by solvent cleaning according to SSPC-SP1.

- d) Water Cleaning Between Coats. When foreign matter has accumulated on a newly applied coat, washing shall be performed prior to the application of subsequent coats. The water does not need to be collected unless it contacts existing lead containing coatings.

Laminar and Stratified Rust. All laminar and stratified rust that has formed on the existing steel surfaces shall be removed. Pack rust formed along the perimeter of mating surfaces of connected plates or shapes of structural steel shall be removed to the extent feasible without mechanically detaching the mating surface. Any pack rust remaining after cleaning the mating surfaces shall be tight and intact when examined using a dull putty knife. The tools used to remove these corrosion products shall be identified in the submittals and accepted by the Engineer. If the surface preparation or removal of rust results in nicks or gouges, the work shall be suspended, and the damaged areas repaired to the satisfaction of the Engineer, at the Contractor's expense. The Contractor shall also demonstrate that he/she has made the necessary adjustments to prevent a reoccurrence of the damage prior to resuming work.

Surface Preparation (HOLD POINT). One or more of the following methods of surface preparation shall be used as specified on the plans. When a method of surface preparation is specified, it applies to the entire surface, including areas that may be concealed by the containment connection points. In each case, as part of the surface preparation process, soluble salts shall be remediated as specified under "Soluble Salt Remediation". The Contractor shall also note that the surface of the steel beneath the existing coating system may contain corrosion and/or mill scale. Removal of said corrosion and/or mill scale, when specified, shall be considered included in this work and no extra compensation will be allowed.

When a particular cleaning method is specified for use in distinct zones on the bridge, the cleaning shall extend into the existing surrounding paint until a sound border is achieved. The edge of the existing paint is considered to be sound and intact if it can not be lifted by probing the edge with a dull putty knife. The sound paint shall be feathered for a minimum of 1 1/2 in. (40 mm) to achieve a smooth transition between the prepared steel and the existing coatings. Sanders with vacuum attachments, which have been approved by the Engineer, shall be used as necessary to accomplish the feathering.

- a) Limited Access Areas: A best effort with the specified methods of cleaning shall be performed in limited access areas such as the backsides of rivets inside built up box members. The equipment being used for the majority of the cleaning may need to be supplemented with other commercially available equipment, such as angle nozzles, to properly clean the limited access areas. The acceptability of the best effort cleaning in these areas is at the sole discretion of the Engineer.
- b) Near White Metal Blast Cleaning: This surface preparation shall be accomplished according to the requirements of Near White Metal Blast Cleaning SSPC-SP 10. Unless otherwise specified in the contract, the designated surfaces shall be prepared by dry abrasive blast cleaning, wet abrasive blast cleaning, or water jetting with abrasive injection. A Near White Metal Blast Cleaned surface, when viewed without magnification, shall be free of all visible oil, grease, dirt, dust, mill scale, rust, paint, oxides, corrosion products, and other foreign matter, except for staining.

Random staining shall be limited to no more than 5 percent of each 9 sq. in. (58 sq. cm) of surface area and may consist of light shadows, slight streaks, or minor discoloration caused by stains of rust, stains of mill scale, or stains of previously applied paint. With the exception of crevices as defined below, surface discoloration is considered to be a residue that must be removed, rather than a stain, if it possesses enough mass or thickness that it can be removed as a powder or in chips when scraped with a pocketknife.

A surface profile shall be created on the steel as defined later under "Surface Profile."

At the discretion of the Engineer, after a best effort cleaning, slight traces of existing coating may be permitted to remain within crevices such as those created between rivets, bolts, and plates, and the underlying steel. When traces of coating are permitted to remain, the coating shall be tightly bonded when examined by probing with a dull putty knife. The traces of coating shall be confined to the bottom portion of the crevices only, and shall not extend onto the surrounding steel or plate or onto the outer surface of the rivets or bolts. Pitted steel is excluded from exemption considerations and shall be cleaned according to SSPC-SP10.

If hackles or slivers are visible on the steel surface after cleaning, the Contractor shall remove them by grinding followed by reblast cleaning. At the discretion of the Engineer, the use of power tools to clean the localized areas after grinding, and to establish a surface profile acceptable to the coating manufacturer, can be used in lieu of blast cleaning.

If the surfaces are prepared using wet abrasive methods, attention shall be paid to tightly configured areas to assure that the preparation is thorough. After surface preparation is completed, the surfaces, surrounding steel, and containment materials/scaffolding shall be rinsed to remove abrasive dust and debris. Potable water shall be used for all operations. An inhibitor may be added to the supply water and/or rinse water to prevent flash rusting. If a rust inhibitor is proposed, the Contractor shall provide a sample of the proposed inhibitor together with a letter from the coating manufacturer indicating that the inhibitor is suitable for use with their products. The surfaces shall be allowed to completely dry before the application of any coating.

- c) Commercial Grade Power Tool Cleaning: This surface preparation shall be accomplished according to the requirements of Commercial Grade Power Tool Cleaning, SSPC-SP15. The designated surfaces shall be completely cleaned with power tools. A Commercial Grade Power Tool Cleaned surface, when viewed without magnification, is free of all visible oil, grease, dirt, rust, coating, oxides, mill scale, corrosion products, and other foreign matter, except for staining. In previously pitted areas, slight residues of rust and paint may also be left in the bottoms of pits.

Random staining shall be limited to no more than 33 percent of each 9 sq. in. (58 sq. cm) of surface area. Allowable staining may consist of light shadows, slight streaks, or minor discoloration caused by stains of rust, stains of mill scale, or stains of previously applied paint. Surface discoloration is considered to be a residue that must be removed, rather than a stain, if it possesses enough mass or thickness that it can be removed as a powder or in chips when scraped with a pocketknife.

A surface profile shall be created on the steel as defined later under "Surface Profile."

At the Contractor's option, Near White Metal Blast Cleaning may be substituted for Power Tool Cleaning – Commercial Grade, as long as containment systems appropriate for abrasive blast cleaning are utilized and there is no additional cost to the Department.

- d) Power Tool Cleaning – Modified SP3: This surface preparation shall be accomplished according to the requirements of SSPC-SP3, Power Tool Cleaning except as modified as follows. The designated surfaces shall be cleaned with power tools. A power tool cleaned surface shall be free of all loose rust, loose mill scale, loose and peeling paint, and loose rust that is bleeding through and/or penetrating the coating. All locations of visible corrosion and rust bleed, exposed or lifting mill scale, and lifting or loose paint shall be prepared using the power tools.

Upon completion of the cleaning, rust, rust bleed, mill scale and surrounding paint are permitted to remain if they can not be lifted using a dull putty knife.

Power Tool Cleaning of Shop Primed Steel. When steel coated with only a prime coat of inorganic or organic zinc is specified to be cleaned, this work shall be accomplished as follows. After cleaning the surface as specified under "Water Cleaning of Non-Lead Coatings Prior to Overcoating," damaged and rusted areas shall be spot cleaned according Power Tool Cleaning -Modified SSPC-SP3. The edges of the coating surrounding the spot repairs shall be feathered.

Abrasives. Unless otherwise specified in the contract, when abrasive blast cleaning is specified, it shall be performed using either expendable abrasives (other than silica sand) or recyclable steel grit abrasives. Expendable abrasives shall be used one time and disposed of. Abrasive suppliers shall certify that the expendable abrasives meet the requirements of SSPC-AB1 and that recyclable steel grit abrasives meet AB3. On a daily basis, the Contractor shall verify that recycled abrasives are free of oil contamination by conducting oil content tests according to SSPC-AB2.

All surfaces prepared with abrasives not meeting the SSPC-AB1, AB2, or AB3 requirements, as applicable, shall be solvent cleaned or low pressure water cleaned as directed by the Engineer, and reblast cleaned at the Contractor's expense.

Surface Profile (HOLD POINT). The abrasives used for blast cleaning shall have a gradation such that the abrasive will produce a uniform surface profile of 1.5 to 4.5 mils (38 to 114 microns). If the profile requirements of the coating manufacturer are more restrictive, advise the Engineer and comply with the more restrictive requirements. For recycled abrasives, an appropriate operating mix shall be maintained in order to control the profile within these limits.

The surface profile for the Power Tool Cleaning - Commercial Grade shall be within the range specified by the coating manufacturer, but not less than 2.0 mils (50 microns).

The surface profile produced by the Contractor's surface preparation procedures shall be determined by replica tape and spring micrometer at the beginning of the work, and each day that surface preparation is performed. Areas having unacceptable measurements shall be further tested to determine the limits of the deficient area. The replica tape shall be attached to the daily report.

When unacceptable profiles are produced, work shall be suspended. The Contractor shall submit a plan for the necessary adjustments to insure that the correct surface profile is achieved on all surfaces. The Contractor shall not resume work until the new profile is verified by the QA observations, and the Engineer confirms, in writing, that the profile is acceptable.

Soluble Salt Remediation (HOLD POINT). The Contractor shall implement surface preparation procedures and processes that will remove chloride from the surfaces. Surfaces that may be contaminated with chloride include, but are not limited to, expansion joints and all areas that are subject to roadway splash or run off such as fascia beams and stringers.

Methods of chloride removal may include, but are not limited to, steam cleaning or pressure washing with or without the addition of a chemical soluble salt remover as approved by the coating manufacturer, and scrubbing before or after initial paint removal. The Contractor may also elect to clean the steel and allow it to rust overnight followed by recleaning, or by utilizing blends of fine and coarse abrasives during blast cleaning, wet abrasive/water jetting methods of preparation, or combinations of the above. If steam or water cleaning methods of chloride removal are utilized over surfaces where the coating has been completely removed, and the water does not contact any lead containing coatings, the water does not have to be collected. The Contractor shall provide the proposed procedures for chloride remediation in the Surface Preparation/Painting Plan.

Upon completion of the chloride remediation steps, the Contractor shall use cell methods of field chloride extraction and test procedures (e.g., silver dichromate) accepted by the Engineer, to test representative surfaces that were previously rusted (e.g., pitted steel) for the presence of remaining chlorides. Remaining chloride levels shall be no greater than $7\mu\text{g}/\text{sq cm}$ as read directly from the surface without any multiplier applied to the results. The testing must be performed, and the results must be acceptable, prior to painting each day.

A minimum of 5 tests per 1000 sq. ft. (93 sq m) or fraction thereof completed in a given day, shall be conducted at project start up. If results greater than $7\mu\text{g}/\text{sq cm}$ are detected, the surfaces shall be recleaned and retested at the same frequency. If acceptable results are achieved on three consecutive days in which testing is conducted, the test frequency may be reduced to 1 test per 1000 sq. ft. (93 sq. m) prepared each day provided the chloride remediation process remains unchanged. If unacceptable results are encountered, or the methods of chloride remediation are changed, the Contractor shall resume testing at a frequency of 5 tests per 1000 sq. ft. (93 sq. m).

Following successful chloride testing the chloride test areas shall be cleaned. Commercial Grade Power Tool Cleaning can be used to clean the test locations when the specified degree of cleaning is SSPC-SP10.

Surface Condition Prior to Painting (HOLD POINT). Prepared surfaces, shall meet the requirements of the respective degrees of cleaning immediately prior to painting, and shall be painted before rusting appears on the surface. If rust appears or bare steel remains unpainted for more than 12 hours, the affected area shall be prepared again at the expense of the Contractor.

All loose paint and surface preparation cleaning residue on bridge steel surfaces, scaffolding and platforms, containment materials, and tops of abutments and pier caps shall be removed prior to painting. When lead paint is being disturbed, cleaning shall be accomplished by HEPA vacuuming unless it is conducted within a containment that is designed with a ventilation system capable of collecting the airborne dust and debris created by sweeping and blowing with compressed air.

The quality of surface preparation and cleaning of surface dust and debris must be accepted by the Engineer prior to painting. The Engineer has the right to reject any work that was performed without adequate provision for QA observations to accept the degree of cleaning. Rejected coating work shall be removed and replaced at the Contractor's expense.

General Paint Requirements. Paint storage, mixing, and application shall be accomplished according to these specifications and as specified in the paint manufacturer's written instructions and product data sheets for the paint system used. In the event of a conflict between these specifications and the coating manufacturers' instructions and data sheets, the Contractor shall advise the Engineer and comply with the Engineer's written resolution. Until a resolution is provided, the most restrictive conditions shall apply.

Unless noted otherwise, If a new concrete deck or repair to an existing deck is required, painting shall be done after the deck is placed and the forms have been removed.

- a) **Paint Storage and Mixing.** All Paint shall be stored according to the manufacturer's published instructions, including handling, temperatures, and warming as required prior to mixing. All coatings shall be supplied in sealed containers bearing the manufacturers name, product designation, batch number and mixing/thinning instructions. Leaking containers shall not be used.

Mixing shall be according to the manufacturer's instructions. Thinning shall be performed using thinner provided by the manufacturer, and only to the extent allowed by the manufacturer's written instructions. In no case shall thinning be permitted that would cause the coating to exceed the local Volatile Organic Compound (VOC) emission restrictions. For multiple component paints, only complete kits shall be mixed and used. Partial mixing is not allowed.

The ingredients in the containers of paint shall be thoroughly mixed by mechanical power mixers according to the manufacturer's instructions, in the original containers before use or mixing with other containers of paint. The paint shall be mixed in a manner that will break up all lumps, completely disperse pigment and result in a uniform composition. Paint shall be carefully examined after mixing for uniformity and to verify that no unmixed pigment remains on the bottom of the container. Excessive skinning or partial hardening due to improper or prolonged storage will be cause for rejection of the paint, even though it may have been previously inspected and accepted.

Multiple component coatings shall be discarded after the expiration of the pot life. Single component paint shall not remain in spray pots, painters buckets, etc. overnight. It shall be stored in a covered container and remixed before use.

The Engineer reserves the right to sample field paint (individual components and/or the mixed material) and have it analyzed. If the paint does not meet the product requirements due to excessive thinning or because of other field problems, the coating shall be removed from that section of the structure and replaced as directed by the Engineer.

- b) **Application Methods.** Unless prohibited by the coating manufacturer's written instructions, paint may be applied by spray methods, rollers, or brushes. If applied with conventional or airless spray methods, paint shall be applied in a uniform layer with overlapping at the edges of the spray pattern.

The painters shall monitor the wet film thickness of each coat during application. The wet film thickness shall be calculated based on the solids by volume of the material and the amount of thinner added. When the new coating is applied over an existing system, routine QC inspections of the wet film thickness shall be performed in addition to the painter's checks in order to establish that a proper film build is being applied.

When brushes or rollers are used to apply the coating, additional applications may be required to achieve the specified thickness per layer.

- c) Painting Shop Primed Steel. After cleaning, rusted and damaged areas shall be touched up using the same primer specified for painting the existing structure. The intermediate and finish coats specified for painting the existing structure shall be applied to the steel. When inorganic zinc has been used as the shop primer, a mist coat of the intermediate coat shall be applied first in order to prevent pinholing and bubbling.
- d) Recoating and Film Continuity (HOLD POINT for each coat). Paint shall be considered dry for recoating according to the time/temperature/humidity criteria provided in the manufacturer's instructions and when an additional coat can be applied without the development of film irregularities; such as lifting, wrinkling, or loss of adhesion of the under coat. If surfaces are contaminated, washing shall be accomplished prior to intermediate and final coats. Wash water does not have to be collected unless the water contacts existing lead containing coatings.

Painting shall be done in a neat and workmanlike manner. Each coat of paint shall be applied as a continuous film of uniform thickness free of defects including, but not limited to, runs, sags, overspray, dryspray, pinholes, voids, skips, misses, and shadow-through. Defects such as runs and sags shall be brushed out immediately during application.

Paint Systems. The paint system(s) from the list below shall be applied as specified.

The paint manufacturer's relative humidity, dew point, and material, surface, and ambient temperature restrictions shall be provided with the submittals and shall be strictly followed. Written recommendations from the paint manufacturer for the length of time each coat must be protected from cold or inclement weather (e.g., exposure to rain), during the drying period shall be included in the submittals. Upon acceptance by the Engineer, these times shall be used to govern the duration that protection must be maintained during drying.

Where stripe coats are indicated, the Contractor shall apply an additional coat to edges, rivets, bolts, crevices, welds, and similar surface irregularities. The stripe coat shall be applied by brush and/or spray to thoroughly work the coating into or on the irregular surfaces, and shall extend onto the surrounding steel a minimum of 1 in. (25 mm) in all directions. The purpose of the stripe coat is to build additional thickness and to assure complete coverage of these areas.

The stripe coat may be applied as part of the application of the full coat unless prohibited by the coating manufacturer. If applied as part of the application process of the full coat, the stripe coat shall be allowed to dry for a minimum of 10 minutes in order to allow Contractor QC personnel to verify that the coat was applied. If a wet-on-wet stripe coat is prohibited by the coating manufacturer or brush or roller application of the full coat pulls the underlying stripe coat, the stripe coat shall dry according to the manufacturers' recommended drying times prior to the application of the full coat. In the case of the prime coat, the full coat can also be applied first to protect the steel, followed by the stripe coat after the full coat has dried.

a) System 1 – OZ/E/U – for Bare Steel: System 1 shall consist of the application of a full coat of organic (epoxy) zinc-rich primer, a full intermediate coat of epoxy, and a full finish coat of aliphatic urethane. Stripe coats of the prime and finish coats shall be applied. The film thicknesses of the full coats shall be as follows, measured according to SSPC-PA2:

- One full coat of organic zinc-rich primer between 3.5 and 5.0 mils (90 and 125 microns) dry film thickness. The prime coat shall be tinted to a color that contrasts with the steel surface.
- One full intermediate coat of epoxy between 3.0 and 6.0 mils (75 and 150 microns) dry film thickness. The intermediate coat shall be a contrasting color to both the first coat and finish coat.
- One full finish coat of aliphatic urethane between 2.5 and 4.0 mils (65 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of areas receiving the stripe coats, shall be between 9.0 and 15.0 mils (225 and 375 microns).

- b) System 2 – PS/EM/U – for Overcoating an Existing System: System 2 shall consist of the application of a full coat of epoxy penetrating sealer, a spot intermediate coat of aluminum epoxy mastic and a stripe and full finish coat of aliphatic urethane.

A full coat of epoxy penetrating sealer shall be applied to all surfaces following surface preparation. A spot intermediate coat shall consist of the application of one coat of the aluminum epoxy mastic on all areas where rust is evident and areas where the old paint has been removed, feathered and/or damaged prior to, during or after the cleaning and surface preparation operations. After the spot intermediate, a stripe coat and full finish coat of aliphatic urethane shall be applied. The film thicknesses shall be as follows, measured according to SSPC-PA2:

- One full coat of epoxy penetrating sealer between 1.0 and 2.0 mils (25 and 50 microns) dry film thickness.
- One spot coat of aluminum epoxy mastic between 5.0 and 7.0 mils (125 and 175 microns) dry film thickness. The color shall contrast with the finish coat.
- One full finish coat of aliphatic urethane between 2.5 and 4.0 mils (65 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of the stripe coat, shall be between 8.5 and 13.0 mils (215 and 325 microns). The existing coating thickness to remain under the overcoat must be verified in order to obtain accurate total dry film thickness measurements.

- c) System 3 – EM/EM/AC – for Bare Steel: System 3 shall consist of the application of two full coats of aluminum epoxy mastic and a full finish coat of waterborne acrylic. Stripe coats for first coat of epoxy mastic and the finish coat shall be applied. The film thicknesses of the full coats shall be as follows, measured according to SSPC-PA2:

- One full coat of aluminum epoxy mastic between 5.0 and 7.0 mils (125 and 175 microns) dry film thickness. The first coat of aluminum epoxy mastic shall be tinted a contrasting color with the blast cleaned surface and the second coat.
- One full intermediate coat of aluminum epoxy mastic between 5.0 and 7.0 mils (125 and 175 microns) dry film thickness. The intermediate coat shall be a contrasting color to the first coat and the finish coat.
- A full finish coat of waterborne acrylic between 2.0 and 4.0 mils (50 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of areas receiving the stripe coats, shall be between 12.0 and 18.0 mils (360 and 450 microns).

- d) System 4 – PS/EM/AC – for Overcoating an Existing System: System 4 shall consist of the application of a full coat of epoxy penetrating sealer, a spot intermediate coat of aluminum epoxy mastic and a stripe and full finish coat of waterborne acrylic.

A full coat of epoxy penetrating sealer shall be applied to all surfaces following surface preparation. A spot intermediate coat shall consist of the application of one coat of the aluminum epoxy mastic on all areas where rust is evident and areas where the old paint has been removed, feathered and/or damaged prior to, during or after the cleaning and surface preparation operations. After the spot intermediate, a stripe coat and full finish coat of waterborne acrylic shall be applied. The film thicknesses shall be as follows, measured according to SSPC-PA2:

- One full coat of epoxy penetrating sealer between 1.0 and 2.0 mils (25 and 50 microns) dry film thickness.
- One spot coat of aluminum epoxy mastic between 5.0 and 7.0 mils (125 and 175 microns) dry film thickness. The color shall contrast with the finish coat.
- One full finish coat of waterborne acrylic between 2.0 and 4.0 mils (50 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of the stripe coat, shall be between 8.0 and 13.0 mils (200 and 325 microns). The existing coating thickness to remain under the overcoat must be verified in order to obtain accurate total dry film thickness measurements.

- e) System 5 – MCU – for Bare Steel: System 5 shall consist of the application of a full coat of moisture cure urethane (MCU) zinc primer, a full coat of MCU intermediate, and a full coat of MCU finish. Stripe coats of the prime and finish coats shall be applied. The contractor shall comply with the manufacturer's requirements for drying times between the application of the stripe coats and the full coats. The film thicknesses of the full coats shall be as follows, measured according to SSPC-PA2:

- One full coat of MCU zinc primer between 3.0 and 5.0 mils (75 and 125 microns) dry film thickness. The prime coat shall be tinted to a color that contrasts with the steel surface.
- One full MCU intermediate coat between 3.0 and 4.0 mils (75 and 100 microns) dry film thickness. The intermediate coat shall be a contrasting color to both the first coat and finish coat.
- One full MCU finish coat between 2.0 and 4.0 mils (50 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of areas receiving the stripe coats, shall be between 8.0 and 13.0 mils (200 and 325 microns).

- f) System 6 – MCU – for Overcoating an Existing System: System 6 shall consist of the application of a full coat of moisture cure urethane (MCU) penetrating sealer, a spot coat of MCU intermediate, and a stripe and full coat of MCU finish.

A full coat of MCU penetrating sealer shall be applied to all surfaces following surface preparation. A spot intermediate coat shall consist of the application of one coat of MCU intermediate on all areas where rust is evident and areas where the old paint has been removed, feathered and/or damaged prior to, during or after the cleaning and surface preparation operations. After the spot intermediate, a stripe coat and full coat of MCU finish shall be applied. The contractor shall comply with the manufacturer's requirements for drying time between the application of the stripe coat and the full finish coat. The film thicknesses shall be as follows, measured according to SSPC-PA2:

- One full coat of MCU sealer between 1.0 and 2.0 mils (25 and 50 microns) dry film thickness.
- One full MCU intermediate coat between 3.0 and 4.0 mils (75 and 100 microns) dry film thickness. The color shall contrast with the finish coat.
- One full MCU finish coat 2.0 and 4.0 mils (50 and 100 microns) dry film thickness. Finish coat color shall be according to contract plans.

The total dry film thickness for this system, exclusive of areas receiving the stripe coats, shall be between 6.0 and 10.0 mils (150 and 250 microns). The existing coating thickness to remain under the overcoat must be verified in order to obtain accurate total dry film thickness measurements.

Repair of Damage to New Coating System and Areas Concealed by Containment. The Contractor shall repair all damage to the newly installed coating system and areas concealed by the containment/protective covering attachment points, at no cost to the Department. If the damage extends to the substrate and the original preparation involved abrasive blast cleaning, the damaged areas shall be prepared to Power Tool Cleaning - Commercial Grade. If the original preparation was other than blast cleaning or the damage does not extend to the substrate, the loose, fractured paint shall be cleaned to Power Tool Cleaning – Modified SP3.

The surrounding coating at each repair location shall be feathered for a minimum distance of 1 1/2 in. (40 mm) to achieve a smooth transition between the prepared areas and the existing coating.

If the bare steel is exposed, all coats shall be applied to the prepared area. If only the intermediate and finish coats are damaged, the intermediate and finish shall be applied. If only the finish coat is damaged, the finish shall be applied.

Special Instructions.

- a) At the completion of the work, the Contractor shall stencil the painting date and the paint code on the bridge. The letters shall be capitals, not less than 2 in. (50 mm) and not more than 3 in. (75 mm) in height.

The stencil shall contain the following wording "PAINTED BY (insert the name of the Contractor)" and shall show the month and year in which the painting was completed, followed by the appropriate code for the coating material applied, all stenciled on successive lines:

CODE U (for field applied System 3 or System 4).

CODE Z (for field applied System 1 or System 2).

CODE AA (for field applied System 5 or System 6).

This information shall be stenciled on the cover plate of a truss end post near the top of the railing, or on the outside face of an outside stringer near one end of the bridge, or at some equally visible surface near the end of the bridge, as designated by the Engineer.

- b) All surfaces painted inadvertently shall be cleaned immediately.

It is understood and agreed that the cost of all work outlined above, unless otherwise specified, has been included in the bid, and no extra compensation will be allowed.

Basis of Payment. This work shall be paid for at the contract Lump Sum price for CLEANING AND PAINTING STEEL BRIDGE, at the designated location, or for CLEANING AND PAINTING the structure or portions thereof described. Payment will not be authorized until all requirements for surface preparation and painting have been fulfilled as described in this specification, including the preparation and submittal of all QC documentation. Payment will also not be authorized for non-conforming work until the discrepancy is resolved in writing.

Appendix 1 – Reference List

The Contractor shall maintain the following regulations and references on site for the duration of the project:

- Illinois Environmental Protection Act
- ASTM D 4214, Standard Test Method for Evaluating Degree of Chalking of Exterior Paint Films
- ASTM D 4285, Standard Test Method for Indicating Oil or Water in Compressed Air
- SSPC-AB 1, Mineral and Slag Abrasives
- SSPC-AB 2, Specification for Cleanliness of Recycled Ferrous Metallic Abrasives
- SSPC-AB 3, Newly Manufactured or Re-Manufactured Steel Abrasives
- SSPC-PA 2, Measurement of Dry Coating Thickness with Magnetic Gages
- SSPC-QP 1, Standard Procedure for Evaluating Painting Contractors (Field Application to Complex Structures)
- SSPC-QP 2, Standard Procedure for Evaluating the Qualifications of Painting Contractors to Remove Hazardous Paint
- SSPC-SP 1, Solvent Cleaning
- SSPC-SP 3, Power Tool Cleaning
- SSPC-SP 10/NACE No. 2, Near White Metal Blast Cleaning
- SSPC-SP 12/NACE No. 5, Surface Preparation and Cleaning of Metals by Waterjetting Prior to Recoating
- SSPC-SP15, Commercial Grade Power Tool Cleaning
- SSPC-VIS 1, Guide and Reference Photographs for Steel Surfaces Prepared by Dry Abrasive Blast Cleaning
- SSPC-VIS 3, Visual Standard for Power- and Hand-Tool Cleaned Steel
- SSPC-VIS 4, Guide and Reference Photographs for Steel Cleaned by Water Jetting
- SSPC-VIS 5, Guide and Reference Photographs for Steel Prepared by Wet Abrasive Blast Cleaning
- The paint manufacturer's application instructions, MSDS and product data sheets

CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUES

Effective: October 2, 2001

Revised: April 30, 2010

Description. This work shall consist of the containment, collection, temporary storage, transportation and disposal of waste from lead paint removal projects. Waste requiring containment and control includes, but is not limited to, old paint, spent abrasives, corrosion products, mill scale, dirt, dust, grease, oil, salts, and water used for cleaning the surface of existing lead coatings prior to overcoating.

General. The existing coatings contain lead and may also contain other toxic metals. This specification provides the requirements for containment and for the protection of the public, and the environment from exposure to harmful levels of toxic metals that may be present in the paint being removed or repaired. The Contractor shall take reasonable and appropriate precautions to protect the public from the inhalation or ingestion of dust or debris from the operations, and is responsible for the clean-up of all spills of waste at no additional cost to the Department.

The Contractor shall comply with the requirements of this Specification and all applicable Federal, State, and Local laws, codes, and regulations, including, but not limited to the regulations of the United States Environmental Protection Agency (USEPA), Occupational Safety and Health Administration (OSHA), and Illinois Environmental Protection Agency (IEPA). The Contractor shall comply with all applicable regulations even if the regulation is not specifically referenced herein. If a Federal, State, or Local regulation is more restrictive than the requirements of this Specification, the more restrictive requirements shall prevail.

Submittals. The Contractor shall submit for Engineer review and acceptance, the following drawings and plans for accomplishing the work. The submittals shall be provided within 30 days of execution of the contract unless given written permission by the Engineer to submit them at a later date. Work cannot proceed until the submittals are accepted by the Engineer. Details for each of the plans are presented within the body of this specification. The Contractor shall also maintain on site, copies of the standards and regulations referenced herein (list provided in appendix 1).

- a) Containment Plans. The containment plans shall include drawings, equipment specifications, and calculations (wind load, air flow and ventilation when negative pressure is specified). The plans shall include copies of the manufacturer's specifications for the containment materials and equipment that will be used to accomplish containment and ventilation.

When required by the contract plans, the submittal shall provide calculations that assure the structural integrity of the bridge when it supports the containment and the calculations and drawings shall be signed and sealed by a Structural Engineer licensed in the state of Illinois.

When working over the railroad or navigable waterways, the Department will notify the respective agencies that work is being planned. Unless otherwise directed by the Engineer, the Contractor is responsible for follow up contact, and shall provide evidence that the railroad, Coast Guard, Corps of Engineers, and other applicable agencies are satisfied with the clearance provided and other safety measures that are proposed.

- b) Environmental Monitoring Plan. The Environmental Monitoring Plan shall address the visual inspections and clean up of the soil and water that the Contractor will perform, including final project inspection and cleanup. The plan shall address the daily visible emissions observations that will be performed and the corrective action that will be implemented in the event emissions or releases occur. When high volume ambient air monitoring is required, an Ambient Air Monitoring Plan shall be developed. The plan shall include:
- Proposed monitor locations and power sources in writing. A site sketch shall be included, indicating sensitive receptors, monitor locations, and distances and directions from work area.
 - Equipment specification sheet for monitors to be used, and a written commitment to calibrate and maintain the monitors.
 - Include a procedure for operation of monitors per 40 CFR 50, Appendix B, including use of field data chain-of-custody form. Include a sample chain of custody form.
 - Describe qualifications/training of monitor operator.
 - The name, contact information (person's name and number), and certification of the laboratory performing the filter analysis. Laboratory shall be accredited by one of the following: 1) the American Industrial Hygiene Association (AIHA) for lead (metals) analysis, 2) Environmental Lead Laboratory Accreditation Program (ELLAP) for metals analysis, 3) State or federal accreditation program for ambient air analysis or, 4) the EPA National Lead Laboratory Accreditation Program (NLLAP) for lead analysis. The laboratory shall provide evidence of certification, a sample laboratory chain-of-custody form, and sample laboratory report that provides the information required by this specification. The laboratory shall also provide a letter committing to do the analysis per 40 CFR 50, Appendix G. If the analysis will not be performed per 40 CFR Appendix G, a proposed alternate method shall be described, together with the rationale for using it. The alternate method can not be used unless specifically accepted by the Engineer in writing.
- c) Waste Management Plan. The Waste Management Plan shall address all aspects of waste handling, storage, testing, hauling and disposal. Include the names, addresses, and a contact person for the proposed licensed waste haulers and disposal facilities. Submit the name and qualifications of the laboratory proposed for Toxicity Characteristic Leaching Procedure (TCLP) analysis. If the use of abrasive additives is proposed, provide the name of the additive, the premixed ratio of additive to abrasive being provided by the supplier, and a letter from the supplier of the additive indicating IEPA acceptance of the material. Note that the use of any steel or iron based material, such as but not limited to grit, shot, fines, or filings as an abrasive additive is prohibited.
- d) Contingency Plan. The Contractor shall prepare a contingency plan for emergencies including fire, accident, failure of power, failure of dust collection system, failure of supplied air system or any other event that may require modification of standard operating procedures during lead removal. The plan shall include specific procedures to ensure safe egress and proper medical attention in the event of an emergency.

When the Engineer accepts the submittals, the Contractor will receive written notification. The Contractor shall not begin any work until the Engineer has accepted the submittals. The Contractor shall not construe Engineer acceptance of the submittals to imply approval of any particular method or sequence for conducting the work, or for addressing health and safety concerns. Acceptance of the plans does not relieve the Contractor from the responsibility to conduct the work according to the requirements of Federal, State, or Local regulations, this specification, or to adequately protect the health and safety of all workers involved in the project and any members of the public who may be affected by the project. The Contractor remains solely responsible for the adequacy and completeness of the programs and work practices, and adherence to them.

Quality Control (QC) Inspections. The Contractor shall perform first line, in process QC inspections of all environmental control and waste handling aspects of the project to verify compliance with these specification requirements and the accepted drawings and plans. The Contractor shall use the IDOT Environmental Daily Report form supplied by the Engineer to record the results of the inspections. The completed reports shall be turned into the Engineer before work resumes the following day. Contractor QC inspections shall include, but not be limited to the following:

- Proper installation and continued performance of the containment system(s) in accordance with the approved drawings.
- Visual inspections of emissions into the air and verification that the cause(s) for any unacceptable emissions is corrected.
- Set up, calibration, operation, and maintenance of the regulated area and high volume ambient air monitoring equipment, including proper shipment of cassettes/filters to the laboratory for analysis. Included is verification that the Engineer receives the results within the time frames specified and that appropriate steps are taken to correct work practices or containment in the event of unacceptable results.
- Visual inspections of spills or deposits of contaminated materials into the water or onto the ground, pavement, soil, or slope protection. Included is verification that proper cleanup is undertaken and that the cause(s) of unacceptable releases is corrected.
- Proper implementation of the waste management plan including laboratory analysis and providing the results to the Engineer within the time frames specified herein.
- Proper implementation of the contingency plans for emergencies.

The personnel providing the QC inspections shall pose current SSPC-C3 certification or equal, including the annual training necessary to maintain that certification (SSPC-C5 or equal), and shall provide evidence of successful completion of 2 projects of similar or greater complexity and scope that have been completed in the last 2 years. References shall include the name, address, and telephone number of a contact person employed by the bridge owner. Proof of initial certification and the current annual training shall also be provided.

Quality Assurance (QA) Observations. The Engineer will conduct QA observations of any or all of the QC monitoring inspections that are undertaken. The presence or activity of Engineer observations in no way relieves the Contractor of the responsibility to provide all necessary daily QC inspections of its own and to comply with all requirements of this Specification.

Containment Requirements. The Contractor shall install and maintain containment systems surrounding the work for the purpose of controlling emissions of dust and debris according to the requirements of this specification. Working platforms and containment materials that are used shall be firm and stable and platforms shall be designed to support the workers, inspectors, spent surface preparation media (e.g., abrasives), and equipment during all phases of surface preparation and painting. Platforms, cables, and other supporting structures shall be designed according to OSHA regulations. If the containment needs to be attached to the structure, the containment shall be attached by bolting, clamping, or similar means. Welding or drilling into the structure is prohibited unless approved by the Engineer in writing.

The containment shall be dropped in the event of sustained winds of 40 mph (64 kph) or greater and all materials and equipment secured.

The Contractor shall provide drawings showing the containment system and indicating the method(s) of supporting the working platforms and containment materials to each other and to the bridge. When the use of negative pressure and airflow inside containment is specified, the Contractor shall provide all ventilation calculations and details on the equipment that will be used for achieving the specified airflow and dust collection.

When directed in the contract plans, the Contractor shall submit calculations and drawings, signed and sealed by a Structural Engineer licensed in the state of Illinois, that assure the structural integrity of the bridge under the live and dead loads imposed, including the design wind loading.

When working over railroads, the Contractor shall provide evidence that the proposed clearance and the safety provisions that will be in place (e.g., flagman) are acceptable to the railroad. In the case of work over navigable waters, the Contractor shall provide evidence that the proposed clearance and provisions for installing or moving the containment out of navigation lanes is acceptable to authorities such as the Coast Guard and Army Corps of Engineers. The Contractor shall include plans for assuring that navigation lighting is not obscured, or if it is obscured, that temporary lighting is acceptable to the appropriate authorities (e.g., Coast Guard) and will be utilized.

Engineer review and acceptance of the drawings and calculations shall not relieve the Contractor from the responsibility for the safety of the working platforms and containment, and for providing ample ventilation to control worker and environmental exposures. After the work platforms and containment materials are erected additional measures may be needed to ensure worker safety according to OSHA regulations. The Contractor shall institute such measures at no additional cost to the Department.

Containment for the cleaning operation of this contract is defined as follows:

- The containment system shall maintain the work area free of visible emissions of dust and debris according to all provisions of this Specification, with no debris permitted outside of the regulated area at any time. All debris within the regulated area and within the containment shall be collected at the end of the last shift each day, and properly stored in sealed containers. Cleaning shall be accomplished by HEPA vacuuming unless it is conducted within a containment that is designed with a ventilation system capable of collecting the airborne dust and debris created by sweeping and blowing with compressed air. The ventilation system shall be in operation during the cleaning.
- The containment systems shall comply with the specified SSPC Guide 6 classifications as presented in Table 1 for the method of paint removal utilized.
- TSP-lead in the air at monitoring locations selected by the Contractor shall comply with the requirements specified herein.

The Contractor shall take appropriate action to avoid personnel injury or damage to the structure from the installation and use of the containment system. If the Engineer determines that there is the potential for structural damage caused by the installed containment system, the Contractor shall take appropriate action to correct the situation.

In addition to complying with the specific containment requirements in Table 1 for each method of removal, the Contractor shall provide and maintain coverage over the ground in the areas to be cleaned. This coverage shall be capable of catching and containing surface preparation media, paint chips, and paint dust in the event of an accidental escape from the primary containment. The containment materials shall be cleaned of loose material prior to relocation or dismantling. Acceptable methods of cleaning include blowing down the surfaces with compressed air while the ventilation system is in operation, HEPA vacuuming, and/or wet wiping. If paint chips or dust is observed escaping from the containment materials during moving, all associated operations shall be halted and the materials and components recleaned.

The containment systems shall also meet the following requirements:

a) Dry Abrasive Blast Cleaning - Full Containment with Negative Pressure (SSPC Class 1A)

The enclosure shall be designed, installed, and maintained to sustain maximum anticipated wind forces, including negative pressure. Flapping edges of containment materials are prohibited and the integrity of all containment materials, seams, and seals shall be maintained for the duration of the project. Airflow inside containment shall be designed to provide visibility and reduce worker exposures to toxic metals according to OSHA regulations and as specified in Table 1 and its accompanying text. When the location of the work on the bridge, or over lane closures permit, the blast enclosure shall extend a minimum of 3 ft. (1 m) beyond the limits of surface preparation to allow the workers to blast away from, rather than into the seam between the containment and the structure. The blast enclosure shall have an airlock or resealable door entryway to allow entrance and exit from the enclosure without allowing the escape of blasting residue.

If recyclable metallic abrasives are used, the Contractor shall operate the equipment in a manner that minimizes waste generation. Steps shall also be taken to minimize dust generation during the transfer of all abrasive/paint debris (expendable or recyclable abrasives) for recycling or disposal. Acceptable methods include, but are not limited to vacuuming, screw or belt conveyance systems, or manual conveyance. However manual conveyance is only permitted if the work is performed inside a containment that is equipped with an operating ventilation system capable of controlling the dust that is generated.

Appropriate filtration shall be used on the exhaust air of dust collection and abrasive recycling equipment as required to comply with IEPA regulations. The equipment shall be enclosed if visible dust and debris are being emitted and/or the regulated area or high volume monitor lead levels are not in compliance.

Areas beneath containment connection points that were shielded from abrasive blast cleaning shall be prepared by vacuum blast cleaning or vacuum-shrouded power tool cleaning after the containment is removed.

b) Vacuum Blast Cleaning within Containment (SSPC-Class 4A)

Vacuum blasting equipment shall be fully automatic and capable of cleaning and recycling the abrasive. The system shall be designed to deliver cleaned, recycled blasting abrasives and provide a closed system containment during blasting. The removed coating, mill scale, and corrosion shall be separated from the abrasive, and stored for disposal.

The Contractor shall attach containment materials around and under the work area to catch and contain abrasive and waste materials in the event of an accidental escape from the vacuum shroud. This containment is in addition to the ground covers specified earlier.

It is possible that the close proximity of some structural steel members, such as the end diaphragms or end cross-frames underneath transverse deck expansion joints, preclude the use of the vacuum blasting equipment for the removal of the old paint. For surfaces that are inaccessible for the nozzles of the vacuum blasting equipment, the Contractor shall remove the paint by means of full containment inside a complete enclosure as directed by the Engineer.

c) Vacuum-Shrouded Power Tool Cleaning within Containment (SSPC-Class 3P)

The Contractor shall utilize power tools equipped with vacuums and High Efficiency Particulate Air (HEPA) filters. The Contractor shall attach containment walls around the work area, and install containment materials beneath the work area to catch and contain waste materials in the event of an accidental escape from the vacuum shroud. This containment is in addition to the ground covers specified earlier and shall be installed within 10 ft. (3m) of the areas being cleaned.

d) Power Tool Cleaning without Vacuum, within Containment (SSPC-Class 2P)

When the use of power tools without vacuum attachments is authorized by the Engineer, the Contractor shall securely install containment walls and flooring around the work area to capture and collect all debris that is generated. The containment material requirements for this Class 2P are similar to Class 3P used for vacuum-shrouded tools, but the supporting structure will be more substantial in Class 2P to better secure the containment materials from excessive movement that could lead to the loss of waste paint chips and debris. Containment beneath the work shall be within 10 ft. (3m) of the areas being cleaned, and is in addition to the ground covers specified earlier.

e) Water Washing, Water Jetting or Wet Abrasive Blast Cleaning within Containment (SSPC Class 2W-3W)

Water washing of the bridge for the purpose of removing chalk, dirt, grease, oil, bird nests, and other surface debris, and water jetting or wet abrasive blast cleaning for the purpose of removing paint and surface debris shall be conducted within a containment designed, installed, and maintained in order to capture and contain all water and waste materials. The containment shall consist of impermeable floors and lower walls to prevent the water and debris from escaping. Permeable upper walls and ceilings are acceptable provided the paint chips, debris, and water, other than mists, are collected. A fine mist passing through the permeable upper walls is acceptable, provided the environmental controls specified below are met. If paint chips, debris, or water, other than mists, escape the containment system, impermeable walls and ceilings shall be installed.

When water is used for surface cleaning, the collected water shall be filtered to separate the particulate from the water. Recycling of the water is preferred in order to reduce the volume of waste that is generated. The water after filtration shall be collected and disposed of according to the waste handling portions of this specification.

When a slurry is created by injecting water into the abrasive blast stream, the slurry need not be filtered to separate water from the particulate.

Environmental Controls and Monitoring. The Contractor shall prepare and submit to the Engineer for review and acceptance, an Environmental Monitoring Plan. The purpose of the plan is to address the observations and equipment monitoring undertaken by the Contractor to confirm that project dust and debris are not escaping the containment into the surrounding air, soil, and water.

a) Soil and Water. Containment systems shall be maintained to prevent the escape of paint chips, abrasives, and other debris into the water, and onto the ground, soil, slope protection, and pavements. Releases or spills of, paint chips, abrasives, dust and debris that have become deposited on surrounding property, structures, equipment or vehicles, and bodies of water are unacceptable. If there are inadvertent spills or releases, the Contractor shall immediately shut down the emissions-producing operations, clean up the debris, and change work practices, modify the containment, or take other appropriate corrective action as needed to prevent similar releases from occurring in the future.

Water booms, boats with skimmers, or other means as necessary shall be used to capture and remove paint chips or project debris that falls or escapes into the water.

At the end of each workday at a minimum, the work area inside and outside of containment, including ground tarpaulins, shall be inspected to verify that paint debris is not present. If debris is observed, it shall be removed by hand and HEPA-vacuuuming. If wet methods of preparation are used, the damp debris can remain overnight provided it is protected from accidental release by securely covering the waste, folding the waste into the ground tarps, or by other acceptable methods. Prior to commencing work the next day, the debris from the folded ground tarps shall be removed.

Upon project completion, the ground and water in and around the project site are considered to have been properly cleaned if paint chips, paint removal media (e.g., spent abrasives), fuel, materials of construction, litter, or other project debris have been removed.

NOTE: All project debris must be removed even if the debris (e.g., spent abrasive and paint chips) was a pre-existing condition.

- b) Visible Emissions. The Contractor shall conduct observations of visible emissions and releases on an ongoing daily basis when dust-producing activities are underway, such as paint removal, clean up, waste handling, and containment dismantling or relocation. Note that visible emissions observations do not apply to the fine mist that may escape through permeable containment materials when wet methods of preparation are used.

Visible emissions in excess of SSPC Guide 6, Level 1 (1% of the workday) are unacceptable. In an 8-hour workday, this equates to emissions of a cumulative duration no greater than 4.8 minutes (288 seconds). This criterion applies to scattered, random emissions of short duration. Sustained emissions from a given location (e.g., 1 minute or longer), regardless of the total length of emissions for the workday, are unacceptable and action shall be initiated to halt the emission.

If unacceptable visible emissions or releases are observed, the Contractor shall immediately shut down the emission-producing operations, clean up the debris, and change work practices, modify the containment, or take other appropriate corrective action as needed to prevent similar releases from occurring in the future.

- c) Ambient Air Monitoring. The Contractor shall perform ambient air monitoring according to the following:
- Monitor Siting. The Contractor shall collect and analyze air samples to evaluate levels of TSP-lead if there are sensitive receptors within 5 times the height of the structure or within 1000 ft. (305 m) of the structure, whichever is greater. If sensitive receptors are not located within these limits, monitoring is not required. Sensitive receptors are areas of public presence or access including, but not limited to, homes, schools, parks, playgrounds, shopping areas, livestock areas, and businesses. The motoring public is not considered to be a sensitive receptor for the purpose of ambient air monitoring.

The Contractor shall locate the monitors according to SSPC-TU-7, in areas of public exposure and in areas that will capture the maximum pollutant emissions resulting from the work. The Contractor shall identify the recommended monitoring sites in the Ambient Air Monitoring Plan, including a sketch identifying the above. The monitors shall not be sited until the Engineer accepts the proposed locations.

- **Equipment Provided by Contractor.** The Contractor shall provide up to 4 monitors per work site and all necessary calibration and support equipment, power to operate them, security (or arrangements to remove and replace the monitors daily), filters, flow chart recorders and overnight envelopes for shipping the filters to the laboratory. The number of monitors required will be indicated in the Plan Notes. Each monitor shall be tagged with the calibration date.
- **Duration of Monitoring.** Monitoring shall be performed for the duration of dust-producing operations (e.g., paint removal, waste handling, containment clean-up and movement, etc.) or a minimum of 8 hours each day (when work is performed).

The monitoring schedule shall be as follows:

1. For dry abrasive blast cleaning monitoring shall be conducted full time during all days of dust-producing operations (e.g., paint removal, waste handling, containment movement, etc.).
 2. For wet abrasive blast cleaning, water jetting, or power tool cleaning, monitoring shall be conducted for the first 5 days of dust producing operations. If the results after 5 days are acceptable, monitoring may be discontinued. If the results are unacceptable, corrective action shall be initiated to correct the cause of the emissions, and monitoring shall continue for an additional 5 days. If the results are still unacceptable, the Engineer may direct that the monitoring continue full time.
 3. When monitoring is discontinued, if visible emissions are observed and/or the Contractor's containment system changes during the course of the project, then air monitoring will again be required for a minimum of two consecutive days until compliance is shown.
- **Background Monitoring.** Background samples shall be collected for two days prior to the start of work while no dust producing operations are underway to provide a baseline. The background monitoring shall include one weekday and one weekend day. The background monitoring shall coincide with the anticipated working hours for the paint removal operations, but shall last for a minimum of 8 hours each day.

- Monitor Operation and Laboratory Analysis.

The Contractor shall calibrate the monitors according to the manufacturer's written instructions upon mobilization to the site and quarterly. Each monitor shall be tagged with the calibration date, and calibration information shall be provided to the Engineer upon request.

All ambient air monitoring shall be performed by the Contractor according to the accepted Ambient Air Monitoring Plan and according to EPA regulations 40 CFR Part 50 Appendix B, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere (High-Volume Method), and 40 CFR Part 50 Appendix G, Reference Method for the Determination of Lead in Suspended Particulate Matter Collected from Ambient Air.

Filters shall be placed in monitors and monitors operated each day prior to start of dust-producing operations and the filters removed upon completion each day. The Contractor shall advise the Engineer in advance when the filters will be removed and replaced. The monitor operator shall record the following information, at a minimum, on field data and laboratory chain-of-custody forms (or equivalent):

1. Monitor location and serial number
2. Flow rate, supported by flow charts
3. Start, stop times and duration of monitoring
4. Work activities and location of work during the monitoring period
5. Wind direction/speed

For the first 5 days of monitoring, the Contractor shall submit the filters, field data and laboratory chain-of-custody forms together with the flow chart recorders (i.e. monitor flow rate and the duration of monitoring) on a daily basis in an overnight envelope to the laboratory for analysis. The laboratory must provide the Engineer with written results no later than 72 hours after the completion of each day's monitoring. At the discretion of the Engineer, if the initial 5 days of monitoring on full time monitoring projects is acceptable, the filters may be sent to the laboratory every 3 days rather than every day. Written results must be provided to the Engineer no later than 5 days after the completion of monitoring for the latest of the 3 days.

- Ambient Air Monitoring Results. The laboratory shall provide the report directly to the Engineer with a copy to the contractor. The report shall include:
 1. Monitor identification and location
 2. Work location and activities performed during monitoring period
 3. Monitor flow rate, duration, and volume of air sampled
 4. Laboratory methods used for filter digestion / analysis
 5. Sample results for the actual duration of monitoring
 6. Sample results expressed in terms of a 24 hour time weighted average. Assume zero for period not monitored.
 7. Comparison of the results with the acceptance criteria indicating whether the emissions are compliant.
 8. Field data and chain-of-custody records used to derive results.

Should revised reports or any information regarding the analysis be issued by the laboratory directly to the Contractor at any time, the contractor shall immediately provide a copy to the Engineer and advise the laboratory that the Engineer is to receive all information directly from the laboratory.

- Acceptance Criteria. TSP-lead results at each monitor location shall be less than 1.5 $\mu\text{g}/\text{cu m}$ per calendar quarter converted to a daily allowance using the formulas from SSPC Guide 6 as follows, except that the maximum 24-hour daily allowance shall be no greater than 6 $\mu\text{g}/\text{cu m}$.

The formula for determining a 24-hour daily value based on the actual number of paint disturbance days expected to occur during the 90-day quarter is:

$$\text{DA} = (90 \div \text{PD}) \times 1.5 \mu\text{g}/\text{cu m}, \text{ where}$$

DA is the daily allowance, and

PD is the number of preparation days anticipated in the 90-day period

If the DA calculation is $> 6.0 \mu\text{g}/\text{cu m}$, use $6.0 \mu\text{g}/\text{cu m}$.

Regulated Areas. Physically demarcated regulated area(s) shall be established around exposure producing operations at the OSHA Action Level for the toxic metal(s) present in the coating. The Contractor shall provide all required protective clothing and equipment for personnel entering into a regulated area. Unprotected street clothing is not permitted within the regulated areas.

Hygiene Facilities/Protective Clothing/Blood Tests. The Contractor shall provide clean lavatory and hand washing facilities according to OSHA regulations and confirm that employees wash hands, forearms, and face before breaks. The facilities shall be located at the perimeter of the regulated area in close proximity to the paint removal operation. Shower facilities shall be provided when workers' exposures exceed the Permissible Exposure Limit. Showers shall be located at each bridge site, or if allowed by OSHA regulations, at a central location to service multiple bridges. The shower and wash facilities shall be cleaned at least daily during use.

All wash and shower water shall be filtered and containerized. The Contractor is responsible for filtration, testing, and disposal of the water.

The Contractor shall make available to all IDOT project personnel a base line and post project blood level screening determined by the whole blood lead method, utilizing the Vena-Puncture technique. This screening shall be made available every 2 months for the first 6 months, and every 6 months thereafter.

The Contractor shall provide IDOT project personnel with all required protective clothing and equipment, including disposal or cleaning. Clothing and equipment includes but is not limited to disposable coveralls with hood, booties, disposable surgical gloves, hearing protection, and safety glasses. The protective clothing and equipment shall be provided and maintained on the job site for the exclusive, continuous and simultaneous use by the IDOT personnel. This equipment shall be suitable to allow inspection access to any area in which work is being performed.

All handwash and shower facilities shall be fully available for use by IDOT project personnel.

Site Emergencies.

- a) Stop Work. The Contractor shall stop work at any time the conditions are not within specifications and take the appropriate corrective action. The stoppage will continue until conditions have been corrected. Standby time and cost required for corrective action is at the Contractor's expense. The occurrence of the following events shall be reported in writing to IDOT and shall require the Contractor to automatically stop lead paint removal and initiate clean up activities.
- Airborne lead levels at any of the high volume ambient air monitoring locations that exceed the limits in this specification, or airborne lead in excess of the OSHA Action Level at the boundary of the regulated area.
 - Break in containment barriers.
 - Visible emissions in excess of the specification tolerances.
 - Loss of negative air pressure when negative air pressure is specified (e.g., for dry abrasive blast cleaning).
 - Serious injury within the containment area.
 - Fire or safety emergency
 - Respiratory system failure
 - Power failure

- b) Contingency Plans and Arrangements. The Engineer will refer to the contingency plan for site specific instructions in the case of emergencies.

The Contractor shall prepare a contingency plan for emergencies including fire, accident, failure of power, failure of dust collection system, failure of supplied air system or any other event that may require modification of standard operating procedures during lead removal. The plan shall include specific procedures to ensure safe egress and proper medical attention in the event of an emergency. The Contractor shall post the telephone numbers and locations of emergency services including fire, ambulance, doctor, hospital, police, power company and telephone company on clean side of personnel decontamination area.

A two-way radio, or equal, as approved by the Engineer, capable of summoning emergency assistance shall be available at each bridge during the time the Contractor's personnel are at the bridge site under this contract. The following emergency response equipment described in the contingency plan (generic form attached) shall be available during this time as well: an appropriate portable fire extinguisher, a 55 gal (208 L) drum, a 5 gal (19 L) pail, a long handled shovel, absorbent material (one bag).

A copy of the contingency plan shall be maintained at each bridge during cleaning operations and during the time the Contractor's personnel are at the bridge site under this contract. The Contractor shall designate the emergency coordinator(s) required who shall be responsible for the activities described.

An example of a contingency plan is included at the end of this Special Provision.

Collection, Temporary Storage, Transportation and Disposal of Waste. The Contractor and the Department are considered to be co-generators of the waste.

The Contractor is responsible for all aspects of waste collection, testing and identification, handling, storage, transportation, and disposal according to these specifications and all applicable Federal, State, and Local regulations. The Contractor shall provide for Engineer review and acceptance a Waste Management Plan that addresses all aspects of waste handling, storage, and testing, and provides the names, addresses, and a contact person for the proposed licensed waste haulers and disposal facilities. The Department will not perform any functions relating to the waste other than provide EPA identification numbers, provide the Contractor with the emergency response information, the emergency response telephone number required to be provided on the manifest, and to sign the waste manifest. The Engineer will obtain the identification numbers from the state and federal environmental protection agencies for the bridge(s) to be painted and furnish those to the Contractor.

All surface preparation/paint residues shall be collected daily and deposited in all-weather containers supplied by the Contractor as temporary storage. The storage area shall be secure to prevent unauthorized entry or tampering with the containers. Acceptable measures include storage within a fully enclosed (e.g., fenced in) and locked area, within a temporary building, or implementing other reasonable means to reduce the possibility of vandalism or exposure of the waste to the public or the environment (e.g., securing the lids or covers of waste containers and roll-off boxes). Waste shall not be stored outside of the containers. Waste shall be collected and transferred to bulk containers taking extra precautions as necessary to prevent the suspension of residues in air or contamination of surrounding surfaces. Precautions may include the transfer of the material within a tarpaulin enclosure. Transfer into roll-off boxes shall be planned to minimize the need for workers to enter the roll-off box.

No residues shall remain on surfaces overnight, either inside or outside of containment. Waste materials shall not be removed through floor drains or by throwing them over the side of the bridge. Flammable materials shall not be stored around or under any bridge structures.

The all-weather containers shall meet the requirements for the transportation of hazardous materials and as approved by the Department. Acceptable containers include covered roll-off boxes and 55-gallon drums (17H). The Contractor shall insure that no breaks and no deterioration of these containers occurs and shall maintain a written log of weekly inspections of the condition of the containers. A copy of the log shall be furnished to the Engineer upon request. The containers shall be kept closed and sealed from moisture except during the addition of waste. Each container shall be permanently identified with the date that waste was placed into the container, contract number, hazardous waste name and ID number, and other information required by the IEPA.

The Contractor shall have each waste stream sampled for each project and tested by TCLP and according to EPA and disposal company requirements. The Engineer shall be notified in advance when the samples will be collected. The samples shall be collected and shipped for testing within the first week of the project, with the results due back to the Engineer within 10 days. Testing shall be considered included in the pay item for "Containment and Disposal of Lead Paint Cleaning Residues." Copies of the test results shall be provided to the Engineer prior to shipping the waste.

Waste water generated from bridge washing, hygiene purposes, and cleaning of equipment shall be filtered on site to remove particulate and disposed of at a Publicly Owned Treatment Works (POTW) according to State regulations. The Contractor shall provide the Engineer with a letter from the POTW indicating that they will accept the waste water. If the POTW allows the filtered water to be placed into the sanitary sewer system, the Contractor shall provide a letter from the POTW indicating that based on the test results of the water, disposal in the sanitary sewer is acceptable to them. Water shall not be disposed of until the above letter(s) are provided to, and accepted by, the Engineer.

If approved abrasive additives are used that render the waste non-hazardous as determined by TCLP testing, the waste shall be classified as a non-hazardous special waste, transported by a licensed waste transporter, and disposed of at an IEPA permitted disposal facility in Illinois.

When paint is removed from the bridge without the use of abrasive additives, the paint, together with the surface preparation media (e.g. abrasive) shall be handled as a hazardous waste, regardless of the TCLP results. The waste shall be transported by a licensed hazardous waste transporter, treated by an IEPA permitted treatment facility to a non-hazardous special waste and disposed of at an IEPA permitted disposal facility in Illinois.

The treatment/disposal facilities shall be approved by the Engineer, and shall hold an IEPA permit for waste disposal and waste stream authorization for this cleaning residue. The IEPA permit and waste stream authorization must be obtained prior to beginning cleaning, except that if necessary, limited paint removal will be permitted in order to obtain samples of the waste for the disposal facilities. The waste shall be shipped to the facility within 90 days of the first accumulation of the waste in the containers. When permitted by the Engineer, waste from multiple bridges in the same contract may be transported by the Contractor to a central waste storage location(s) approved by the Engineer in order to consolidate the material for pick up, and to minimize the storage of waste containers at multiple remote sites after demobilization. Arrangements for the final waste pickup shall be made with the waste hauler by the time blast cleaning operations are completed or as required to meet the 90 day limit stated above.

The Contractor shall submit a waste accumulation inventory table to the Engineer no later than the 5th day of the month. The table shall show the number and size of waste containers filled each day in the preceding month and the amount of waste shipped that month, including the dates of shipments.

The Contractor shall prepare a manifest supplied by the IEPA for off-site treatment and disposal before transporting the hazardous waste off-site. The Contractor shall prepare a land ban notification for the waste to be furnished to the disposal facility. The Contractor shall obtain the handwritten signature of the initial transporter and date of the acceptance of the manifest. The Contractor shall send one copy of the manifest to the IEPA within two working days of transporting the waste off-site. The Contractor shall furnish the generator copy of the manifest and a copy of the land ban notification to the Engineer. The Contractor shall give the transporter the remaining copies of the manifest.

All other project waste shall be removed from the site according to Federal, State and Local regulations, with all waste removed from the site prior to final Contractor demobilization.

The Contractor shall make arrangements to have other hazardous waste, which he/she generates, such as used paint solvent, transported to the Contractor's facility at the end of each day that this waste is generated. These hazardous wastes shall be manifested using the Contractor's own generator number to a treatment or disposal facility from the Contractor's facility. The Contractor shall not combine solvents or other wastes with cleaning residue wastes. All waste streams shall be stored in separate containers.

The Contractor is responsible for the payment of any fines and undertaking any clean up activities mandated by State or federal environmental agencies for improper waste handling, storage, transportation, or disposal.

Contractor personnel shall be trained in the proper handling of hazardous waste, and the necessary notification and clean up requirements in the event of a spill. The Contractor shall maintain a copy of the personnel training records at each bridge site.

Basis of Payment. The soil, water, and air monitoring, containment, collection, temporary storage, transportation, testing and disposal of all project waste, and all other work described herein will be paid for at the contract lump sum price for CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUES at the designated location. Payment will not be authorized until all requirements have been fulfilled as described in this specification, including the preparation and submittal of all QC documentation, submittal of environmental monitoring and waste test results, and disposal of all waste.

Appendix 1 – Reference List

The Contractor shall maintain the following reference standards and regulations on site for the duration of the project:

- Illinois Environmental Protection Agency – Information Statement on the Removal of Lead-Based Paint from Exterior Surfaces, latest revision
- Illinois Environmental Protection Act
- SSPC Guide 6, Guide for Containing Debris Generated During Paint Removal Operations
- 29 CFR 1926.62, Lead in Construction
- 40 CFR Part 50, Appendix B, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere (High-Volume Method)
- 40 CFR Part 50, Appendix G, Reference Method for the Determination of Lead in Suspended Particulate Matter Collected from Ambient Air
- SSPC Guide 16, Guide to Specifying and Selecting Dust Collectors
- SSPC TU-7, Conducting Ambient Air, Soil, and Water Sampling Activities During Surface Preparation and Paint Disturbance Activities.

Table 1 Containment Criteria for Removal of Paint Containing Lead and Other Toxic Metals¹					
Removal Method	SSPC Class²	Containment Material Flexibility	Containment Material Permeability³	Containment Support Structure	Containment Material Joints⁴
Hand Tool Cleaning	3P ⁶	Rigid or Flexible	Permeable or Impermeable	Minimal	Partially Sealed
Power Tool Cleaning w/ Vacuum	3P ⁶	Rigid or Flexible	Permeable or Impermeable	Minimal	Partially Sealed
Power Tool Cleaning w/o Vacuum	2P	Rigid or Flexible	Permeable or Impermeable	Rigid or Flexible	Fully or Partially Sealed
Water Jetting Wet Ab Blast Water Cleaning ⁷	2W-3W	Rigid or Flexible	Permeable and Impermeable ⁷	Rigid, Flexible, or Minimal	Fully and Partially Sealed
Abrasive Blast Cleaning	1A	Rigid or Flexible	Impermeable	Rigid or Flexible	Fully Sealed
Vacuum Blast Cleaning	4A ⁶	Rigid or Flexible	Permeable	Minimal	Partially Sealed

Table 1 (Continued) Containment Criteria for Removal of Paint Containing Lead and Other Toxic Metals¹					
Removal Method	SSPC Class²	Containment Entryway	Ventilation System Required⁵	Negative Pressure Required	Exhaust Filtration Required
Hand Tool Cleaning	3P ⁶	Overlapping or Open Seam	Natural	No	No
Power Tool Cleaning w/ Vacuum	3P ⁶	Overlapping or Open Seam	Natural	No	No
Power Tool Cleaning w/o Vacuum	2P	Overlapping or Open Seam	Natural	No	No
Water Jetting Wet Ab Blast Water Cleaning ⁷	2W-3W	Overlapping or Open Seam	Natural	No	No
Abrasive Blast Cleaning	1A	Airlock or Resealable	Mechanical	Yes	Yes
Vacuum Blast Cleaning	4A ⁶	Open Seam	Natural	No	No

Notes:

¹This table provides general design criteria only. It does not guarantee that specific controls over emissions will occur because unique site conditions must be considered in the design. Other combinations of materials may provide controls over emissions equivalent to or greater than those combinations shown above.

²The SSPC Classification is based on SSPC Guide 6. Note that for work over water, water booms or boats with skimmers must be employed, where feasible, to contain spills or releases. Debris must be removed daily at a minimum.

³Permeability addresses both air and water as appropriate. In the case of water removal methods, the containment materials must be resistant to water. Ground covers should always be impermeable, and of sufficient strength to withstand the impact and weight of the debris and the equipment used for collection and clean-up. Ground covers must also extend beyond the containment boundary to capture escaping debris.

⁴ If debris escapes through the seams, then additional sealing of the seams and joints is required.

⁵When "Natural" is listed, ventilation is not required provided the emissions are controlled as specified in this Special Provision, and provided worker exposures are properly controlled. If unacceptable emissions or worker exposures to lead or other toxic metals occur, incorporate a ventilation system into the containment.

⁶Ground covers and wall tarpaulins may provide suitable controls over emissions without the need to completely enclose the work area.

⁷This method applies to water cleaning to remove surface contaminants, and water jetting (with and without abrasive) and wet abrasive blast cleaning where the goal is to remove paint. Although both permeable and impermeable containment materials are included, ground covers and the lower portions of the containment must be water impermeable with fully sealed joints, and of sufficient strength and integrity to facilitate the collection and holding of the water and debris for proper disposal. If water or debris, other than mist, escape through upper sidewalls or ceiling areas constructed of permeable materials, they shall be replaced with impermeable materials. Permeable materials for the purpose of this specification are defined as materials with openings measuring 25 mils (1 micron) or less in greatest dimension.

- A. Containment Components - The basic components that make up containment systems are defined below. The components are combined in Table 1 to establish the minimum containment system requirements for the method(s) of paint removal specified for the Contract.
1. Rigidity of Containment Materials - Rigid containment materials consist of solid panels of plywood, aluminum, rigid metal, plastic, fiberglass, composites, or similar materials. Flexible materials consist of screens, tarps, drapes, plastic sheeting, or similar materials. When directed by the Engineer, do not use flexible materials for horizontal surfaces directly over traffic lanes or vertical surfaces in close proximity to traffic lanes. If the Engineer allows the use of flexible materials, The Contractor shall take special precautions to completely secure the materials to prevent any interference with traffic.
 2. Permeability of Containment Materials - The containment materials are identified as air impenetrable if they are impervious to dust or wind such as provided by rigid panels, coated solid tarps, or plastic sheeting. Air penetrable materials are those that are formed or woven to allow air flow. Water impermeable materials are those that are capable of containing and controlling water when wet methods of preparation are used. Water permeable materials allow the water to pass through. Chemical resistant materials are those resistant to chemical and solvent stripping solutions. Use fire retardant materials in all cases.
 3. Support Structure - Rigid support structures consist of scaffolding and framing to which the containment materials are affixed to minimize movement of the containment cocoon. Flexible support structures are comprised of cables, chains, or similar systems to which the containment materials are affixed. Use fire retardant materials in all cases.
 4. Containment Joints - Fully sealed joints require that mating surfaces between the containment materials and to the structure being prepared are completely sealed. Sealing measures include tape, caulk, Velcro, clamps, or other similar material capable of forming a continuous, impenetrable or impermeable seal. When materials are overlapped, a minimum overlap of 8 in. (200 mm) is required.

5. Entryway - An airlock entryway involves a minimum of one stage that is fully sealed to the containment and which is maintained under negative pressure using the ventilation system of the containment. Resealable door entryways involve the use of flexible or rigid doors capable of being repeatedly opened and resealed. Sealing methods include the use of zippers, Velcro, clamps, or similar fasteners. Overlapping door tarpaulin entryways consist of two or three overlapping door tarpaulins.
6. Mechanical Ventilation - The requirement for mechanical ventilation is to ensure that adequate air movement is achieved to reduce worker exposure to toxic metals to as low as feasible according to OSHA regulations (e.g., 29 CFR 1926.62), and to enhance visibility. Design the system with proper exhaust ports or plenums, adequately sized ductwork, adequately sized discharge fans and air cleaning devices (dust collectors) and properly sized and distributed make-up air points to achieve a uniform air flow inside containment for visibility. The design target for airflow shall be a minimum of 100 ft. (30.5m) per minute cross-draft or 60 ft. (18.3 m) per minute downdraft. Increase these minimum airflow requirements if necessary to address worker lead exposures. Natural ventilation does not require the use of mechanical equipment for moving dust and debris through the work area.
7. Negative Pressure - When specified, achieve a minimum of 0.03 in. (7.5 mm) water column (W.C.) relative to ambient conditions, or confirm through visual assessments for the concave appearance of the containment enclosure.
8. Exhaust Ventilation - When mechanical ventilation systems are used, provide filtration of the exhaust air, to achieve a filtration efficiency of 99.9 percent at 0.02 mils (0.5 microns).

HAZARDOUS WASTE
CONTINGENCY PLAN
FOR
LEAD BASED PAINT REMOVAL PROJECTS

Bridge No.: _____
Location: _____
USEPA Generator No.: _____
IEPA Generator No.: _____

Note:

- 1. A copy of this plan must be kept at the bridge while the Contractor's employees are at the site.
- 2. A copy of the plan must be mailed to the police and fire departments and hospital identified herein.

Primary Emergency Coordinator

Name: _____
Address: _____
City: _____
Phone: (Work) _____
(Home) _____

Alternate Emergency Coordinator

Name: _____
Address: _____
City: _____
Phone: (Work) _____
(Home) _____

Emergency Response Agencies

POLICE:

- 1. State Police (if bridge not in city) Phone: _____
District No. _____
Address: _____
- 2. County Sheriff _____ Phone: _____
County: _____
Address: _____
- 3. City Police _____ Phone: _____
District No. _____
Address: _____

Arrangements made with police: (Describe arrangements or refusal by police to make arrangements):

FIRE:

- 1. City _____ Phone: _____
Name: _____
Address: _____
- 2. Fire District _____ Phone: _____
Name: _____
Address: _____
- 3. Other _____ Phone: _____
Name: _____
Address: _____

Arrangements made with fire departments: (Describe arrangements or refusal by fire departments to make arrangements):

HOSPITAL:

Name: _____ Phone: _____

Address: _____

Arrangements made with hospital: (Describe arrangements or refusal by hospital to make arrangements):

Properties of waste and hazard to health:

Places where employees working:

Location of Bridge:

Types of injuries or illness which could result:

Appropriate response to release of waste to the soil:

Appropriate response to release of waste to surface water:

Emergency Equipment at Bridge

Emergency Equipment List	Location of Equipment	Description of Equipment	Capability of Equipment
1. Two-way radio	Truck		Communication
2. Portable Fire Extinguisher	Truck		Extinguishes Fire
3. Absorbent Material	Truck		Absorbs Paint or Solvent Spills
4. Hand Shovel	Truck		Scooping Material
5. 55 Gallon (208 L) Drum	Truck		Storing Spilled Material
6. 5 Gallon (19 L) Pail	Truck		Storing Spilled Material

Emergency Procedure

1. Notify personnel at the bridge of the emergency and implement emergency procedure.
2. Identify the character, source, amount and extent of released materials.
3. Assess possible hazards to health or environment.
4. Contain the released waste or extinguish fire. Contact the fire department if appropriate.
5. If human health or the environment is threatened, contact appropriate police and fire department. In addition, the Emergency Services and Disaster Agency needs to be called using their 24-hour toll free number (800-782-7860) and the National Response Center using their 24-hour toll free number (800-824-8802).
6. Notify the Engineer that an emergency has occurred.
7. Store spilled material and soil contaminated by spill, if any, in a drum or pail. Mark and label the drum or pail for disposal.
8. Write a full account of the spill or fire incident including date, time, volume, material, and response taken.
9. Replenish stock of absorbent material or other equipment used in response.

DECK SLAB REPAIR

Effective: May 15, 1995

Revised: October 15, 2011

This work shall consist of hot-mix asphalt surface removal, when required, the removal and disposal of all loose and deteriorated concrete from bridge deck and the replacement with new concrete to the original top of deck. The work shall be done according to the applicable requirements of Sections 501, 503 and 1020 of the Standard Specifications and this Special Provision.

Deck slab repairs will be classified as follows:

- (a) Partial-Depth. Partial-depth repairs shall consist of removing the loose and unsound deck concrete, disposing of the concrete removed and replacing with new concrete. The removal may be performed by chipping with power driven hand tools or by hydro-scarification equipment. The depth shall be measured from the top of the concrete deck surface, at least 3/4 in. (20 mm) but not more than 1/2 the concrete deck thickness.
- (b) Full-Depth. Full-depth repairs shall consist of removing concrete full-depth of the deck, disposing of the concrete removed, and replacing with new concrete to the original concrete deck surface. The removal may be performed with power driven hand tools, hydraulic impact equipment, or by hydro-scarification equipment. Full-depth repairs shall be classified for payment as Full-Depth, Type I and Full-Depth, Type II according to the following:

Type I Full-depth patches less than or equal to 5 sq. ft. (0.5 sq m) in area. The minimum dimensions for a patch shall be 1 ft. x 1 ft. (300 mm x 300 mm).

Type II Full-depth patches greater than 5 sq. ft. (0.5 sq. m) in area.

Materials.

Materials shall be according to Article 1020.02.

Portland cement concrete for partial and full-depth repairs shall be according to Section 1020. Class PP-1, PP-2, PP-3, PP-4, PP-5 or BS concrete shall be used at the Contractor's option unless noted otherwise on the contract plans. For Class BS concrete, a CA 13, 14, or 16 shall be used. If the BS concrete mixture is used only for full depth repairs, a CA-11 may be used.

Equipment:

The equipment used shall be subject to the approval of the Engineer and shall meet the following requirements:

- (a) Surface Preparation Equipment. Surface preparation and concrete removal equipment shall be according to the applicable portions of Section 1100 and the following:
 - (1) Sawing Equipment. Sawing equipment shall be a concrete saw capable of sawing concrete to the specified depth.
 - (2) Blast Cleaning Equipment. The blast cleaning may be performed by wet sandblasting, high-pressure waterblasting, shotblasting or abrasive blasting. Blast cleaning equipment shall be capable of removing rust and old concrete from exposed reinforcement bars, and shall have oil traps.
 - (3) Power-Driven Hand Tools. Power-driven hand tools will be permitted including jackhammers lighter than the nominal 45 lb. (20 kg) class. Chipping hammers heavier than a nominal 15 lb. (6.8 kg) class shall not be used for removing concrete from below any reinforcing bar for partial depth repairs, or for removal within 1 ft (300 mm) of existing beams, girders or other supporting structural members that are to remain in service or within 1 ft (300 mm) of the boundaries of full-depth repairs. Jackhammers or chipping hammers shall not be operated at an angle in excess of 45 degrees measured from the surface of the slab.
 - (4) Hydraulic Impact Equipment. Hydraulic impact equipment with a maximum rated striking energy of 360 ft-lbs (270 J) may be permitted only in areas of full depth removal more than 1 ft (300 mm) away from existing beams, girders or other supporting structural members that are to remain in service or more than 1 ft (300 mm) from the boundaries of full-depth repairs.
 - (5) Hydro-Demolition Equipment. The hydro-demolition equipment shall consist of filtering and pumping units operating with a remote-controlled robotic device. The equipment shall use water according to Section 1002. The equipment shall be capable of being controlled to remove only unsound concrete.
- (b) Concrete Equipment: Equipment for proportioning and mixing the concrete shall be according to Article 1020.03.
- (c) Finishing Equipment: Finishing equipment shall be according to Article 1103.17. Adequate hand tools will be permitted for placing and consolidating concrete in the patch areas and for finishing small patches.

Construction Requirements: Sidewalks, curbs, drains, reinforcement and/or existing transverse and longitudinal joints which are to remain in place shall be protected from damage during removal and cleaning operations.

The Contractor shall control the runoff water generated by the various construction activities in such a manner as to minimize, to the maximum extent practicable, the discharge of untreated effluent into adjacent waters, and shall properly dispose of the solids generated according to Article 202.03. The Contractor shall submit a water management plan to the Engineer specifying the control measures to be used. The control measures shall be in place prior to the start of runoff water generating activities. Runoff water shall not be allowed to constitute a hazard to adjacent or underlying roadways, waterways, drainage areas or railroads nor be allowed to erode existing slopes.

(a) Hot-Mix Asphalt Surface Removal.

The hot-mix asphalt surface course and all waterproofing membrane shall be removed and disposed of according to applicable portions of Articles 440.04 and 440.06, except milling equipment will not be allowed if the deck is to receive a waterproofing membrane system. If the overlay or waterproofing membrane contains asbestos fibers, removal shall be in accordance with the Special Provision for "Asbestos Waterproofing Membrane or Asbestos Hot-mix Asphalt Surface Removal". Removal of the hot-mix asphalt surface by the use of radiant or direct heat will not be permitted.

(b) Surface Preparation:

All loose, disintegrated and unsound concrete shall be removed from portions of the deck slab shown on the plans or as designated by the Engineer. The Engineer will determine the limits of removal as the work progresses.

The Contractor shall take care not to damage reinforcement bars or expansion joints which are to remain in place. Any damage to reinforcement bars or expansion joints shall be corrected at the Contractor's expense. All loose reinforcement bars, as determined by the Engineer, shall be retied at the Contractor's expense.

- (1) Partial-Depth. Areas to be repaired will be determined and marked by the Engineer. A concrete saw shall be used to provide vertical edges approximately 3/4 in. (20 mm) deep around the perimeter of the area to be patched when a concrete overlay is not specified. Where high steel is present, the depth may be reduced as directed by the Engineer. A saw cut will not be required on those boundaries along the face of the curb, parapet or joint or when sharp vertical edges are provided by hydro-demolition.

The loose and unsound concrete shall be removed by chipping, with power driven hand tools or by hydro-demolition equipment. All exposed reinforcing bars and newly exposed concrete shall be thoroughly blast cleaned. Where, in the judgment of the Engineer, the bond between existing concrete and reinforcement steel within the patch area has been destroyed, the concrete adjacent to the bar shall be removed to a depth that will permit new concrete to bond to the entire periphery of the exposed bar. A minimum of 1 in. (25 mm) clearance will be required. The Engineer may require enlarging a designated removal area should inspection indicate deterioration beyond the limits previously designated. In this event, a new saw cut shall be made around the extended area before additional removal is begun. The removal area shall not be enlarged solely to correct debonded reinforcement or deficient lap lengths.

- (2) Full-Depth. Concrete shall be removed as determined by the Engineer within all areas designated for full-depth repair and in all designated areas of partial depth repair in which unsound concrete is found to extend below half the concrete deck thickness. Full depth removal shall be performed according to Article 501.05 except that hydraulic impact equipment may be permitted in areas of full depth removal more than 1 ft (300 mm) away from the edges of existing beams, girders or other supporting structural members or more than 1 ft (300 mm) from the boundaries of full-depth repairs. Saw cuts shall be made on the top of the deck, except those boundaries along the face of curbs, parapets and joints or where hydro-demolition provided sharp vertical edges. The top saw cut may be omitted if the deck is to receive an overlay.

Forms for full-depth repair may be supported by hangers with adjustable bolts or by blocking from the beams below. When approved by the Engineer, forms for Type 1 patches may be supported by No. 9 wires or other devices attached to the reinforcement bars.

All form work shall be removed after the curing sequence is complete and prior to opening to traffic.

- (3) Reinforcement Treatment. Care shall be exercised during concrete removal to protect the reinforcement bars and structural steel from damage. Any damage to the reinforcement bars or structural steel to remain in place shall be repaired or replaced. All existing reinforcement bars shall remain in place except as herein provided for corroded bars. Tying of loose bars will be required. Reinforcing bars which have been cut or have lost 25 percent or more of their original cross sectional area shall be supplemented by new in kind reinforcement bars. New bars shall be lapped a minimum of 32 bar diameters to existing bars. An approved mechanical bar splice capable of developing in tension at least 125 percent of the yield strength of the existing bar shall be used when it is not feasible to provide the minimum bar lap. No welding of bars will be permitted.

- (4) Cleaning. Immediately after completion of the concrete removal and reinforcement repairs, the repair areas shall be cleaned of dust and debris. Once the initial cleaning is completed, the repair areas shall be thoroughly blast cleaned to a roughened appearance free from all foreign matter. Particular attention shall be given to removal of concrete fines. Any method of cleaning which does not consistently produce satisfactory results shall be discontinued and replaced by an acceptable method. All debris, including water, resulting from the blast cleaning shall be confined and shall be immediately and thoroughly removed from all areas of accumulation. If concrete placement does not follow immediately after the final cleaning, the area shall be carefully protected with well-anchored polyethylene sheeting.

Exposed reinforcement bars shall be free of dirt, detrimental scale, paint, oil, or other foreign substances which may reduce bond with the concrete. A tight non-scaling coating of rust is not considered objectionable. Loose, scaling rust shall be removed by rubbing with burlap, wire brushing, blast cleaning or other methods approved by the Engineer.

(c) Placement & Finishing of Concrete Repair:

- (1) Bonding Method. The patch area shall be cleaned to the satisfaction of the Engineer and shall be thoroughly wetted and maintained in a dampened condition with water for at least 12 hours before placement of the concrete. Any excess water shall be removed by compressed air or by vacuuming prior to the beginning of concrete placement. Water shall not be applied to the patch surface within one hour before or at any time during placement of the concrete.

(2) Concrete Placement.

The concrete shall be placed and consolidated according to Article 503.07 and as herein specified. Article 1020.14 shall apply.

When an overlay system is not specified, the patches shall be finished according to Article 503.16 (a), followed by a light brooming.

(d) Curing and Protection.

Concrete patches shall be cured by the Wetted Burlap or Wetted Cotton Mat Method according to Article 1020.13 (a)(3) or Article 1020.13 (a)(5). The curing period shall be 3 days for Class PP-1, PP-2, PP-3, PP-4, and PP-5 concrete. The curing period shall be 7 days for Class BS concrete. In addition to Article 1020.13, when the air temperature is less than 55° F (13° C), the Contractor shall cover the patch according to Article 1020.13 (d)(1) with minimum R12 insulation. Insulation is optional when the air temperature is 55° F. - 90° F (13° C - 32° C). Insulation shall not be placed when the air temperature is greater than 90° F (32° C). A 72-hour minimum drying period shall be required before placing waterproofing or hot-mix asphalt surfacing.

(e) Opening to Traffic.

No traffic will be permitted on a patch until after the specified cure period, and the concrete has obtained a minimum compressive strength of 4000 psi (27.6 MPa) or flexural strength of 675 psi (4.65 MPa).

Construction equipment will be permitted on a patch during the cure period if the concrete has obtained the minimum required strength. In this instance, the strength specimens shall be cured with the patch.

Method of Measurement.

When specified, hot-mix asphalt surface removal and full or partial depth repairs will be measured for payment and computed in square yards (square meters).

Basis of Payment.

The hot-mix asphalt surface removal will be paid for at the contract unit price per square yard (square meter) for HOT-MIX ASPHALT SURFACE REMOVAL (DECK). Areas removed and replaced up to and including a depth of half the concrete deck thickness will be paid for at the contract unit price per square yard (square meter) for DECK SLAB REPAIR (PARTIAL). Areas requiring removal greater than a depth of half the concrete deck thickness shall be removed and replaced full depth and will be paid for at the contract unit price per square yard (square meter) for DECK SLAB REPAIR (FULL DEPTH, TYPE I) and/or DECK SLAB REPAIR (FULL DEPTH, TYPE II).

When corroded reinforcement bars are encountered in the performance of this work and replacement is required, the Contractor will be paid according to Article 109.04.

No payment will be allowed for removal and replacement of reinforcement bars damaged by the Contractor in the performance of his/her work or for any increases in dimensions needed to provide splices for these replacement bars.

Removal and disposal of asbestos waterproofing and/or asbestos bituminous concrete will be paid for as specified in the Special Provision for "Asbestos Waterproofing Membrane or Asbestos Hot-Mix Asphalt Surface Removal".

BRIDGE DECK LATEX CONCRETE OVERLAY

Effective: May 15, 1995

Revised: December 29, 2014

This work shall consist of the preparation of the existing concrete bridge deck and the construction of a latex overlay to the specified thickness.

Materials. Materials shall meet the following Articles of Section 1000:

<u>Item</u>	<u>Section</u>
(a) Latex/Portland Cement Concrete (Note 1) (Note 2)	1020
(b) Packaged Rapid Hardening Mortar or Concrete	1018
(c) Concrete Curing Materials	1022.02
(d) Fibers	(Note 3)

Note 1: The latex admixture shall be a uniform, homogeneous, non-toxic, film-forming, polymeric emulsion in water to which all stabilizers have been added at the point of manufacture. The latex admixture shall not contain any chlorides and shall contain 46 to 49 percent solids.

The Contractor shall submit a manufacturer's certification that the latex emulsion meets the requirements of FHWA Research Report RD-78-35, Chapter VI. The certificate shall include the date of manufacture of the latex admixture, batch or lot number, quantity represented, manufacturer's name, and the location of the manufacturing plant. The latex emulsion shall be sampled and tested in accordance with RD-78-35, Chapter VII, Certification Program.

The latex admixture shall be packaged and stored in containers and storage facilities which will protect the material from freezing and from temperatures above 85°F (30°C). Additionally, the material shall not be stored in direct sunlight and shall be shaded when stored outside of buildings during moderate temperatures.

Note 2: Cement shall be Type I portland cement. Fine aggregate shall be natural sand and the coarse aggregate shall be crushed stone or crushed gravel. The gradation of the coarse aggregates shall be CA 13, CA 14 or CA 16.

Note 3: When specified to be used, the fibers shall be macro-size and shall be Type II or III according to ASTM C 1116.

Macro fibers shall have a length between 0.75 and 1.75 inches (19 and 45 mm) and aspect ratio (length divided by the equivalent diameter for the fiber) between 70 and 100.

The fibers proposed for use along with the method of incorporating the fibers into the mix shall be submitted to the Department for approval prior to use.

The dosage rate of fibers shall be per the manufacturer's recommendation but in no case less than 2 lb./cu yd (1.2 kg/cu m). Dosage rates greater than 3.0 lb/cu yd (1.8 kg/cu m) shall be evaluated by field demonstration for fiber clumping, ease of placement, and ease of finishing. The field demonstration shall consist of a minimum 2 cu yd (1.5 cu m) trial batch placed in a 12 ft. x 12 ft. (3.6 m x 3.6 m) slab or other configuration approved by the Engineer. The trial batch will be verified by the Engineer according to the "Portland Cement Concrete Level III Technician" course material. Based on the trial batch, the Department has the option to reduce the dosage rate of fibers.

Mixture Design. The latex concrete shall contain the following approximate units of measure or volumes per cubic yard (cubic meter):

Type I Portland Cement	658 lb. (390 kg)
Latex Admixture	24.5 gal (121.3 L)
Coarse Aggregate	42 to 50 percent by weight (mass) of total aggregate
Water (including free moisture on the fine and coarse aggregates)	157 lb. (93.1 kg) maximum

No air entraining admixtures shall be added to the mix.

This mix design is based on a specific gravity of 2.65 for both the fine and the coarse aggregates. The mix will be adjusted by the Engineer to compensate for aggregate specific gravity and moisture.

The latex concrete shall meet the following requirements:

Slump shall be according to Article 1020.07 and 1020.12: 3 to 6 in. (75 to 150 mm)

Air Content shall be according to Article 1020.08 and 1020.12: 7 percent maximum

Water-cement ratio (considering all the nonsolids in the latex admixture as part of the total water) 0.30 to 0.40

Compressive Strength (14 days) 4000 psi (27,500 kPa) minimum

Flexural Strength (14 days) 675 psi (4,650 kPa)

Equipment: The equipment used shall be subject to the approval of the Engineer and shall meet the following requirements:

(a) Surface Preparation Equipment. Surface preparation equipment shall be according to the applicable portions of Section 1100 and the following:

(1) Sawing Equipment. Sawing equipment shall be a concrete saw capable of sawing concrete to the specified depth.

(2) Mechanical Blast Cleaning Equipment. Mechanical blast cleaning may be performed by high-pressure waterblasting or shotblasting. Mechanical blast cleaning equipment shall be capable of removing weak concrete at the surface, including the microfractured concrete surface layer remaining as a result of mechanical scarification, and shall have oil traps.

Mechanical high-pressure waterblasting equipment shall be mounted on a wheeled carriage and shall include multiple nozzles mounted on a rotating assembly, and shall be operated with a 7000 psi (48 MPa) minimum water pressure. The distance between the nozzles and the deck surface shall be kept constant and the wheels shall maintain contact with the deck surface during operation.

(3) Hand-Held Blast Cleaning Equipment. Blast cleaning using hand-held equipment may be performed by high-pressure waterblasting or abrasive blasting. Hand-held blast cleaning equipment shall have oil traps.

Hand-held high-pressure waterblasting equipment that is used in areas inaccessible to mechanical blast cleaning equipment shall have a minimum water pressure of 7000 psi (48 MPa).

(4) Mechanical Scarifying Equipment. Scarifying equipment shall be a power-operated, mechanical scarifier capable of uniformly scarifying or removing the old concrete surface and new patches to the depths required in a satisfactory manner. Other types of removal devices may be used if their operation is suitable and they can be demonstrated to the satisfaction of the Engineer.

(5) Hydro-Scarification Equipment. The hydro-scarification equipment shall consist of filtering and pumping units operating with a computerized, self-propelled robotic machine with gauges and settings that can be easily verified. The equipment shall use water according to Section 1002. The equipment shall be capable of removing in a single pass, sound concrete to the specified depth, and operating at a 16,000 psi (110 MPa) minimum water pressure with a 55 gal/min (208 L/min) minimum water flow rate.

(6) Vacuum Cleanup Equipment. The equipment shall be equipped with fugitive dust control devices capable of removing wet debris and water all in the same pass. Vacuum equipment shall also be capable of washing the deck with pressurized water prior to the vacuum operation to dislodge all debris and slurry from the deck surface.

(7) Power-Driven Hand Tools. Power-driven hand tools will be permitted including jackhammers lighter than the nominal 45 lb. (20 kg) class. Jackhammers or chipping hammers shall not be operated at an angle in excess of 45 degrees measured from the surface of the slab.

(b) Pull-off Test Equipment. Equipment used to perform pull-off testing shall be either approved by the Engineer, or obtained from one of the following approved sources:

James Equipment
007 Bond Tester
800-426-6500

Germann Instruments, Inc.
BOND-TEST Pull-off System
847-329-9999

SDS Company
DYNA Pull-off Tester
805-238-3229

Pull-off test equipment shall include all miscellaneous equipment and materials to perform the test and clean the equipment, as indicated in the Illinois Test procedure 304 and 305 "Pull-off Test (Surface or Overlay Method)". Prior to the start of testing, the Contractor shall submit to the Engineer a technical data sheet and material safety data sheet for the epoxy used to perform the testing. For solvents used to clean the equipment, a material safety data sheet shall be submitted.

(c) Concrete Equipment: A mobile Portland cement concrete plant shall be used for Latex Concrete and shall be according to Articles 1020.12, 1103.04 and the following:

(1) The device for proportioning water shall be accurate within one percent.

(2) The mixer shall be a self-contained, mobile, continuous mixer used in conjunction with volumetric proportioning.

(3) The mixer shall be calibrated prior to every placement of material or as directed by the Engineer.

(d) Finishing Equipment. Finishing equipment shall be according to Article 503.03.

(e) Mechanical Fogging Equipment. Mechanical fogging equipment shall be according to 503.03.

Construction Requirements: Sidewalks, curbs, drains, reinforcement and/or existing transverse and longitudinal joints which are to remain in place shall be protected from damage during scarification and cleaning operations. All damage caused by the Contractor shall be corrected, at the Contractor's expense, to the satisfaction of the Engineer.

The Contractor shall control the runoff water generated by the various construction activities in such a manner as to minimize, to the maximum extent practicable, the discharge of untreated effluent into adjacent waters, and shall properly dispose of the solids generated according to Article 202.03. The Contractor shall submit a water management plan to the Engineer specifying the control measures to be used. The control measures shall be in place prior to the start of runoff water generating activities. Runoff water shall not be allowed to constitute a hazard to adjacent or underlying roadways, waterways, drainage areas or railroads nor be allowed to erode existing slopes.

(a) Deck Preparation:

- (1) Bridge Deck Scarification. The scarification work shall consist of removing the designated concrete deck surface using mechanical and hydro-scarifying equipment as specified. The areas designated shall be scarified to the depth specified on the plans. The depth specified shall be measured from the existing concrete deck surface to the top of peaks remaining after scarification. In areas of the deck not accessible to the scarifying equipment, power-driven hand tools will be permitted. Power driven hand tools shall be used for removal around areas to remain in place.

The Contractor shall use mechanical scarification equipment to remove an initial depth of concrete roughening the concrete deck surface to facilitate hydro-scarification. At a minimum, the last 1/2 in. (13 mm) of removal shall be accomplished with hydro-scarification equipment. If the Contractor's use of mechanical scarifying equipment results in exposing, snagging, or dislodging the top mat of reinforcing steel, the mechanical scarifying depth shall be reduced as necessary immediately. If the exposing, snagging, or dislodging the top mat of reinforcing steel cannot be avoided, the mechanical scarifying shall be stopped immediately and the remaining removal shall be accomplished using the hydro-scarification equipment. All damage to the existing reinforcement resulting from the Contractor's operation shall be repaired or replaced at the Contractor's expense as directed by the Engineer. Replacement shall include the removal of any additional concrete required to position or splice the new reinforcing steel. Undercutting of exposed reinforcement bars shall only be as required to replace or repair damaged reinforcement. Repairs to existing reinforcement shall be according to the Special Provision for "Deck Slab Repair".

Just prior to performing hydro-scarification, the deck shall be sounded, with unsound areas marked on the deck by the Engineer. A trial section, in an area of sound concrete, on the existing deck surface will be designated by the Engineer to calibrate the equipment settings to remove sound concrete to the required depth, in a single pass, and provide a highly roughened bondable surface. The trial section shall consist of approximately 30 sq. ft. (3 sq. m). After calibration in an area of sound concrete, the equipment shall be moved to a second trial section, as designated by the Engineer, in an area containing unsound concrete to verify the calibrated settings are sufficient to remove the unsound concrete. If the calibrated settings are insufficient to remove the unsound concrete, the equipment may be moved back to an area of sound concrete and the calibration settings verified. If the equipment cannot be calibrated to produce the required results in an area of sound concrete, it shall be removed and additional hydro-scarification equipment capable of producing the required results shall be supplied by the Contractor.

After the equipment settings are established, they shall be supplied to the Engineer. These settings include the following:

- a) Water pressure
- b) Water flow rate
- c) Nozzle type and size
- d) Nozzle travel speed
- e) Machine staging control (step/advance rate)

Hydro-scarification may begin after the calibration settings have been approved by the Engineer.

The removal depth shall be verified by the Engineer, as necessary. If sound concrete is being removed below the desired depth, the equipment shall be recalibrated.

After hydro-scarification the deck shall be thoroughly vacuum cleaned in a timely manner before the water and debris are allowed to dry and re-solidify to the deck. The uses of alternative cleaning and debris removal methods to minimize driving heavy vacuum equipment over exposed deck reinforcement may be used subject to the approval of the Engineer.

- (2) Deck Patching. After bridge deck scarification and cleaning, the Engineer will sound the scarified deck and survey the existing reinforcement condition. All remaining unsound concrete and unacceptably corroded reinforcement bars will be marked for additional removal and/or repairs as applicable. All designated repairs and reinforcement treatment shall be completed according to the Special Provision for "Deck Slab Repair" except as noted below:
- a) Partial depth removal will not be measured for payment. Any deck survey information implying partial depth repairs is for information only. Partial depth removal shall be accomplished concurrent with the hydro-scarification operation. After the hydro scarification has been performed to the satisfaction of the Engineer, areas requiring additional partial depth removal of unsound concrete will be paid for according to Article 109.04.
 - b) In areas where unsound concrete extends below the specified removal depth and hydro-scarification completely removes unsound concrete, a full-depth repair is only required when the bottom mat of reinforcement is exposed.
 - c) All full-depth patches shall be struck off to the scarified deck surface and then roughened with a suitable stiff bristled broom or wire brush to provide a rough texture designed to promote bonding of the overlay. Hand finishing of the patch surface shall be kept to a minimum to prevent overworking of the surface.
 - d) All full-depth repairs shall be completed prior to final surface preparation.
 - e) Any removal required or made below the specified depth for scarification of the bridge deck, which does not result in full-depth repair, shall be filled with the overlay material at the time of the overlay placement.
 - f) Epoxy coating, on existing reinforcement bars, damaged during hydro-scarification shall not be repaired.
 - g) Undercutting of exposed reinforcement bars shall only be as required to replace or repair damaged or corroded reinforcement.
- (3) Final Surface Preparation. Any areas determined by the Engineer to be inaccessible to scarifying equipment shall be thoroughly blast cleaned with hand-held equipment.

If spoils from the scarification operation are allowed to dry and re-solidify on the deck surface, the deck surface shall be cleaned with mechanical blast cleaning equipment.

Final surface preparation shall also include the cleaning of all dust, debris, concrete fines and other foreign substances from the deck surface including vertical faces of curbs, previously placed adjacent overlays, barrier walls up to a height of 1 in. (25 mm) above the overlay, depressions, and beneath reinforcement bars. Hand-held high-pressure waterblasting equipment shall be used for this operation.

The Department may require surface pull-off testing of areas inaccessible to scarifying equipment. Testing shall be in accordance to the Illinois Test Procedure 304 "Pull-off Test (Surface Method)". The Contractor shall provide the test equipment. The Engineer shall determine each test location, and each individual test shall have a minimum strength of 175 psi (1,207 kPa). In the case of a failing test, the Contractor shall adjust the blast cleaning method and re-clean the area. Testing will be repeated until satisfactory results are attained.

Exposed reinforcement bars shall be free of dirt, detrimental scale, paint, oil, and other foreign substances which may reduce bond with the concrete. A tight non-scaling coating of rust is not considered objectionable. Loose, scaling rust shall be removed by rubbing with burlap, wire brushing, blast cleaning or other methods approved by the Engineer. All loose reinforcement bars, as determined by the Engineer, shall be retied at the Contractor's expense.

All dust, concrete fines, debris, including water, resulting from the surface preparation shall be confined and shall be immediately and thoroughly removed from all areas of accumulation. If concrete placement does not follow immediately after the final cleaning, the area shall be carefully protected with well-anchored white polyethylene sheeting.

- (b) Pre-placement Procedure. Prior to placing the overlay, the Engineer will inspect the deck surface. All contaminated areas shall be blast cleaned again at the Contractor's expense.

Before placing the overlay, the finishing machine shall be operated over the full length of bridge segment to be overlaid to check support rails for deflection and confirm the minimum overlay thickness. All necessary adjustments shall be made and another check performed, unless otherwise directed by the Engineer.

- (c) Placement Procedure: Concrete placement shall be according to Article 503.07 and the following:

(1) Bonding Method. The deck shall be cleaned to the satisfaction of the Engineer and shall be thoroughly wetted and maintained in a dampened condition with water for at least 12 hours before placement of the overlay. Any excess water shall be removed by compressed air or by vacuuming prior to the beginning of overlay placement. Water shall not be applied to the deck surface within one hour before or at any time during placement of the overlay.

- (2) Overlay Placement. Placement of the concrete shall be according to Article 503.16.

Internal vibration will be required along edges, adjacent to bulkheads, and where the overlay thickness exceeds 3 in. (75 mm). Internal vibration along the longitudinal edges of a pour will be required with a minimum of 2 hand-held vibrators, one on each edge of the pour. Hand finishing will be required along the edges of the pour and shall be done from sidewalks, curbs or work bridges.

A construction dam or bulkhead shall be installed in case of a delay of 30 minutes or more in the concrete placement operation.

All construction joints shall be formed. When required by the Engineer the previously placed overlay shall be sawed full-depth to a straight and vertical edge before fresh concrete is placed. The Engineer will determine the extent of the removal. When longitudinal joints are not shown on the plans, the locations shall be subject to approval by the Engineer and shall not be located in the wheel paths.

The Contractor shall stencil the date of construction (month and year) and the letters LX into the overlay before it takes its final set. The stencil shall be located in a conspicuous location, as determined by the Engineer, for each stage of construction. This location shall be outside of the grooving where possible and within 3 ft. (1 m) of an abutment joint. The characters shall be 3 to 4 in. (75 mm to 100 mm) in height, 1/4 in. (5 mm) in depth and face the centerline of the roadway.

(3) Limitations of Operations:

(a) Weather Limitations. Temperature control for concrete placement shall be according to 1020.14(b). The concrete protection from low air temperatures during the curing period shall be according to Article 1020.13(d). Concrete shall not be placed when rain is expected during the working period. If night placement is required, illumination and placement procedures will be subject to the approval of the Engineer. No additional compensation will be allowed if night work is required.

(b) Other Limitations. Concrete delivery vehicles driven on the structure shall be limited to a maximum load of 6 cu. yd. (4.6 cu. m).

Mobile concrete mixers, truck mixers, concrete pumps, or other heavy equipment will not be permitted on any portion of the deck where the top reinforcing mat has been exposed. Conveyors, buggy ramps and pump piping shall be installed in a way that will not displace undercut reinforcement bars. Air compressors may be operated on the deck only if located directly over a pier and supported off undercut reinforcement bars. Compressors will not be allowed to travel over undercut reinforcement bars.

Concrete removal may proceed during final cleaning and concrete placement on adjacent portions of the deck, provided the removal does not interfere in any way with the cleaning or placement operations.

Water or contaminants from the hydro-scarification shall not be permitted in areas where the new overlay has been placed until the overlay has cured a minimum of 24 hours.

No concrete shall be removed within 6 ft. (1.8 m) of a newly-placed overlay until the concrete has obtained a minimum compressive strength of 3000 psi (20,700 kPa) or flexural strength of 600 psi (4,150 kPa).

(4) Curing.

Curing. The minimum curing time shall be 48 hours of wet cure followed by 48 hours of dry cure. The wet cure shall be according to Article 1020.13(a)(5) (Wetted Cotton Mat Method). When the cotton mats have been pre-dampened, excess water shall not be allowed to drip from the cotton mats onto the overlay during placement of the mats. After the wet cure is completed all layers of covering materials shall be removed to allow for the dry cure.

If the ambient temperature falls below 50°F (10°C) during either the wet or dry curing periods, the time below 50°F (10°C) will not be included in the 96 hour curing period. If there is sufficient rain to wet the surface of the overlay for more than one hour of the dry cure period, the wet time will not be included in the 48 hour dry cure period.

(5) Opening to Traffic.

No traffic or construction equipment will be permitted on the overlay until after the specified cure period and the concrete has obtained a minimum compressive strength of 4000 psi (27,500 kPa) or flexural strength of 675 psi (4,650 kPa) unless permitted by the Engineer.

(6) Overlay Testing. The Engineer reserves the right to conduct pull-off tests on the overlay to determine if any areas are not bonded to the underlying concrete, and at a time determined by the Engineer. The overlay will be tested according to the Illinois Test procedure 305 "Pull-off Test (Overlay Method)", and the Contractor shall provide the test equipment. Each individual test shall have a minimum strength of 150 psi (1,034 kPa). Unacceptable test results will require removal and replacement of the overlay at the Contractor's expense, and the locations will be determined by the Engineer. When removing portions of an overlay, the saw cut shall be a minimum depth of 1 in. (25 mm).

If the overlay is to remain in place, all core holes due to testing shall be filled with a rapid set mortar or concrete. Only enough water to permit placement and consolidation by rodding shall be used, and the material shall be struck-off flush with the adjacent material.

For a rapid set mortar mixture, one part packaged rapid set cement shall be combined with two parts fine aggregate, by volume; or a packaged rapid set mortar shall be used. For a rapid set concrete mixture, a packaged rapid set mortar shall be combined with coarse aggregate according to the manufacturer's instructions; or a packaged rapid set concrete shall be used. Mixing of a rapid set mortar or concrete shall be according to the manufacturer's instructions.

Method of Measurement. The area of bridge deck scarification will be measured for payment in square yards (square meters). No additional payment will be made for multiple passes of the equipment.

The concrete overlay will be measured for payment in square yards (square meters).

Additional concrete placed with the overlay, required to fill all depressions below the specified thickness will be measured for payment in cubic yards (cubic meters). The volume will be determined by subtracting the theoretical volume of the overlay from the ticketed volume of overlay delivered minus the volume estimated by the Engineer left in the last truck at the end of the overlay placement. The theoretical cubic yard (cubic meter) quantity for the overlay will be determined by multiplying the plan surface area of the overlay times the specified thickness of the overlay.

Basis of Payment. Bridge deck scarification will be paid for at the contract unit price per square yard (square meter) for BRIDGE DECK SCARIFICATION of the depth specified.

Latex concrete overlay will be paid for at the contract unit price per square yard (square meter) for BRIDGE DECK LATEX CONCRETE OVERLAY, of the thickness specified. The additional volume of overlay required to fill all depressions below the specified thickness and/or for grade adjustments will be paid for at the Contractor's actual material cost for the latex concrete per cubic yard (cubic meter) times an adjustment factor. For volumes 15 percent or less over the theoretical volume of the overlay the adjustment factor will be 1.15. For volumes greater than 15 percent the adjustment factor will be 1.25 for that volume over 15 percent of the theoretical volume of the overlay.

Areas requiring additional partial depth removal of unsound concrete after hydro-scarification will be paid for according to Article 109.04.

When the Engineer conducts pull-off tests on the existing surface or overlay and they are acceptable, Contractor expenses incurred due to testing and for filling core holes will be paid according to Article 109.04. Unacceptable pull-off tests will be at the Contractor's expense.

DRILLED SOLDIER PILE RETAINING WALL

Effective: September 20, 2001

Revised: January 3, 2014

Description. This work shall consist of providing all labor, materials, and equipment necessary to fabricate and furnish the soldier piles, create and maintain the shaft excavations, set and brace the soldier piles into position and encase the soldier piles in concrete to the specified elevation. Also included in this work is the backfilling of the remainder of the shaft excavation with Controlled Low-Strength Material (CLSM), and the furnishing and installation of lagging. All work shall be according to the details shown on the plans and as directed by the Engineer.

The remainder of the retaining wall components as shown on the plans, such as concrete facing, shear studs, reinforcement bars, tie backs, hand rails, and various drainage items etc., are not included in this Special Provision but are paid for as specified elsewhere in this Contract.

Materials. The materials used for the soldier piles and lagging shall satisfy the following requirements:

- (a) The structural steel components for the soldier piles shall conform to the requirements of AASHTO M270, Grade 36 (M270M Grade 250), unless otherwise designated on the plans.
- (b) The soldier pile encasement concrete shall be Class DS according to Article 516.02.
- (c) The Controlled Low-Strength Material (CLSM), used for backfilling shaft excavations above the soldier pile encasement concrete and for backfilling secant lagging excavations, to the existing ground surface, shall be according to Section 1019.
- (d) Temporary casing shall be produced by electric seam, butt, or spiral welding to produce a smooth wall surface, fabricated from steel satisfying ASTM A252 Grade 2. The minimum wall thickness shall be as required to resist the anticipated installation and dewatering stresses, as determined by the Contractor, but in no case less than 1/4 in. (6 mm).
- (e) Drilling slurry shall consist of a polymer or mineral base material. Mineral slurry shall have both a mineral grain size that will remain in suspension with sufficient viscosity and gel characteristics to transport excavated material to a suitable screening system. The percentage and specific gravity of the material used to make the suspension shall be sufficient to maintain the stability of the excavation and to allow proper concrete placement. For polymer slurry, the calcium hardness of the mixing water shall not exceed 100 mg/L.
- (f) Timber Lagging. The minimum tabulated unit stress in bending (F_b), used for the design of the timber lagging, shall be 1000 psi (6.9 MPa) unless otherwise specified on the plans. When treated timber lagging is specified on the plans, the method of treatment shall be according to Article 1007.12. All timber shall meet the inspection requirements of Article 1007.01.
- (g) Precast Concrete Lagging. Precast concrete lagging shall be according to Section 504 of the Standard Specifications, except as modified herein. Unless specified otherwise, precast concrete lagging surfaces exposed to view in the completed wall shall be finished according to Article 503.15. When specified on the plans, the exposed surface shall be finished with a concrete form liner approved by the Engineer. The back face of the panel shall be roughly screeded to eliminate open pockets of aggregate and surface distortions in excess of 1/4 in. Reinforcement for precast concrete lagging shall be epoxy coated. Lifting inserts shall have a total minimum design capacity based on yield strength of 4 times the dead load calculated for the width of lagging used. Fabric bearing pads, when specified on the plans, shall meet the requirements of Section 1082. Threaded inserts, or other accessories, cast into the precast concrete lagging shall be galvanized according to AASHTO M111 or M232 as applicable.

Equipment. The drilling equipment shall have adequate capacity, including power, torque and down thrust, to create a shaft excavation of the maximum diameter specified to a depth of 20 percent beyond the depths shown on the plans. Concrete equipment shall be according to Article 1020.03.

Construction Requirements. The shaft excavation for each soldier pile shall extend to the tip elevation indicated on the plans for soldier piles terminating in soil or to the required embedment in rock when rock is indicated on the contract plans. The Contractor shall satisfy the following requirements:

- (a) Drilling Methods. The soldier pile installation shall be according to Articles 516.06(a),(b), or(c).

No shaft excavation shall be made adjacent to a soldier pile with encasement concrete that has a compressive strength less than 1500 psi (10.35 MPa), nor adjacent to secant lagging until the CLSM has reach sufficient strength to maintain its position and shape unless otherwise approved by the Engineer. Materials removed or generated from the shaft excavations shall be disposed of by the Contractor according to Article 202.03. Excavation by blasting will not be permitted.

- (b) Drilling Slurry. During construction, the level of the slurry shall be maintained at a height sufficient to prevent caving of the hole. In the event of a sudden or significant loss of slurry to the hole, the construction of that shaft shall be stopped and the shaft excavation backfilled or supported by temporary casing until a method to stop slurry loss, or an alternate construction procedure, has been developed and approved by the Engineer.

- (c) Obstructions. Obstructions shall be defined as any object (such as but not limited to, boulders, logs, old foundations, etc.) that cannot be removed with normal earth drilling procedures, but requires special augers, tooling, core barrels or rock augers to remove the obstruction. When obstructions are encountered, the Contractor shall notify the Engineer and upon concurrence of the Engineer, the Contractor shall begin working to core, break up, push aside, or remove the obstruction. Lost tools or equipment in the excavation, as a result of the Contractor's operation, shall not be defined as obstructions and shall be removed at the Contractor's expense.

- (d) Top of Rock. The top of rock will be considered as the point where rock, defined as bedded deposits and conglomerate deposits exhibiting the physical characteristics and difficulty of rock removal as determined by the Engineer, is encountered which cannot be drilled with earth augers and/or underreaming tools configured to be effective in the soils indicated in the contract documents, and requires the use of special rock augers, core barrels, air tools, blasting, or other methods of hand excavation.

- (e) Design Modifications. If the top of rock elevation encountered is below that estimated on the plans, such that the soldier pile length above rock is increased by more than 10 percent, the Engineer shall be contacted to determine if any soldier pile design changes are required. In addition, if the type of soil or rock encountered is not similar to that shown in the subsurface exploration data, the Engineer shall be contacted to determine if revisions are necessary.

- (f) Soldier Pile Fabrication and Placement. The soldier pile is defined as the structural steel section(s) shown on the plans as well as any connecting plates used to join multiple sections. The types of soldier piles shall be defined as HP, W Sections, or Built-Up Sections. Cleaning and painting of all steel components, when specified, shall be as shown on the plans and accomplished according to Section 506. This work will not be paid for separately, but shall be considered included in the cost of Furnishing Soldier Piles of the type specified.

The soldier pile shall be shop fabricated such that no field welding is required. The Contractor shall attach suitable bracing or support to maintain the position of the soldier pile within the shaft excavation such that the final location will satisfy the Construction Tolerances portion of this Special Provision. The bracing or supports shall remain in place until the concrete for encasement has reached a minimum compressive strength of 1500 psi (10.35 MPa).

When embedment in rock is indicated on the plans, modification to the length of a soldier pile may be required to satisfy the required embedment. The modification shall be made to the top of the soldier pile unless otherwise approved by the Engineer. When the top of rock encountered is above the estimated elevation indicated on the plans, the soldier piles shall be cut to the required length. If the top of rock encountered is below that estimated on the plans, the Contractor shall either furnish longer soldier piles or splice on additional length of soldier pile per Article 512.05(a) to satisfy the required embedment in rock. In order to avoid delays, the Contractor may have additional soldier pile sections fabricated as necessary to make the required adjustments. Additional soldier pile quantities, above those shown on the plans, shall not be furnished without prior written approval by the Engineer.

- (g) Concrete Placement. Concrete work shall be performed according to Article 516.12 and as specified herein.

The soldier pile encasement concrete pour shall be made in a continuous manner from the bottom of the shaft excavation to the elevation indicated on the plans. Concrete shall be placed as soon as possible after the excavation is completed and the soldier pile is secured in the proper position. Uneven levels of concrete placed in front, behind, and on the sides of the soldier pile shall be minimized to avoid soldier pile movement, and to ensure complete encasement.

Following the soldier pile encasement concrete pour, the remaining portion of the shaft excavation shall be backfilled with CLSM according to Section 593. CLSM Secant lagging placement shall be placed as soon as practical after the shaft excavation is cleared.

- (h) Construction Tolerances. The soldier piles shall be installed within the excavation to satisfy the following tolerances:
- (1) The center of the soldier pile shall be within 2 in. (50 mm) of plan location in any direction at the top of the pile.
 - (2) The out of vertical plumbness of the soldier pile shall not exceed 1/8 in./ft. (10 mm/m)
 - (3) The top of the soldier pile shall be within ± 2 in. (± 50 mm) of the plan elevation.
- (i) Timber Lagging. Timber lagging, when required by the plans, installed below the original ground surface, shall be placed from the top down as the excavation proceeds. Lagging shown above grade shall be installed and backfilled against prior to installing any permanent facing to minimize post construction deflections. Over-excavation required to place the timber lagging behind the flanges of the soldier piles shall be the minimum necessary to install the lagging. Any voids produced behind the lagging shall be filled with porous granular embankment at the Contractors expense. When the plans require the Contractor to design the timber lagging, the design shall be based on established practices published in FHWA or AASHTO documents considering lateral earth pressure, construction loading, traffic surcharges and the lagging span length(s). The nominal thickness of the lagging selected shall not be less than 3 in. (75 mm) and shall satisfy the minimum tabulated unit stress in bending (Fb) stated elsewhere in this Special Provision. The Contractor shall be responsible for the successful performance of the lagging system until the concrete facing is installed. When the nominal timber lagging thickness(s) and allowable stress are specified on the plans, the timber shall be according to Article 1007.03.
- (j) Precast Concrete Lagging. Precast concrete lagging, when required by the plans, installed below the original ground surface, shall be placed from the top down as the excavation proceeds. Lagging shown above grade shall be installed and backfilled against prior to installing any permanent facing to minimize post construction deflections. Over-excavation required to place the precast lagging behind the flanges of the soldier piles shall be the minimum necessary to install the lagging. Any voids produced behind the lagging shall be filled with porous granular embankment at the Contractor's expense. When the plans require the Contractor to design the precast concrete lagging, the design shall be based on established practices published in FHWA or AASHTO documents considering lateral earth pressure, construction loading, traffic surcharges and the lagging span length(s). The Contractor shall be responsible for the successful performance of the lagging system until the permanent concrete facing, when specified on the plans, is installed.

The precast concrete lagging shall be reinforced with a minimum of 0.31 square inches/foot (655 Sq. mm/meter) of horizontal and vertical reinforcement per unit width of lagging with a minimum thickness of 3 in. (75 mm).

When precast concrete lagging is exposed to view in the completed wall, shop drawings for the lagging shall be submitted according to Article 1042.03(b) and Article 105.04 of the Standard Specifications. The supplier selected by the Contractor shall submit complete design calculations and shop drawings, prepared and sealed by an Illinois Licensed Structural Engineer, for approval by the Engineer.

- (k) Structure Excavation. When structure excavation is necessary to place a concrete facing, it shall be made and paid for according to Section 502 except that the horizontal limits for structure excavation shall be from the face of the soldier pile to a vertical plane 2 ft. (600 mm) from the finished face of the wall. The depth shall be from the top of the original ground surface to the bottom of the concrete facing. The additional excavation necessary to place the lagging whether through soil or CLSM shall be included in this work.
- (l) Geocomposite Wall Drain. When required by the plans, the geocomposite wall drain shall be installed and paid for according to Section 591 except that, in the case where a concrete facing is specified on the plans, the wall drain shall be installed on the concrete facing side of the lagging with the pervious (fabric) side of the drain installed to face the lagging. When a concrete facing is not specified on the plans, the pervious (fabric) side of the drain shall be installed to face the soil. In this case, the drain shall be installed in stages as the lagging is installed. The wall drain shall be placed in sections and spliced, or kept on a continuous roll, so that as each piece of lagging is placed, the drain can be properly located as the excavation proceeds.

Method of Measurement. The furnishing of soldier piles will be measured for payment in feet (meters) along the centerline of the soldier pile for each of the types specified. The length shall be determined as the difference between the plan top of soldier pile and the final as built shaft excavation bottom.

The drilling and setting of soldier piles in soil and rock, will be measured for payment and the volumes computed in cubic feet (cubic meters) for the shaft excavation required to set the soldier piles according to the plans and specifications, and accepted by the Engineer. These volumes shall be the theoretical volumes computed using the diameter(s) of the shaft(s) shown in the plans and the depth of the excavation in soil and/or rock as appropriate. The depth in soil will be defined as the difference in elevation between the ground surface at the time of concrete placement and the bottom of the shaft excavation or the top of rock (when present), whichever is encountered first. The depth in rock will be defined as the difference in elevation between the measured top of rock and the bottom of the shaft excavation.

Drilling and placing CLSM secant lagging shall be measured for payment in cubic feet (cubic meters) of the shaft excavation required to install the secant lagging as shown in the plans. This volume shall be the theoretical volume computed using the diameter(s) shown on the plans and the difference in elevation between the as built shaft excavation bottom and the ground surface at the time of the CLSM placement.

Timber and precast concrete lagging shall be measured for payment in square feet (square meters) of lagging installed to the limits as shown on the plans. The quantity shall be calculated using the minimum lagging length required on the plans multiplied by the as-installed height of lagging, for each bay of lagging spanning between the soldier piles.

Basis of Payment. The furnishing of soldier piles will be paid for at the contract unit price per foot (meter) for FURNISHING SOLDIER PILES, of the type specified, for the total number of feet (meters) furnished to the job site. The cost of any field splices required due to changes in top of rock elevation shall be paid for according to Article 109.04.

The drilling and setting of soldier piles will be paid for at the contract unit price per cubic foot (cubic meter) for DRILLING AND SETTING SOLDIER PILES (IN SOIL) and DRILLING AND SETTING SOLDIER PILES (IN ROCK). The required shaft excavation, soldier pile encasement concrete and any CLSM backfill required around each soldier pile will not be paid for separately but shall be included in this item.

Timber lagging will be paid for at the contract unit price per square foot (square meter) for UNTREATED TIMBER LAGGING, or TREATED TIMBER LAGGING as detailed on the plans. Precast concrete lagging will be paid for at the contract unit price per square foot (square meter) for PRECAST CONCRETE LAGGING as detailed on the plans.

The secant lagging will be paid for at the contract unit price per cubic foot (cubic meter) for SECANT LAGGING. The required shaft excavation and CLSM backfill required to fill that excavation shall be included in this item.

Obstruction mitigation shall be paid for according to Article 109.04.

No additional compensation, other than noted above, will be allowed for removing and disposing of excavated materials, for furnishing and placing concrete, CLSM, bracing, lining, temporary casings placed and removed or left in place, or for any excavation made or concrete placed outside of the plan diameter(s) of the shaft(s) specified.

PIPE UNDERDRAINS FOR STRUCTURES

Effective: May 17, 2000

Revised: January 22, 2010

Description. This work shall consist of furnishing and installing a pipe underdrain system as shown on the plans, as specified herein, and as directed by the Engineer.

Materials. Materials shall meet the requirements as set forth below:

The perforated pipe underdrain shall be according to Article 601.02 of the Standard Specifications. Outlet pipes or pipes connecting to a separate storm sewer system shall not be perforated.

The drainage aggregate shall be a combination of one or more of the following gradations, FA1, FA2, CA5, CA7, CA8, CA11, or CA13 thru 16, according to Sections 1003 and 1004 of the Standard Specifications.

The fabric surrounding the drainage aggregate shall be Geotechnical Fabric for French Drains according to Article 1080.05 of the Standard Specifications.

Construction Requirements. All work shall be according to the applicable requirements of Section 601 of the Standard Specifications except as modified below.

The pipe underdrains shall consist of a perforated pipe drain situated at the bottom of an area of drainage aggregate wrapped completely in geotechnical fabric and shall be installed to the lines and gradients as shown on the plans.

Method of Measurement. Pipe Underdrains for Structures shall be measured for payment in feet (meters), in place. Measurement shall be along the centerline of the pipe underdrains. All connectors, outlet pipes, elbows, and all other miscellaneous items shall be included in the measurement. Concrete headwalls shall be included in the cost of Pipe Underdrains for Structures, but shall not be included in the measurement for payment.

Basis of Payment. This work will be paid for at the contract unit price per foot (meter) for PIPE UNDERDRAINS FOR STRUCTURES of the diameter specified. Furnishing and installation of the drainage aggregate, geotechnical fabric, forming holes in structural elements and any excavation required, will not be paid for separately, but shall be included in the cost of the pipe underdrains for structures.

STRUCTURAL REPAIR OF CONCRETE

Effective: March 15, 2006

Revised: April 18, 2014

Description. This work shall consist of structurally repairing concrete.

Materials. Materials shall be according to the following.

Item	Article/Section
(a) Portland Cement Concrete (Note 1)	1020
(b) R1 or R2 Concrete (Note 2)	
(c) Normal Weight Concrete (Notes 3 and 4)	
(d) Shotcrete (High Performance) (Note 5 and 6)	
(e) Reinforcement Bars	1006.10
(f) Anchor Bolts	1006.09
(g) Water	1002
(h) Curing Compound (Type I)	1022.01
(i) Cotton Mats	1022.02
(j) Protective Coat	1023.01
(k) Epoxy (Note 7)	1025
(l) Mechanical Bar Splicers	508.06(c)

Note 1. The concrete shall be Class SI, except the cement factor shall be a minimum 6.65 cwt/cu yd (395 kg/cu m), the coarse aggregate shall be a CA 16, and the strength shall be a minimum 4000 psi (27,500 kPa) compressive or 675 psi (4650 kPa) flexural at 14 days. A high range water-reducing admixture shall be used to obtain a 5-7 in. (125-175 mm) slump, but a cement factor reduction according to Article 1020.05(b)(8) is prohibited. A self-consolidating concrete mixture is also acceptable per Article 1020.04, except the mix design requirements of this note regarding the cement factor, coarse aggregate, strength, and cement factor reduction shall apply.

Note 2. The R1 or R2 concrete shall be from the Department's approved list of Packaged, Dry, Rapid Hardening, Cementitious Materials for Concrete Repairs. The R1 or R2 concrete shall comply with the air content and strength requirements for Class SI concrete as indicated in Note 1. Mixing shall be per the manufacturer's recommendations, except the water/cement ratio shall not exceed the value specified for Class SI concrete as indicated in Note 1. A high range water-reducing admixture shall be used to obtain a 5-7 in. (125-175 mm) slump, and a retarder may be required to allow time to perform the required field tests. The admixtures shall be per the manufacturer's recommendation, and the Department's approved list of Concrete Admixtures shall not apply.

Note 3. The “high slump” packaged concrete mixture shall be from the Department’s approved list of Packaged, Dry, Formed, Concrete Repair Mixtures. The materials and preparation of aggregate shall be according to ASTM C 387. The cement factor shall be 6.65 cwt/cu yd (395 kg/cu m) minimum to 7.05 cwt/cu yd (418 kg/cu m) maximum. Cement replacement with fly ash or ground granulated blast-furnace slag shall be according to Section 1020. The “high slump” packaged concrete mixture shall have a water soluble chloride ion content of less than 0.40 lb/cu yd (0.24 kg/cu m). The test shall be performed according to ASTM C 1218, and the “high slump” packaged concrete mixture shall have an age of 28 to 42 days at the time of test. The ASTM C 1218 test shall be performed by an independent lab a minimum of once every two years, and the test results shall be provided to the Department. The coarse aggregate shall be a maximum size of 1/2 in. (12.5 mm). The packaged concrete mixture shall comply with the air content and strength requirements for Class SI concrete as indicated in Note 1. Mixing shall be per the manufacturer’s recommendations, except the water/cement ratio shall not exceed the value specified for Class SI concrete as indicated in Note 1. A high range water-reducing admixture shall be used to obtain a 5-7 in. (125-175 mm) slump. The admixture shall be per the manufacturer’s recommendation, and the Department’s approved list of Concrete Admixtures shall not apply. A maximum slump of 10 in. (250 mm) may be permitted if no segregation is observed by the Engineer in a laboratory or field evaluation.

Note 4 The “self-consolidating concrete” packaged concrete mixture shall be from the Department’s approved list of Packaged, Dry, Formed, Concrete Repair Mixtures. The materials and preparation of aggregate shall be according to ASTM C 387. The cement factor shall be 6.65 cwt/cu yd (395 kg/cu m) minimum to 7.05 cwt/cu yd (418 kg/cu m) maximum. Cement replacement with fly ash or ground granulated blast-furnace slag shall be according to Section 1020. The “self-consolidating concrete” packaged concrete mixture shall have a water soluble chloride ion content of less than 0.40 lb/cu yd (0.24 kg/cu m). The test shall be performed according to ASTM C 1218, and the “self-consolidating concrete” packaged concrete mixture shall have an age of 28 to 42 days at the time of test. The ASTM C 1218 test shall be performed by an independent lab a minimum of once every two years, and the test results shall be provided to the Department. The concrete mixture should be uniformly graded, and the coarse aggregate shall be a maximum size of 1/2 in. (12.5 mm). The fine aggregate proportion shall be a maximum 50 percent by weight (mass) of the total aggregate used. The packaged concrete mixture shall comply with the air content and strength requirements for Class SI concrete as indicated in Note 1. Mixing shall be per the manufacturer’s recommendations, except the water/cement ratio shall not exceed the value specified for Class SI concrete as indicated in Note 1. The admixtures used to produce self-consolidating concrete shall be per the manufacturer’s recommendation, and the Department’s approved list of Concrete Admixtures shall not apply. The packaged concrete mixture shall meet the following self-consolidating requirements:

- The slump flow range shall be 22 in. (560 mm) minimum to 28 in. (710 mm) maximum and tested according to Illinois Test Procedure SCC-2.
- The visual stability index shall be a maximum of 1 and tested according to Illinois Test Procedure SCC-2.
- The J-Ring value shall be a maximum of 2 in. (50 mm) and tested according to Illinois Test Procedure SCC-3. The L-Box blocking ratio shall be a minimum of 80 percent and tested according to Illinois Test Procedure SCC-4. The Manufacturer has the option to select either the J-Ring or L-Box test.
- The hardened visual stability index shall be a maximum of 1 and tested according to Illinois Test Procedure SCC-6.

Note 5. Packaged shotcrete that includes aggregate shall be from the Department’s approved list of Packaged High Performance Shotcrete, and independent laboratory test results showing the product meets Department specifications will be required. The product shall be a packaged, pre-blended, and dry combination of materials, for the wet-mix shotcrete method according to ASTM C 1480. A non-chloride accelerator may be used according to the shotcrete manufacturer’s recommendations. The shotcrete shall be Type FA or CA, Grade FR, and Class I. The fibers shall be Type III synthetic according to ASTM C 1116.

The packaged shotcrete shall have a water soluble chloride ion content of less than 0.40 lb/cu yd (0.24 kg/cu m). The test shall be performed according to ASTM C 1218, and the hardened shotcrete shall have an age of 28 to 42 days at the time of test. The ASTM C 1218 test shall be performed by an independent lab a minimum of once every two years, and the test results shall be provided to the Department.

Each individual aggregate used in the packaged shotcrete shall have either a maximum ASTM C 1260 expansion of 0.16 percent or a maximum ASTM C 1293 expansion of 0.040 percent. However, the ASTM C 1260 value may be increased to 0.27 percent for each individual aggregate if the cement total equivalent alkali content ($\text{Na}_2\text{O} + 0.658\text{K}_2\text{O}$) does not exceed 0.60 percent. As an alternative to these requirements, ASTM C 1567 testing which shows the packaged shotcrete has a maximum expansion of 0.16 percent may be submitted. The ASTM C 1260, C 1293, or C 1567 test shall be performed a minimum of once every two years.

The 7 and 28 day compressive strength requirements in ASTM C 1480 shall not apply. Instead the shotcrete shall obtain a minimum compressive strength of 4000 psi (27,500 kPa) at 14 days.

The packaged shotcrete shall be limited to the following proportions:

The portland cement and finely divided minerals shall be 6.05 cwt/cu yd (360 kg/cu m) to 8.50 cwt/cu yd (505 kg/cu m) for Type FA and 6.05 cwt/cu yd (360 kg/cu. m) to 7.50 cwt/cu yd (445 kg/cu m) for Type CA. The portland cement shall not be below 4.70 cwt/cu yd (279 kg/cu m) for Type FA or CA.

The finely divided mineral(s) shall constitute a maximum of 35 percent of the total cement plus finely divided mineral(s).

Class F fly ash is optional and the maximum shall be 20 percent by weight (mass) of cement.

Class C fly ash is optional and the maximum shall be 25 percent by weight (mass) of cement.

Ground granulated blast-furnace slag is optional and the maximum shall be 30 percent by weight (mass) of cement.

Microsilica is required and shall be a minimum of 5 percent by weight (mass) of cement, and a maximum of 10 percent. As an alternative to microsilica, high-reactivity metakaolin may be used at a minimum of 5 percent by weight (mass) of cement, and a maximum of 10 percent.

Fly ash shall not be used in combination with ground granulated blast-furnace slag. Class F fly ash shall not be used in combination with Class C fly ash. Microsilica shall not be used in combination with high-reactivity metakaolin. A finely divided mineral shall not be used in combination with a blended hydraulic cement, except for microsilica or high-reactivity metakaolin.

The water/cement ratio as defined in Article 1020.06 shall be a maximum of 0.42.

The air content as shot shall be 4.0 – 8.0 percent.

Note 6 Packaged shotcrete that does not include pre-blended aggregate shall be from the Department's approved list of Packaged High Performance Shotcrete, and independent laboratory test results showing the product meets Department specifications will be required. The shotcrete shall be according to Note 5, except the added aggregate shall also be according to Articles 1003.02 and 1004.02. The aggregate gradation shall be according to the manufacturer. The shotcrete shall be batched and mixed with added aggregate according to the manufacturer.

Note 7. In addition ASTM C 881, Type IV, Grade 2 or 3, Class A, B, or C may be used.

Equipment. Equipment shall be according to Article 503.03 and the following.

Chipping Hammer – The chipping hammer for removing concrete shall be a light-duty pneumatic or electric tool with a 15 lb. (7 kg) maximum class or less.

Blast Cleaning Equipment – Blast cleaning equipment for concrete surface preparation shall be the abrasive type, and the equipment shall have oil traps.

Hydrodemolition Equipment – Hydrodemolition equipment for removing concrete shall be calibrated, and shall use water according to Section 1002.

High Performance Shotcrete Equipment – The batching, mixing, pumping, hose, nozzle, and auxiliary equipment shall be for the wet-mix shotcrete method, and shall meet the requirements of ACI 506R.

Construction Requirements

General. The repair methods shall be either formed concrete repair or shotcrete. The repair method shall be selected by the Contractor with the following rules.

- (a) Rule 1. For formed concrete repair, a subsequent patch to repair the placement point after initial concrete placement will not be allowed. As an example, this may occur in a vertical location located at the top of the repair.
- (b) Rule 2. Formed concrete repair shall not be used for overhead applications.
- (c) Rule 3. If formed concrete repair is used for locations that have reinforcement with less than 0.75 in. (19 mm) of concrete cover, the concrete mixture shall contain fly ash or ground granulated blast-furnace slag at the maximum cement replacement allowed.
- (d) Rule 4. Shotcrete shall not be used for any repair greater than 6 in. (150 mm) in depth, except in horizontal applications, where the shotcrete may be placed from above in one lift.
- (e) Rule 5. Shotcrete shall not be used for repairs greater than 4 in. (100 mm) in depth unless the shotcrete mixture contains 3/8 in. (9.5 mm) aggregate.

Temporary Shoring or Cribbing. When a temporary shoring or cribbing support system is required, the Contractor shall provide details and computations, prepared and sealed by an Illinois licensed Structural Engineer, to the Department for review and approval. When ever possible the support system shall be installed prior to starting the associated concrete removal. If no system is specified, but during the course of removal the need for temporary shoring or cribbing becomes apparent or is directed by the Engineer due to a structural concern, the Contractor shall not proceed with any further removal work until an appropriate and approved support system is installed.

Concrete Removal. The Contractor shall provide ladders or other appropriate equipment for the Engineer to mark the removal areas. Repair configurations will be kept simple, and squared corners will be preferred. The repair perimeter shall be sawed a depth of 1/2 in. (13 mm) or less, as required to avoid cutting the reinforcement. Any cut reinforcement shall be repaired or replaced at the expense of the Contractor. If the concrete is broken or removed beyond the limits of the initial saw cut, the new repair perimeter shall be recut. The areas to be repaired shall have all loose, unsound concrete removed completely by the use of chipping hammers, hydrodemolition equipment, or other methods approved by the Engineer. The concrete removal shall extend along the reinforcement bar until the reinforcement is free of bond inhibiting corrosion. Reinforcement bars with 50 percent or more exposed shall be undercut to a depth of 3/4 in. (19 mm) or the diameter of the reinforcement bar, whichever is larger.

If sound concrete is encountered before existing reinforcement bars are exposed, further removal of concrete shall not be performed unless the minimum repair depth is not met.

The repair depth shall be a minimum of 1 in. (25 mm). The substrate profile shall be $\pm 1/16$ in. (± 1.5 mm). The perimeter of the repair area shall have a vertical face.

If a repair is located at the ground line, any excavation required below the ground line to complete the repair shall be included in this work.

The Contractor shall have a maximum of 14 calendar days to complete each repair location with concrete or shotcrete, once concrete removal has started for the repair.

The Engineer shall be notified of concrete removal that exceeds 6 in. (150 mm) in depth, one fourth the cross section of a structural member, more than half the vertical column reinforcement is exposed in a cross section, more than 6 consecutive reinforcement bars are exposed in any direction, within 1.5 in. (38 mm) of a bearing area, or other structural concern. Excessive deterioration or removal may require further evaluation of the structure or installation of temporary shoring and cribbing support system.

Surface Preparation. Prior to placing the concrete or shotcrete, the Contractor shall prepare the repair area and exposed reinforcement by blast cleaning. The blast cleaning shall provide a surface that is free of oil, dirt, and loose material.

If a succeeding layer of shotcrete is to be applied, the initial shotcrete surface and remaining exposed reinforcement shall be free of curing compound, oil, dirt, loose material, rebound (i.e. shotcrete material leaner than the original mixture which ricochets off the receiving surface), and overspray. Preparation may be by lightly brushing or blast cleaning if the previous shotcrete surface is less than 36 hours old. If more than 36 hours old, the surface shall be prepared by blast cleaning.

The repair area and perimeter vertical face shall have a rough surface. Care shall be taken to ensure the perimeter sawcut is roughened by blast cleaning. Just prior to concrete or shotcrete placement, saturate the repair area with water to a saturated surface-dry condition. Any standing water shall be removed.

Concrete or shotcrete placement shall be done within 3 calendar days of the surface preparation or the repair area shall be prepared again.

Reinforcement. Exposed reinforcement bars shall be cleaned of concrete and corrosion by blast cleaning. After cleaning, all exposed reinforcement shall be carefully evaluated to determine if replacement or additional reinforcement bars are required.

Reinforcing bars that have been cut or have lost 25 percent or more of their original cross sectional area shall be supplemented by new in kind reinforcement bars. New bars shall be lapped a minimum of 32 bar diameters to existing bars. A mechanical bar splicer shall be used when it is not feasible to provide the minimum bar lap. No welding of bars shall be performed.

Intersecting reinforcement bars shall be tightly secured to each other using 0.006 in. (1.6 mm) or heavier gauge tie wire, and shall be adequately supported to minimize movement during concrete placement or application of shotcrete.

For reinforcement bar locations with less than 0.75 in. (19 mm) of cover, protective coat shall be applied to the completed repair. The application of the protective coat shall be according to Article 503.19, 2nd paragraph, except blast cleaning shall be performed to remove curing compound.

The Contractor shall anchor the new concrete to the existing concrete with 3/4 in. (19 mm) diameter hook bolts for all repair areas where the depth of concrete removal is greater than 8 in. (205 mm) and there is no existing reinforcement extending into the repair area. The hook bolts shall be spaced at 15 in. (380 mm) maximum centers both vertically and horizontally, and shall be a minimum of 12 in. (305 mm) away from the perimeter of the repair. The hook bolts shall be installed according to Section 584.

Repair Methods. All repair areas shall be inspected and approved by the Engineer prior to placement of the concrete or application of the shotcrete.

- (a) Formed Concrete Repair. Falsework shall be according to Article 503.05. Forms shall be according to Article 503.06. Formwork shall provide a smooth and uniform concrete finish, and shall approximately match the existing concrete structure. Formwork shall be mortar tight and closely fitted where they adjoin the existing concrete surface to prevent leakage. Air vents may be provided to reduce voids and improve surface appearance. The Contractor may use exterior mechanical vibration, as approved by the Engineer, to release air pockets that may be entrapped.

The concrete for formed concrete repair shall be a Class SI Concrete, or a packaged R1 or R2 Concrete with coarse aggregate added, or a packaged Normal Weight Concrete at the Contractor's option. The concrete shall be placed and consolidated according to Article 503.07. The concrete shall not be placed when frost is present on the surface of the repair area, or the surface temperature of the repair area is less than 40 °F (4 °C). All repaired members shall be restored as close as practicable to their original dimensions.

Curing shall be done according to Article 1020.13.

If temperatures below 45°F (7°C) are forecast during the curing period, protection methods shall be used. Protection Method I according to Article 1020.13(d)(1), or Protection Method II according to Article 1020.13(d)(2) shall be used during the curing period.

The surfaces of the completed repair shall be finished according to Article 503.15.

- (b) Shotcrete. Shotcrete shall be tested by the Engineer for air content according to Illinois Modified AASHTO T 152. The sample shall be obtained from the discharge end of the nozzle by shooting a pile large enough to scoop a representative amount for filling the air meter measuring bowl. Shotcrete shall not be shot directly into the measuring bowl for testing.

For compressive strength of shotcrete, a 18 x 18 x 3.5 in. (457 x 457 x 89 mm) test panel shall be shot by the Contractor for testing by the Engineer. A steel form test panel shall have a minimum thickness of 3/16 in. (5 mm) for the bottom and sides. A wood form test panel shall have a minimum 3/4 in. (19 mm) thick bottom, and a minimum 1.5 in. (38 mm) thickness for the sides. The test panel shall be cured according to Article 1020.13 (a) (3) or (5) while stored at the jobsite and during delivery to the laboratory. After delivery to the laboratory for testing, curing and testing shall be according to ASTM C 1140.

The method of alignment control (i.e. ground wires, guide strips, depth gages, depth probes, and formwork) to ensure the specified shotcrete thickness and reinforcing bar cover is obtained shall be according to ACI 506R. Ground wires shall be removed after completion of cutting operations. Guide strips and formwork shall be of dimensions and a configuration that do not prevent proper application of shotcrete. Metal depth gauges shall be cut 1/4 in. (6 mm) below the finished surface. All repaired members shall be restored as close as practicable to their original dimensions.

For air temperature limits when applying shotcrete in cold weather, the first paragraph of Article 1020.14(b) shall apply. For hot weather, shotcrete shall not be applied when the air temperature is greater than 90°F (32°C). The applied shotcrete shall have a minimum temperature of 50°F (10°C) and a maximum temperature of 90°F (32°C). The shotcrete shall not be applied during periods of rain unless protective covers or enclosures are installed. The shotcrete shall not be applied when frost is present on the surface of the repair area, or the surface temperature of the repair area is less than 40°F (4°C). If necessary, lighting shall be provided to provide a clear view of the shooting area.

The shotcrete shall be applied according to ACI 506R, and shall be done in a manner that does not result in cold joints, laminations, sandy areas, voids, sags, or separations. In addition, the shotcrete shall be applied in a manner that results in maximum densification of the shotcrete. Shotcrete which is identified as being unacceptable while still plastic shall be removed and re-applied.

The nozzle shall normally be at a distance of 2 to 5 ft. (0.6 to 1.5 m) from the receiving surface, and shall be oriented at right angles to the receiving surface. Exceptions to this requirement will be permitted to fill corners, encase large diameter reinforcing bars, or as approved by the Engineer. For any exception, the nozzle shall never be oriented more than 45 degrees from the surface. Care shall be taken to keep the front face of the reinforcement bar clean during shooting operations. Shotcrete shall be built up from behind the reinforcement bar. Accumulations of rebound and overspray shall be continuously removed prior to application of new shotcrete. Rebound material shall not be incorporated in the work.

Whenever possible, shotcrete shall be applied to the full thickness in a single layer. The maximum thickness shall be according to Rules 4 and 5 under the Construction Requirements, General. When two or more layers are required, the minimum number shall be used and shall be done in a manner without sagging or separation. A flash coat (i.e. a thin layer of up to 1/4 in. (6 mm) applied shotcrete) may be used as the final lift for overhead applications.

Prior to application of a succeeding layer of shotcrete, the initial layer of shotcrete shall be prepared according to the surface preparation and reinforcement bar cleaning requirements. Upon completion of the surface preparation and reinforcement bar treatment, water shall be applied according to the surface preparation requirements unless the surface is moist. The second layer of shotcrete shall then be applied within 30 minutes.

Shotcrete shall be cut back to line and grade using trowels, cutting rods, screeds or other suitable devices. The shotcrete shall be allowed to stiffen sufficiently before cutting. Cutting shall not cause cracks or delaminations in the shotcrete. For depressions, cut material may be used for small areas. Rebound material shall not be incorporated in the work. For the final finish, a wood float shall be used to approximately match the existing concrete texture. A manufacturer approved finishing aid may be used. Water shall not be used as a finishing aid. All repaired members shall be restored as close as practicable to their original dimensions.

Contractor operations for curing shall be continuous with shotcrete placement and finishing operations. Curing shall be accomplished using wetted cotton mats, membrane curing, or a combination of both.. Cotton mats shall be applied according to Article 1020.13(a)(5) except the exposed layer of shotcrete shall be covered within 10 minutes after finishing, and wet curing shall begin immediately. Manufacturer approved curing compound shall be applied according to Article 1020.13(a)(4), except the curing compound shall be applied as soon as the shotcrete has hardened sufficiently to prevent marring the surface, and each of the two separate applications shall be applied in opposite directions to ensure coverage. Note 5 of the Index Table in Article 1020.13 shall apply to the membrane curing method.

When a shotcrete layer is to be covered by a succeeding shotcrete layer within 36 hours, the repair area shall be protected with intermittent hand fogging, or wet curing with either burlap or cotton mats shall begin within 10 minutes. Intermittent hand fogging may be used only for the first hour. Thereafter, wet curing with burlap or cotton mats shall be used until the succeeding shotcrete layer is applied. Intermittent hand fogging may be extended to the first hour and a half if the succeeding shotcrete layer is applied by the end of this time.

The curing period shall be for 7 days, except when there is a succeeding layer of shotcrete. In this instance, the initial shotcrete layer shall be cured until the surface preparation and reinforcement bar treatment is started.

If temperatures below 45°F (7°C) are forecast during the curing period, protection methods shall be used. Protection Method I according to Article 1020.13(d)(1), or Protection Method II according to Article 1020.13(d)(2) shall be used during the curing period

Inspection of Completed Work. The Contractor shall provide ladders or other appropriate equipment for the Engineer to inspect the repaired areas. After curing but no sooner than 28 days after placement of concrete or shooting of shotcrete, the repair shall be examined for conformance with original dimensions, cracks, voids, and delaminations. Sounding for delaminations will be done with a hammer or by other methods determined by the Engineer.

The acceptable tolerance for conformance of a repaired area shall be within 1/4 in. (6 mm) of the original dimensions. A repaired area not in dimensional conformance or with delaminations shall be removed and replaced.

A repaired area with cracks or voids shall be considered as nonconforming. Exceeding one or more of the following crack and void criteria shall be cause for removal and replacement of a repaired area.

1. The presence of a single surface crack greater than 0.01 in. (0.25 mm) in width and greater than 12 in. (300 mm) in length.
2. The presence of two or more surface cracks greater than 0.01 in. (0.25 mm) in width that total greater than 24 in. (600 mm) in length.
3. The presence of map cracking in one or more regions totaling 15 percent or more of the gross surface area of the repair.
4. The presence of two or more surface voids with least dimension 3/4 in. (19 mm) each.

A repaired area with cracks or voids that do not exceed any of the above criteria may remain in place, as determined by the Engineer.

If a nonconforming repair is allowed to remain in place, cracks greater than 0.007 in. (0.2 mm) in width shall be repaired with epoxy injection according to Section 590. For cracks less than or equal to 0.007 in. (0.2 mm) in width, the epoxy may be applied to the surface of the crack. Voids shall be repaired according to Article 503.15.

Publications and Personnel Requirements. The Contractor shall provide a current copy of ACI 506R to the Engineer a minimum of one week prior to start of construction.

The shotcrete personnel who perform the work shall have current American Concrete Institute (ACI) nozzle men certification for vertical wet and overhead wet applications, except one individual may be in training. This individual shall be adequately supervised by a certified ACI nozzle men as determined by the Engineer. A copy of the nozzle men certificate(s) shall be given to the Engineer.

Method of Measurement. This work will be measured for payment in place and the area computed in square feet (square meters). For a repair at a corner, both sides will be measured.

Basis of Payment. This work will be paid for at the contract unit price per square foot (square meter) for STRUCTURAL REPAIR OF CONCRETE (DEPTH GREATER THAN 5 IN. (125 MM), STRUCTURAL REPAIR OF CONCRETE (DEPTH EQUAL TO OR LESS THAN 5 IN. (125 MM).

When not specified to be paid for elsewhere, the work to design, install, and remove the temporary shoring and cribbing will be paid for according to Article 109.04.

With the exception of reinforcement damaged by the Contractor during removal, the furnishing and installation of supplemental reinforcement bars, mechanical bar splicers, hook bolts, and protective coat will be paid according to Article 109.04.

GRANULAR BACKFILL FOR STRUCTURES

Effective: April 19, 2012

Revised: October 30, 2012

Revise Section 586 of the Standard Specifications to read:

SECTION 586. Granular Backfill for structures

586.01 Description. This work shall consist of furnishing, transporting and placing granular backfill for abutment structures.

586.02 Materials. Materials shall be according to the following.

Item	Article/Section
(a) Fine Aggregate.....	1003.04
(b) Coarse Aggregates	1004.05

CONSTRUCTION REQUIREMENTS

586.03 General. This work shall be done according to Article 502.10 except as modified below. The backfill volume shall be backfilled, with granular material as specified in Article 586.02, to the required elevation as shown in the contract plans. The backfill volume shall be placed in convenient lifts for the full width to be backfilled. Unless otherwise specified in the contract plans, mechanical compaction will not be required. A deposit of gravel or crushed stone placed behind drain holes shall not be required. All drains not covered by geocomposite wall drains or other devices to prevent loss of backfill material shall be covered by sufficient filter fabric material meeting the requirements of Section 1080 and Section 282 with either 6 or 8 oz/sq yd (200 or 270 g/sq m) material allowed, with free edges overlapping the drain hole by at least 12 in. (300 mm) in all directions.

The granular backfill shall be brought to the finished grade as shown in the contract plans. When concrete is to be cast on top of the granular backfill, the Contractor, subject to approval of the Engineer, may prepare the top surface of the fill to receive the concrete as he/she deems necessary for satisfactory placement at no additional cost to the Department.

586.04 Method of Measurement. This work will be measured for payment as follows.

- (a) Contract Quantities. The requirements for the use of contract quantities shall conform to Article 202.07(a).
- (b) Measured Quantities. This work will be measured for payment in place and the volume computed in cubic yards (cubic meters). The volume will be determined by the method of average end areas behind the abutment.

586.05 Basis of Payment. This work will be paid for at the contract unit price per cubic yard (cubic meter) for GRANULAR BACKFILL FOR STRUCTURES.

BRIDGE DECK CONSTRUCTION

Effective: October 22, 2013

Revised: April 18, 2014

Revise the Second Paragraph of Article 503.06(b) to read as follows.

“When the Contractor uses cantilever forming brackets on exterior beams or girders, additional requirements shall be as follows.”

Revise Article 503.06(b)(1) to read as follows.

- “(1) Bracket Placement. The spacing of brackets shall be per the manufacturer’s published design specifications for the size of the overhang and the construction loads anticipated. The resulting force of the leg brace of the cantilever bracket shall bear on the web within 6 inches (150 mm) of the bottom flange of the beam or girder.”

Revise Article 503.06(b)(2) to read as follows.

- “(2) Beam Ties. The top flange of exterior steel beams or girders supporting the cantilever forming brackets shall be tied to the bottom flange of the next interior beam. The top flange of exterior concrete beams supporting the cantilever forming brackets shall be tied to the top flange of the next interior beam. The ties shall be spaced at 4 ft (1.2 m) centers. Permanent cross frames on steel girders may be considered a tie. Ties shall be a minimum of 1/2 inch (13 mm) diameter threaded rod with an adjusting mechanism for drawing the tie taut. The ties shall utilize hanger brackets or clips which hook onto the flange of steel beams. No welding will be permitted to the structural steel or stud shear connectors, or to reinforcement bars of concrete beams, for the installation of the tie bar system. After installation of the ties and blocking, the tie shall be drawn taut until the tie does not vary from a straight line from beam to beam. The tie system shall be approved by the Engineer.”

Revise Article 503.06(b)(3) to read as follows.

“(3) Beam Blocks. Suitable beam blocks of 4 in x 4 in (100 x 100 mm) timbers or metal structural shapes of equivalent strength or better, acceptable to the Engineer, shall be wedged between the webs of the two beams tied together, within 6 inches (150 mm) of the bottom flange at each location where they are tied. When it is not feasible to have the resulting force from the leg brace of the cantilever brackets transmitted to the web within 6 inches (150 mm) of the bottom flange, then additional blocking shall be placed at each bracket to transmit the resulting force to within 6 inches (150 mm) of the bottom flange of the next interior beam or girder.”

Delete the last paragraph of Article 503.06(b).

Revise the third paragraph of Article 503.16 to read as follows.

“Fogging equipment shall be in operation unless the evaporation rate is less than 0.1 lb/sq ft/hour (0.5kg/sq m/hour) and the Engineer gives permission to stop. The evaporation rate shall be determined according to the following formula.

$$E = (T_c^{2.5} - rT_a^{2.5})(1 + 0.4V) \times 10^{-6} \text{ (English)}$$

$$E = 5[(T_c + 18)^{2.5} - r(T_a + 18)^{2.5}](V + 4) \times 10^{-6} \text{ (Metric)}$$

Where:

E = Evaporation Rate, lb/ft²/h (kg/sq m/h)

T_c = Concrete Temperature, °F (°C)

T_a = Air Temperature, °F (°C)

r = Relative Humidity in percent/100

V = Wind Velocity, mph (km/h)

The Contractor shall provide temperature, relative humidity, and wind speed measuring equipment. Fogging equipment shall be adequate to reach or cover the entire pour from behind the finishing machine or vibrating screed to the point of curing covering application, and shall be operated in a manner which shall not accumulate water on the deck until the curing covering has been placed.”

Revise the third paragraph of Article 503.16(a)(1) to read as follows.

“At the Contractor’s option, a vibrating screed may be used in lieu of a finishing machine for superstructures with a pour width less than or equal to 24 ft (7.3 m). After the concrete is placed and consolidated, it shall be struck off with a vibrating screed allowing for camber, if required. The vibrating screed shall be of a type approved by the Engineer. A slight excess of concrete shall be kept in front of the cutting edge at all times during the striking off operation. After screeding, the entire surface shall be finished with hand-operated longitudinal floats having blades not less than 10 ft (3 m) in length and 6 in. (150 mm) in width. Decks so finished need not be straightedge tested as specified in 503.16(a)(2).”

Delete the fifth paragraph of 503.16(a)(1).

Revise Article 503.16(a)(2) to read as follows.

“(2) Straightedge Testing and Surface Correction. After the finishing has been completed and while the concrete is still plastic, the surface shall be tested for trueness with a 10 ft (3 m) straightedge, or a hand-operated longitudinal float having blades not less than 10 ft (3 m) in length and 6 in. (150 mm) in width. The Contractor shall furnish and use an accurate 10 ft (3 m) straightedge or float which has a handle not less than 3 ft (1 m) longer than 1/2 the pour width. The straightedge or float shall be held in contact with the surface and passed gradually from one side of the superstructure to the other. Advance along the surface shall be in successive stages of not more than 1/2 the length of the straightedge or float. Any depressions found shall be immediately filled with freshly mixed concrete, struck off, consolidated, and refinished. High areas shall be cut down and refinished.”

Replace the second sentence of the first paragraph of Article 1020.13(a)(5) with the following sentences.

“Cotton mats in poor condition will not be allowed. The cotton mats shall be placed in a manner which will not create indentations greater than 1/4 inch (6 mm) in the concrete surface. Minor marring of the surface is tolerable and is secondary to the importance of timely curing.”

Revise Article 1020.14(b) to read as follows.

“(b) Concrete in Structures. Concrete may be placed when the air temperature is above 40 °F (4 °C) and rising, and concrete placement shall stop when the falling temperature reaches 45 °F (7 °C) or below, unless otherwise approved by the Engineer.

(1) Bridge Deck Concrete. For concrete in bridge decks, slabs, and bridge approach slabs the Contractor shall schedule placing and finishing of the concrete during hours in which the ambient air temperature is forecast to be lower than 85 °F (30 °C). It shall be understood this may require scheduling the deck pour at night in order to utilize the temperature window available. The temperature of the concrete immediately before placement shall be a minimum of 50 °F (10 °C) and a maximum of 85 °F (30 °C).

(2) Non-Bridge Deck Concrete. Except as noted above, the temperature of the concrete immediately before placement shall be a minimum of 50 °F (10 °C) and a maximum of 90 °F (32 °C).

If concrete is pumped, the temperature restrictions above shall be considered at point of placement. When insulated forms are used according to Article 1020.13(d)(1), the maximum temperature of the concrete mixture immediately before placement shall be 80 °F (25 °C). When concrete is placed in contact with previously placed concrete, the temperature of the freshly mixed concrete may be increased by the Contractor to offset anticipated heat loss, but in no case shall the maximum concrete temperature be permitted to exceed the limits stated in this Article.”

Revise Article 1103.13(a) to read as follows.

“(a) Bridge Deck. The finishing machine shall be equipped with: (1) a mechanical strike off device; (2) either a rotating cylinder(s) or a longitudinal oscillating screed which transversely finishes the surface of the concrete. The Contractor may attach other equipment to the finishing machine to enhance the final finish when approved by the Engineer. The finishing machine shall produce a deck surface of uniform texture, free from porous areas, and with the required surface smoothness.

The finishing machine shall be operated on rails or other supports that will not deflect under the applied loads. The maximum length of rail segments supported on top of beams and within the pour shall be 10 ft (3 m). The supports shall be adjustable for elevation and shall be completely in place to allow the finishing machine to be used for the full length of the area to be finished. The supports shall be approved by the Engineer before placing of the concrete is started.”

Revise Article 1103.17(k) to read as follows.

“(k) Fogging Equipment. Fogging equipment shall be hand held fogging equipment for humidity control. The equipment shall be capable of atomizing water to produce a fog blanket by the use of pressure 2500 psi minimum (17.24 MPa) and an industrial fire hose fogging nozzle or equivalent. Fogging equipment attached to the finishing machine will not be permitted.”

COATED GALVANIZED STEEL CONDUIT (BDE)

Effective: January 1, 2013

Revised: January 1, 2015

Revise Article 811.03(b) of the Standard Specifications to read:

“(b) Coated Galvanized Steel Conduit. In addition to the methods described in Article 810.05(a) the following methods shall be observed when installing coated conduit.

Coated conduit pipe vise jaw adapters shall be used when the conduit is being clamped to avoid damaging the coating.

Coated conduit shall be cut with a roller cutter or by other means approved by the conduit manufacturer.

After any cutting or threading operations are completed, the bare steel shall be touched up with the conduit manufacturer’s touch up compound.”

COILABLE NONMETALLIC CONDUIT (BDE)

Effective: August 1, 2014

Revised: January 1, 2015

Revise Article 1088.01(c) of the Standard Specifications to read:

“(c) Coilable Nonmetallic Conduit. The conduit shall be a high density polyethylene duct which is intended for underground use can be manufactured and coiled or reeled in continuous transportable lengths and uncoiled for further processing and/or installation without adversely affecting its properties or performance. The conduit and its manufacture shall be according to UL 651A for Schedule 40 conduit, except Schedule 80 shall be used under pavement, stabilized shoulder, paved median, paved driveway, curb and/or gutter and sidewalk.

Performance Tests. Testing procedures and test results shall meet the requirements of UL 651A. Certified copies of the test report shall be submitted to the Engineer prior to the installation of the conduit.”

CONCRETE GUTTER, CURB, MEDIAN, AND PAVED DITCH (BDE)

Effective: April 1, 2014

Revised: August 1, 2014

Add the following to Article 606.02 of the Standard Specifications:

“(i) Polyurethane Joint Sealant 1050.04”

Revise the fifth paragraph of Article 606.07 of the Standard Specifications to read:

“Transverse contraction and longitudinal construction joints shall be sealed according to Article 420.12, except transverse joints in concrete curb and gutter shall be sealed with polysulfide or polyurethane joint sealant.”

Add the following to Section 1050 of the Standard Specifications:

“**1050.04 Polyurethane Joint Sealant.** The joint sealant shall be a polyurethane sealant, Type S, Grade NS, Class 25 or better, Use T (T₁ or T₂), according to ASTM C 920.”

CONSTRUCTION AIR QUALITY – DIESEL RETROFIT (BDE)

Effective: June 1, 2010

Revised: November 1, 2014

The reduction of emissions of particulate matter (PM) for off-road equipment shall be accomplished by installing retrofit emission control devices. The term “equipment” refers to diesel fuel powered devices rated at 50 hp and above, to be used on the jobsite in excess of seven calendar days over the course of the construction period on the jobsite (including rental equipment).

Contractor and subcontractor diesel powered off-road equipment assigned to the contract shall be retrofitted using the phased in approach shown below. Equipment that is of a model year older than the year given for that equipment's respective horsepower range shall be retrofitted:

Effective Dates	Horsepower Range	Model Year
June 1, 2010 ^{1/}	600-749	2002
	750 and up	2006
June 1, 2011 ^{2/}	100-299	2003
	300-599	2001
	600-749	2002
	750 and up	2006
June 1, 2012 ^{2/}	50-99	2004
	100-299	2003
	300-599	2001
	600-749	2002
	750 and up	2006

1/ Effective dates apply to Contractor diesel powered off-road equipment assigned to the contract.

2/ Effective dates apply to Contractor and subcontractor diesel powered off-road equipment assigned to the contract.

The retrofit emission control devices shall achieve a minimum PM emission reduction of 50 percent and shall be:

- a) Included on the U.S. Environmental Protection Agency (USEPA) *Verified Retrofit Technology List* (<http://www.epa.gov/cleandiesel/verification/verif-list.htm>), or verified by the California Air Resources Board (CARB) (<http://www.arb.ca.gov/diesel/verdev/vt/cvt.htm>); or
- b) Retrofitted with a non-verified diesel retrofit emission control device if verified retrofit emission control devices are not available for equipment proposed to be used on the project, and if the Contractor has obtained a performance certification from the retrofit device manufacturer that the emission control device provides a minimum PM emission reduction of 50 percent.

Note: Large cranes (Crawler mounted cranes) which are responsible for critical lift operations are exempt from installing retrofit emission control devices if such devices adversely affect equipment operation.

Diesel powered off-road equipment with engine ratings of 50 hp and above, which are unable to be retrofitted with verified emission control devices or if performance certifications are not available which will achieve a minimum 50 percent PM reduction, may be granted a waiver by the Department if documentation is provided showing good faith efforts were made by the Contractor to retrofit the equipment.

Construction shall not proceed until the Contractor submits a certified list of the diesel powered off-road equipment that will be used, and as necessary, retrofitted with emission control devices. The list(s) shall include (1) the equipment number, type, make, Contractor/rental company name; and (2) the emission control devices make, model, USEPA or CARB verification number, or performance certification from the retrofit device manufacturer. Equipment reported as fitted with emissions control devices shall be made available to the Engineer for visual inspection of the device installation, prior to being used on the jobsite.

The Contractor shall submit an updated list of retrofitted off-road construction equipment as retrofitted equipment changes or comes on to the jobsite. The addition or deletion of any diesel powered equipment shall be included on the updated list.

If any diesel powered off-road equipment is found to be in non-compliance with any portion of this special provision, the Engineer will issue the Contractor a diesel retrofit deficiency deduction.

Any costs associated with retrofitting any diesel powered off-road equipment with emission control devices shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed. The Contractor's compliance with this notice and any associated regulations shall not be grounds for a claim.

Diesel Retrofit Deficiency Deduction

When the Engineer determines that a diesel retrofit deficiency exists, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency continues to exist. The calendar day(s) will begin when the time period for correction is exceeded and end with the Engineer's written acceptance of the correction. The daily monetary deduction will be \$1,000.00 for each deficiency identified.

The deficiency will be based on lack of diesel retrofit emissions control.

If a Contractor accumulates three diesel retrofit deficiency deductions for the same piece of equipment in a contract period, the Contractor will be shutdown until the deficiency is corrected. Such a shutdown will not be grounds for any extension of the contract time, waiver of penalties, or be grounds for any claim.

CONTRACT CLAIMS (BDE)

Effective: April 1, 2014

Revise the first paragraph of Article 109.09(a) of the Standard Specifications to read:

“(a) Submission of Claim. All claims filed by the Contractor shall be in writing and in sufficient detail to enable the Department to ascertain the basis and amount of the claim. As a minimum, the following information must accompany each claim submitted.”

Revise Article 109.09(e) of the Standard Specifications to read:

“(e) Procedure. The Department provides two administrative levels for claims review.

- Level I Engineer of Construction
- Level II Chief Engineer/Director of Highways or Designee

(1) Level I. All claims shall first be submitted at Level I. Two copies each of the claim and supporting documentation shall be submitted simultaneously to the District and the Engineer of Construction. The Engineer of Construction, in consultation with the District, will consider all information submitted with the claim and render a decision on the claim within 90 days after receipt by the Engineer of Construction. Claims not conforming to this Article will be returned without consideration. The Engineer of Construction may schedule a claim presentation meeting if in the Engineer of Construction’s judgment such a meeting would aid in resolution of the claim, otherwise a decision will be made based on the claim documentation submitted. If a Level I decision is not rendered within 90 days of receipt of the claim, or if the Contractor disputes the decision, an appeal to Level II may be made by the Contractor.

(2) Level II. An appeal to Level II shall be made in writing to the Engineer of Construction within 45 days after the date of the Level I decision. Review of the claim at Level II shall be conducted as a full evaluation of the claim. A claim presentation meeting may be scheduled if the Chief Engineer/Director of Highways determines that such a meeting would aid in resolution of the claim, otherwise a decision will be made based on the claim documentation submitted. A Level II final decision will be rendered within 90 days of receipt of the written request for appeal.

Full compliance by the Contractor with the provisions specified in this Article is a contractual condition precedent to the Contractor’s right to seek relief in the Court of Claims. The Director’s written decision shall be the final administrative action of the Department. Unless the Contractor files a claim for adjudication by the Court of Claims within 60 days after the date of the written decision, the failure to file shall constitute a release and waiver of the claim.”

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE)

Effective: September 1, 2000

Revised: January 2, 2015

FEDERAL OBLIGATION. The Department of Transportation, as a recipient of federal financial assistance, is required to take all necessary and reasonable steps to ensure nondiscrimination in the award and administration of contracts. Consequently, the federal regulatory provisions of 49 CFR Part 26 apply to this contract concerning the utilization of disadvantaged business enterprises. For the purposes of this Special Provision, a disadvantaged business enterprise (DBE) means a business certified by the Department in accordance with the requirements of 49 CFR Part 26 and listed in the Illinois Unified Certification Program (IL UCP) DBE Directory.

STATE OBLIGATION. This Special Provision will also be used by the Department to satisfy the requirements of the Business Enterprise for Minorities, Females, and Persons with Disabilities Act, 30 ILCS 575. When this Special Provision is used to satisfy state law requirements on 100 percent state-funded contracts, the federal government has no involvement in such contracts (not a federal-aid contract) and no responsibility to oversee the implementation of this Special Provision by the Department on those contracts. DBE participation on 100 percent state-funded contracts will not be credited toward fulfilling the Department's annual overall DBE goal required by the US Department of Transportation to comply with the federal DBE program requirements.

CONTRACTOR ASSURANCE. The Contractor makes the following assurance and agrees to include the assurance in each subcontract that the Contractor signs with a subcontractor.

The Contractor, subrecipient, or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of contracts funded in whole or in part with federal or state funds. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

- (a) Withholding progress payments;
- (b) Assessing sanctions;
- (c) Liquidated damages; and/or
- (d) Disqualifying the Contractor from future bidding as non-responsible.

OVERALL GOAL SET FOR THE DEPARTMENT. As a requirement of compliance with 49 CFR Part 26, the Department has set an overall goal for DBE participation in its federally assisted contracts. That goal applies to all federal-aid funds the Department will expend in its federally assisted contracts for the subject reporting fiscal year. The Department is required to make a good faith effort to achieve the overall goal. The dollar amount paid to all approved DBE companies performing work called for in this contract is eligible to be credited toward fulfillment of the Department's overall goal.

CONTRACT GOAL TO BE ACHIEVED BY THE CONTRACTOR. This contract includes a specific DBE utilization goal established by the Department. The goal has been included because the Department has determined that the work of this contract has subcontracting opportunities that may be suitable for performance by DBE companies. The determination is based on an assessment of the type of work, the location of the work, and the availability of DBE companies to do a part of the work. The assessment indicates that, in the absence of unlawful discrimination, and in an arena of fair and open competition, DBE companies can be expected to perform **18.00%** of the work. This percentage is set as the DBE participation goal for this contract. Consequently, in addition to the other award criteria established for this contract, the Department will only award this contract to a bidder who makes a good faith effort to meet this goal of DBE participation in the performance of the work. A bidder makes a good faith effort for award consideration if either of the following is done in accordance with the procedures set for in this Special Provision:

- (a) The bidder documents that enough DBE participation has been obtained to meet the goal or,
- (b) The bidder documents that a good faith effort has been made to meet the goal, even though the effort did not succeed in obtaining enough DBE participation to meet the goal.

DBE LOCATOR REFERENCES. Bidders shall consult the IL UCP DBE Directory as a reference source for DBE-certified companies. In addition, the Department maintains a letting and item specific DBE locator information system whereby DBE companies can register their interest in providing quotes on particular bid items advertised for letting. Information concerning DBE companies willing to quote work for particular contracts may be obtained by contacting the Department's Bureau of Small Business Enterprises at telephone number (217) 785-4611, or by visiting the Department's website at www.dot.il.gov.

BIDDING PROCEDURES. Compliance with this Special Provision is a material bidding requirement. The failure of the bidder to comply will render the bid not responsive.

- (a) The bidder shall submit a Disadvantaged Business Utilization Plan on Department forms SBE 2025 and 2026 with the bid.
- (b) The Utilization Plan shall indicate that the bidder either has obtained sufficient DBE participation commitments to meet the contract goal or has not obtained enough DBE participation commitments in spite of a good faith effort to meet the goal. The Utilization Plan shall further provide the name, telephone number, and telefax number of a responsible official of the bidder designated for purposes of notification of plan approval or disapproval under the procedures of this Special Provision.

- (c) The Utilization Plan shall include a DBE Participation Commitment Statement, Department form SBE 2025, for each DBE proposed for the performance of work to achieve the contract goal. For bidding purposes, submission of the completed SBE 2025 forms, signed by the DBEs and faxed to the bidder will be acceptable as long as the original is available and provided upon request. All elements of information indicated on the said form shall be provided, including but not limited to the following:
- (1) The names and addresses of DBE firms that will participate in the contract;
 - (2) A description, including pay item numbers, of the work each DBE will perform;
 - (3) The dollar amount of the participation of each DBE firm participating. The dollar amount of participation for identified work shall specifically state the quantity, unit price, and total subcontract price for the work to be completed by the DBE. If partial pay items are to be performed by the DBE, indicate the portion of each item, a unit price where appropriate and the subcontract price amount;
 - (4) DBE Participation Commitment Statements, form SBE 2025, signed by the bidder and each participating DBE firm documenting the commitment to use the DBE subcontractors whose participation is submitted to meet the contract goal;
 - (5) If the bidder is a joint venture comprised of DBE companies and non-DBE companies, the plan must also include a clear identification of the portion of the work to be performed by the DBE partner(s); and,
 - (6) If the contract goal is not met, evidence of good faith efforts; the documentation of good faith efforts must include copies of each DBE and non-DBE subcontractor quote submitted to the bidder when a non-DBE subcontractor is selected over a DBE for work on the contract.

GOOD FAITH EFFORT PROCEDURES. The contract will not be awarded until the Utilization Plan submitted by the apparent successful bidder is approved. All information submitted by the bidder must be complete, accurate and adequately document that enough DBE participation has been obtained or document that good faith efforts of the bidder, in the event enough DBE participation has not been obtained, before the Department will commit to the performance of the contract by the bidder. The Utilization Plan will be approved by the Department if the Utilization Plan documents sufficient commercially useful DBE work performance to meet the contract goal or the bidder submits sufficient documentation of a good faith effort to meet the contract goal pursuant to 49 CFR Part 26, Appendix A. The Utilization Plan will not be approved by the Department if the Utilization Plan does not document sufficient DBE participation to meet the contract goal unless the apparent successful bidder documented in the Utilization Plan that it made a good faith effort to meet the goal. This means that the bidder must show that all necessary and reasonable steps were taken to achieve the contract goal. Necessary and reasonable steps are those which, by their scope, intensity and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not successful. The Department will consider the quality, quantity, and intensity of the kinds of efforts that the bidder has made. Mere *pro forma* efforts, in other words, efforts done as a matter of form, are not good faith efforts; rather, the bidder is expected to have taken genuine efforts that would be reasonably expected of a bidder actively and aggressively trying to obtain DBE participation sufficient to meet the contract goal.

- (a) The following is a list of types of action that the Department will consider as part of the evaluation of the bidder's good faith efforts to obtain participation. These listed factors are not intended to be a mandatory checklist and are not intended to be exhaustive. Other factors or efforts brought to the attention of the Department may be relevant in appropriate cases, and will be considered by the Department.
 - (1) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBE companies that have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBE companies to respond to the solicitation. The bidder must determine with certainty if the DBE companies are interested by taking appropriate steps to follow up initial solicitations.
 - (2) Selecting portions of the work to be performed by DBE companies in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime Contractor might otherwise prefer to perform these work items with its own forces.
 - (3) Providing interested DBE companies with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

- (4) a. Negotiating in good faith with interested DBE companies. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBE companies that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBE companies to perform the work.
 - b. A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBE companies is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also the ability or desire of a bidder to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidders are not, however, required to accept higher quotes from DBE companies if the price difference is excessive or unreasonable. In accordance with Section 6 of the above Bidding Procedures, the documentation of good faith efforts must include copies of each DBE and non-DBE subcontractor quote submitted to the bidder when a non-DBE subcontractor was selected over a DBE for work on the contract.
- (5) Not rejecting DBE companies as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.
 - (6) Making efforts to assist interested DBE companies in obtaining bonding, lines of credit, or insurance as required by the recipient or Contractor.
 - (7) Making efforts to assist interested DBE companies in obtaining necessary equipment, supplies, materials, or related assistance or services.
 - (8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBE companies.

- (b) If the Department determines that the apparent successful bidder has made a good faith effort to secure the work commitment of DBE companies to meet the contract goal, the Department will award the contract provided that it is otherwise eligible for award. If the Department determines that the bidder has failed to meet the requirements of this Special Provision or that a good faith effort has not been made, the Department will notify the responsible company official designated in the Utilization Plan that the bid is not responsive. The notification shall include a statement of reasons for the determination.
- (c) The bidder may request administrative reconsideration of a determination adverse to the bidder within the five working days after the receipt of the notification date of the determination by delivering the request to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764 (Telefax: (217) 785-1524). Deposit of the request in the United States mail on or before the fifth business day shall not be deemed delivery. The determination shall become final if a request is not made and delivered. A request may provide additional written documentation or argument concerning the issues raised in the determination statement of reasons, provided the documentation and arguments address efforts made prior to submitting the bid. The request will be forwarded to the Department's Reconsideration Officer. The Reconsideration Officer will extend an opportunity to the bidder to meet in person in order to consider all issues of documentation and whether the bidder made a good faith effort to meet the goal. After the review by the Reconsideration Officer, the bidder will be sent a written decision within ten working days after receipt of the request for consideration, explaining the basis for finding that the bidder did or did not meet the goal or make adequate good faith efforts to do so. A final decision by the Reconsideration Officer that a good faith effort was made shall approve the Utilization Plan submitted by the bidder and shall clear the contract for award. A final decision that a good faith effort was not made shall render the bid not responsive.

CALCULATING DBE PARTICIPATION. The Utilization Plan values represent work anticipated to be performed and paid for upon satisfactory completion. The Department is only able to count toward the achievement of the overall goal and the contract goal the value of payments made for the work actually performed by DBE companies. In addition, a DBE must perform a commercially useful function on the contract to be counted. A commercially useful function is generally performed when the DBE is responsible for the work and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. The Department and Contractor are governed by the provisions of 49 CFR Part 26.55(c) on questions of commercially useful functions as it affects the work. Specific counting guidelines are provided in 49 CFR Part 26.55, the provisions of which govern over the summary contained herein.

- (a) DBE as the Contractor: 100 percent goal credit for that portion of the work performed by the DBE's own forces, including the cost of materials and supplies. Work that a DBE subcontracts to a non-DBE does not count toward the DBE goals.

- (b) DBE as a joint venture Contractor: 100 percent goal credit for that portion of the total dollar value of the contract equal to the distinct, clearly defined portion of the work performed by the DBE's own forces.
- (c) DBE as a subcontractor: 100 percent goal credit for the work of the subcontract performed by the DBE's own forces, including the cost of materials and supplies, excluding the purchase of materials and supplies or the lease of equipment by the DBE subcontractor from the prime Contractor or its affiliates. Work that a DBE subcontractor in turn subcontracts to a non-DBE does not count toward the DBE goal.
- (d) DBE as a trucker: 100 percent goal credit for trucking participation provided the DBE is responsible for the management and supervision of the entire trucking operation for which it is responsible. At least one truck owned, operated, licensed, and insured by the DBE must be used on the contract. Credit will be given for the following:
 - (1) The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services the lessee DBE provides on the contract.
 - (2) The DBE may also lease trucks from a non-DBE firm, including from an owner-operator. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission is receives as a result of the lease arrangement.
- (e) DBE as a material supplier:
 - (1) 60 percent goal credit for the cost of the materials or supplies purchased from a DBE regular dealer.
 - (2) 100 percent goal credit for the cost of materials of supplies obtained from a DBE manufacturer.
 - (3) 100 percent credit for the value of reasonable fees and commissions for the procurement of materials and supplies if not a regular dealer or manufacturer.

CONTRACT COMPLIANCE. Compliance with this Special Provision is an essential part of the contract. The Department is prohibited by federal regulations from crediting the participation of a DBE included in the Utilization Plan toward either the contract goal or the Department's overall goal until the amount to be applied toward the goals has been paid to the DBE. The following administrative procedures and remedies govern the compliance by the Contractor with the contractual obligations established by the Utilization Plan. After approval of the Utilization Plan and award of the contract, the Utilization Plan and individual DBE Participation Statements become part of the contract. If the Contractor did not succeed in obtaining enough DBE participation to achieve the advertised contract goal, and the Utilization Plan was approved and contract awarded based upon a determination of good faith, the total dollar value of DBE work calculated in the approved Utilization Plan as a percentage of the awarded contract value shall become the amended contract goal. All work indicated for performance by an approved DBE shall be performed, managed, and supervised by the DBE executing the Participation Statement.

- (a) NO AMENDMENT. No amendment to the Utilization Plan may be made without prior written approval from the Department's Bureau of Small Business Enterprises. All requests for amendment to the Utilization Plan shall be submitted to the Department of Transportation, Bureau of Small Business Enterprises, Contract Compliance Section, 2300 South Dirksen Parkway, Room 319, Springfield, Illinois 62764. Telephone number (217) 785-4611. Telefax number (217) 785-1524.
- (b) CHANGES TO WORK. Any deviation from the DBE condition-of-award or contract plans, specifications, or special provisions must be approved, in writing, by the Department as provided elsewhere in the Contract. The Contractor shall notify affected DBEs in writing of any changes in the scope of work which result in a reduction in the dollar amount condition-of-award to the contract. Where the revision includes work committed to a new DBE subcontractor, not previously involved in the project, then a Request for Approval of Subcontractor, Department form BC 260A, must be signed and submitted. If the commitment of work is in the form of additional tasks assigned to an existing subcontract, then a new Request for Approval of Subcontractor shall not be required. However, the Contractor must document efforts to assure that the existing DBE subcontractor is capable of performing the additional work and has agreed in writing to the change.
- (c) SUBCONTRACT. The Contractor must provide DBE subcontracts to IDOT upon request. Subcontractors shall ensure that all lower tier subcontracts or agreements with DBEs to supply labor or materials be performed in accordance with this Special Provision.

(d) ALTERNATIVE WORK METHODS. In addition to the above requirements for reductions in the condition of award, additional requirements apply to the two cases of Contractor-initiated work substitution proposals. Where the contract allows alternate work methods which serve to delete or create underruns in condition of award DBE work, and the Contractor selects that alternate method or, where the Contractor proposes a substitute work method or material that serves to diminish or delete work committed to a DBE and replace it with other work, then the Contractor must demonstrate one of the following:

- (1) That the replacement work will be performed by the same DBE (as long as the DBE is certified in the respective item of work) in a modification of the condition of award; or
- (2) That the DBE is aware that its work will be deleted or will experience underruns and has agreed in writing to the change. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so; or
- (3) That the DBE is not capable of performing the replacement work or has declined to perform the work at a reasonable competitive price. If this occurs, the Contractor shall substitute other work of equivalent value to a certified DBE or provide documentation of good faith efforts to do so.

(e) TERMINATION AND REPLACEMENT PROCEDURES. The Contractor shall not terminate or replace a DBE listed on the approved Utilization Plan, or perform with other forces work designated for a listed DBE except as provided in this Special Provision. The Contractor shall utilize the specific DBEs listed to perform the work and supply the materials for which each is listed unless the Contractor obtains the Department's written consent as provided in subsection (a). Unless Department consent is provided for termination of a DBE subcontractor, the Contractor shall not be entitled to any payment for work or material unless it is performed or supplied by the DBE listed in the Utilization Plan.

As stated above, the Contractor shall not terminate or replace a DBE subcontractor listed in the approved Utilization Plan without prior written consent. This includes, but is not limited to, instances in which the Contractor seeks to perform work originally designated for a DBE subcontractor with its own forces or those of an affiliate, a non-DBE firm, or with another DBE firm. Written consent will be granted only if the Bureau of Small Business Enterprises agrees, for reasons stated in its concurrence document, that the Contractor has good cause to terminate or replace the DBE firm. Before transmitting to the Bureau of Small Business Enterprises any request to terminate and/or substitute a DBE subcontractor, the Contractor shall give notice in writing to the DBE subcontractor, with a copy to the Bureau, of its intent to request to terminate and/or substitute, and the reason for the request. The Contractor shall give the DBE five days to respond to the Contractor's notice. The DBE so notified shall advise the Bureau and the Contractor of the reasons, if any, why it objects to the proposed termination of its subcontract and why the Bureau should not approve the Contractor's action. If required in a particular case as a matter of public necessity, the Bureau may provide a response period shorter than five days.

For purposes of this paragraph, good cause includes the following circumstances:

- (1) The listed DBE subcontractor fails or refuses to execute a written contract;
- (2) The listed DBE subcontractor fails or refuses to perform the work of its subcontract in a way consistent with normal industry standards. Provided, however, that good cause does not exist if the failure or refusal of the DBE subcontractor to perform its work on the subcontract results from the bad faith or discriminatory action of the prime contractor;
- (3) The listed DBE subcontractor fails or refuses to meet the prime Contractor's reasonable, nondiscriminatory bond requirements;
- (4) The listed DBE subcontractor becomes bankrupt, insolvent, or exhibits credit unworthiness;
- (5) The listed DBE subcontractor is ineligible to work on public works projects because of suspension and debarment proceedings pursuant 2 CFR Parts 180, 215 and 1,200 or applicable state law.
- (6) You have determined that the listed DBE subcontractor is not a responsible contractor;
- (7) The listed DBE subcontractor voluntarily withdraws from the projects and provides to you written notice of its withdrawal;
- (8) The listed DBE is ineligible to receive DBE credit for the type of work required;
- (9) A DBE owner dies or becomes disabled with the result that the listed DBE contractor is unable to complete its work on the contract;
- (10) Other documented good cause that compels the termination of the DBE subcontractor. Provided, that good cause does not exist if the prime Contractor seeks to terminate a DBE it relied upon to obtain the contract so that the prime Contractor can self-perform the work for which the DBE contractor was engaged or so that the prime Contractor can substitute another DBE or non-DBE contractor after contract award.

When a DBE is terminated, or fails to complete its work on the Contract for any reason the Contractor shall make a good faith effort to find another DBE to substitute for the original DBE to perform at least the same amount of work under the contract as the terminated DBE to the extent needed to meet the established Contract goal. The good faith efforts shall be documented by the Contractor. If the Department requests documentation under this provision, the Contractor shall submit the documentation within seven days, which may be extended for an additional seven days if necessary at the request of the Contractor. The Department shall provide a written determination to the Contractor stating whether or not good faith efforts have been demonstrated.

- (f) PAYMENT RECORDS. The Contractor shall maintain a record of payments for work performed to the DBE participants. The records shall be made available to the Department for inspection upon request. After the performance of the final item of work or delivery of material by a DBE and final payment therefore to the DBE by the Contractor, but not later than thirty calendar days after payment has been made by the Department to the Contractor for such work or material, the Contractor shall submit a DBE Payment Agreement on Department form SBE 2115 to the Regional Engineer. If full and final payment has not been made to the DBE, the DBE Payment Agreement shall indicate whether a disagreement as to the payment required exists between the Contractor and the DBE or if the Contractor believes that the work has not been satisfactorily completed. If the Contractor does not have the full amount of work indicated in the Utilization Plan performed by the DBE companies indicated in the Utilization Plan and after good faith efforts are reviewed, the Department may deduct from contract payments to the Contractor the amount of the goal not achieved as liquidated and ascertained damages. The Contractor may request an administrative reconsideration of any amount deducted as damages pursuant to subsection (h) of this part.
- (g) ENFORCEMENT. The Department reserves the right to withhold payment to the Contractor to enforce the provisions of this Special Provision. Final payment shall not be made on the contract until such time as the Contractor submits sufficient documentation demonstrating achievement of the goal in accordance with this Special Provision or after liquidated damages have been determined and collected.
- (h) RECONSIDERATION. Notwithstanding any other provision of the contract, including but not limited to Article 109.09 of the Standard Specifications, the Contractor may request administrative reconsideration of a decision to deduct the amount of the goal not achieved as liquidated damages. A request to reconsider shall be delivered to the Contract Compliance Section and shall be handled and considered in the same manner as set forth in paragraph (c) of "Good Faith Effort Procedures" of this Special Provision, except a final decision that a good faith effort was not made during contract performance to achieve the goal agreed to in the Utilization Plan shall be the final administrative decision of the Department.

FRICITION AGGREGATE (BDE)

Effective: January 1, 2011

Revised: November 1, 2014

Revise Article 1004.01(a)(4) of the Standard Specifications to read:

- “(4) Crushed Stone. Crushed stone shall be the angular fragments resulting from crushing undisturbed, consolidated deposits of rock by mechanical means. Crushed stone shall be divided into the following, when specified.
- a. Carbonate Crushed Stone. Carbonate crushed stone shall be either dolomite or limestone. Dolomite shall contain 11.0 percent or more magnesium oxide (MgO). Limestone shall contain less than 11.0 percent magnesium oxide (MgO).
 - b. Crystalline Crushed Stone. Crystalline crushed stone shall be either metamorphic or igneous stone, including but is not limited to, quartzite, granite, rhyolite and diabase.”

Revise Article 1004.03(a) of the Standard Specifications to read:

“**1004.03 Coarse Aggregate for Hot-Mix Asphalt (HMA).** The aggregate shall be according to Article 1004.01 and the following.

(a) Description. The coarse aggregate for HMA shall be according to the following table.

Use	Mixture	Aggregates Allowed
Class A	Seal or Cover	<u>Allowed Alone or in Combination ^{5/}:</u> Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag Crushed Concrete
HMA Low ESAL	Stabilized Subbase or Shoulders	<u>Allowed Alone or in Combination ^{5/}:</u> Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{1/} Crushed Concrete

Use	Mixture	Aggregates Allowed	
HMA High ESAL Low ESAL	Binder IL-19.0 or IL-19.0L SMA Binder	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Carbonate Crushed Stone ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Concrete ^{3/}	
HMA High ESAL Low ESAL	C Surface and Leveling Binder IL-9.5 or IL-9.5L SMA Ndesign 50 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Carbonate Crushed Stone ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{4/} Crushed Concrete ^{3/}	
HMA High ESAL	D Surface and Leveling Binder IL-9.5 SMA Ndesign 50 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Carbonate Crushed Stone (other than Limestone) ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{4/} Crushed Concrete ^{3/}	
		<u>Other Combinations Allowed:</u>	
		<i>Up to...</i>	<i>With...</i>
		25% Limestone	Dolomite
		50% Limestone	Any Mixture D aggregate other than Dolomite
75% Limestone	Crushed Slag (ACBF) or Crushed Sandstone		
HMA High ESAL	E Surface IL-9.5 SMA Ndesign 80 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{4/} Crushed Concrete ^{3/} No Limestone. <u>Other Combinations Allowed:</u>	
		<i>Up to...</i>	<i>With...</i>

Use	Mixture	Aggregates Allowed	
		50% Dolomite ^{2/}	Any Mixture E aggregate
		75% Dolomite ^{2/}	Crushed Sandstone, Crushed Slag (ACBF), Crushed Steel Slag, or Crystalline Crushed Stone
		75% Crushed Gravel or Crushed Concrete ^{3/}	Crushed Sandstone, Crystalline Crushed Stone, Crushed Slag (ACBF), or Crushed Steel Slag
HMA High ESAL	F Surface IL-9.5 SMA Ndesign 80 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag No Limestone.	
		<u>Other Combinations Allowed:</u>	
		<i>Up to...</i>	<i>With...</i>
		50% Crushed Gravel, Crushed Concrete ^{3/} , or Dolomite ^{2/}	Crushed Sandstone, Crushed Slag (ACBF), Crushed Steel Slag, or Crystalline Crushed Stone

- 1/ Crushed steel slag allowed in shoulder surface only.
- 2/ Carbonate crushed stone shall not be used in SMA Ndesign 80. In SMA Ndesign 50, carbonate crushed stone shall not be blended with any of the other aggregates allowed alone in Ndesign 50 SMA binder or Ndesign 50 SMA surface.
- 3/ Crushed concrete will not be permitted in SMA mixes.
- 4/ Crushed steel slag shall not be used as leveling binder.
- 5/ When combinations of aggregates are used, the blend percent measurements shall be by volume.”

HOT MIX ASPHALT – PRIME COAT (BDE)

Effective: November 1, 2014

Revise Note 1 of Article 406.02 of the Standard Specifications to read:

“Note 1. The bituminous material used for prime coat shall be one of the types listed in the following table.

When emulsified asphalts are used, any dilution with water shall be performed by the emulsion producer. The emulsified asphalt shall be thoroughly agitated within 24 hours of application and show no separation of water and emulsion.

Application	Bituminous Material Types
Prime Coat on Brick, Concrete, or HMA Bases	SS-1, SS-1h, SS-1hP, SS-1vh, RS-1, RS-2, CSS-1, CSS-1h, CSS-1hp, CRS-1, CRS-2, HFE-90, RC-70
Prime Coat on Aggregate Bases	MC-30, PEP”

Add the following to Article 406.03 of the Standard Specifications.

- “(i) Vacuum Sweeper 1101.19
- “(j) Spray Paver 1102.06”

Revise Article 406.05(b) of the Standard Specifications to read:

“(b) Prime Coat. The bituminous material shall be prepared according to Article 403.05 and applied according to Article 403.10. The use of RC-70 shall be limited to air temperatures less than 60 °F (15 °C).

- (1) Brick, Concrete or HMA Bases. The base shall be cleaned of all dust, debris and any substance that will prevent the prime coat from adhering to the base. Cleaning shall be accomplished by sweeping to remove all large particles and air blasting to remove dust. As an alternative to air blasting, a vacuum sweeper may be used to accomplish the dust removal. The base shall be free of standing water at the time of application. The prime coat shall be applied uniformly and at a rate that will provide a residual asphalt rate on the prepared surface as specified in the following table.

Type of Surface to be Primed	Residual Asphalt Rate lb/sq ft (kg/sq m)
Milled HMA, Aged Non-Milled HMA, Milled Concrete, Non-Milled Concrete & Tined Concrete	0.05 (0.244)
Fog Coat between HMA Lifts, IL-4.75 & Brick	0.025 (0.122)

The bituminous material for the prime coat shall be placed one lane at a time. If a spray paver is not used, the primed lane shall remain closed until the prime coat is fully cured and does not pickup under traffic. When placing prime coat through an intersection where it is not possible to keep the lane closed, the prime coat may be covered immediately following its application with fine aggregate mechanically spread at a uniform rate of 2 to 4 lb/sq yd (1 to 2 kg/sq m).

- (2) Aggregate Bases. The prime coat shall be applied uniformly and at a rate that will provide a residual asphalt rate on the prepared surface of 0.25 lb/sq ft \pm 0.01 (1.21 kg/sq m \pm 0.05).

The prime coat shall be permitted to cure until the penetration has been approved by the Engineer, but at no time shall the curing period be less than 24 hours for MC-30 or four hours for PEP. Pools of prime occurring in the depressions shall be broomed or squeegeed over the surrounding surface the same day the prime coat is applied.

The base shall be primed 1/2 width at a time. The prime coat on the second half/width shall not be applied until the prime coat on the first half/width has cured so that it will not pickup under traffic.

The residual asphalt rate will be verified a minimum of once per type of surface to be primed as specified herein for which at least 2000 tons (1800 metric tons) of HMA will be placed. The test will be according to the "Determination of Residual Asphalt in Prime and Tack Coat Materials" test procedure.

Prime coat shall be fully cured prior to placement of HMA to prevent pickup by haul trucks or paving equipment. If pickup occurs, paving shall cease in order to provide additional cure time, and all areas where the pickup occurred shall be repaired.

If after five days, loss of prime coat is evident prior to covering with HMA, additional prime coat shall be placed as determined by the Engineer at no additional cost to the Department."

Revise the last sentence of the first paragraph of Article 406.13(b) of the Standard Specifications to read:

"Water added to emulsified asphalt, as allowed in Article 406.02, will not be included in the quantities measured for payment."

Revise the second paragraph of Article 406.13(b) of the Standard Specifications to read:

"Aggregate for covering prime coat will not be measured for payment."

Revise the first paragraph of Article 406.14 of the Standard Specifications to read:

"406.14 Basis of Payment. Prime Coat will be paid for at the contract unit price per pound (kilogram) of residual asphalt applied for BITUMINOUS MATERIALS (PRIME COAT), or POLYMERIZED BITUMINOUS MATERIALS (PRIME COAT)."

Revise Article 407.02 of the Standard Specifications to read:

“407.02 Materials. Materials shall be according to Article 406.02, except as follows.

Item	Article/Section
(a) Packaged Rapid Hardening Mortar or Concrete	1018”

Revise Article 407.06(b) of the Standard Specifications to read:

“(b) A bituminous prime coat shall be applied between each lift of HMA according to Article 406.05(b).”

Delete the second paragraph of Article 407.12 of the Standard Specifications.

Revise the first paragraph of Article 408.04 of the Standard Specifications to read:

“408.04 Method of Measurement. Bituminous priming material will be measured for payment according to Article 406.13.”

Revise the first paragraph of Article 408.05 of the Standard Specifications to read:

“408.05 Basis of Payment. This work will be paid for at the contract unit price per pound (kilogram) of residual asphalt applied for BITUMINOUS MATERIALS (PRIME COAT) or POLYMERIZED BITUMINOUS MATERIALS (PRIME COAT) and at the contract unit price per ton (metric ton) for INCIDENTAL HOT-MIX ASPHALT SURFACING.”

Revise Article 1032.02 of the Standard Specifications to read:

“1032.02 Measurement. Asphalt binders, emulsified asphalts, rapid curing liquid asphalt, medium curing liquid asphalts, slow curing liquid asphalts, asphalt fillers, and road oils will be measured by weight.

A weight ticket for each truck load shall be furnished to the inspector. The truck shall be weighed at a location approved by the Engineer. The ticket shall show the weight of the empty truck (the truck being weighed each time before it is loaded), the weight of the loaded truck, and the net weight of the bituminous material.

When an emulsion or cutback is used for prime coat, the percentage of asphalt residue of the actual certified product shall be shown on the producer’s bill of lading or attached certificate of analysis. If the producer adds extra water to an emulsion at the request of the purchaser, the amount of water shall also be shown on the bill of lading.

Payment will not be made for bituminous materials in excess of 105 percent of the amount specified by the Engineer.”

Add the following to the table in Article 1032.04 of the Standard Specifications.

“SS-1vh	160-180	70-80
RS-1, CRS-1	75-130	25-55”

Add the following to Article 1032.06 of the Standard Specifications.

“(g) Non Tracking Emulsified Asphalt SS-1vh shall be according to the following.

Requirements for SS-1vh			
Test		SPEC	AASHTO Test Method
Saybolt Viscosity @ 25C,	SFS	20-200	T 72
Storage Stability, 24hr.,	%	1 max.	T 59
Residue by Evaporation,	%	50 min.	T 59
Sieve Test,	%	0.3 max.	T 59
Tests on Residue from Evaporation			
Penetration @25°C, 100g., 5 sec., dmm		20 max.	T 49
Softening Point,	°C	65 min.	T 53
Solubility,	%	97.5 min.	T 44
Orig. DSR @ 82°C,	kPa	1.00 min.	T 315”

Revise the last table in Article 1032.06(f)(2)d. of the Standard Specifications to read:

“Grade	Use
SS-1, SS-1h, RS-1, RS-2, CSS-1, CRS-1, CRS-2, CSS-1h, HFE-90, SS-1hP, CSS-1hP, SS-1vh	Prime or fog seal
PEP	Bituminous surface treatment prime
RS-2, HFE-90, HFE-150, HFE- 300, CRSP, HFP, CRS-2, HFRS-2	Bituminous surface treatment
CSS-1h Latex Modified	Microsurfacing”

Add the following to Article 1101 of the Standard Specifications.

“**1101.19 Vacuum Sweeper.** The vacuum sweeper shall have a minimum sweeping path of 52 in. (1.3 m) and a minimum blower rating of 20,000 cu ft per minute (566 cu m per minute).”

Add the following to Article 1102 of the Standard Specifications:

“1102.06 Spray Paver. The spreading and finishing machine shall be capable of spraying a rapid setting emulsion tack coat, paving a layer of HMA, and providing a smooth HMA mat in one pass. The HMA shall be spread over the tack coat in less than five seconds after the application of the tack coat during normal paving speeds. No wheel or other part of the paving machine shall come into contact with the tack coat before the HMA is applied. In addition to meeting the requirements of Article 1102.03, the spray paver shall also meet the requirements of Article 1102.05 for the tank, heating system, pump, thermometer, tachometer or synchronizer, and calibration. The spray bar shall be equipped with properly sized and spaced nozzles to apply a uniform application of tack coat at the specified rate for the full width of the mat being placed.”

LRFD STORM SEWER BURIAL TABLES (BDE)

Effective: November 1, 2013

Revised: November 1, 2014

Revise Article 550.02 of the Standard Specifications to read as follows:

“Item	Article Section
(a) Clay Sewer Pipe	1040.02
(b) Extra Strength Clay Pipe	1040.02
(c) Concrete Sewer, Storm Drain, and Culvert Pipe	1042
(d) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe	1042
(e) Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe (Note 1)	1042
(f) Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe (Note 1)	1042
(g) Polyvinyl Chloride (PVC) Pipe	1040.03
(h) Corrugated Polyvinyl Chloride (PVC) Pipe with a Smooth Interior	1040.03
(i) Corrugated Polypropylene (CPP) Pipe with Smooth Interior	1040.07
(j) Rubber Gaskets and Preformed Flexible Joint Sealants for Concrete Pipe	1056
(k) Mastic Joint Sealer for Pipe	1055
(l) External Sealing Band	1057
(m) Fine Aggregate (Note 2)	1003.04
(n) Coarse Aggregate (Note 3)	1004.05
(o) Reinforcement Bars and Welded Wire Fabric	1006.10
(p) Handling Hole Plugs	1042.16
(q) Polyethylene (PE) Pipe with a Smooth Interior	1040.04
(r) Corrugated Polyethylene (PE) Pipe with a Smooth Interior	1040.04

Note 1. The class of elliptical and arch pipe used for various storm sewer sizes and heights of fill shall conform to the requirements for circular pipe.

Note 2. The fine aggregate shall be moist.

Note 3. The coarse aggregate shall be wet.”

Revise the table for permitted materials in Article 550.03 of the Standard Specifications as follows:

"Class	Materials
A	Rigid Pipes: Clay Sewer Pipe Extra Strength Clay Pipe Concrete Sewer, Storm Drain, and Culvert Pipe Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe
B	Rigid Pipes: Clay Sewer Pipe Extra Strength Clay Pipe Concrete Sewer, Storm Drain, and Culvert Pipe Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe Flexible Pipes: Polyvinyl Chloride (PVC) Pipe Corrugated Polyvinyl Chloride Pipe (PVC) with a Smooth Interior Polyethylene (PE) Pipe with a Smooth Interior Corrugated Polyethylene (PE) Pipe with a Smooth Interior Corrugated Polypropylene (CPP) Pipe with a Smooth Interior"

Replace the storm sewers tables in Article 550.03 of the Standard Specifications with the following:

STORM SEWERS KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE																
Nominal Diameter in.	Type 1								Type 2							
	Fill Height: 3' and less With 1' minimum cover								Fill Height: Greater than 3' not exceeding 10'							
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP
10	NA	3	X	X	X	X	X	NA	NA	1	*X	X	X	X	X	NA
12	IV	NA	X	X	X	X	X	X	II	1	*X	X	X	X	X	X
15	IV	NA	NA	X	X	NA	X	X	II	1	*X	X	X	NA	X	X
18	IV	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
21	III	NA	NA	X	X	NA	NA	NA	II	2	X	X	X	NA	NA	NA
24	III	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
27	III	NA	NA	NA	NA	NA	NA	NA	II	3	X	NA	NA	NA	NA	NA
30	IV	NA	NA	X	X	X	X	X	II	3	X	X	X	X	X	X
33	III	NA	NA	NA	NA	NA	NA	NA	II	NA	X	NA	NA	NA	NA	NA
36	III	NA	NA	X	X	X	X	X	II	NA	X	X	X	X	X	X
42	II	NA	X	X	NA	X	X	NA	II	NA	X	X	NA	X	NA	NA
48	II	NA	X	X	NA	X	X	X	II	NA	X	X	NA	X	NA	NA
54	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
60	II	NA	NA	NA	NA	NA	NA	X	II	NA	NA	NA	NA	NA	NA	X
66	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
72	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
78	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
84	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
90	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
96	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
102	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
108	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA

- RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
- CSP Concrete Sewer, Storm drain, and Culvert Pipe
- PVC Polyvinyl Chloride Pipe
- CPVC Corrugated Polyvinyl Chloride Pipe
- ESCP Extra Strength Clay Pipe
- PE Polyethylene Pipe with a Smooth Interior
- CPE Corrugated Polyethylene Pipe with a Smooth Interior
- CPP Corrugated Polypropylene pipe with a Smooth Interior
- X This material may be used for the given pipe diameter and fill height.
- NA This material is Not Acceptable for the given pipe diameter and fill height.
- * May also use Standard Strength Clay Pipe

STORM SEWERS (Metric)																
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED																
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE																
Nominal Diameter in.	Type 1								Type 2							
	Fill Height: 1 m and less With 300 mm minimum cover								Fill Height: Greater than 1 m not exceeding 3 m							
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP
250	NA	3	X	X	X	X	X	NA	NA	1	*X	X	X	X	X	NA
300	IV	NA	X	X	X	X	X	X	II	1	*X	X	X	X	X	X
375	IV	NA	NA	X	X	NA	X	X	II	1	*X	X	X	NA	X	X
450	IV	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
525	III	NA	NA	X	X	NA	NA	NA	II	2	X	X	X	NA	NA	NA
600	III	NA	NA	X	X	X	X	X	II	2	X	X	X	X	X	X
675	III	NA	NA	NA	NA	NA	NA	NA	II	3	X	NA	NA	NA	NA	NA
750	IV	NA	NA	X	X	X	X	X	II	3	X	X	X	X	X	X
825	III	NA	NA	NA	NA	NA	NA	NA	II	NA	X	NA	NA	NA	NA	NA
900	III	NA	NA	X	X	X	X	X	II	NA	X	X	X	X	X	X
1050	II	NA	X	X	NA	X	X	NA	II	NA	X	X	NA	X	NA	NA
1200	II	NA	X	X	NA	X	X	X	II	NA	X	X	NA	X	NA	NA
1350	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1500	II	NA	NA	NA	NA	NA	NA	X	II	NA	NA	NA	NA	NA	NA	X
1650	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1800	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
1950	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
2100	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
2250	II	NA	NA	NA	NA	NA	NA	NA	II	NA	NA	NA	NA	NA	NA	NA
2400	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
2550	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA
2700	II	NA	NA	NA	NA	NA	NA	NA	III	NA	NA	NA	NA	NA	NA	NA

- RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
- CSP Concrete Sewer, Storm drain, and Culvert Pipe
- PVC Polyvinyl Chloride Pipe
- CPVC Corrugated Polyvinyl Chloride Pipe
- ESCP Extra Strength Clay Pipe
- PE Polyethylene Pipe with a Smooth Interior
- CPE Corrugated Polyethylene Pipe with a Smooth Interior
- CPP Corrugated Polypropylene pipe with a Smooth Interior
- X This material may be used for the given pipe diameter and fill height.
- NA This material is Not Acceptable for the given pipe diameter and fill height.
- * May also use Standard Strength Clay Pipe

STORM SEWERS KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE															
Nominal Diameter in.	Type 3								Type 4						
	Fill Height: Greater than 10' not exceeding 15'								Fill Height: Greater than 15' not exceeding 20'						
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPP
10	NA	2	X	X	X	X	X	NA	NA	3	X	X	X	X	NA
12	III	2	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
15	III	3	X	X	X	NA	NA	X	IV	NA	NA	X	X	NA	X
18	III	NA	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
21	III	NA	NA	X	X	NA	NA	NA	IV	NA	NA	X	X	NA	NA
24	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
27	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
30	III	NA	NA	X	X	X	NA	X	IV	NA	NA	X	X	X	NA
33	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
36	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA
42	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
48	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA
54	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
60	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
66	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
72	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
78	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
84	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA
90	III	NA	NA	NA	NA	NA	NA	NA	1680	NA	NA	NA	NA	NA	NA
96	III	NA	NA	NA	NA	NA	NA	NA	1690	NA	NA	NA	NA	NA	NA
102	III	NA	NA	NA	NA	NA	NA	NA	1700	NA	NA	NA	NA	NA	NA
108	1360	NA	NA	NA	NA	NA	NA	NA	1710	NA	NA	NA	NA	NA	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

CSP Concrete Sewer, Storm drain, and Culvert Pipe

PVC Polyvinyl Chloride Pipe

CPVC Corrugated Polyvinyl Chloride Pipe

ESCP Extra Strength Clay Pipe

PE Polyethylene Pipe with a Smooth Interior

CPE Corrugated Polyethylene Pipe with a Smooth Interior

CPP Corrugated Polypropylene pipe with a Smooth Interior

X This material may be used for the given pipe diameter and fill height.

NA This material is Not Acceptable for the given pipe diameter and fill height.

* May also use Standard Strength Clay Pipe

Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the D-load to produce a 0.01 in crack.

STORM SEWERS (metric)																
KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED																
FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE																
Nominal Diameter in.	Type 3								Type 4							
	Fill Height: Greater than 3 m not exceeding 4.5 m								Fill Height: Greater than 4.5 m not exceeding 6 m							
	RCCP	CSP	ESCP	PVC	CPVC	PE	CPE	CPP	RCCP	CSP	ESCP	PVC	CPVC	PE	CPP	
250	NA	2	X	X	X	X	X	NA	NA	3	X	X	X	X	NA	
300	III	2	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA	
375	III	3	X	X	X	NA	NA	X	IV	NA	NA	X	X	NA	X	
450	III	NA	X	X	X	X	NA	X	IV	NA	NA	X	X	X	NA	
525	III	NA	NA	X	X	NA	NA	NA	IV	NA	NA	X	X	NA	NA	
600	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA	
675	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
750	III	NA	NA	X	X	X	NA	X	IV	NA	NA	X	X	X	NA	
825	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
900	III	NA	NA	X	X	X	NA	NA	IV	NA	NA	X	X	X	NA	
1050	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA	
1200	III	NA	NA	X	NA	X	NA	NA	IV	NA	NA	X	NA	X	NA	
1350	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
1500	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
1650	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
1800	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
1950	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
2100	III	NA	NA	NA	NA	NA	NA	NA	IV	NA	NA	NA	NA	NA	NA	
2250	III	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA	
2400	III	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA	
2550	III	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA	
2700	70	NA	NA	NA	NA	NA	NA	NA	80	NA	NA	NA	NA	NA	NA	

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

CSP Concrete Sewer, Storm drain, and Culvert Pipe

PVC Polyvinyl Chloride Pipe

CPVC Corrugated Polyvinyl Chloride Pipe

ESCP Extra Strength Clay Pipe

PE Polyethylene Pipe with a Smooth Interior

CPE Corrugated Polyethylene Pipe with a Smooth Interior

CPP Corrugated Polypropylene pipe with a Smooth Interior

X This material may be used for the given pipe diameter and fill height.

NA This material is Not Acceptable for the given pipe diameter and fill height.

* May also use Standard Strength Clay Pipe

Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the metric D-load to produce a 25.4 micro-meter crack.

STORM SEWERS KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE								
Nominal Diameter in.	Type 5			Type 6			Type 7	
	Fill Height: Greater than 20' not exceeding 25'			Fill Height: Greater than 25' not exceeding 30'			Fill Height: Greater than 30' not exceeding 35'	
	RCCP	PVC	CPVC	RCCP	PVC	CPVC	RCCP	CPVC
10	NA	X	X	NA	X	X	NA	X
12	IV	X	X	V	X	X	V	X
15	IV	X	X	V	X	X	V	X
18	IV	X	X	V	X	X	V	X
21	IV	X	X	V	X	X	V	X
24	IV	X	X	V	X	X	V	X
27	IV	NA	NA	V	NA	NA	V	NA
30	IV	X	X	V	X	X	V	X
33	IV	NA	NA	V	NA	NA	V	NA
36	IV	X	X	V	X	X	V	X
42	IV	X	NA	V	X	NA	V	NA
48	IV	X	NA	V	X	NA	V	NA
54	IV	NA	NA	V	NA	NA	V	NA
60	IV	NA	NA	V	NA	NA	V	NA
66	IV	NA	NA	V	NA	NA	V	NA
72	V	NA	NA	V	NA	NA	V	NA
78	2020	NA	NA	2370	NA	NA	2730	NA
84	2020	NA	NA	2380	NA	NA	2740	NA
90	2030	NA	NA	2390	NA	NA	2750	NA
96	2040	NA	NA	2400	NA	NA	2750	NA
102	2050	NA	NA	2410	NA	NA	2760	NA
108	2060	NA	NA	2410	NA	NA	2770	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

PVC Polyvinyl Chloride Pipe

CPVC Corrugated Polyvinyl Chloride Pipe

ESCP Extra Strength Clay Pipe

X This material may be used for the given pipe diameter and fill height.

NA This material is Not Acceptable for the given pipe diameter and fill height.

Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the D-load to produce a 0.01 in crack.

STORM SEWERS (metric) KIND OF MATERIAL PERMITTED AND STRENGTH REQUIRED FOR A GIVEN PIPE DIAMETERS AND FILL HEIGHTS OVER THE TOP OF THE PIPE								
Nominal Diameter in.	Type 5			Type 6			Type 7	
	Fill Height: Greater than 20' not exceeding 25'			Fill Height: Greater than 25' not exceeding 30'			Fill Height: Greater than 30' not exceeding 35'	
	RCCP	PVC	CPVC	RCCP	PVC	CPVC	RCCP	CPVC
250	NA	X	X	NA	X	X	NA	X
300	IV	X	X	V	X	X	V	X
375	IV	X	X	V	X	X	V	X
450	IV	X	X	V	X	X	V	X
525	IV	X	X	V	X	X	V	X
600	IV	X	X	V	X	X	V	X
675	IV	NA	NA	V	NA	NA	V	NA
750	IV	X	X	V	X	X	V	X
825	IV	NA	NA	V	NA	NA	V	NA
900	IV	X	X	V	X	X	V	X
1050	IV	X	NA	V	X	NA	V	NA
1200	IV	X	NA	V	X	NA	V	NA
1350	IV	NA	NA	V	NA	NA	V	NA
1500	IV	NA	NA	V	NA	NA	V	NA
1650	IV	NA	NA	V	NA	NA	V	NA
1800	V	NA	NA	V	NA	NA	V	NA
1950	100	NA	NA	110	NA	NA	130	NA
2100	100	NA	NA	110	NA	NA	130	NA
2250	100	NA	NA	110	NA	NA	130	NA
2400	100	NA	NA	120	NA	NA	130	NA
2550	100	NA	NA	120	NA	NA	130	NA
2700	100	NA	NA	120	NA	NA	130	NA

RCCP Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

PVC Polyvinyl Chloride Pipe

CPVC Corrugated Polyvinyl Chloride Pipe

ESCP Extra Strength Clay Pipe

X This material may be used for the given pipe diameter and fill height.

NA This material is Not Acceptable for the given pipe diameter and fill height.

Note RCCP with a number instead of a Roman numeral shall be furnished according to AASHTO M170 Section 6. This number represents the metric D-load to produce a 25.4 micro-meter crack.

Revise the sixth paragraph of Article 550.06 of the Standard Specifications to read:

“PVC, PE and CPP pipes shall be joined according to the manufacturer’s specifications.”

Revise the first and second paragraphs of Article 550.08 of the Standard Specifications to read:

“550.08 Deflection Testing for Storm Sewers. All PVC, PE, and CPP storm sewers shall be tested for deflection not less than 30 days after the pipe is installed and the backfill compacted. The testing shall be performed in the presence of the Engineer.

For PVC, PE, and CPP storm sewers with diameters 24 in. (600 mm) or smaller, a mandrel drag shall be used for deflection testing. For PVC, PE, and CPP storm sewers with diameters over 24 in. (600 mm), deflection measurements other than by a mandrel shall be used.”

Revise the fifth paragraph of Article 550.08 to read as follows.

“The outside diameter of the mandrel shall be 95 percent of the base inside diameter. For all PVC pipe the base inside diameter shall be defined using ASTM D 3034 methodology. For all PE and CPP pipe, the base inside diameter shall be defined as the average inside diameter based on the minimum and maximum tolerances specified in the corresponding ASTM or AASHTO material specifications.”

Revise the first paragraph of Article 1040.03 of the Standard Specifications to read:

“1040.03 Polyvinyl Chloride (PVC) Pipe. Acceptance testing of PVC pipe and fittings shall be accomplished during the same construction season in which they are installed. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written certification that the material meets those properties. The pipe shall meet the following additional requirements.”

Delete Articles 1040.03(e) and (f) of the Standard Specifications.

Revise Articles 1040.04(c) and (d) of the Standard Specifications to read:

“(c) PE Profile Wall Pipe for Insertion Lining. The pipe shall be according to ASTM F 894. When used for insertion lining of pipe culverts, the pipe liner shall have a minimum pipe stiffness of 46 psi (317 kPa) at five percent deflection for nominal inside diameters of 42 in. (1050 mm) or less. For nominal inside diameters of greater than 42 in. (1050 mm), the pipe liner shall have a minimum pipe stiffness of 32.5 psi (225 kPa) at five percent deflection. All sizes shall have wall construction that presents essentially smooth internal and external surfaces.

(d) PE Pipe with a Smooth Interior. The pipe shall be according to ASTM F 714 (DR 32.5) with a minimum cell classification of PE 335434 as defined in ASTM D 3350. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written certification that the material meets those properties and the resin used to manufacture the pipe meets or exceeds the minimum cell classification requirements.”

Add the following to Section 1040 of the Standard Specifications:

“1040.08 Polypropylene (PP) Pipe. Storage and handling shall be according to the manufacturer’s recommendations, except in no case shall the pipe be exposed to direct sunlight for more than six months. Acceptance testing of the pipe shall be accomplished during the same construction season in which it is installed. The section properties shall be according to the manufacturer pre-submitted geometric properties on file with the Department. The manufacturer shall submit written certification that the material meets those properties. The pipe shall meet the following additional requirements.

- (a) Corrugated PP Pipe with a Smooth Interior. The pipe shall be according to AAHSTO M 330 (nominal size – 12 to 60 in. (300 to 1500 mm)). The pipe shall be Type S or D.
- (b) Perforated Corrugated PP Pipe with A Smooth Interior. The pipe shall be according to AASHTO M 330 (nominal size – 12 to 60 in. (300 to 1500 mm)). The pipe shall be Type SP. In addition, the top centerline of the pipe shall be marked so that it is readily visible from the top of the trench before backfilling, and the upper ends of the slot perforations shall be a minimum of ten degrees below the horizontal.”

PAVED SHOULDER REMOVAL (BDE)

Effective: April 1, 2014

Revise the first paragraph of Article 440.07(b) of the Standard Specifications to read:

“(b) Measured Quantities. Pavement removal, driveway pavement removal, and paved shoulder removal will be measured for payment in place and the area computed in square yards (square meters).”

Revise Article 440.07(c) of the Standard Specifications to read:

“(c) Adjustment of Quantities. The quantity of pavement removal and paved shoulder removal will be adjusted if their respective thickness varies more than 15 percent from that shown on the plans. The quantity will be either increased or decreased according to the following table.

% change of thickness	% change of quantity
0 to less than 15	0
15 to less than 20	10
20 to less than 30	15
30 to less than 50	20

If the thickness of the existing pavement varies by 50 percent or more from that shown on the plans, the character of the work will be considered significantly changed and an adjustment to the contract will be made according to Article 104.02.

When an adjustment is made for variations in pavement or shoulder thickness a resulting adjustment will also be made in the earthwork quantities when applicable.

No adjustment will be made for variations in the amount of reinforcement.”

PAVEMENT PATCHING (BDE)

Effective: January 1, 2010

Revise the first sentence of the second paragraph of Article 701.17(e)(1) of the Standard Specifications to read:

“In addition to the traffic control and protection shown elsewhere in the contract for pavement, two devices shall be placed immediately in front of each open patch, open hole, and broken pavement where temporary concrete barriers are not used to separate traffic from the work area.”

PAVEMENT STRIPING - SYMBOLS (BDE)

Effective: January 1, 2015

Revise the Symbol Table of Article 780.14 of the Supplemental Specifications to read:

“SYMBOLS

Symbol	Large Size sq ft (sq m)	Small Size sq ft (sq m)
Through Arrow	11.5 (1.07)	6.5 (0.60)
Left or Right Arrow	15.6 (1.47)	8.8 (0.82)
2 Arrow Combination Left (or Right) and Through	26.0 (2.42)	14.7 (1.37)
3 Arrow Combination Left, Right, and Through	38.4 (3.56)	20.9 (1.94)
Lane Drop Arrow	41.5 (3.86)	--
Wrong Way Arrow	24.3 (2.26)	--
Railroad "R" 6 ft (1.8 m)	3.6 (0.33)	--
Railroad "X" 20 ft (6.1 m)	54.0 (5.02)	--
International Symbol of Accessibility	3.1 (0.29)	--
Bike Symbol	4.7 (0.44)	--
Shared Lane Symbol	8.0 (0.74)	--“

PRECAST CONCRETE HANDHOLE (BDE)

Effective: August 1, 2014

Revise the third paragraph of Article 814.03 of the Standard Specifications to read:

“Handholes shall be constructed as shown on the plans and shall be cast-in-place, composite concrete, or precast units. Heavy duty handholes shall be either cast-in-place or precast units.”

Add the following to Article 814.03 of the Standard Specifications:

“(c) Precast Concrete. Precast concrete handholes shall be fabricated according to Article 1042.17. Where a handhole is contiguous to a sidewalk, preformed joint filler of 1/2 inch (13 mm) thickness shall be placed between the handhole and the sidewalk.”

Add the following to Section 1042 of the Standard Specifications:

“**1042.17 Precast Concrete Handholes.** Precast concrete handholes shall be according to Articles 1042.03(a)(c)(d)(e).”

PROGRESS PAYMENTS (BDE)

Effective: November 2, 2013

Revise Article 109.07(a) of the Standard Specifications to read:

“(a) Progress Payments. At least once each month, the Engineer will make a written estimate of the quantity of work performed in accordance with the contract, and the value thereof at the contract unit prices. The amount of the estimate approved as due for payment will be vouchered by the Department and presented to the State Comptroller for payment. No amount less than \$1000.00 will be approved for payment other than the final payment.

Progress payments may be reduced by liens filed pursuant to Section 23(c) of the Mechanics' Lien Act, 770 ILCS 60/23(c).

If a Contractor or subcontractor has defaulted on a loan issued under the Department's Disadvantaged Business Revolving Loan Program (20 ILCS 2705/2705-610), progress payments may be reduced pursuant to the terms of that loan agreement. In such cases, the amount of the estimate related to the work performed by the Contractor or subcontractor, in default of the loan agreement, will be offset, in whole or in part, and vouchered by the Department to the Working Capital Revolving Fund or designated escrow account. Payment for the work shall be considered as issued and received by the Contractor or subcontractor on the date of the offset voucher. Further, the amount of the offset voucher shall be a credit against the Department's obligation to pay the Contractor, the Contractor's obligation to pay the subcontractor, and the Contractor's or subcontractor's total loan indebtedness to the Department. The offset shall continue until such time as the entire loan indebtedness is satisfied. The Department will notify the Contractor and Fund Control Agent in a timely manner of such offset. The Contractor or subcontractor shall not be entitled to additional payment in consideration of the offset.

The failure to perform any requirement, obligation, or term of the contract by the Contractor shall be reason for withholding any progress payments until the Department determines that compliance has been achieved."

RETROREFLECTIVE SHEETING FOR HIGHWAY SIGNS (BDE)

Effective: November 1, 2014

Revise the first sentence of the first paragraph of Article 1091.03(a)(3) of the Standard Specifications to read:

"When tested according to ASTM E 810, with averaging, the sheeting shall have a minimum coefficient of retroreflection as show in the following tables."

Replace the Tables for Type AA sheeting, Type AP sheeting, Type AZ sheeting and Type ZZ sheeting in Article 1091.03(a)(3) with the following.

Type AA Sheeting
 Minimum Coefficient of Retroreflection
 Candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AA (Average of 0 and 90 degree rotation)

Observation Angle (deg.)	Entrance Angle (deg.)	White	Yellow	Red	Green	Blue	FO
0.2	-4	800	600	120	80	40	200
0.2	+30	400	300	60	35	20	100
0.5	-4	200	150	30	20	10	75
0.5	+30	100	75	15	10	5	35

Type AA (45 degree rotation)

Observation Angle (deg.)	Entrance Angle (deg.)	Yellow	FO
0.2	-4	500	165
0.2	+30	115	40
0.5	-4	140	65
0.5	+30	60	30

Type AP Sheeting
 Minimum Coefficient of Retroreflection
 Candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AP (Average of 0 and 90 degree rotation)

Observation Angle (deg.)	Entrance Angle (deg.)	White	Yellow	Red	Green	Blue	Brown	FO
0.2	-4	500	380	75	55	35	25	150
0.2	+30	180	135	30	20	15	10	55
0.5	-4	300	225	50	30	20	15	90
0.5	+30	90	70	15	10	7.5	5	30

Type AZ Sheeting
 Minimum Coefficient of Retroreflection
 Candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type AZ (Average of 0 and 90 degree rotation)

Observation Angle (deg.)	Entrance Angle (deg.)	White	Yellow	Red	Green	Blue	FYG	FY
0.2	-4	375	280	75	45	25	300	230
0.2	+30	235	170	40	25	15	190	150
0.5	-4	245	180	50	30	20	200	155
0.5	+30	135	100	25	15	10	100	75
1.0	-4	50	37.5	8.5	5	2	45	25
1.0	+30	22.5	20	5	3	1	25	12.5

Type ZZ Sheeting
 Minimum Coefficient of Retroreflection
 Candelas/foot candle/sq ft (candelas/lux/sq m) of material

Type ZZ (Average of 0 and 90 degree rotation)

Observation Angle (deg.)	Entrance Angle (deg.)	White	Yellow	Red	Green	Blue	FYG	FY	FO
0.2	-4	570	425	90	60	30	460	340	170
0.2	+30	190	140	35	20	10	150	110	65
0.5	-4	400	300	60	40	20	320	240	120
0.5	+30	130	95	20	15	7	100	80	45
1.0	-4	115	90	17	12	5	95	70	35
1.0	+30	45	35	7	5	2	35	25	15

REINFORCEMENT BARS (BDE)

Effective: November 1, 2013

Revise the first and second paragraphs of Article 508.05 of the Standard Specifications to read:

“508.05 Placing and Securing. All reinforcement bars shall be placed and tied securely at the locations and in the configuration shown on the plans prior to the placement of concrete. Manual welding of reinforcement may only be permitted on precast concrete products as indicated in the current Bureau of Materials and Physical Research Policy Memorandum “Quality Control / Quality Assurance Program for Precast Concrete Products”, and for precast prestressed concrete products as indicated in the Department’s current “Manual for Fabrication of Precast Prestressed Concrete Products”. Reinforcement bars shall not be placed by sticking or floating into place or immediately after placement of the concrete.

Bars shall be tied at all intersections, except where the center to center dimension is less than 1 ft (300 mm) in each direction, in which case alternate intersections shall be tied. Molded plastic clips may be used in lieu of wire to secure bar intersections, but shall not be permitted in horizontal bar mats subject to construction foot traffic or to secure longitudinal bar laps. Plastic clips shall adequately secure the reinforcement bars, and shall permit the concrete to flow through and fully encase the reinforcement. Plastic clips may be recycled plastic, and shall meet the approval of the Engineer. The number of ties as specified shall be doubled for lap splices at the stage construction line of concrete bridge decks when traffic is allowed on the first completed stage during the pouring of the second stage.”

Revise the fifth paragraph of Article 508.05 of the Standard Specifications to read:

“Supports for reinforcement in bridge decks shall be metal. For all other concrete construction the supports shall be metal or plastic. Metal bar supports shall be made of cold-drawn wire, or other approved material and shall be either epoxy coated, galvanized or plastic tipped. When the reinforcement bars are epoxy coated, the metal supports shall be epoxy coated. Plastic supports may be recycled plastic. Supports shall be provided in sufficient number and spaced to provide the required clearances. Supports shall adequately support the reinforcement bars, and shall permit the concrete to flow through and fully encase the reinforcement. The legs of supports shall be spaced to allow an opening that is a minimum 1.33 times the nominal maximum aggregate size used in the concrete. Nominal maximum aggregate size is defined as the largest sieve which retains any of the aggregate sample particles. All supports shall meet the approval of the Engineer.”

Revise the first sentence of the eighth paragraph of Article 508.05 of the Standard Specifications to read:

“Epoxy coated reinforcement bars shall be tied with plastic coated wire, epoxy coated wire, or molded plastic clips where allowed.”

Add the following sentence to the end of the first paragraph of Article 508.06(c) of the Standard Specifications:

“In addition, the total slip of the bars within the splice sleeve of the connector after loading in tension to 30 ksi (207 MPa) and relaxing to 3 ksi (20.7 MPa) shall not exceed 0.01 in. (254 microns).”

Revise Article 1042.03(d) of the Standard Specifications to read:

“(d) Reinforcement and Accessories: The concrete cover over all reinforcement shall be within $\pm 1/4$ in. (± 6 mm) of the specified cover.

Welded wire fabric shall be accurately bent and tied in place.

Miscellaneous accessories to be cast into the concrete or for forming holes and recesses shall be carefully located and rigidly held in place by bolts, clamps, or other effective means. If paper tubes are used for vertical dowel holes, or other vertical holes which require grouting, they shall be removed before transportation to the construction site.”

SIDEWALK, CORNER, OR CROSSWALK CLOSURE (BDE)

Effective: January 1, 2015

Revise the first sentence of Article 1106.02(m) of the Supplemental Specifications to read:

“The top and bottom panels shall have alternating white and orange stripes sloping 45 degrees on both sides.”

SPEED DISPLAY TRAILER (BDE)

Effective: April 2, 2014

Add the following to Article 701.15(l) of the Standard Specifications:

“(l) Speed Display Trailer. A speed display trailer shall be utilized on freeways and expressways as part of Highway Standard 701400. The trailer shall be placed on the right hand side of the roadway adjacent to, or within 100 ft (30 m) beyond, the first work zone speed limit sign.

Whenever the speed display trailer is not in use, it shall be considered non-operating equipment and shall be stored according to Article 701.11.”

Add the following to Article 701.20 of the Standard Specifications:

“(k) Speed Display Trailer will be paid for at the contract unit price per calendar month or fraction thereof for each trailer as SPEED DISPLAY TRAILER.”

Add the following to Article 1106.02 of the Standard Specifications:

“(o) Speed Display Trailer. The speed display trailer shall consist of a LED speed indicator display with self-contained, one-direction radar mounted on an orange see-through trailer. The height of the display and radar shall be such that it will function and be visible when located behind concrete barrier.

The speed measurement shall be by radar and provide a minimum detection distance of 1000 ft (300 m). The radar shall have an accuracy of ± 1 mile per hour.

The speed indicator display shall face approaching traffic and shall have a sign legend of “YOUR SPEED” immediately above or below the speed display. The digital speed display shall show two digits (00 to 99) in mph. The color of the changeable message legend shall be a yellow legend on a black background. The minimum height of the numerals shall be 18 in. (450 mm), and the nominal legibility distance shall be at least 750 ft (250 m).

The speed indicator display shall be equipped with a violation alert that flashes the displayed detected speed when the posted limit is exceeded. The speed indicator shall have a maximum speed cutoff. The display shall include automatic dimming for nighttime operation.

The speed indicator measurement and display functions shall be equipped with the power supply capable of providing 24 hours of uninterrupted service.”

TEMPORARY CONCRETE BARRIER (BDE)

Effective: January 1, 2015

Revise Article 704.02 of the Standard Specifications to read:

“704.02 Materials. Materials shall be according to the following.

Item	Article/Section
(a) Precast Temporary Concrete Barrier	1042
(b) Reinforcement Bars (Note 1)	1006.10(a)
(c) Connecting Pins and Anchor Pins (Note 2)	
(d) Connecting Loop Bars (Note 3)	
(e) Packaged Rapid Hardening Mortar or Concrete	1018

Note 1. Reinforcement bars shall be Grade 60 (Grade 400).

Note 2. Connecting Pins and Anchor Pins shall be according to the requirements of ASTM F 1554 Grade 36 (Grade 250).

Note 3. Connecting loop bars shall be smooth bars according to the requirements of ASTM A 36 (A 36M).”

Revise Article 704.04 of the Standard Specifications to read:

“704.04 Installation. The barriers shall be seated on bare, clean pavement or paved shoulder and connected together in a smooth, continuous line at the locations provided by the Engineer.

Except on bridge decks, or where alternate anchoring details are shown on the plans, the barrier unit at each end of an installation shall be anchored to the pavement or paved shoulder using six anchor pins and protected with an impact attenuator as shown on the plans. When pinning of additional barrier units within the installation is specified, three anchor pins shall be installed in the traffic side holes of the required barriers.

Where both pinned and unpinned barrier units are used in a continuous installation, a transition shall be provided between them. The transition from pinned to unpinned barrier shall consist of two anchor pins installed in the end holes on the traffic side of the first barrier beyond the pinned section and one anchor pin installed in the middle hole on the traffic side of the second barrier beyond the pinned section. The third barrier beyond the pinned section shall then be unpinned.

Barriers located on bridge decks shall be restrained as shown in the plans. Anchor pins shall not be installed through bridge decks.

Barriers or attachments damaged during transportation or handling, or by traffic during the life of the installation, shall be repaired or replaced. The Engineer will be the sole judge in determining which units or attachments require repair or replacement.

The barriers shall be removed when no longer required by the contract. After removal, all anchor holes in the pavement or paved shoulder shall be filled with a rapid hardening mortar or concrete. Only enough water to permit placement and consolidation by rodding shall be used and the material shall be struck-off flush.”

Add the following after the first paragraph of Article 704.05 of the Standard Specifications:

“Anchor pins, except for the six anchor pins for the barrier unit at each end of an installation, will be measured for payment as each, per anchor pin installed.”

Add the following after the second paragraph of Article 704.06 of the Standard Specifications:

“Anchor pins, except for the six anchor pins for the barrier unit at each end of an installation, will be paid for at the contract unit price per each for PINNING TEMPORARY CONCRETE BARRIER.”

TRACKING THE USE OF PESTICIDES (BDE)

Effective: August 1, 2012

Add the following paragraph after the first paragraph of Article 107.23 of the Standard Specifications:

“Within 48 hours of the application of pesticides, including but not limited to herbicides, insecticides, algacides, and fungicides, the Contractor shall complete and return to the Engineer, Operations form “OPER 2720”.”

TRAINING SPECIAL PROVISIONS (BDE)

Effective: October 15, 1975

This Training Special Provision supersedes Section 7b of the Special Provision entitled “Specific Equal Employment Opportunity Responsibilities,” and is in implementation of 23 U.S.C. 140(a).

As part of the Contractor’s equal employment opportunity affirmative action program, training shall be provided as follows:

The Contractor shall provide on-the-job training aimed at developing full journeyman in the type of trade or job classification involved. The number of trainees to be trained under this contract will be **4**. In the event the Contractor subcontracts a portion of the contract work, he shall determine how many, if any, of the trainees are to be trained by the subcontractor, provided however, that the Contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The Contractor shall also insure that this Training Special Provision is made applicable to such subcontract. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training.

The number of trainees shall be distributed among the work classifications on the basis of the Contractor's needs and the availability of journeymen in the various classifications within the reasonable area of recruitment. Prior to commencing construction, the Contractor shall submit to the Illinois Department of Transportation for approval the number of trainees to be trained in each selected classification and training program to be used. Furthermore, the Contractor shall specify the starting time for training in each of the classifications. The Contractor will be credited for each trainee employed by him on the contract work who is currently enrolled or becomes enrolled in an approved program and will be reimbursed for such trainees as provided hereinafter.

Training and upgrading of minorities and women toward journeyman status is a primary objective of this Training Special Provision. Accordingly, the Contractor shall make every effort to enroll minority trainees and women (e.g. by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees) to the extent such persons are available within a reasonable area of recruitment. The Contractor will be responsible for demonstrating the steps that he has taken in pursuance thereof, prior to a determination as to whether the Contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee in any classification in which he has successfully completed a training course leading to journeyman status or in which he has been employed as a journeyman. The Contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used, the Contractor's records should document the findings in each case.

The minimum length and type of training for each classification will be as established in the training program selected by the Contractor and approved by the Illinois Department of Transportation and the Federal Highway Administration. The Illinois Department of Transportation and the Federal Highway Administration shall approve a program, if it is reasonably calculated to meet the equal employment opportunity obligations of the Contractor and to qualify the average trainee for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau and training programs approved by not necessarily sponsored by the U.S. Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training shall also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts. Approval or acceptance of a training program shall be obtained from the State prior to commencing work on the classification covered by the program. It is the intention of these provisions that training is to be provided in the construction crafts rather than clerk-typists or secretarial-type positions. Training is permissible in lower level management positions such as office engineers, estimators, timekeepers, etc., where the training is oriented toward construction applications. Training in the laborer classification may be permitted provided that significant and meaningful training is provided and approved by the Illinois Department of Transportation and the Federal Highway Administration. Some offsite training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training.

Except as otherwise noted below, the Contractor will be reimbursed 80 cents per hour of training given an employee on this contract in accordance with an approved training program. As approved by the Engineer, reimbursement will be made for training of persons in excess of the number specified herein. This reimbursement will be made even though the Contractor receives additional training program funds from other sources, provided such other source does not specifically prohibit the Contractor from receiving other reimbursement. Reimbursement for offsite training indicated above may only be made to the Contractor where he does one or more of the following and the trainees are concurrently employed on a Federal-aid project; contributes to the cost of the training, provides the instruction to the trainee or pays the trainee's wages during the offsite training period.

No payment shall be made to the Contractor if either the failure to provide the required training, or the failure to hire the trainee as a journeyman, is caused by the Contractor and evidences a lack of good faith on the part of the Contractor in meeting the requirement of this Training Special Provision. It is normally expected that a trainee will begin his training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project as long as training opportunities exist in his work classification or until he has completed his training program.

It is not required that all trainees be on board for the entire length of the contract. A Contractor will have fulfilled his responsibilities under this Training Special Provision if he has provided acceptable training to the number of trainees specified. The number trained shall be determined on the basis of the total number enrolled on the contract for a significant period.

Trainees will be paid at least 60 percent of the appropriate minimum journeyman's rate specified in the contract for the first half of the training period, 75 percent for the third quarter of the training period, and 90 percent for the last quarter of the training period, unless apprentices or trainees in an approved existing program are enrolled as trainees on this project. In that case, the appropriate rates approved by the Departments of Labor or Transportation in connection with the existing program shall apply to all trainees being trained for the same classification who are covered by this Training Special Provision.

The Contractor shall furnish the trainee a copy of the program he will follow in providing the training. The Contractor shall provide each trainee with a certification showing the type and length of training satisfactorily complete.

The Contractor shall provide for the maintenance of records and furnish periodic reports documenting his performance under this Training Special Provision.

Method of Measurement. The unit of measurement is in hours.

Basis of Payment. This work will be paid for at the contract unit price of 80 cents per hour for TRAINEES. The estimated total number of hours, unit price, and total price have been included in the schedule of prices.

**IDOT TRAINING PROGRAM GRADUATE ON-THE-JOB TRAINING SPECIAL PROVISION
(TPG)**

Effective: August 1, 2012

Revised: February 1, 2014

In addition to the Contractor's equal employment opportunity affirmative action efforts undertaken as elsewhere required by this Contract, the Contractor is encouraged to participate in the incentive program to provide additional on-the-job training to certified graduates of IDOT funded pre-apprenticeship training programs outlined by this Special Provision.

It is the policy of IDOT to fund IDOT pre-apprenticeship training programs throughout Illinois to provide training and skill-improvement opportunities to assure the increased participation of minority groups, disadvantaged persons and women in all phases of the highway construction industry. The intent of this IDOT Training Program Graduate (TPG) Special Provision is to place certified graduates of these IDOT funded pre-apprentice training programs on IDOT project sites when feasible, and provide the graduates with meaningful on-the-job training intended to lead to journey-level employment. IDOT and its sub-recipients, in carrying out the responsibilities of a state contract, shall determine which construction contracts shall include "Training Program Graduate Special Provisions." To benefit from the incentives to encourage the participation in the additional on-the-job training under this Training Program Graduate Special Provision, the Contractor shall make every reasonable effort to employ certified graduates of IDOT funded Pre-apprenticeship Training Programs to the extent such persons are available within a reasonable recruitment area.

Participation pursuant to IDOT's requirements by the Contractor or subcontractor in this Training Program Graduate (TPG) Special Provision entitles the Contractor or subcontractor to be reimbursed at \$15.00 per hour for training given a certified TPG on this contract. As approved by the Department, reimbursement will be made for training persons as specified herein. This reimbursement will be made even though the Contractor or subcontractor may receive additional training program funds from other sources for other trainees, provided such other source does not specifically prohibit the Contractor or subcontractor from receiving other reimbursement. For purposes of this Special Provision the Contractor is not relieved of requirements under applicable federal law, the Illinois Prevailing Wage Act, and is not eligible for other training fund reimbursements in addition to the Training Program Graduate (TPG) Special Provision reimbursement.

No payment shall be made to the Contractor if the Contractor or subcontractor fails to provide the required training. It is normally expected that a TPG will begin training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project through completion of the contract, so long as training opportunities exist in his work classification or until he has completed his training program. Should the TPG's employment end in advance of the completion of the contract, the Contractor shall promptly notify the designated IDOT staff member under this Special Provision that the TPG's involvement in the contract has ended and supply a written report of the reason for the end of the involvement, the hours completed by the TPG under the Contract and the number of hours for which the incentive payment provided under this Special Provision will be or has been claimed for the TPG.

The Contractor will provide for the maintenance of records and furnish periodic reports documenting its performance under this Special Provision.

METHOD OF MEASUREMENT: The unit of measurement is in hours.

BASIS OF PAYMENT: This work will be paid for at the contract unit price of \$15.00 per hour for certified TRAINEES TRAINING PROGRAM GRADUATE. The estimated total number of hours, unit price and total price have been included in the schedule of prices.

The Contractor shall provide training opportunities aimed at developing full journeyworker in the type of trade or job classification involved. The initial number of TPGs for which the incentive is available under this contract is 4. During the course of performance of the Contract the Contractor may seek approval from the Department for additional incentive eligible TPGs. In the event the Contractor subcontracts a portion of the contract work, it shall determine how many, if any, of the TPGs are to be trained by the subcontractor, provided however, that the Contractor shall retain the primary responsibility for meeting the training requirements imposed by this Special Provision. The Contractor shall also insure that this Training Program Graduate Special Provision is made applicable to such subcontract if the TPGs are to be trained by a subcontractor and that the incentive payment is passed on to each subcontractor.

For the Contractor to meet the obligations for participation in this TPG incentive program under this Special Provision, the Department has contracted with several entities to provide screening, tutoring and pre-training to individuals interested in working in the applicable construction classification and has certified those students who have successfully completed the program and are eligible to be TPGs. A designated IDOT staff member, the Director of the Office of Business and Workforce Diversity (OBWD), will be responsible for providing assistance and referrals to the Contractor for the applicable TPGs. For this contract, the Director of OBWD is designated as the responsible IDOT staff member to provide the assistance and referral services related to the placement for this Special Provision. For purposes of this Contract, contacting the Director of OBWD and interviewing each candidate he/she recommends constitutes reasonable recruitment.

Prior to commencing construction, the Contractor shall submit to the Department for approval the TPGs to be trained in each selected classification. Furthermore, the Contractor shall specify the starting time for training in each of the classifications. No employee shall be employed as a TPG in any classification in which he/she has successfully completed a training course leading to journeyman status or in which he/she has been employed as a journeyman. Notwithstanding the on-the-job training purpose of this TPG Special Provision, some offsite training is permissible as long as the offsite training is an integral part of the work of the contract and does not comprise a significant part of the overall training.

Training and upgrading of TPGs of IDOT pre-apprentice training programs is intended to move said TPGs toward journeyman status and is the primary objective of this Training Program Graduate Special Provision. Accordingly, the Contractor shall make every effort to enroll TPGs by recruitment through the IDOT funded TPG programs to the extent such persons are available within a reasonable area of recruitment. The Contractor will be responsible for demonstrating the steps that it has taken in pursuance thereof, prior to a determination as to whether the Contractor is in compliance and entitled to the Training Program Graduate Special Provision \$15.00 an hour incentive.

The Contractor or subcontractor shall provide each TPG with a certificate showing the type and length of training satisfactorily completed.

UNDERPASS LUMINAIRE (BDE)

Effective: August 1, 2014

Revise the first paragraph of Article 821.06 of the Standard Specifications to read:

“821.06 Underpass Installation. When attached directly to a structure, the underpass luminaire shall have stainless steel brackets installed between the luminaire and the structure to create a gap of not less than 1 in. (25 mm).”

Revise the third sentence of the third paragraph of Article 821.06 of the Standard Specifications to read:

“All mounting hardware, including the vibration dampers, shall be stainless steel.”

Revise Article 1067.04(a) of the Standard Specifications to read:

“(a) Housing. The housing and lens frame shall be made of heavy duty die cast aluminum or 16 gauge (1.5 mm) minimum thickness stainless steel according to ASTM A 269, Grade 304L. All seams in the housing enclosure shall be welded by continuous welds.

The housing shall have an opening for installation of 3/4 in. (19 mm) diameter conduit.”

Revise the third sentence of the first paragraph of Article 1067.04(b) of the Standard Specifications to read:

“The lens frame shall be hinged with a continuous stainless steel piano type hinge for stainless steel housings.”

Revise the first sentence of the first paragraph of Article 1067.04(c) of the Standard Specifications to read:

“Four luminaire mounting brackets fabricated from 11 gauge (3.05 mm) stainless steel according to ASTM A 269, Grade 304L shall be used to attach the luminaire housing.”

WATERWAY OBSTRUCTION WARNING LUMINAIRE (BDE)

Effective: August 1, 2014

Revise the second paragraph of Article 1067.07(a) of the Standard Specifications to read:

“The luminaire shall have a bronze housing and shall meet the requirements set forth by the United States Coast Guard in Title 33, Part 118 of the Code of Federal Regulations. Nuts, bolts, thumb screws, hardware, thread rods, and mounting bases which are exterior, shall be stainless steel (300 series) or bronze. Hardware on the interior of the lamp cavity shall be stainless steel or bronze.”

Add the following paragraphs after the third paragraph of Article 1067.01(a) of the Standard Specifications:

“The pivot type mounting assembly shall be bronze and shall be mounted on an external vibration isolator. The pivot assembly shall include a greased bearing with a grease fitting installed near the counterweight such that the bearing can be lubricated from the bridge deck. An aluminum or stainless steel extension tube shall run from the grease fitting to the bearing. A locking rod assembly made of aluminum or stainless steel shall secure the luminaire in operating position. Stainless steel pipes shall be used to attach the pivot assembly to both the luminaire housing and the counterweights. A stainless steel locknut shall be used at all threaded connections to the pipes.

Stainless steel hook, ring, and connecting plates shall be attached to the bridge railing with stainless steel hardware or shall be anchored in the parapet. The connecting plate shall include a vandal-resistant rod locking mechanism. The service chain shall be stainless steel.”

Add the following to the end of the first paragraph of Article 1067.07(a)(3) of the Standard Specifications:

“Surge protection for the luminaire shall be integral to the fixture housing.”

WEEKLY DBE TRUCKING REPORTS (BDE)

Effective: June 2, 2012

The Contractor shall provide a weekly report of Disadvantaged Business Enterprise (DBE) trucks hired by the Contractor or subcontractors (i.e. not owned by the Contractor or subcontractors) that are used on the jobsite; or used for the delivery and/or removal of equipment/material to and from the jobsite. The jobsite shall also include offsite locations, such as plant sites or storage sites, when those locations are used solely for this contract.

The report shall be submitted on the form provided by the Department within ten business days following the reporting period. The reporting period shall be Monday through Sunday for each week reportable trucking activities occur. The report shall be submitted to the Engineer and a copy shall be provided to the district EEO Officer.

Any costs associated with providing weekly DBE trucking reports shall be considered as included in the contract unit prices bid for the various items of work involved and no additional compensation will be allowed.

STEEL COST ADJUSTMENT (BDE) (RETURN FORM WITH BID)

Effective: April 2, 2004

Revised: April 1, 2009

Description. Steel cost adjustments will be made to provide additional compensation to the Contractor, or a credit to the Department, for fluctuations in steel prices when optioned by the Contractor. The bidder shall indicate on the attached form whether or not this special provision will be part of the contract and submit the completed form with his/her bid. Failure to submit the form or failure to indicate contract number, company name, and sign and date the form shall make this contract exempt of steel cost adjustments for all items of steel. Failure to indicate "Yes" for any item of work will make that item of steel exempt from steel cost adjustment.

Types of Steel Products. An adjustment will be made for fluctuations in the cost of steel used in the manufacture of the following items:

- Metal Piling (excluding temporary sheet piling)
- Structural Steel
- Reinforcing Steel

Other steel materials such as dowel bars, tie bars, mesh reinforcement, guardrail, steel traffic signal and light poles, towers and mast arms, metal railings (excluding wire fence), and frames and grates will be subject to a steel cost adjustment when the pay items they are used in has a contract value of \$10,000 or greater.

Documentation. Sufficient documentation shall be furnished to the Engineer to verify the following:

- (a) The dates and quantity of steel, in lb (kg), shipped from the mill to the fabricator.
- (b) The quantity of steel, in lb (kg), incorporated into the various items of work covered by this special provision. The Department reserves the right to verify submitted quantities.

Method of Adjustment. Steel cost adjustments will be computed as follows:

$$SCA = Q \times D$$

Where: SCA = steel cost adjustment, in dollars
Q = quantity of steel incorporated into the work, in lb (kg)
D = price factor, in dollars per lb (kg)

$$D = MPI_M - MPI_L$$

Where: MPI_M = The Materials Cost Index for steel as published by the Engineering News-Record for the month the steel is shipped from the mill. The indices will be converted from dollars per 100 lb to dollars per lb (kg).

MPI_L = The Materials Cost Index for steel as published by the Engineering News-Record for the month prior to the letting. The indices will be converted from dollars per 100 lb to dollars per lb (kg).

The unit weights (masses) of steel that will be used to calculate the steel cost adjustment for the various items are shown in the attached table.

No steel cost adjustment will be made for any products manufactured from steel having a mill shipping date prior to the letting date.

If the Contractor fails to provide the required documentation, the method of adjustment will be calculated as described above; however, the MPI_M will be based on the date the steel arrives at the job site. In this case, an adjustment will only be made when there is a decrease in steel costs.

Basis of Payment. Steel cost adjustments may be positive or negative but will only be made when there is a difference between the MPI_L and MPI_M in excess of five percent, as calculated by:

$$\text{Percent Difference} = \{(MPI_L - MPI_M) \div MPI_L\} \times 100$$

Steel cost adjustments will be calculated by the Engineer and will be paid or deducted when all other contract requirements for the items of work are satisfied. Adjustments will only be made for fluctuations in the cost of the steel as described herein. No adjustment will be made for changes in the cost of manufacturing, fabrication, shipping, storage, etc.

The adjustments shall not apply during contract time subject to liquidated damages for completion of the entire contract.

Attachment

Item	Unit Mass (Weight)
Metal Piling (excluding temporary sheet piling)	
Furnishing Metal Pile Shells 12 in. (305 mm), 0.179 in. (3.80 mm) wall thickness)	23 lb/ft (34 kg/m)
Furnishing Metal Pile Shells 12 in. (305 mm), 0.250 in. (6.35 mm) wall thickness)	32 lb/ft (48 kg/m)
Furnishing Metal Pile Shells 14 in. (356 mm), 0.250 in. (6.35 mm) wall thickness)	37 lb/ft (55 kg/m)
Other piling	See plans
Structural Steel	See plans for weights (masses)
Reinforcing Steel	See plans for weights (masses)
Dowel Bars and Tie Bars	6 lb (3 kg) each
Mesh Reinforcement	63 lb/100 sq ft (310 kg/sq m)
Guardrail	
Steel Plate Beam Guardrail, Type A w/steel posts	20 lb/ft (30 kg/m)
Steel Plate Beam Guardrail, Type B w/steel posts	30 lb/ft (45 kg/m)
Steel Plate Beam Guardrail, Types A and B w/wood posts	8 lb/ft (12 kg/m)
Steel Plate Beam Guardrail, Type 2	305 lb (140 kg) each
Steel Plate Beam Guardrail, Type 6	1260 lb (570 kg) each
Traffic Barrier Terminal, Type 1 Special (Tangent)	730 lb (330 kg) each
Traffic Barrier Terminal, Type 1 Special (Flared)	410 lb (185 kg) each
Steel Traffic Signal and Light Poles, Towers and Mast Arms	
Traffic Signal Post	11 lb/ft (16 kg/m)
Light Pole, Tenon Mount and Twin Mount, 30 - 40 ft (9 - 12 m)	14 lb/ft (21 kg/m)
Light Pole, Tenon Mount and Twin Mount, 45 - 55 ft (13.5 - 16.5 m)	21 lb/ft (31 kg/m)
Light Pole w/Mast Arm, 30 - 50 ft (9 - 15.2 m)	13 lb/ft (19 kg/m)
Light Pole w/Mast Arm, 55 - 60 ft (16.5 - 18 m)	19 lb/ft (28 kg/m)
Light Tower w/Luminaire Mount, 80 - 110 ft (24 - 33.5 m)	31 lb/ft (46 kg/m)
Light Tower w/Luminaire Mount, 120 - 140 ft (36.5 - 42.5 m)	65 lb/ft (97 kg/m)
Light Tower w/Luminaire Mount, 150 - 160 ft (45.5 - 48.5 m)	80 lb/ft (119 kg/m)
Metal Railings (excluding wire fence)	
Steel Railing, Type SM	64 lb/ft (95 kg/m)
Steel Railing, Type S-1	39 lb/ft (58 kg/m)
Steel Railing, Type T-1	53 lb/ft (79 kg/m)
Steel Bridge Rail	52 lb/ft (77 kg/m)
Frames and Grates	
Frame	250 lb (115 kg)
Lids and Grates	150 lb (70 kg)

Return With Bid

**ILLINOIS DEPARTMENT
OF TRANSPORTATION**

**OPTION FOR
STEEL COST ADJUSTMENT**

The bidder shall submit this completed form with his/her bid. Failure to submit the form or properly complete contract number, company name, and sign and date the form shall make this contract exempt of steel cost adjustments for all items of steel. Failure to indicate "Yes" for any item of work will make that item of steel exempt from steel cost adjustment. After award, this form, when submitted shall become part of the contract.

Contract No.: _____

Company Name: _____

Contractor's Option:

Is your company opting to include this special provision as part of the contract plans for the following items of work?

- | | | |
|--|-----|--------------------------|
| Metal Piling | Yes | <input type="checkbox"/> |
| Structural Steel | Yes | <input type="checkbox"/> |
| Reinforcing Steel | Yes | <input type="checkbox"/> |
| Dowel Bars, Tie Bars and Mesh Reinforcement | Yes | <input type="checkbox"/> |
| Guardrail | Yes | <input type="checkbox"/> |
| Steel Traffic Signal and Light Poles, Towers and Mast Arms | Yes | <input type="checkbox"/> |
| Metal Railings (excluding wire fence) | Yes | <input type="checkbox"/> |
| Frames and Grates | Yes | <input type="checkbox"/> |

Signature: _____ **Date:** _____

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If

the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color,

religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. Davis-Bacon and Related Act Provisions

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such

action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for

debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such

contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded,"

as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with

commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the

certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**MINIMUM WAGES FOR FEDERAL AND FEDERALLY
ASSISTED CONSTRUCTION CONTRACTS**

This project is funded, in part, with Federal-aid funds and, as such, is subject to the provisions of the Davis-Bacon Act of March 3, 1931, as amended (46 Sta. 1494, as amended, 40 U.S.C. 276a) and of other Federal statutes referred to in a 29 CFR Part 1, Appendix A, as well as such additional statutes as may from time to time be enacted containing provisions for the payment of wages determined to be prevailing by the Secretary of Labor in accordance with the Davis-Bacon Act and pursuant to the provisions of 29 CFR Part 1. The prevailing rates and fringe benefits shown in the General Wage Determination Decisions issued by the U.S. Department of Labor shall, in accordance with the provisions of the foregoing statutes, constitute the minimum wages payable on Federal and federally assisted construction projects to laborers and mechanics of the specified classes engaged on contract work of the character and in the localities described therein.

General Wage Determination Decisions, modifications and supersedes decisions thereto are to be used in accordance with the provisions of 29 CFR Parts 1 and 5. Accordingly, the applicable decision, together with any modifications issued, must be made a part of every contract for performance of the described work within the geographic area indicated as required by an applicable DBRA Federal prevailing wage law and 29 CFR Part 5. The wage rates and fringe benefits contained in the General Wage Determination Decision shall be the minimum paid by contractors and subcontractors to laborers and mechanics.