


- NOTES**
1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
  2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
  3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.

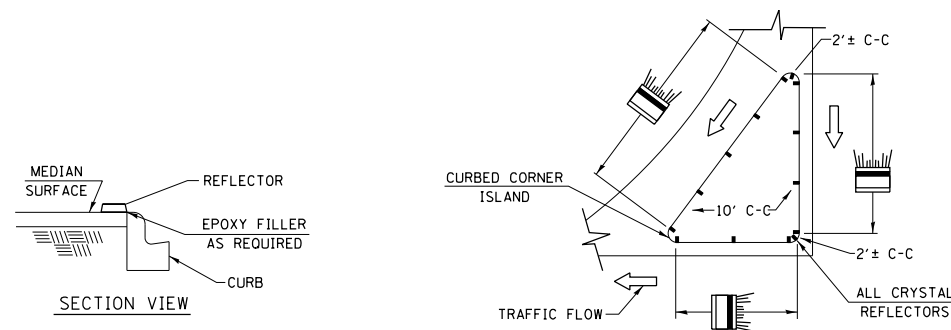

TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS  
(NO SCALE)

LAST SAVED = 1/25/2013  
PEN TABLE = V:\2013\141  
PLOT DRIVER = pdfplotlayers.batcf9

FILE NAME = AGGREGATE DITCH.dgn	USER NAME = JLM	DESIGNED - KCM	REVISED -
		DRAWN - JLM	REVISED -
		CHECKED - TMM	REVISED -
		DATE -	REVISED -
PLOT SCALE =			
PLOT DATE = 3:35:10 PM			

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

HORNER &  
SHIRIN, INC.  
ENGINEERS

SCALE: NONE

MISCELLANEOUS DETAILS  
TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS

SHEET NO. 20 OF 22 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
312	68-WRS-1	MONROE	760	484
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT			CONTRACT NO. 76817	