


TYPICAL SECTION EXISTING APPROACH ROADWAY

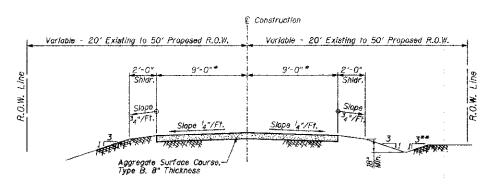

TYPICAL SECTION PROPOSED APPROACH ROADWAY

* Variable in transitions,

** Unless otherwise shown
on Cross Sections

SUMMARY OF QUANTITIES

Location			
Code No.	Item	Unit	Quantity
20100500	TREE REMOVAL, ACRES	ACRE	0.5
20200100	EARTH EXCAVATION	CU YD	313
20 3 00100	CHANNEL EXCAVATION	CU YD	613
20400800	FURNISHED EXCAVATION	CU YD	1276
28000305	TEMPORARY DITCH CHECKS	F00T	40
28100807	STONE DUMPED RIPRAP, CLASS A4	TON	5 <i>3</i> 6
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	610
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50300225	CONCRETE STRUCTURES	CU YD	49.0
50300280	CONCRETE ENCASEMENT	CU YD	28.0
50400405	PRECAST PRESTRESSED CONCRETE DECK BEAMS (21" DEPTH)	SQ FT	2904
50800105	REINFORCEMENT BARS	POUND	6560
50900205	STEEL RAILING, TYPE SI	FOOT	246
51201800	FURNISHING STEEL PILES HP14X73	FOOT	713
51202305	DRIVING PILES	F00T	713
51203800	TEST PILE STEEL HP14X73	EACH	1
51500100	NAME PLATES	EACH	1
59300100	CONTROLLED LOW-STRENGTH MATERIAL	CU YD	47.4
67100100	MOBILIZATION	L SUM	1
78201000	TERMINAL MARKER - DIRECT APPLIED	EACH	4
X2 5 01000	SEEDING, CLASS 2 (SPECI A L)	<i>ACRE</i>	0.6
X6650200	WOVEN WIRE FENCE (SPECIAL)	F00T	245

^{*} Specialty Item

UTILITIES

J.U.L.I.E.: Design Phase Locate Dig No.: A0040691

Telephone: Frontier Communications Darrell Senior Phone: 309-827-1253

Electric: Wayne-White Countles Electric Coop. Erin Halley Phone: 618-842-2196

GENERAL NOTES

- This section shall be constructed according to the plans, the Special Provisions, and the "Standard Specifications for Road and Bridge Construction", adopted January 1, 2012.
- 2. Roadway Centerline profiles refer to the finished surface.
- 3. If Ash trees are removed on the Project, the Contractor shall become familiar with and comply with measures specified by the Illinois Department of Agriculture (IDOA) to prevent the spread of the Emeraid Ash Borer. The IDOA information for Ash tree removal can be found on the IDOA website at www.agr.state.il.us/eab.
- 4. Existing utilities shown are located from surface observations or information provided by the respective utilities and must be considered approximate. There may be others, the exact location of which are unknown and not shown. The Contractor will be responsible for notifying the respective utilities before work is begun. Field marking of underground utilities may be obtained by providing a minimum of 48 hours advance notice through the J.U.L.I.E. system by calling 1-800-892-0123, 811. or by direct contact with non-members of J.U.L.I.E.
- 5. The Aggregate Surface Course, Type B gradation shall be CA 6 or CA 10. Only crushed stone will be approved for use on this project.
- The nominal thickness for surface course is shown on the Typical Sections, Standards, Schedules, or Special Details. The constructed thickness of the above item shall not be less than 90 percent of the nominal thickness at any location.
- 7. Factors used for quantity calculations are as follows:
 Stone Dumped Riprap 130 pounds/cu. ft.
 Aggregate Surface Course 2.1 tons/cu. yd.
- 8. Commitments: None as of January 31, 2013.