

EROSION CONTROL DETAILS FOR SILT FENCE

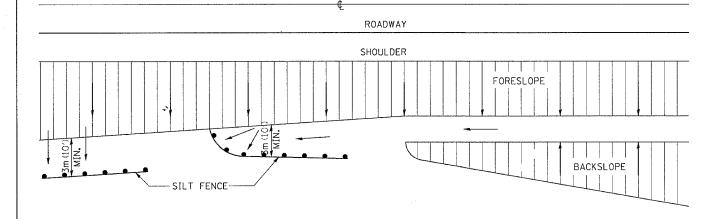

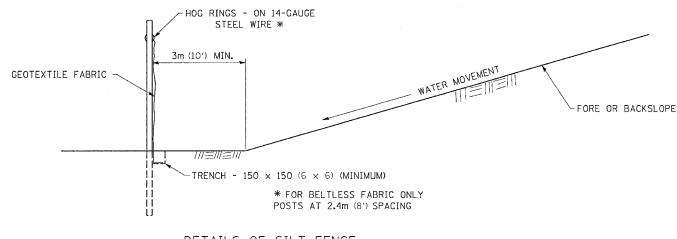



DETAILS OF SILT FENCE

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

DISABLED RAMP DETAIL


| CONTRACT NO. 64450 | F.A.P. | SECTION | COUNTY | SHEET | SNO. 734 | (4MFT)R | WINNEBAGO | 353 | 277 | STA. | TO STA. | FED. ROJO DIST. NO. | ILLINOIS | FED. AID | PROJECT |






SEE STANDARD 424001 FOR SIDE FLARE DETAIL & SEE PLANS FOR RAMP TYPE.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

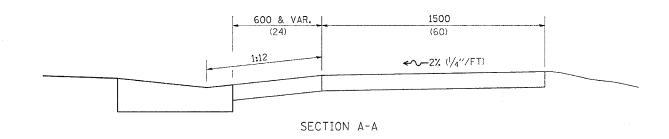



SECTION B-B

NOTES: THIS DETAIL TO BE USED IN CONJUNCTION WITH STATE STANDARD 424001.

THE MAXIMUM ALLOWABLE CROSS SLOPE FOR SIDEWALK IS 2% (1/4"/FT).

THE MAXIMUM ALLOWABLE SIDEWALK GRADE IS 8% (1/2"/FT). IF SPACE

LIMITATIONS PROHIBIT THE USE OF THE 1:12 SLOPE, THEN SLOPES BETWEEN 1:10

ARE 1:12 ARE PERMITTED FOR A MAXIMUM RISE OF 150 (6). SLOPES 1:8 AND 1:10

ARE ALLOWED FOR A MAXIMUM RISE OF 75 (3). SLOPES STEEPER THAN 1:8 ARE

NOT PERMITTED.

THE DEPRESSED CURB IS NOT STANDARD. THE RISE IS 13(1/2) INSTEAD OF 40 (11/2).

EROSION CONTROL DETAILS FOR SILT FENCE

29.2

DISABLED RAMP DETAIL

60.2