CONTRACT NO. 76949

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1832	5BR-2	WASHINGTON	97	86
STA. _____	TO STA. _____			
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

STATE OF ILLINOIS
DEPARTMENT OF PUBLIC WORKS & BUILDINGS
DIVISION OF HIGHWAYS

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A. 16	5BR-1	WASHINGTON	20	16

SHEET NO. 4 OF SHEETS

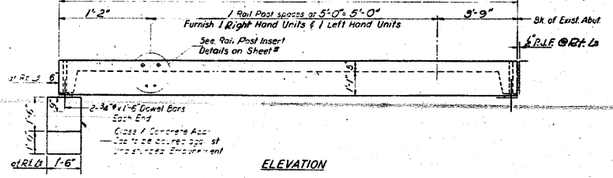

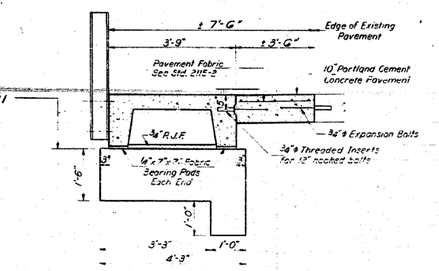



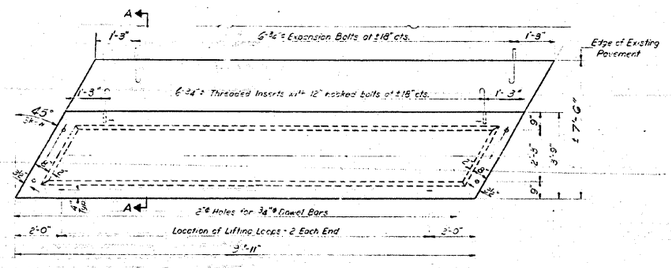





BAR LIST - ONE UNIT
Reinforcement to be cast into Slab

Bar	No.	Size	Length	Shape
A	27	#6	3'-3"	
A1	14	#6	4'-0"	
B3	10	#5	3'-6"	
B2	4	#7	5'-0"	
G1	4	#7	5'-6"	
S	22	#3	3'-4"	



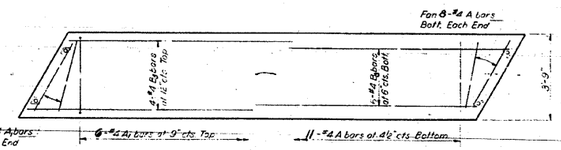





NOTES

Unless otherwise approved by the Engineer, lifting loops shall be ½", 6x19 class wire rope with fiber core and shall have a minimum ultimate strength of 18,700 lbs. Loops shall be burned off after slab has been erected. Holes shall be drilled and anchor dowels grouted in place.

Cost of reinforcement and accessories cast into the slab unit, bearing pads, furnishing, drilling for, placing and grouting anchor dowels and ¾"ø expan bolts is included in Unit bid price for "Precast Concrete Bridge Slab."

The Precast Concrete Bridge Slab shall be erected and aligned with the exterior face of the exterior Deck Beam after Deck Beams are in final position.

BILL OF MATERIAL

Item	Unit	Quantity
Precast Concrete Bridge Slab	Sq Ft	75
Portland Cement Concrete Pavement (10)	Sq Yds	2
Pavement Fabric	Sq Yds	8
Expansion Bolts ¾"ø	Each	12
Class X Concrete	Cu Yds	11

STRESSES
f_c = 4,500 psi
f_c = 1,800 psi
f_s = 20,000 psi
n = 8
LOADING HS-20

EAST
APPROACH DETAILS
F.A. RT. 16 SEC. 5BR
WASHINGTON COUNTY
STATION 1510+80

Rev. 11-16-11

DESIGNED	W. Haring	EXAMINED	March 24, 1971
CHECKED	Ap-Ann Lee P.E.	PASSED	M.E. Baumann
DRAWN	J.L. Armstrong		Director of Highways
CHECKED	WH		

AP-3 20' Precast Appr. Unit (Skewed L.F.)

PLOT DATE = 11/29/2007
FILE NAME = c:\pw_docs\wd0\1105\p\en\pi-09185a.dgn
PLOT SCALE = 50.0000 ' / IN.
REFERENCE = $WDIR$

S.N. 095-0078

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING STRUCTURE PLANS

FAS ROUTE 1832
SECTION 5BR-2
WASHINGTON COUNTY

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY

FOR INFORMATION ONLY