
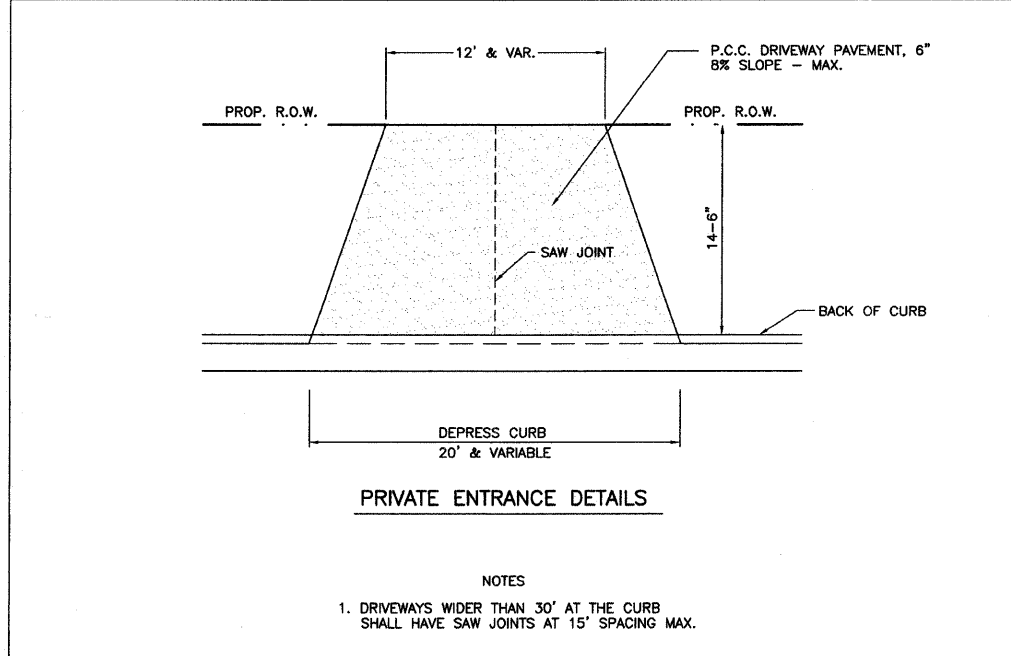


SUMMARY OF QUANTITIES				SUMMARY OF QUANTITIES				ROUTE	SECTION	CITY	TOTAL SHEETS	SHEET NO.
								HOLLY ROAD	05-00076-00-PV	OLNEY	14	3
								CONTRACT NO. 95541		ILLINOIS		
ITEM	UNIT	QUANT.	J000	ITEM	UNIT	QUANT.	J000					
20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNIT	46	60603800	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12	FOOT	92					
20200100	EARTH EXCAVATION	CU.YD.	850	60604400	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18	FOOT	96					
20800150	TRENCH BACKFILL	CU.YD.	156	60609800	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-6.18	FOOT	82					
25000900	SEEDING, CLASS 1 (SPECIAL)	ACRE	0.95	60625600	ISLAND PAVEMENT (6")	SQ.YD.	21					
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	400	67100100	MOBILIZATION	L SUM	1					
28000300	TEMPORARY DITCH CHECKS	EACH	4	70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1					
28000500	INLET AND PIPE PROTECTION	EACH	20	70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1					
28100805	STONE DUMPED RIPRAP, CLASS A3	TON	31	70103700	TRAFFIC CONTROL COMPLETE	L SUM	1					
35100100	AGGREGATE BASE COURSE, TYPE A	TON	1,240	70103815	TRAFFIC CONTROL SURVEILLANCE	CAL DAY	30					
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	50	72000100	SIGN PANEL - TYPE 1	SQ.FT.	9.0					
40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	15	72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	16					
42300200	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH	SQ.YD.	669	* 78001100	PAINT PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ.FT.	61.2					
42400100	PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH	SQ.FT.	70	* 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	325					
44000200	DRIVEWAY PAVEMENT REMOVAL	SQ.YD.	228	* 78001180	PAINT PAVEMENT MARKING - LINE 24"	FOOT	63					
44000600	SIDEWALK REMOVAL	SQ.FT.	70	* 81000400	CONDUIT IN TRENCH, 1 1/4" DIA., Δ GALVANIZED STEEL	FOOT	64					
44004400	PAVEMENT REMOVAL (SPECIAL)	SQ.YD.	2991	* 81100500	CONDUIT ATTACHED TO STRUCTURE, 1 1/2" DIA., Δ GALVANIZED STEEL	FOOT	18					
50104400	CONCRETE HEADWALL REMOVAL	EACH	1	* 81700205	ELECTRIC CABLE IN CONDUIT, 600 V (EPR-TYPE RHW) Δ 2-1/C NO. 12	FOOT	100					
50105220	PIPE CULVERT REMOVAL	FOOT	325	* 88000110	SIGNAL HEAD, 1-FACE, I-SECTION, POST MOUNTED Δ	EACH	1					
54213657	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 12"	EACH	4	* 89501510	RELOCATE EXISTING FLASHING BEACON Δ	EACH	1					
54213663	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 18"	EACH	2	LR420125	PORTLAND CEMENT CONCRETE PAVEMENT 7" (SPECIAL) WITH INTEGRAL CURB	SQ.YD.	5105					
54213669	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 24"	EACH	2	X0321583	PIPE ELBOW 18"	EACH	2					
54247110	GRATING FOR CONCRETE FLARED END SECTION 18"	EACH	2	XX003474	PIPE TEE, 18" PIPE WITH 12" RISER	EACH	2					
54247130	GRATING FOR CONCRETE FLARED END SECTION 24"	EACH	2	XX005239	PIPE TEE, 15" PIPE WITH 12" RISER	EACH	1					
550B0050	STORM SEWERS, CLASS B, TYPE 1 12"	FOOT	1140	XX007267	PIPE TEE, 12" PIPE WITH 12" RISER	EACH	3					
550B0070	STORM SEWERS, CLASS B, TYPE 1 15"	FOOT	131	XX007268	PIPE TEE, 18" PIPE WITH 18" RISER	EACH	1					
550B0090	STORM SEWERS, CLASS B, TYPE 1 18"	FOOT	234	XX007269	PIPE TEE, 24" PIPE WITH 12" RISER	EACH	1					
550B0120	STORM SEWERS, CLASS B, TYPE 1 24"	FOOT	214	Z0022800	FENCE REMOVAL	FOOT	190					
60218400	MANHOLES, TYPE A, 4'-DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	1	Z0048665	Railroad Protective Liability Insurance	L SUM	1					
60235300	INLETS, TYPE A, TYPE 1 FRAME, CLOSED LID	EACH	2	Z0051500	REMOVING AND RESETTING STREET SIGNS	EACH	2					
60236200	INLETS, TYPE A, TYPE 8 GRATE	EACH	11									
60236800	INLETS, TYPE A, TYPE 11 FRAME AND GRATE	EACH	3									
60237460	INLETS, TYPE A, TYPE 23 FRAME AND GRATE	EACH	25									
60243800	INLETS, SPECIAL, WITH TYPE 1 FRAME, OPEN LID	EACH	1									
60243900	INLETS, SPECIAL, WITH TYPE 1 FRAME, CLOSED LID	EACH	2									
60244130	INLETS, SPECIAL, WITH TYPE 11 FRAME AND GRATE	EACH	1									
60244213	INLETS, SPECIAL, WITH TYPE 23 FRAME AND GRATE	EACH	2									

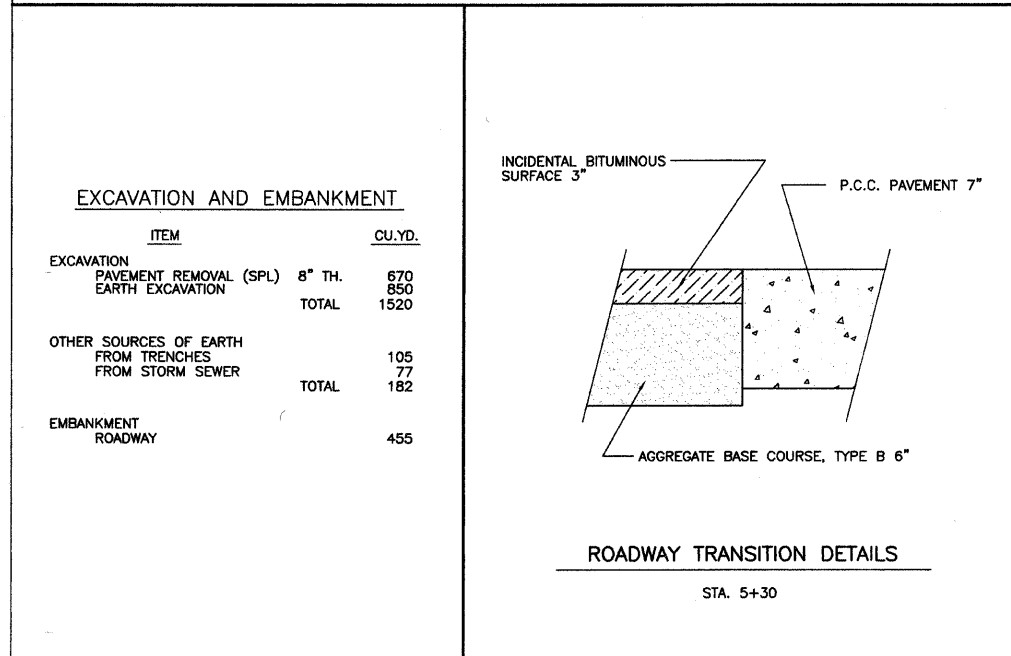

Δ Y031-1F
* SPECIALTY ITEMS