



- NOTES:
- TOP OF WALL, BOTTOM OF WALL ELEVATIONS VARY PER LOCATION, 2' - 3' TYPICAL. VERIFY IN FIELD.
  - SEE ASSOCIATED DETAILS 2, 3 SHEET L-6

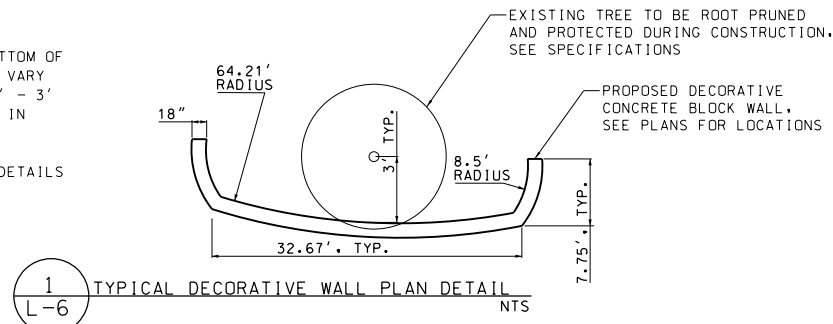


1 TYPICAL DECORATIVE WALL PLAN DETAIL  
L-6 NTS

- NOTES:
- REFER TO DETAIL 1 SHEET L-6 FOR MINIMUM DISTANCE OF TREE LOCATION WHERE WALL IS USED AS TREE WALL
  - TREE WALL HEIGHT VARIES PER LOCATION, 2' TO 3'. VERIFY IN FIELD
  - FOR SEAT WALL HEIGHT, SEE DETAIL 5, 6 SHEET L-6

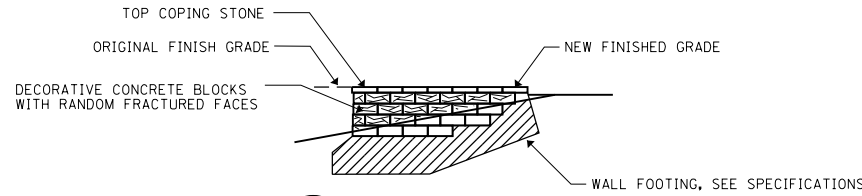

2 DECORATIVE CONCRETE BLOCK WALL DETAIL 1  
L-6 NTS

- NOTES:
- REFER TO DETAIL 1 SHEET L-6 FOR MINIMUM DISTANCE OF TREE LOCATION WHERE WALL IS USED AS TREE WALL
  - TREE WALL HEIGHT VARIES PER LOCATION, 2' TO 3'. VERIFY IN FIELD
  - FOR SEAT WALL HEIGHT, SEE DETAIL 5, 6 SHEET L-6

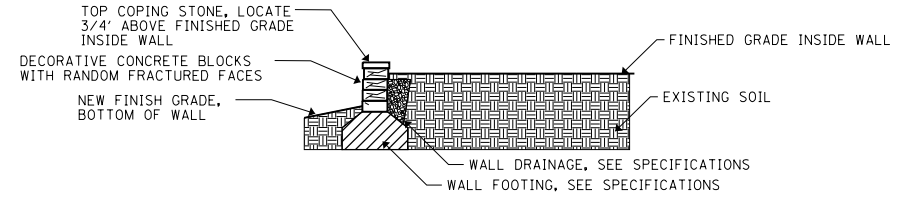


3 DECORATIVE CONCRETE BLOCK WALL DETAIL 2  
L-6 NTS

NAME	DESCRIPTION	SPECIES LIST	RATE	LBS.
TYPE 1	IDOT SALT TOLERANT SOD	SEE PAY ITEMS		
TOTAL	21,586yd'			
TYPE 2	ROCK SWALE WITH SEDGE MEADOW PLUGS	SEE SHEET L-7 FOR SWALE SCHEDULE AND QUANTITIES		
CLASS 3	NATIVE GRASS SEED MIX			
TOTAL	1.75 ACRES POUNDS PER ACRE = 90 lbs	DACTYLIS GLOMERATA 22.2% 35 POA PRATENSIS 22.2% 35 FESTUCA RUBRA 22.2% 35 LOLIUM MULTIFLORUM 22.2% 35 SCHIZACHYRIUM SCOPARIUM 6.7% 10.5 BOUTELOUA CURTIPENDULA 4.4% 7		157.5
CLASS 4	ROCKFORD PARK DISTRICT SUN/SHADE TURF SEED MIX			
TOTAL	4.90 ACRES POUNDS PER ACRE = 225 lbs	98/85 POA PRATENSIS (KENTUCKY BLUE GRASS) 50% 551 EXPRESS PERENNIAL RYEGRASS 19% 209 DASHER 3 PERENNIAL FESCUE 8% 88 SPARTAN II HARD FESCUE 7% 77 PENN LAWN CREEPING RED FESCUE 6% 66 FIESTA 4 PERENNIAL RYEGRASS 5% 55 WINDWARD CHEWINGS FESCUE 5% 55		102.5
CLASS 5	NO MOW FESCUE			
TOTAL	4.12 ACRES PIYUNDS PER ACRE = 225 lbs	CHARIOT HARD FESCUE 25% 232 LONGFELLOW II (CHEWING FESCUE WITH ENDOPHYTE) 25% 232 SHEEPS FESCUE 25% 232 JASPER II CREEPING RED FESCUE 25% 232		927.0
CLASS 6	TALL FESCUE	HIGHLANDS FESCUE MIX:		
TOTAL	.12 ACRES POUNDS PER ACRE = 225 lbs	OXFORD HARD FESCUE 25% 7 AMBASSADOR CHEWINGS FESCUE 25% 7 PATHFINDER CREEPING RED FESCUE 25% 7 QUATRO SHEEPS FESCUE 25% 7		27.0
TYPE 7	MEDIAN PERENNIALS-1 GAL	SEE SHEET L-7 FOR SCHEDULE AND QUANTITIES		


4 LANDSCAPING SCHEDULE AND TOTAL AREAS  
L-6 NTS

ROCK TYPE	% TOTAL OF MEDIAN SWALE AREA	DESCRIPTION	SIZE (FOOT DIMENSION)	1CY=1.4 TONS CONVERSION FACTOR	SWALE #	1	2	3	4	5	6	TOTAL
W 4, 5, 6	20%	NATIVE ROCKFORD LIMESTONE ROCK PLACE ONE LAYER OF 2" ROCK PER AREA NOTE TONNAGE CALCULATION IS BASED UPON 2ft x 2ft. x 2ft. STONE DIMENSION	2	0.21		150	150	150	150	150	150	900
TOTAL TONS PER SWALE:						12.44	12.44	12.44	12.44	12.44	12.44	74.67

7 PLANTING TYPE 7: MEDIAN BOULDER AND ROCK SCHEDULE  
L-6 NTS

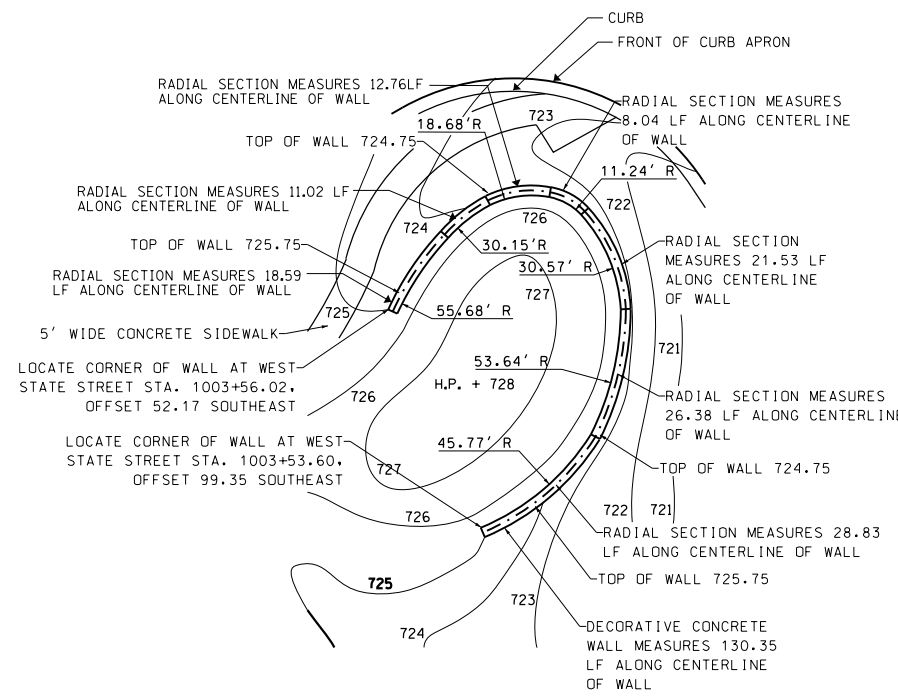

5 DECORATIVE CONCRETE BLOCK SEAT WALL AT NORTH TRIANGLE DETAIL  
L-6 NTS

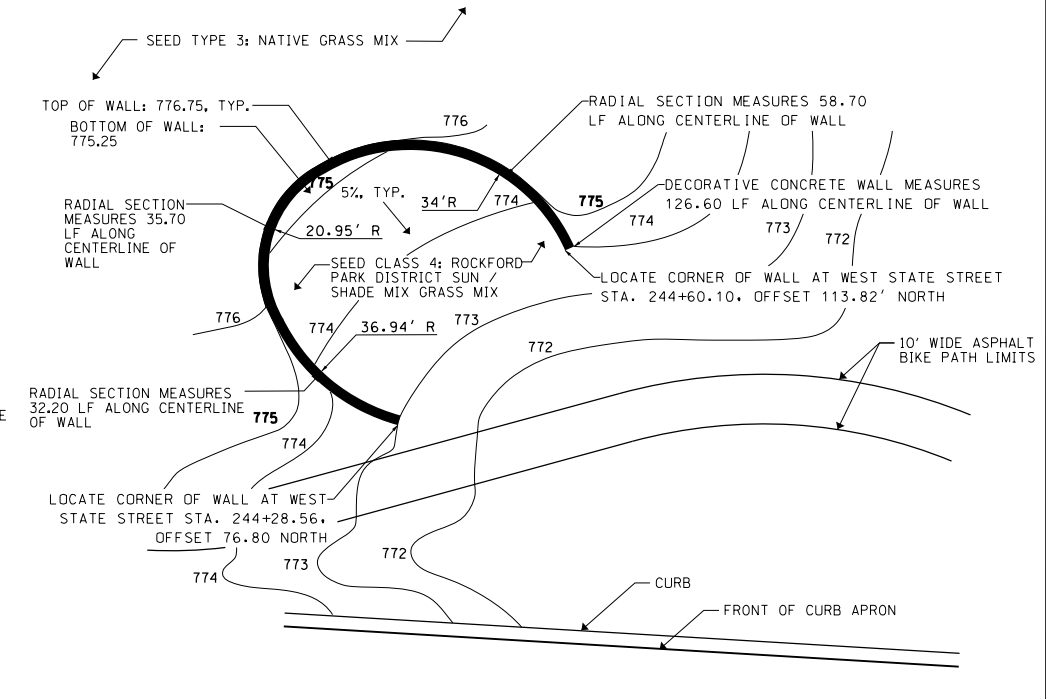

6 DECORATIVE CONCRETE BLOCK SEAT WALL AT NORTH INDEPENDENCE DETAIL  
L-6 NTS

PLANT GROUP	% OF TOTAL SWALE AREA	SPECIES	RATE	15" O.C. SPACING = .738 GAL/SF	QTY OF EACH TYPE PLANT PER PLANTING GROUP						TOTALS:
					1	2	3	4	5	6	
A	80%	ALLIUM SUMMER BEAUTY (SUMMER BEAUTY ALLIUM)	10%	0.738	9	9	9	9	9	9	53
		ASTER OBLONGIFOLIUS (AROMATIC ASTER)	3%	0.738	3	3	3	3	3	3	16
		CALAMAGROSTIS KARL FOERSTER (FEATHER REED GRASS)	15%	0.738	13	13	13	13	13	13	80
		CALAMINTHA SSP. NEPETA (LESSER CALAMINT)	10%	0.738	9	9	9	9	9	9	53
		CAREX FLACCA (HEATH SEDGE)	5%	0.738	4	4	4	4	4	4	27
		COREOPSIS PALMATA (STIFF TICKSEED)	7%	0.738	6	6	6	6	6	6	37
		NEPETA WALKER'S LOW (WALKER'S LOW CATMINT)	10%	0.738	9	9	9	9	9	9	53
		SPOROBOLUS HETEROLEPSIS (PRAIRIE DROPSEED)	35%	0.738	31	31	31	31	31	31	186
		PARTHENIUM INTEGRIFOLIUM (WILD QUININE)	5%	0.738	4	4	4	4	4	4	27
		B	80%	NARCISSUS ICE FOLLIES	30%	2.6	94	94	94	94	94
FALL INTERPLANT THROUGH GRASSES 8" O.C. SPACING = 2.6 PLUGS/SF											
TOTAL GALLON PLANTS PER SWALE:					89	89	89	89	89	89	531
TOTAL FALL BULBS PER SWALE:					94	94	94	94	94	94	562

8 PLANTING TYPE 7: MEDIAN PERENNIAL PLANT SCHEDULE  
L-6 NTS