



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	55-2	McDONOUGH	1025	590
STA.	TO STA.			
FED. ROAD DIST. NO. 4	ILLINOIS	FED. AID PROJECT		

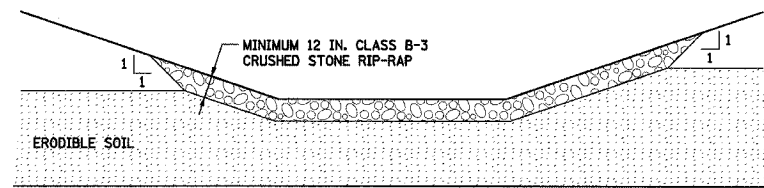


DITCH PROTECTION

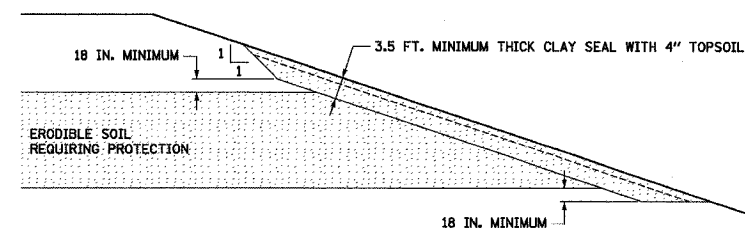


CLAY SEAL SLOPE TREATMENT

NOTES


- SEE EARTHWORK MATERIALS AND ARTICLES 204 AND 205 OF THE STANDARD SPECIFICATIONS.
- CULVERT SUPPORT:
 - DRY CONDITIONS: USE CA-6 CRUSHED LIMESTONE OR CRUSHED GRAVEL.
 - WET CONDITIONS:
 - MAXIMUM 18.0 IN. SPECIAL TREATMENT DEPTH. USE CA-11 OR CA-7 CRUSHED STONE OR CRUSHED GRAVEL.
 - SPECIAL TREATMENT DEPTH GREATER THAN 18.0 IN. USE CA-5 CRUSHED STONE OR CRUSHED GRAVEL, OR BREAKER RUN REJECT ROCK. CAP THE PLACEMENT WITH A MINIMUM 6.0 IN. LAYER OF CA-11 OR CA-7 CRUSHED STONE OR CRUSHED GRAVEL.
- EMBANKMENT SUPPORT:
 - USE ITEMS 2.B.1 AND 2.B.2 TO 2.0 FT. ABOVE THE WATER LEVEL EXISTING AT TIME OF PLACEMENT.
 - USE APPROVED EMBANKMENT MATERIAL FOR REST OF PLACEMENT.

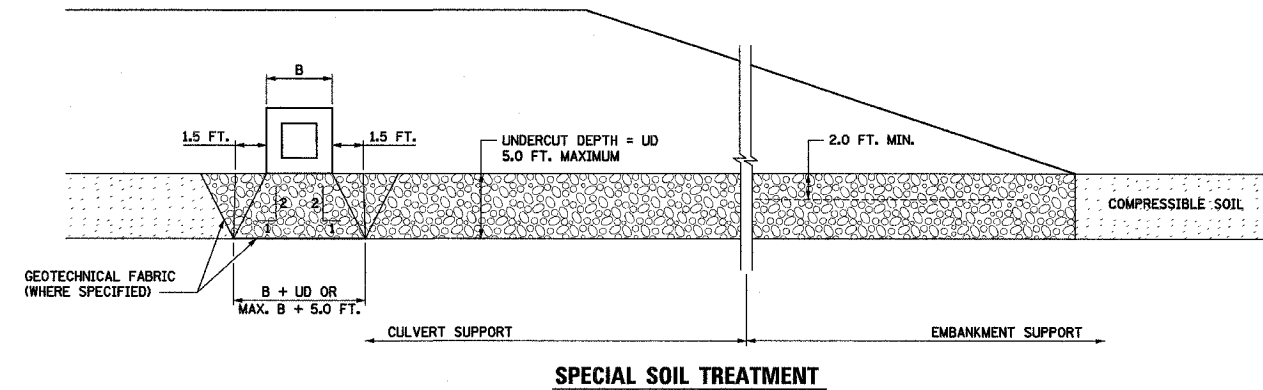


SPECIAL SOIL TREATMENT

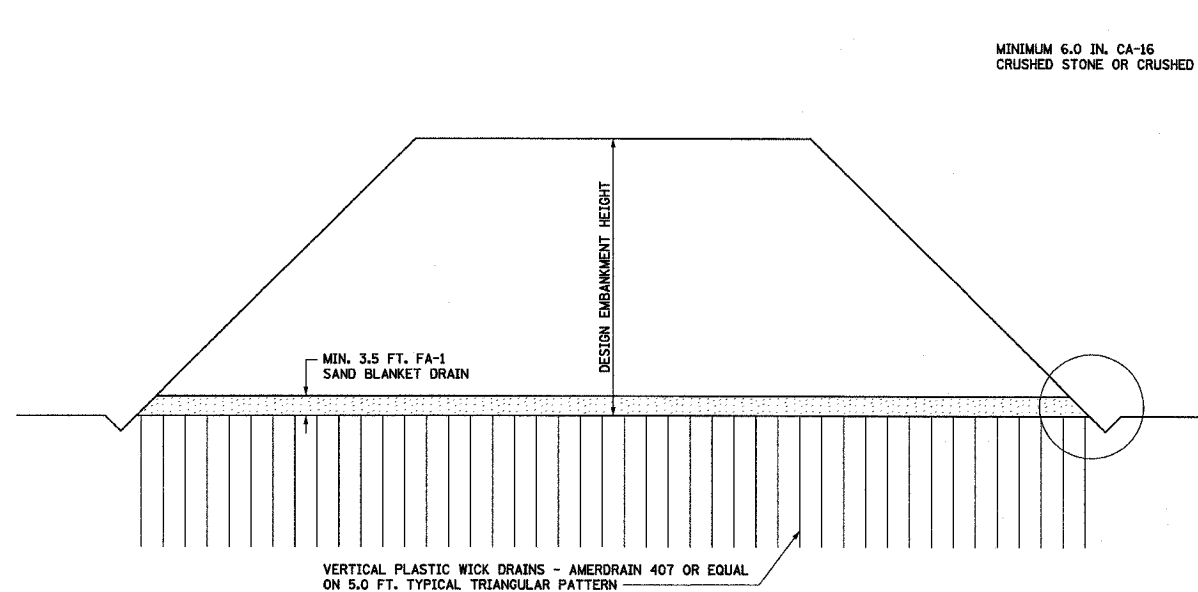

WICK DRAIN - CROSS SECTION VIEW

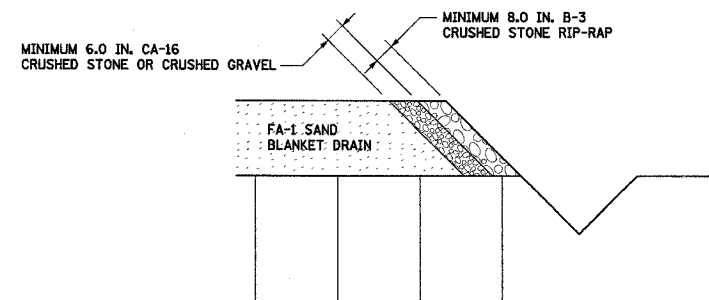

BLANKET DRAIN PROTECTION

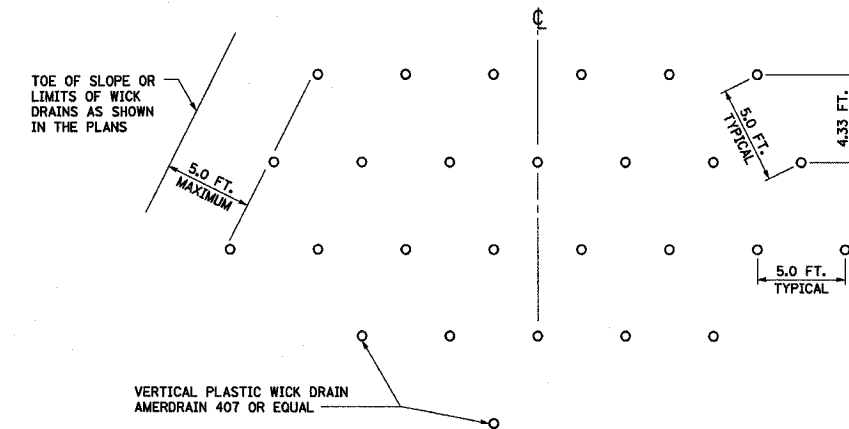

WICK DRAIN - PLAN VIEW

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SOILS TREATMENT DETAILS

IL. ROUTE 336

DATE 3/30/06

DRAWN BY MGM
CHECKED BY DLC

D:\SOILS\DRAWING\315\2006\11\25\336.DWG