


AGGREGATE ENTRANCE DETAIL

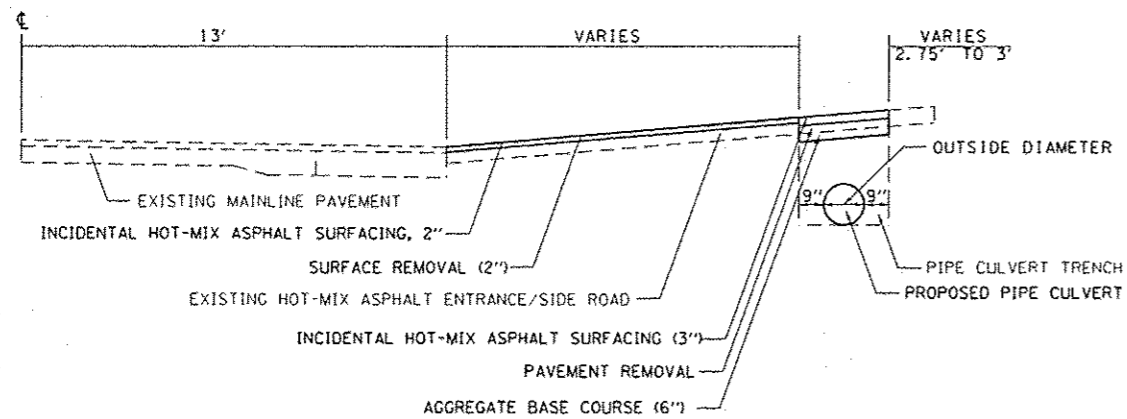

HOT-MIX ASPHALT ENTRANCE AND SIDE ROAD DETAIL

1. THE COST OF THE SURFACE REMOVAL, 2" AND THE PAVEMENT REMOVAL FOR THE ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

2. THE COST OF THE BITUMINOUS MATERIALS AND AGGREGATE (PRIME COAT) FOR THE ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

ENTRANCE SCHEDULE

STATION	SIDE	TYPE	MATERIAL TYPE	AGGREGATE BASE COURSE TON	AGGREGATE SURFACE COURSE, TYPE B TON	AGGREGATE FOR TEMPORARY ACCESS TON	INCIDENTAL HOT-MIX ASPHALT SURFACING TON
430+17	RT	FE	AGG	-	2.5	-	-
460+53	RT	FE	AGG	-	2.6	-	-
473+59	RT	PRA	BIT	2.8	-	1.4	3.7
476+07	RT	PE	AGG	-	3.2	-	-
480+39	RT	FE	AGG	-	2.7	-	-
486+89	LT	FE	AGG	-	5.4	-	-
489+87	RT	PE	BIT	1.7	-	0.8	2.2
513+23	RT	FE	AGG	-	2.7	-	-
513+37	LT	FE	AGG	-	3.4	-	-
528+20	LT	FE	AGG	-	5.4	-	-
531+02	RT	FE	AGG	-	3.2	-	-
565+13	RT	FE	AGG	-	3.5	-	-
606+07	RT	PE	AGG	-	6.0	-	-
612+32	LT	PE	AGG	-	7.7	-	-
619+16	RT	PRA	BIT	3.4	-	1.7	4.1
632+50	RT	FE	AGG	-	2.9	-	-
632+79	LT	PRA	BIT	2.5	-	1.3	3.4
642+31	LT	PE	AGG	-	3.4	-	-
648+88	RT	FE	AGG	-	4.3	-	-
667+75	LT	PE	AGG	-	3.6	-	-
688+55	LT	FE	AGG	-	2.9	-	-
731+41	LT	FE	BIT	2.7	-	1.3	3.7
752+33	RT	FE	AGG	-	3.7	-	-
752+41	LT	FE	AGG	-	4.0	-	-
761+49	RT	PE	AGG	-	4.0	-	-
778+91	LT	FE	AGG	-	3.5	-	-
792+30	LT	FE	AGG	-	6.9	-	-
808+74	RT	FE	AGG	-	3.1	-	-
828+96	RT	FE	AGG	-	3.7	-	-
850+92	LT	FE	AGG	-	3.4	-	-
865+57	RT	FE	AGG	-	3.0	-	-
872+11	LT	FE	AGG	-	5.8	-	-
883+74	RT	FE	AGG	-	2.8	-	-
892+24	LT	FE	AGG	-	3.0	-	-
898+72	LT	PRA	BIT	3.8	-	1.8	5.5
903+73	RT	FE	AGG	-	2.6	-	-
910+28	RT	FE	AGG	-	2.9	-	-
911+99	LT	FE	AGG	-	5.8	-	-
923+34	RT	FE	AGG	-	2.9	-	-
925+42	LT	FE	AGG	-	2.9	-	-
926+13	RT	PE	AGG	-	3.2	-	-

ENTRANCE SCHEDULE CONTINUED

STATION	SIDE	TYPE	MATERIAL TYPE	AGGREGATE BASE COURSE TON	AGGREGATE SURFACE COURSE, TYPE B TON	AGGREGATE FOR TEMPORARY ACCESS TON	INCIDENTAL HOT-MIX ASPHALT SURFACING TON
932+35	LT	FE	AGG	-	2.9	-	-
937+01	RT	FE	AGG	-	2.9	-	-
978+74	LT	FE	AGG	-	2.5	-	-
979+03	RT	FE	AGG	-	3.1	-	-
991+63	LT	FE	AGG	-	2.9	-	-
998+57	RT	FE	AGG	-	4.3	-	-
1003+21	RT	PRA	BIT	2.4	-	1.2	5.9
1005+24	LT	PRA	BIT	2.5	-	1.3	7
1015+45	RT	FE	AGG	-	5.7	-	-
1029+70	RT	FE	AGG	-	5.2	-	-
1043+37	RT	FE	AGG	-	3.5	-	-
1057+82	RT	FE	AGG	-	3.2	-	-
1058+48	RT	PRA	BIT	2.7	-	1.3	3.3
1058+51	LT	PRA	BIT	2.7	-	1.3	3.6
1087+99	LT	FE	AGG	-	2.8	-	-
1100+18	RT	FE	AGG	-	3.0	-	-
TOTALS:				27	174	13	42