


ROUTE NO	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 855 C.H. 7	10-00076 -00-RS	MONROE	6	6

FEDERAL AID PROJECT
CONTRACT NO. 97511

SIDEROAD SCHEDULE


LOCATION STATION	SIDE LT/RT	EXISTING SURFACE	LENGTH FT.	WIDTH FT.	INCIDENTAL HMA SURFACING TONS	BIT. MAT'L. (PRIME COAT) GALLON	AGGREGATE (PRIME COAT) TONS	COMMENTS
262+02	LEFT	OIL & CHIP	6	20	1.68	0.67	0.03	JJ ROAD
286+20	RIGHT	OIL & CHIP	6	49	4.12	1.63	0.05	AHNE ROAD
304+40	LEFT	OIL & CHIP	6	24	2.02	0.80	0.03	LRC ROAD
390+95	LEFT	OIL & CHIP	6	22	1.85	0.73	0.03	KK ROAD
391+00	RIGHT	OIL & CHIP	6	22	1.85	0.73	0.03	KK ROAD
448+40	LEFT	OIL & CHIP	6	20	1.68	0.67	0.03	FISCHER ROAD
448+47	RIGHT	OIL & CHIP	6	20	1.68	0.67	0.02	KOCH ROAD
TOTAL					14.87	5.90	0.22	

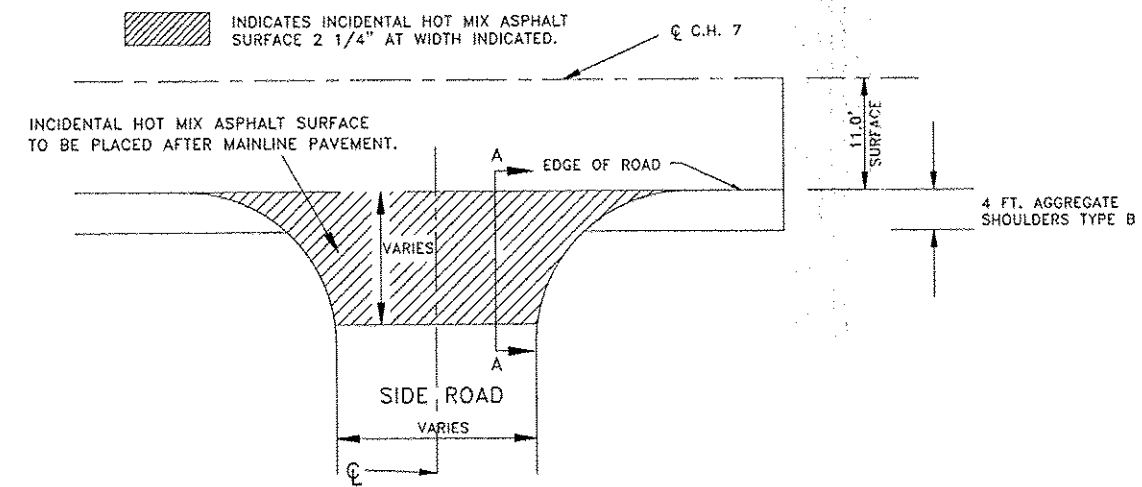

MAILBOX TURNOUT SCHEDULE

LOCATION STATION	SIDE LT/RT	HOUSE NO.	INCIDENTAL HMA SURFACING TONS	BIT. MAT'L. (PRIME COAT) GALLON	AGGREGATE (PRIME COAT) TONS
216+44	LEFT	6269	1.81	0.71	0.02
220+86	LEFT	6239 & 6238	1.81	0.71	0.02
228+03	LEFT	6203 & 6209	1.81	0.71	0.02
228+34	LEFT	6202	1.81	0.71	0.02
233+84	LEFT	NONE	1.81	0.71	0.02
236+60	LEFT	6154	1.81	0.71	0.02
242+37	LEFT	6106	1.81	0.71	0.02
243+95	LEFT	6107	1.81	0.71	0.02
249+68	LEFT	6076 & 6071	1.81	0.71	0.02
259+44	LEFT	6004	1.81	0.71	0.02
266+85	RIGHT	5945	1.81	0.71	0.02
268+33	RIGHT	5939	1.81	0.71	0.02
270+88	RIGHT	5931 & 5935	1.81	0.71	0.02
275+57	RIGHT	5883	1.81	0.71	0.02
276+12	RIGHT	5879	1.81	0.71	0.02
279+09	RIGHT	5863	1.81	0.71	0.02
280+19	RIGHT	5853	1.81	0.71	0.02
281+09	RIGHT	5851	1.81	0.71	0.02
281+27	LEFT	5850	1.81	0.71	0.02
282+07	RIGHT	5847	1.81	0.71	0.02
282+98	RIGHT	5843	1.81	0.71	0.02
283+68	RIGHT	5839	1.81	0.72	0.02
284+48	RIGHT	5835	1.81	0.72	0.02
290+78	RIGHT	NONE	1.81	0.72	0.02
292+63	RIGHT	5765	1.81	0.72	0.02
308+84	RIGHT	5652	1.81	0.72	0.02
310+49	RIGHT	5646	1.81	0.72	0.02
313+70	RIGHT	5621 & 5627	1.81	0.72	0.02
335+11	RIGHT	5530	1.81	0.72	0.02
336+77	RIGHT	5501	1.81	0.72	0.02
349+21	RIGHT	5441	1.81	0.72	0.02
355+41	RIGHT	5411	1.81	0.72	0.02
358+07	RIGHT	5404	1.81	0.72	0.02
374+29	RIGHT	5303	1.81	0.72	0.02
409+30	RIGHT	5062	1.81	0.72	0.02
442+28	RIGHT	4834	1.81	0.72	0.02
468+70	LEFT	4649	1.81	0.72	0.02
469+23	RIGHT	NONE	1.81	0.72	0.02
475+46	LEFT	4601	1.81	0.72	0.02
TOTAL			70.59	27.87	0.78

MAILBOX TURNOUTS TO BE CONSTRUCTED PER STANDARD BLR 24-2

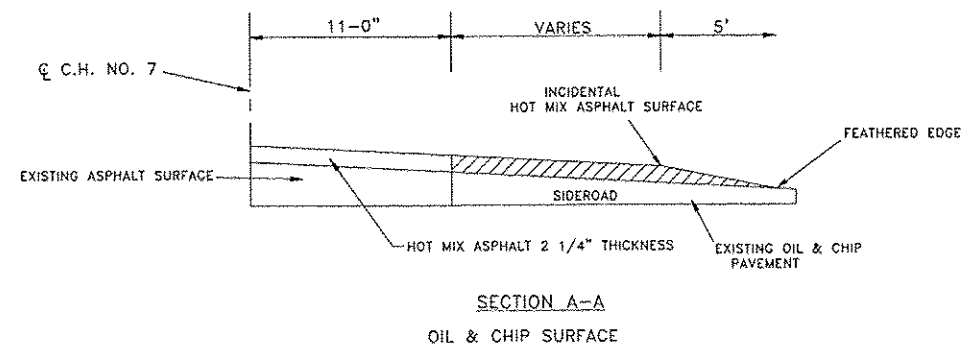

TYPICAL SIDEROAD DETAILS

MAEYSTOWN ROAD RESURFACING
MAILBOX TURNOUT &
SIDE ROAD DETAIL
SEC 10-00076-00-RS
COUNTY HWY. NO. 7 FAS 855

DRAWING FILE: S:\COUNTY PROJECTS\MAEYSTOWN ROAD RESURFACING 2012\SIDEROAD.DWG