If you plan to submit a bid directly to the Department of Transportation

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later that 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

REQUESTS FOR AUTHORIZATION TO BID

Contractors downloading and/or ordering CD-ROM's and are wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) and the ORIGINAL, signed and notarized, "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHO CAN BID?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID? When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID: Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

ADDENDA AND REVISIONS: It is the contractor's responsibility to determine which, if any, addenda or revisions pertain to any project they may be bidding. Failure to incorporate all relevant addenda or revisions may cause the bid to be declared unacceptable.

Each addendum will be placed with the contract number. Addenda and revisions will also be placed on the Addendum/Revision Checklist and each subscription service subscriber will be notified by e-mail of each addendum and revision issued.

The Internet is the Department's primary way of doing business. The subscription server e-mails are an added courtesy the Department provides. It is suggested that bidder check IDOT's website http://www.dot.il.gov/desenv/delett.html before submitting final bid information.

IDOT is not responsible for any e-mail related failures.

Addenda Questions may be directed to the Contracts Office at (217)782-7806 or D&Econtracts@dot.il.gov

Technical Questions about downloading these files may be directed to Tim Garman (217)524-1642 or garmantr@dot.il.gov.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	(217)782-3413
Preparation and submittal of bids	(217)782-7806
Mailing of plans and proposals	(217)782-7806
Electronic plans and proposals	(217)524-1642

ADDENDUMS AND REVISIONS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated the addendum and/or revision prior to submitting their bid. Failure by the bidder to include an addendum could result in a bid being rejected as irregular.

105

_	ILE I OILLI VIIIII DID
	Proposal Submitted By
L	Name
	Address
	City
_	

Letting June 17, 2005

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction. (SEE INSTRUCTIONS ON THE INSIDE OF COVER)

Notice To Bidders, Specifications, Proposal, Contract and Contract Bond



Springfield, Illinois 62764

Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 District 2 Construction Funds Route FAP 595

PLEASE MARK THE APPROPRIATE BOX BELOW:
☐ A <u>Bid</u> <u>Bond</u> is included.
A Cashier's Check or a Certified Check is included.

Plans Included Herein

Prepared by

S

Checked by

Printed by authority of the State of Illinois)

BIDDERS NEED NOT RETURN THE ENTIRE PROPOSAL (See instructions inside front cover)

INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction. To request authorization, a potential bidder <u>must complete and submit Part B of the Request for Authorization to Bid/or Not For Bid Status form (BDE 124 INT) and submit an original Affidavit of Availability (BC 57).</u>

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial. If a contractor has requested to bid but has not received a Proposal Denial and/or Authorization Form, they should contact the Central Bureau of Construction in advance of the letting date.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of CD-ROMS	217/782-7806



PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

1.	Proposal of
	for the improvement identified and advertised for bids in the Invitation for Bids as:

Contract No. 64A67
ROCK ISLAND County
Section D2 MRS 2005-6
Route FAP 595
District 2 Construction Funds

0.4 mile of 2 @ 36 feet and variable width milling and resurfacing on IL Route 5 from 16th Street to 27th Street just west of Interstate 74 in Moline.

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents shall govern performance and payments.

BD 353A (Rev. 11/2001)

- 3. ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER. The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
- 4. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
- 5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

:	Amount o		Proposal Guaranty	<u> 4</u>	Amount o	Proposal of Bid Guaranty
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000\$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000 \$150,000
\$10,000	to	\$50,000	. \$1,000	\$5,000,000	to	\$7,500,000\$250,000
\$50,000	to	\$100,000	. \$3,000	\$7,500,000	to	\$10,000,000\$400,000
\$100,000	to	\$150,000	. \$5,000	\$10,000,000	to	\$15,000,000 \$500,000
\$150,000	to	\$250,000	. \$7,500	\$15,000,000	to	\$20,000,000\$600,000
\$250,000	to	\$500,000	\$12,500	\$20,000,000	to	\$25,000,000\$700,000
\$500,000	to	\$1,000,000	\$25,000	\$25,000,000	to	\$30,000,000\$800,000
\$1,000,000	to	\$1,500,000	\$50,000	\$30,000,000	to	\$35,000,000\$900,000
\$1,500,000	to	\$2,000,000	\$75,000	over		\$35,000,000\$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted, the proposal guaranties which accompany the individual proposals making up the combination will be considered as also covering the combination bid.

The amount of the proposal guaranty check is _______\$(). If this proposal is accepted and the undersigned shall fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty shall become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond shall become void or the proposal guaranty check shall be returned to the undersigned.

Attach Cashier's Check or Certified Check Here						
In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual proposal. If the guaranty check is placed in another proposal, state below where it may be found.						
The proposal guaranty check will be found in the proposal for:	Item					
	Section No.					
	County _					

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

BD 354 (Rev. 11/2001)

6. **COMBINATION BIDS.** The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination		Combination Bid				
No. Sections Included in Combination		Dollars	Cents			

- 7. SCHEDULE OF PRICES. The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices shall govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.
- 8. **CERTIFICATE OF AUTHORITY.** The undersigned bidder, if a business organized under the laws of another State, assures the Department that it will furnish a copy of its certificate of authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish the certificate within the time provided for execution of an awarded contract may be cause for cancellation of the award and forfeiture of the proposal guaranty to the State.

ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 64A67

State Job # - C-92-017-05 PPS NBR - 0-00845-2010

County Name - ROCK ISLAND- -

Code - 161 - - District - 2 - -

Section Number - D2 MRS 2005-6

Project Number	Route
	FAP 595

Item Number	Pay Item Description	Unit of Measure	Quantity	х	Unit Price	=	Total Price
X4066526	P BCSC SUPER "D" N70	TON	1,924.000				
X4066810	POL LB HM SUPER N70	TON	5.000				
X4066910	POL LB MM SUPER N70	TON	962.000				
40600200	BIT MATLS PR CT	TON	5.000				
40600300	AGG PR CT	TON	26.000				
40600990	TEMPORARY RAMP	SQ YD	206.000				
44000009	BIT SURF REM 3	SQ YD	17,182.000				
67100100	MOBILIZATION	L SUM	1.000				
70100310	TRAF CONT-PROT 701421	L SUM	1.000				
70100815	TRAF CONT-PROT 701446	L SUM	1.000				
70300100	SHORT-TERM PAVT MKING	FOOT	3,132.000				
70301000	WORK ZONE PAVT MK REM	SQ FT	348.000				
78000100	THPL PVT MK LTR & SYM	SQ FT	265.000				
78000200		FOOT	10,689.000				
78000500		FOOT	1,799.000				

Page 2 5/18/2005

ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 64A67

State Job # - C-92-017-05

PPS NBR - 0-00845-2010

County Name - ROCK ISLAND- -

Code - 161 - - District - 2 - -

Section Number - D2 MRS 2005-6

Project Number	Route
	FAP 595

ltem Number	Pay Item Description	Unit of Measure	Quantity	x	Unit Price	=	Total Price
 78000600	THPL PVT MK LINE 12	FOOT	360.000				
 78100100	RAISED REFL PAVT MKR	EACH	326.000				
 78300200	RAISED REF PVT MK REM	EACH	276.000				
 88600600	DET LOOP REPL	FOOT	315.000				

CONTRACT NUMBER	64A67
THIS IS THE TOTAL BID	\$

NOTES:

- 1. Each PAY ITEM should have a UNIT PRICE and a TOTAL PRICE.
- 2. The UNIT PRICE shall govern if no TOTAL PRICE is shown or if there is a discrepancy between the product of the UNIT PRICE multiplied by the QUANTITY.
- 3. If a UNIT PRICE is omitted, the TOTAL PRICE will be divided by the QUANTITY in order to establish a UNIT PRICE.
- 4. A bid may be declared UNACCEPTABLE if neither a unit price nor a total price is shown.

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

- **A.** Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.
- **B.** In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.
- **C.** In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

II. ASSURANCES

A. The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

- (a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.
- (b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.
- (e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$150,700.00. Sixty percent of the salary is \$90,420.00.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

- (a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.
- 2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

H. Confidentiality

1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

III. CERTIFICATIONS

A. The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

- (a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:
 - (1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or
 - (2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.
- (b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:
 - (1) the business has been finally adjudicated not guilty; or
 - (2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.
- (c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.
- (d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.
- 2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

C. Educational Loan

- 1. Section 3 of the Educational Loan Default Act provides:
- § 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.
- 2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

D. Bid-Rigging/Bid Rotating

- 1. Section 33E-11 of the Criminal Code of 1961 provides:
- § 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4

E. International Anti-Boycott

- 1. Section 5 of the International Anti-Boycott Certification Act provides:
- § 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.
- 2. The bidder makes the certification set forth in Section 5 of the Act.

F. Drug Free Workplace

- 1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.
- 2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:
- (a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.
- (b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.
- (c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.
- (d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.
- (e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.
- (f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.
- (g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

G. Debt Delinquency

1. The Illinois Procurement Code provides:

Section 50-11 and 50-12. Debt Delinguency.

The contractor or bidder certifies that it, or any affiliate, is not barred from being awarded a contract under 30 ILCS 500. Section 50-11 prohibits a person from entering into a contract with a State agency if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The contractor further acknowledges that the contracting State agency may declare the contract void if this certification is false or if the contractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

H. Sarbanes-Oxley Act of 2002

1. The Illinois Procurement Code provides:

Section 50-60(c).

The contractor certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 for a period of five years prior to the date of the bid or contract. The contractor acknowledges that the contracting agency shall declare the contract void if this certification is false.

I. ADDENDA

The contractor or bidder certifies that all relevant addenda have been incorporated in to this contract. Failure to do so may cause the bid to be declared unacceptable.

J. Section 42 of the Environmental Protection Act

The contractor certifies in accordance with 30 ILCS 500/50-12 that the bidder or contractor is not barred from being awarded a contract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The contractor acknowledges that the contracting agency may declare the contract void if this certification is false.

K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the bidder certifies that it is a participant, either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project as reported on the Construction Employee Workforce Projection (Form BC-1256) and returned with the bid is accounted for and listed.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

TO BE RETURNED WITH BID

IV. DISCLOSURES

A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. <u>Disclosure Forms</u>. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.**

C. <u>Disclosure Form Instructions</u>

Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may sign the following certification statement indicating that the information previously submitted by the bidder is, as of the date of signature, current and accurate. The Certification must be signed and dated by a person who is authorized to execute contracts for the bidding company. Before signing this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder signs the Certification, the Bidder should proceed to Form B instructions.

CERTIFICATION STATEMENT

ac	nave determined that the Form A disclosure inform curate, and all forms are hereby incorporated by rems or amendments to previously submitted forms	eference in this bid. Any necessary additional
-	(Bidding Cor	npany)
-	Name of Authorized Representative (type or print)	Title of Authorized Representative (type or print)
	Signature of Authorize	ed Representative Date

Form A: For bidders who have NOT previously submitted the information requested in Form A

D.

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be

00p.0	
1.	Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES NO
2.	Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$90,420.00? YES NO
3.	Does anyone in your organization receive more than \$90,420.00 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES NO
4.	Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$90,420.00? YES NO
	(Note: Only one set of forms needs to be completed <u>per person per bid</u> even if a specific individual would require a yes answer to more than one question.)
bidding authoriz	"answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the entity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is zed to execute contracts for your organization. Photocopied or stamped signatures are not acceptable . The person signing can be, but thave to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.
	nswer to each of the above questions is "NO", then the <u>NOT APPLICABLE STATEMENT</u> on page 2 of Form A must be signed and dated by n that is authorized to execute contracts for your company.
bidding APPLIC	Existence to the bidder contracts and the bidder to ignore Form B. Form B must be completed for each bid submitted by the entity. It must be signed by an individual who is authorized to execute contracts for the bidding entity. Note: Signing the NOT CABLE STATEMENT on Form A does not allow the bidder to ignore Form B. Form B must be completed, signed and dated or the bidder considered nonresponsive and the bid will not be accepted.
ongoing	der shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other grocurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the re box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:
agency attache and are	I: If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois pending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an d sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts not to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development nust be included. Bidders who submit Affidavits of Availability are suggested to use Option II.
"See Af agency	II: If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type fidavit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois pending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the tof Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.
Bidder	s Submitting More Than One Bid
	submitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. indicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms ence.
	The bid submitted for letting item contains the Form A disclosures or Certification Statement and the Form B lisclosures. The following letting items incorporate the said forms by reference:

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form A Financial Information & Potential Conflicts of Interest Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)
Disclosure of the information contained in the 30 ILCS 500). Vendors desiring to enter integrated and potential conflict of interest information as the publicly available contract file. This Founded contracts. A publicly traded comparting faction of the requirements set forth	o a contract with the State of Illing as specified in this Disclosure Form A must be completed for bids pany may submit a 10K disclin Form A. See Disclosure Form	ois must disclose the financial information. This information shall become part in excess of \$10,000, and for all opeosure (or equivalent if applicable) in Instructions.
DISCLOS	SURE OF FINANCIAL INFORM	<u>IATION</u>
separate Disclosure Form A for each ind FOR INDIVIDUAL (type or print information NAME:		ents)
NAME:		
ADDRESS		
Type of ownership/distributable inco	me share:	
stock sole proprietorship % or \$ value of ownership/distributable i	·	other: (explain on separate sheet):
% or \$ value or ownership/distributable r	ncome share.	
2. Disclosure of Potential Conflicts of In potential conflict of interest relationships ap and describe.		
(a) State employment, currently or in the	ne previous 3 years, including cor	ntractual employment of services. YesNo
If your answer is yes, please answe	er each of the following questions.	
 Are you currently an officer Highway Authority? 	or employee of either the Capitol	Development Board or the Illinois Toll YesNo
Are you currently appointe currently appointed to or er	d to or employed by any agency	of the State of Illinois? If you are te of Illinois, and your annual salary

agency for which you are employed and your annual salary.

exceeds \$90,420.00, (60% of the Governor's salary as of 7/1/01) provide the name the State

	3.	If you are currently appointed to or employed by any agency of the Si salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1 (i) more than 7 1/2% of the total distributable income of your firm, corporation, or (ii) an amount in excess of the salary of the Governor's	/01) are you entitled to receive partnership, association or
	4.	If you are currently appointed to or employed by any agency of the Salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1 or minor children entitled to receive (i) more than 15 % in the aggreincome of your firm, partnership, association or corporation, or (ii) are the salary of the Governor?	/01) are you and your spouse egate of the total distributable
(b)		byment of spouse, father, mother, son, or daughter, including contractions 2 years.	tual employment services
	If your answ	wer is yes, please answer each of the following questions.	YesNo
	1.	Is your spouse or any minor children currently an officer or employee Board or the Illinois Toll Highway Authority?	of the Capitol Development YesNo
	2.	Is your spouse or any minor children currently appointed to or employ of Illinois? If your spouse or minor children is/are currently appagency of the State of Illinois, and his/her annual salary exceed Governor's salary as of 7/1/01) provide the name of your spouse ar of the State agency for which he/she is employed and his/her annual	pointed to or employed by any ls \$90,420.00, (60 % of the nd/or minor children, the name
	3.	If your spouse or any minor children is/are currently appointed to or of State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% as of 7/1/01) are you entitled to receive (i) more then 71/2% of the total firm, partnership, association or corporation, or (ii) an amount in Governor?	6 of the salary of the Governor tal distributable income of your
	4.	If your spouse or any minor children are currently appointed to or er State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% 7/1/01) are you and your spouse or minor children entitled to rece aggregate of the total distributable income of your firm, partnership, (ii) an amount in excess of 2 times the salary of the Governor?	of the Governor's salary as of eive (i) more than 15 % in the association or corporation, or
			YesNo
	unit of	re status; the holding of elective office of the State of Illinois, the gover local government authorized by the Constitution of the State of Illinois currently or in the previous 3 years.	
		onship to anyone holding elective office currently or in the previous 2 years daughter.	rears; spouse, father, mother, YesNo
	Americ of the	ntive office; the holding of any appointive government office of the Statea, or any unit of local government authorized by the Constitution of the State of Illinois, which office entitles the holder to compensation in except and that office currently or in the previous 3 years.	ne State of Illinois or the statutes
	, ,	nship to anyone holding appointive office currently or in the previous 2 daughter.	years; spouse, father, mother, YesNo
	(g) Emplo	yment, currently or in the previous 3 years, as or by any registered lob	obyist of the State government. YesNo

(h) Relationship to a son, or daughter.	nyone who is or was a registered lobbyist in the previous 2 years; spou YesNo	
committee regist	ployment, currently or in the previous 3 years, by any registered electered with the Secretary of State or any county clerk of the State of Illinor registered with either the Secretary of State or the Federal Board of Ele	ois, or any political ections.
last 2 years by ar county clerk of th	nyone; spouse, father, mother, son, or daughter; who was a compensative registered election or re-election committee registered with the Secrete State of Illinois, or any political action committee registered with either	etary of State or any er the Secretary of
		-
	APPLICABLE STATEMENT	
This Disclosure Fo	rm A is submitted on behalf of the INDIVIDUAL named on previous	page.
Completed by:		
	Name of Authorized Representative (type or print)	
Completed by:		
	Title of Authorized Representative (type or print)	
Completed by:		
	Signature of Individual or Authorized Representative	Date
	NOT APPLICABLE STATEMENT	
	that no individuals associated with this organization meet the crite tion of this Form A.	ria that would
This Disclosure Fo	rm A is submitted on behalf of the CONTRACTOR listed on the pre	vious page.
	Name of Authorized Representative (type or print)	
	Title of Authorized Representative (type or print)	
	Signature of Authorized Representative	Date

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form B Other Contracts & Procurement Related Information Disclosure

			Diodiodalo	
Contractor Name				
Legal Address				
City, State, Zip				
Telephone Number	Emai	I Address	Fax Number (if av	vailable)
LCS 500). This information	ntion contained in this Fortion shall become part of the condition, and for all open-ended	the publicly available		
DISCLOSU	JRE OF OTHER CONTRA	ACTS AND PROCUR	REMENT RELATED INF	ORMATION
pending contracts (included fillinois agency: Yes	ontracts & Procurement ding leases), bids, proposes No bidder only needs to con	sals, or other ongoing	procurement relationsh	nip with any other State
	. Identify each such relati such as bid or project nun S:			
	THE FOLLOWI	NG STATEMENT MU	ST BE SIGNED	
	Name of A	uthorized Representative ((type or print)	_
	Title of Au	uthorized Representative (t	ype or print)	_
	Signa	ature of Authorized Repres	entative	Date

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.



Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 Route FAP 595 District 2 Construction Funds

									DISTI	ICT Z	Cons	tructioi	n Fu	unas	i			
PART I. IDENTIFIC	ATION																	
Dept. Human Rights	s #						Dur	ation o	f Proje	ct: _								
Name of Bidder:																		
PART II. WORKFO A. The undersigned which this contract wo projection including a p	bidder hark is to be	as analyz e perform	ed mir ed, an	d for th d fema	ne locati	ons from	m whic	h the b	idder re	cruits	employe	es, and he	ereby	, subm	its the foll	owir con	ng workfo	n orce
		TOTA	AL Wo	rkforce	Project	tion for	Contra	ct						C	URRENT		_	ES
				MINI	ORITY E	MPI O	YEES			TR	AINEES				TO BE		IGNED RACT	
JOB CATEGORIES		TAL OYEES	BL	ACK	HISP			HER OR.	APPI TIC	REN-	ON TI	HE JOB INEES			TAL OYEES			ORITY OYEES
	М	F	М	F	М	F	М	F	М	F	М	F		М	F		M	F
OFFICIALS (MANAGERS)																		
SUPERVISORS																		
FOREMEN																		
CLERICAL																		
EQUIPMENT OPERATORS																		
MECHANICS																		
TRUCK DRIVERS																		
IRONWORKERS																		
CARPENTERS																	<u> </u>	
CEMENT MASONS																	<u> </u>	
ELECTRICIANS																	<u> </u>	
PIPEFITTERS, PLUMBERS													_				<u> </u>	
PAINTERS																	<u> </u>	
LABORERS, SEMI-SKILLED																		
LABORERS, UNSKILLED																		
TOTAL																		
		BLE C									F	OR DEP	ARTI	MENIT	LISE OF	JI V		
	OTAL Tra		ojectio	n for C	ontract		1]		Γ'		uvil	IVILIN I	30L 01	4 L I		
EMPLOYEES	_	TAL	DI -	۸۵۷	HICD	ANIC	_	THER										
IN TRAINING	M	OYEES F	M M	ACK F	M	ANIC F	M	NOR.	+									
APPRENTICES	171	-	101	<u> </u>	141	'	101	'	1									
	i	İ	i	1	1	1	1	i	1	1								1

ON THE JOB TRAINEES

Please specify race of each employee shown in Other Minorities column.

Note: See instructions on the next page

BC 1256 - Pg 1 (Rev. 3/98) IL 494-0454

^{*}Other minorities are defined as Asians (A) or Native Americans (N).

Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 Route FAP 595 District 2 Construction Funds

PART II. WORKFORCE PROJECTION - continued

B.		ed in "Tot the unders							tal ni	umbei	r of	new	hires	tha	t would	l be	emplo	yed in	the
	The u	ndersiane	d bidde	r proie	ects that	t: (nui	mber)										new h	nires w	ould
	be i	indersigne recruited	from	the	area	in \	which	the	СО	ntract	F	orojec	t is	lc	cated;	ar	nd/or	(num	ber)
						_ new	hires	would	be r	ecruit	ed f	rom th	ne are	ea in	which	the b	oidder	's princ	cipal
	office	or base of	operation	on is l	ocated.														
C.		ed in "Tota signed bid																ectly by	/ the
	The u	ndersigne	d bidder	estim	ates tha	at (num	nber)										n	ersons	s will
	be dir	ectly employed by su	oyed by	the p	rime co	ntracto	or and	that (numk	oer) _							_ pers	ons wi	ll be
PARTI	II. AFF	IRMATIVI	E ACTIO	N PL	AN														
A.	utiliza in any comm (geare utiliza	indersigne tion project job cated lencement ed to the tion are co	ction inclosory, and completed compl	uded d in th k, dev tion st . Suc	under P ne even velop ar tages o h Affirm	ART II t that t nd sub f the o	l is det the un omit a contra	termin dersig writte ct) wh	ed to ned n Af iereb	be and bidde firmat by def	n un r is ive iciei	nderuti award Action ncies	llization ded the n Pla in m	on of his o n in inori	f minori contract cluding ty and/	ty pe ;, he/ a sporter	ersons she v pecific emale	or wo vill, pric timet emplo	men or to able byee
	submi to be	indersigne itted hereii part of the	n, and th contrac	ne goa t spec	als and tification	timetak s.	ole inc	luded		er an <i>i</i>	Affir	mative	e Act	ion F		equi	red, a	re dee	
Addre	 SS																		
Γ								GARDI	NG S	SIGNA	TUR	E							\neg
		der's signa						will cor	nstitut	te the	signi	ing of t	this fo	rm.	The follo	owing	signa	ture blo	ock
;	Signatu	re:						_	Γitle:						Date	:			
Instructi	ons:	All tables m	nust includ	le subco	ontractor p	ersonne	el in add	dition to	prime	contrac	ctor p	personn	el.						
Table A	-	Include bot (Table B) the should include	hat will be	allocat	ed to cont	tract wor	rk, and	include	all ap	prentice	es ar	nd on-th	ie-job t	traine	es. The	"Total	Emplo	yees" co	
Table B	-	Include all currently er		s currer	itly emplo	yed that	will be	allocate	d to th	ne conti	ract v	work ind	cluding	any	apprentic	es an	d on-th	e-job tra	inees
Table C	-	Indicate the	e racial bre	eakdowi	n of the to	tal appre	entices a	and on-	he-jol	o traine	es sł	nown in	Table	A.					
																DO 40	CC D-	0 / 0	2/00\

Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 Route FAP 595 District 2 Construction Funds

PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

	Firm Name	
(IF AN INDIVIDUAL)	Signature of Owner	
	Firm Name	
(IF A CO-PARTNERSHIP)		
,		
		Name and Address of All Members of the Firm:
_		
-		
	Corporate Name	
	Бу	Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
(IF A CORPORATION)	A444	
(IF A JOINT VENTURE, USE THIS SECTION		Signature
FOR THE MANAGING PARTY AND THE SECOND PARTY SHOULD SIGN BELOW)	Business Address	
	Corporate Name	
	Ву	0: 1 (1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
		Signature of Authorized Representative
(IE A JOINT VENTURE)		Typed or printed name and title of Authorized Representative
(IF A JOINT VENTURE)	Attest	
		Signature
	Business Address	
If more than two parties are in the joint venture	e, please attach an ac	dditional signature sheet.



Division of Highways Proposal Bid Bond

(Effective November 1, 1992)

-	Item No.
	Letting Date
KNOW ALL MEN BY THESE PRESENTS, That We	
KNOW ALL MEN DI THESE I RESERTS, That we	
as PRINCIPAL, and	
	as SURETY, are
Article 102.09 of the "Standard Specifications for Road and B	LLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in ridge Construction" in effect on the date of invitation for bids, whichever is the lesser sum, well ayment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.
	ON IS SUCH, That Whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF for the improvement designated by the Transportation Bulletin Item Number and Letting Date
the bidding and contract documents, submit a DBE Utilization PRINCIPAL shall enter into a contract in accordance with the coverages and providing such bond as specified with good and labor and material furnished in the prosecution thereof; or if, in into such contract and to give the specified bond, the PRINCIPAL shall be provided by the provided b	bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in Plan that is accepted and approved by the Department; and if, after award by the Department, the terms of the bidding and contract documents including evidence of the required insurance d sufficient surety for the faithful performance of such contract and for the prompt payment of in the event of the failure of the PRINCIPAL to make the required DBE submission or to enter PAL pays to the Department the difference not to exceed the penalty hereof between the amount in the Department may contract with another party to perform the work covered by said bid it, it shall remain in full force and effect.
paragraph, then Surety shall pay the penal sum to the De	e PRINCIPAL has failed to comply with any requirement as set forth in the preceding epartment within fifteen (15) days of written demand therefor. If Surety does not make may bring an action to collect the amount owed. Surety is liable to the Department for y litigation in which it prevails either in whole or in part.
In TESTIMONY WHEREOF, the said PRINCIF officers this day of	PAL and the said SURETY have caused this instrument to be signed by their respective
PRINCIPAL	SURETY
(Company Name)	(Company Name)
By:	Ву:
(Signature & Title)	(Signature of Attorney-in-Fact)
No.	otary Certification for Principal and Surety
STATE OF ILLINOIS, COUNTY OF	our, certification for Frincipal and Survey
Ι,	, a Notary Public in and for said County, do hereby certify that
and	
	viduals signing on behalf of PRINCIPAL & SURETY)
who are each personally known to me to be the same pe	ersons whose names are subscribed to the foregoing instrument on behalf of in person and acknowledged respectively, that they signed and delivered said
Given under my hand and notarial seal this	_ day of, A.D
My commission expires	
,	Notary Public
	tid Form, the Principal may file an Electronic Bid Bond. By signing below the Principal xecuted and the Principal and Surety are firmly bound unto the State of Illinois under the
Electronic Bid Bond ID# Company/Bidder Name	Signature and Title

PROPOSAL ENVELOPE



PROPOSALS

for construction work advertised for bids by the Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:	
Address:	
Phone No.	

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 326 Illinois Department of Transportation 2300 South Dirksen Parkway Springfield, Illinois 62764

NOTICE

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 Route FAP 595 District 2 Construction Funds



Illinois Department of Transportation

NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS. Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., June 17, 2005. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.
- **2. DESCRIPTION OF WORK**. The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

Contract No. 64A67 ROCK ISLAND County Section D2 MRS 2005-6 Route FAP 595 District 2 Construction Funds

0.4 mile of 2 @ 36 feet and variable width milling and resurfacing on IL Route 5 from 16th Street to 27th Street just west of Interstate 74 in Moline.

- 3. INSTRUCTIONS TO BIDDERS. (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.
 - (b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the Illinois Department of Transportation

Timothy W. Martin, Secretary

BD 351 (Rev. 01/2003)

INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

Adopted March 1, 2005

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-02) (Revised 3-1-05)

SUPPLEMENTAL SPECIFICATIONS

Std. Spe	td. Spec. Sec.		
101	Definition of Terms	1	
105	Control of Work	2	
205	Embankment	3	
251	Mulch	4	
281	Riprap		
282	Filter Fabric for Use With Riprap		
285	Concrete Revetment Mats	10	
311	Granular Subbase	14	
351	Aggregate Base Course		
440	Removal of Existing Pavement and Appurtenances	_	
442	Pavement Patching		
449			
	Removal and Replacement of Preformed Elastomeric Compression Joint Seal		
481	Aggregate Shoulders		
501	Removal of Existing Structures		
503	Concrete Structures		
505	Steel Structures	22	
506	Cleaning and Painting Metal Structures		
508	Reinforcement Bars		
512	Piling		
540	Box Culverts		
589	Elastic Joint Sealer	30	
602	Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault		
	Construction, Adjustment and Reconstruction	31	
603	Adjusting Frames and Grates of Drainage and Utility Structures	32	
610	Shoulder Inlets with Curb	33	
665	Woven Wire Fence		
669	Removal and Disposal of Regulated Substances	35	
671	Mobilization		
702	Work Zone Traffic Control Devices		
1003	Fine Aggregates		
1004	Coarse Aggregate		
1005	Stone, Concrete Blocks and Broken Concrete for Erosion Protection,	00	
1000	Sediment Control and Rockfill	42	
1006	Metals		
1007	Timber and Preservative Treatment		
1007	Hydrated Lime		
1012	·		
	Portland Cement Concrete		
1021	Concrete Admixtures		
1022	Concrete Curing Materials		
1024	Nonshrink Grout		
1041	Brick		
1043	Precast Reinforced Concrete Manhole Sections and Adjusting Rings		
1056	Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe		
1059	Elastic Joint Sealers		
1060	Waterproofing Materials	68	
1069	Pole and Tower		
1070	Foundation and Breakaway Devices		
1077	Post and Foundation		
1080	Fabric Materials	73	
1081	Materials For Planting		
1083	Elastomeric Bearings	77	
1094	Overhead Sign Structures		
1103	Portland Cement Concrete Equipment		

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHE	CK	SHEET#	E NO.
1		State Required Contract Provisions All Federal-aid Construction Contracts (Eff. 2-1-69) (Rev. 10-1-83)	80
2		Subletting of Contracts (Federal-aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93)	
3	Χ	EEO (Eff. 7-21-78) (Rev. 11-18-80)	83
4	Χ	Specific Equal Employment Opportunity Responsibilities NonFederal-aid Contracts	
		(Eff. 3-20-69) (Rev. 1-1-94)	94
5	Χ	Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 4-1-93)	100
6		Reserved	105
7	Χ	Asphalt Quantities and Cost Reviews (Eff. 7-1-88)	
8		National Pollutant Discharge Elimination System Permit (Eff. 7-1-94) (Rev. 1-1-03)	107
9		Haul Road Stream Crossings, Other Temporary Stream Crossings and In-Stream Work Pads	
		(Eff. 1-2-92) (Rev. 1-1-98)	108
10		Construction Layout Stakes Except for Bridges (Eff. 1-1-99) (Rev. 1-1-02)	
11		Construction Layout Stakes (Eff. 5-1-93) (Rev. 1-1-02)	112
12		Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-97)	115
13		Asphaltic Emulsion Slurry Seal and Fibrated Asphaltic Emulsion Slurry Seal (Eff. 8-1-89) (Rev. 2-1-97)	
14		Bituminous Surface Treatments Half-Smart (Eff. 7-1-93) (Rev. 1-1-97)	
15	Χ	Quality Control/Quality Assurance of Bituminous Concrete Mixtures (Eff. 1-1-00) (Rev. 3-1-05)	129
16		Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 2-1-95)	
17		Bituminous Surface Removal (Cold Milling) (Eff. 11-1-87) (Rev. 10-15-97)	152
18		Resurfacing of Milled Surfaces (Eff. 10-1-95)	
19		PCC Partial Depth Bituminous Patching (Eff. 1-1-98)	155
20		Patching with Bituminous Overlay Removal (Eff. 10-1-95) (Rev. 7-1-99)	157
21		Reserved	159
22		Protective Shield System (Eff. 4-1-95) (Rev. 1-1-03)	
23		Polymer Concrete (Eff. 8-1-95) (Rev. 3-1-05)	
24		Controlled Low-Strength Material (CLSM) (Eff. 1-1-90) (Rev. 3-1-05)	
25		Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-98)	
26		Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	
27		Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-97)	
28		Reserved	
29		Reserved	
30		Reserved	
31		Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	
32		Reserved	181
33		English Substitution of Metric Bolts (Eff. 7-1-96)	
34		English Substitution of Metric Reinforcement Bars (Eff. 4-1-96) (Rev. 1-1-03)	183
35		Polymer Modified Emulsified Asphalt (Eff. 5-15-89) (Rev. 1-1-04)	
36		Corrosion Inhibitor (Eff. 3-1-80) (Rev. 7-1-99)	
37		Quality Control of Concrete Mixtures at the Plant-Single A (Eff. 8-1-00) (Rev. 1-1-04)	
38		Quality Control of Concrete Mixtures at the Plant-Double A (Eff. 8-1-00) (Rev. 1-1-04)	
39		Quality Control/Quality Assurance of Concrete Mixtures (Eff. 4-1-92) (Rev. 3-1-05)	
40		Traffic Barrier Terminal Type 1, Special (Eff. 8-1-94) (Rev. 1-1-03)	
41		Reserved	
		Segregation Control of Bituminous Concrete (Eff. 7-15-97)	
43		Reserved	77

TABLE OF CONTENTS

LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
TRAFFIC CONTROL PLAN	1
TRAFFIC CONTROL AND PROTECTION STANDARD 701446	2
WORK RESTRICTIONS – NIGHTTIME WORK	2
MAINTENANCE OF TRAFFIC	3
BITUMINOUS CONCRETE SURFACE COURSE (BDE)	3
BITUMINOUS EQUIPMENT, SPREADING AND FINISHING MACHINE (BDE)	4
FLAGGER VESTS (BDE)	4
MINIMUM LANE WIDTH WITH LANE CLOSURE (BDE)	5
PARTIAL PAYMENTS (BDE)	5
PAVEMENT AND SHOULDER RESURFACING (BDE)	6
PAYMENTS TO SUBCONTRACTORS (BDE)	7
PERSONAL PROTECTIVE EQUIPMENT (BDE)	
PUBLIC CONVENIENCE AND SAFETY (BDE)	8
RAP FOR USE IN BITUMINOUS CONCRETE MIXTURES (BDE)	9
SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)	12
SURFACE TESTING OF PAVEMENTS (BDE)	18
TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)	25
TRUCK BED RELEASE AGENT (BDE)	25
WEIGHT CONTROL DEFICIENCY DEDUCTION	26
WORK ZONE TRAFFIC CONTROL DEVICES (BDE)	27
WORKING DAYS (BDE)	29
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)	29

STATE OF ILLINOIS

SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction," adopted January 1, 2002, the latest edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways," and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included herein which apply to and govern the construction of FAP Route 595, Section: D2 MRS 2005-6, Rock Island County, Contract: 64A67, and in case of conflict with any part or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

LOCATION OF PROJECT

Work will be on IL 5 west of I-74 between 16th and 27th Streets in the city of Moline.

DESCRIPTION OF PROJECT

Work will include bituminous surface removal, bituminous surfacing, and thermoplastic pavement markings.

TRAFFIC CONTROL PLAN

Effective January 14, 1999

Traffic Control shall be according to the applicable sections of the Standard Specifications for Road and Bridge Construction, the applicable guidelines contained in the National Manual on Uniform Traffic Control Devices for Streets and Highways, Illinois Supplement to the National Manual on Uniform Traffic Control Devices, these special provisions, and any special details and Highway Standards contained herein and in the plans.

Special attention is called to Articles 107.09 and 107.14 of the Standard Specifications for Road and Bridge Construction and the following Highway Standards relating to traffic control.

Standards:

701421 701426 701446 702001

District Standards:

91.2 94.2

The "WORKERS" (W21-1a(O)-48) signs shall be replaced with symbol "Right or Left Lane Closed Ahead" (W4-2R or L(O)-48) signs.

BUMP (W8-1(O)48) signs shall be installed as directed by the Engineer.

<u>Work Zone Traffic Control Devices</u>: Vertical barricades shall not be used in lane closure tapers, in weaves, and in the gore areas on Highway Standard 701446.

<u>Equipment Illumination</u>: The Contractor shall equip all machinery and vehicles with revolving amber lights, installed so the illumination is visible from all directions.

<u>Median Crossover</u>: The median crossover will generally not be available for Contractor use. It may be used only with both lanes adjacent to the median are closed. Under no condition shall left turn lanes be made to cross the median from lanes open to traffic.

<u>Vehicle Parking</u>: Parking of personal vehicles within the right of way will be strictly prohibited. Parking of construction equipment within the right of way will be permitted only at locations approved by the Engineer.

Uneven Pavement Signs: "UNEVEN LANES" W8-11(O)48 signs shall be installed as directed by the Engineer.

The cost of furnishing, erecting, maintaining, covering and removing the signs shall be included in the cost of TRAFFIC CONTROL AND PROTECTION STANDARD 701446.

TRAFFIC CONTROL AND PROTECTION STANDARD 701446

This work shall be done in accordance with the applicable portions of Section 700 of the Standard Specifications for Road and Bridge Construction, as directed by the Engineer, and as stated herein.

When Traffic Control and Protection Standard 701446 is used, advanced signing, as shown in Standard 701421, will also be required.

The cost for this additional signing shall be considered included in the Lump Sum cost for TRAFFIC CONTROL AND PROTECTION STANDARD 701446.

WORK RESTRICTIONS – NIGHTTIME WORK

During daylight hours, only one through traffic lane will be allowed to be closed in each direction.

If the Contractor elects to do nighttime work, two adjacent through traffic lanes will be allowed to be closed in each direction, using the proper traffic control and lighting. The second adjacent lane closure will only be allowed beginning at 9:00 PM and will have to be opened to traffic by 7:00 AM the following day.

MAINTENANCE OF TRAFFIC

Traffic shall be maintained using Traffic Control and Protection Standards 701421, 701426, and 701446.

The Contractor shall have all lanes open on weekends unless prior approval is obtained from the Resident Engineer.

BITUMINOUS CONCRETE SURFACE COURSE (BDE)

Effective: April 1, 2001 Revised: April 1, 2003

Replace the fourth paragraph of Article 406.23(b) of the Standard Specifications with the following:

"Mixture for cracks, joints, flangeways, leveling binder (machine method), leveling binder (hand method) and binder course in excess of 103 percent of the quantity specified by the Engineer will not be measured for payment.

Surface course mixture in excess of 103 percent of adjusted plan quantity will not be measured for payment. The adjusted plan quantity for surface course mixtures will be calculated as follows:

Adjusted Plan Quantity = $C \times C$ quantity shown on the plans or as specified by the Engineer.

where C = metric:
$$C = \frac{G_{\rm mb} \times 24.99}{IJ}$$
 English: $C = \frac{G_{\rm mb} \times 46.8}{IJ}$

and where:

 G_{mb} = average bulk specific gravity from approved mix design.

U = Unit weight of surface course shown on the plans in kg/sq m/25 mm (lb/sq yd/in.), used to estimate plan quantity.

24.99 = metric constant. 46.8 = English constant.

If project circumstances warrant a new surface course mix design, the above equations shall be used to calculate the adjusted plan quantity for each mix design using its respective average bulk specific gravity."

80050

BITUMINOUS EQUIPMENT, SPREADING AND FINISHING MACHINE (BDE)

Effective: January 1, 2005

Revise the fourth paragraph of Article 1102.03 of the Standard Specifications to read:

"The paver shall be equipped with a receiving hopper having sufficient capacity for a uniform spreading operation. The hopper shall be equipped with a districution system to uniformly place a non-segregated mixture in front of the screed. The distribution system shall have chain curtains, deflector plates, and/or other devices designed and built by the paver manufacturer to prevent segregation during distribution of the mixture from the hopper to the paver screed. The Contractor shall submit a written certification that the devices recommended by; the paver manufacturer to prevent segregation have been installed and are operational. Prior to paving, the Contractor, in the presence of the Engineer, shall visually inspect paver parts specifically identified by the manufacturer for excessive wear and the need for replacement. The Contractor shall supply a completed check list to the Engineer noting the condition of the parts. Worn parts shall be replaced. The Engineer may require an additional inspection prior to the placement of a surface course or at other times throughout the work."

80142

FLAGGER VESTS (BDE)

Effective: April 1, 2003 Revised: April 1, 2005

Revise the first sentence of Article 701.04(c)(1) of the Standard Specifications to read:

"The flagger shall be stationed to the satisfaction of the Engineer and be equipped with a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments and approved flagger traffic control signs conforming to Standard 702001 and Article 702.05(e)."

Revise Article 701.04(c)(6) of the Standard Specifications to read:

"(6) Nighttime Flagging. The flagger station shall be lit by additional overhead lighting other than streetlights. The flagger shall be equipped with a fluorescent orange, fluorescent yellow/green, or a combination of fluorescent orange and fluorescent yellow/green garment meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 3 garments."

80101

MINIMUM LANE WIDTH WITH LANE CLOSURE (BDE)

Effective: January 1, 2005

Add the following paragraph after the eighth paragraph of Article 701.04(a) of the Standard Specifications.

"The minimum lane width adjacent to a closed lane during paving, patching, and other moving operations on freeways and expressways shall be a minimum of 3 m (10 ft). The 3 m (10 ft) shall be clear, unobstructed, and free of channelizing devices or other obstacles."

80137

PARTIAL PAYMENTS (BDE)

Effective: September 1, 2003

Revise Article 109.07 of the Standard Specifications to read:

"109.07 Partial Payments. Partial payments will be made as follows:

(a) Progress Payments. At least once each month, the Engineer will make a written estimate of the amount of work performed in accordance with the contract, and the value thereof at the contract unit prices. The amount of the estimate approved as due for payment will be vouchered by the Department and presented to the State Comptroller for payment. No amount less than \$1000.00 will be approved for payment other than the final payment.

The failure to perform any requirement, obligation, or term of the contract by the Contractor shall be reason for withholding any progress payments until the Department determines that compliance has been achieved. Furthermore, progress payments may be reduced by liens filed pursuant to Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c).

(b) Material Allowances. At the discretion of the Department, payment may be made for materials, prior to their use in the work, when satisfactory evidence is presented by the Contractor. Satisfactory evidence includes justification for the allowance (to expedite the work, meet project schedules, regional or national material shortages, etc.), documentation of material and transportation costs, and evidence that such material is properly stored on the project or at a secure location acceptable and accessible to the Department.

Material allowances will be considered only for nonperishable materials when the cost, including transportation, exceeds \$10,000 and such materials are not expected to be utilized within 60 days of the request for the allowance. For contracts valued under

FAP Route 595 Section D2 MRS 2005-6 Rock Island County

\$500,000, the minimum \$10,000 requirement may be met by combining the principal (material) product of no more than two contract items. An exception to this two item limitation may be considered for any contract regardless of value for items in which material (products) are similar except for type and/or size.

Material allowances shall not exceed the value of the contract items in which used and shall not include the cost of installation or related markups. Amounts paid by the Department for material allowances will be deducted from estimates due the Contractor as the material is used. Two-sided copies of the Contractor's cancelled checks for materials and transportation must be furnished to the Department within 60 days of payment of the allowances or the amounts will be reclaimed by the Department."

80116

PAVEMENT AND SHOULDER RESURFACING (BDE)

Effective: February 1, 2000 Revised: July 1, 2004

Revise Article 406.20 of the Standard Specifications to read:

"406.20 Resurfacing Sequence. The resurfacing operations shall satisfy the following requirements:

- (a) Before paving in a lane, the adjacent lane and its shoulder must be at the same elevation.
- (b) Each lift of resurfacing shall be completed, including shoulders, before the next lift is begun.
- (c) Elevation differences between lanes shall be eliminated within twelve calendar days.

Revise the first paragraph of Article 406.23 of the Standard Specifications to read:

"406.23 Method of Measurement. This work will be measured for payment according to the following:"

Revise the first sentence of the ninth paragraph of Article 406.23 of the Standard Specifications to read:

"When a Superpave Binder and Surface Course mixture is used on shoulders and is placed simultaneously with the traffic lane as specified in Section 482, the quantity of bituminous mixture placed on the traffic lane that will paid for will be limited to a calculated tonnage based upon actual mat width and length, plan thickness or a revised thickness authorized by the Engineer, and design mix weight per millimeter (inch) of thickness."

Delete the tenth paragraph of Article 406.23 of the Standard Specifications.

Revise the second paragraph of Article 482.06 of the Standard Specifications to read:

"On pavement and shoulder resurfacing projects, the resurfacing sequence shall be according to Article 406.20. When the Superpave mixture option is used, the shoulders may be placed, at the Contractor's option, simultaneously with the adjacent traffic lane for both the binder and surface courses, provided the specified density, thickness and cross slope of both the pavement and shoulder can be satisfactorily obtained."

80013

PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000 Revised: September 1, 2003

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts no later than 30 days from the receipt of each payment made to the Contractor.

State law addresses the timing of payments to be made to subcontractors. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, generally requires that when a Contractor receives any payment from the Department, the Contractor is required to make corresponding, proportional payments to each subcontractor performing work within 15 calendar days after receipt of the state payment. Section 7 of the State Prompt Payment Act further provides that interest in the amount of 2% per month, in addition to the payment due, shall be paid to any subcontractor by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

As progress payments are made to the Contractor in accordance with Article 109.07 of the Standard Specifications for Road and Bridge Construction, the Contractor shall make a corresponding partial payment within 15 calendar days to each subcontractor in proportion to the work satisfactorily completed by each subcontractor. The proportionate amount of partial payment due to each subcontractor shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors shall be paid in full within 15 calendar days after the subcontractor's work has been satisfactorily completed. The Contractor shall hold no retainage from the subcontractors.

This Special Provision does not create any rights in favor of any subcontractor against the State of Illinois or authorize any cause of action against the State of Illinois on account of any payment, nonpayment, delayed payment or interest claimed by application of the State Prompt Payment Act. The Department will neither determine the reasonableness of any cause for delay of payment nor enforce any claim to payment, including interest. Moreover, the Department will not approve any delay or postponement of the 15 day requirement. State law creates remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond in accordance with the Public Construction Bond Act, 30 ILCS 550.

80022

PERSONAL PROTECTIVE EQUIPMENT (BDE)

Effective: July 1, 2004

All personnel, excluding flaggers, working outside of a vehicle (car or truck) within 7.6 m (25 ft) of pavement open to traffic shall wear a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/.green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments. Other types of garments may be substituted for the vest as long as the garments have manufacturers tags identifying them as meeting the ANSI Class 2 requirement.

80130

PUBLIC CONVENIENCE AND SAFETY (BDE)

Effective: January 1, 2000

Add the following paragraph after the fourth paragraph of Article 107.09 of the Standard Specifications.

"On weekends, excluding holidays, roadways with Average Daily Traffic of 25,000 or greater, all lanes shall be open to traffic from 3:00 P.M. Friday to midnight Sunday except where structure construction or major rehabilitation makes it impractical."

80015

RAP FOR USE IN BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000 Revised: April 1, 2002

Revise Article 1004.07 to read:

"1004.07 RAP Materials. RAP is reclaimed asphalt pavement resulting from cold milling or crushing of an existing dense graded hot-mix asphalt pavement. RAP must originate from routes or airfields under federal, state or local agency jurisdiction. The Contractor shall supply documentation that the RAP meets these requirements.

- (a) Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. No additional RAP will be allowed on top of the pile after the pile has been sealed.
 - (1) Homogeneous. Homogeneous RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only and represent the same aggregate quality, but shall be at least C quality or better, the same type of crushed aggregate (either crushed natural aggregate, ACBF slag, or steel slag), similar gradation and similar AC content. If approved by the Engineer, combined single pass surface/binder millings may be considered "homogenous", with a quality rating dictated by the lowest coarse aggregate quality present in the mixture. Homogenous stockpiles shall meet the requirements of Article 1004.07(d). Homogeneous RAP stockpiles not meeting these requirements may be processed (crushing and screening) and retested.
 - (2) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I/ Superpave, or equivalent mixtures only. The coarse aggregate in this RAP shall be crushed aggregate only and may represent more than one aggregate type and/or quality but shall be at least C quality or better. This RAP may have an inconsistent gradation and/or asphalt cement content prior to processing. All conglomerate RAP shall be processed prior to testing by crushing to where all RAP shall pass the 16 mm (5/8 in.) or smaller screen. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate RAP stockpiles shall meet the requirements of Article 1004.07(d).
 - (3) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP containing coarse aggregate (crushed or round) that is at least D quality or better. This RAP may have an inconsistent gradation and/or asphalt content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department. Conglomerate DQ RAP shall meet the requirements of Article 1004.07(d).

Reclaimed Superpave Low ESAL IL-9.5L surface mixtures shall only be placed in conglomerate DQ RAP stockpiles due to the potential for rounded aggregate.

- (4) Other. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Other". "Other" RAP stockpiles shall not be used in any of the Department's bituminous mixtures.
- (b) Use. The allowable use of a RAP stockpile shall be set by the lowest quality of coarse aggregate in the RAP stockpile. Class I/Superpave surface mixtures are designated as containing Class B quality coarse aggregate only. Superpave Low ESAL IL-19.0L binder and IL-9.5L surface mixtures are designated as Class C quality coarse aggregate only. Class I/Superpave binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate only. Bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate only. Any mixture not listed above shall have the designated quality determined by the Department.

RAP containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in Class I/Superpave (including Low ESAL) surface mixtures only. RAP stockpiles for use in Class I/Superpave mixtures (including Low ESAL), base course, base course widening and Class B mixtures shall be either homogeneous or conglomerate RAP stockpiles except conglomerate RAP stockpiles shall not be used in Superpave surface mixture Ndesign 50 or greater. RAP for use in bituminous aggregate mixtures (BAM) shoulders and BAM stabilized subbase shall be from homogeneous, conglomerate, or conglomerate DQ stockpiles.

Additionally, RAP used in Class I/Superpave surface mixtures shall originate from milled or crushed mixtures only, in which the coarse aggregate is of Class B quality or better. RAP stockpiles for use in Class I/Superpave (including Low ESAL) binder mixes as well as base course, base course widening and Class B mixtures shall originate from milled or processed surface mixture, binder mixture, or a combination of both mixtures uniformly blended to the satisfaction of the Engineer, in which the coarse aggregate is of Class C quality or better.

- (c) Contaminants. RAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.
- (d) Testing. All RAP shall be sampled and tested either during or after stockpiling.

For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 450 metric tons (500 tons) for the first 1800 metric tons (2,000 tons) and one sample per 1800 metric tons (2,000 tons) thereafter. A minimum of five tests shall be required for stockpiles less than 3600 metric tons (4,000 tons).

For testing existing stockpiles, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP pile either in-

situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to extract representative samples throughout the pile for testing.

Before extraction, each field sample shall be split to test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

All of the extraction results shall be compiled and averaged for asphalt content and gradation. Individual extraction test results, when compared to the averages, will be accepted if within the tolerances listed below.

Parameter	Homogeneous / Conglomerate	Conglomerate "D" Quality
25 mm (1 in.)		± 5%
12.5 mm (1/2 in.)	± 8%	± 15%
4.75 mm (No. 4)	± 6%	± 13%
2.36 mm (No. 8)	± 5%	
1.18 mm (No. 16)		± 15%
600 μm (No. 30)	± 5%	
75 μm (No. 200)	± 2.0%	± 4.0%
AC	± 0.4%	± 0.5%

If more than 20 percent of the individual sieves are out of the gradation tolerances, or if more than 20 percent of the asphalt content test results fall outside the appropriate tolerances, the RAP will not be allowed to be used in the Department's bituminous concrete mixtures unless the RAP representing the failing tests is removed from the stockpile to the satisfaction of the Engineer. All test data and acceptance ranges shall be sent to the District for evaluation.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the Illinois Test Procedure, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)".

(e) Designs. At the Contractor's option, bituminous concrete mixtures may be constructed utilizing RAP material meeting the above detailed requirements. The amount of RAP included in the mixture shall not exceed the percentages specified in the plans.

RAP designs shall be submitted for volumetric verification. If additional RAP stockpiles are tested and found that no more than 20 percent of the results, as defined under "Testing" herein, are outside of the control tolerances set for the original RAP stockpile and design, and meets all of the requirements herein, the additional RAP stockpiles may be used in the original mix design at the percent previously verified.

(f) Production. The coarse aggregate in all RAP used shall be equal to or less than the nominal maximum size requirement for the bituminous mixture being produced.

To remove or reduce agglomerated material, a scalping screen, crushing unit or comparable sizing device approved by the Engineer shall be used in the RAP feed system to remove or reduce oversized material. If material passing the sizing device adversely affects the mix production or quality of the mix, the sizing device shall be set at a size specified by the Engineer.

If the RAP control tolerances or QC/QA test results require corrective action, the Contractor shall cease production of the mixture containing RAP and either switch to the virgin aggregate design or submit a new RAP design.

80011

SUPERPAVE BITUMINOUS CONCRETE MIXTURES (BDE)

Effective: January 1, 2000 Revised: April 1, 2004

<u>Description</u>. This work shall consist of designing, producing and constructing Superpave bituminous concrete mixtures using Illinois Modified Strategic Highway Research Program (SHRP) Superpave criteria. This work shall be according to Sections 406 and 407 of the Standard Specifications and the special provision, "Quality Control/Quality Assurance of Bituminous Concrete Mixtures", except as follows.

Materials.

- (a) Fine Aggregate Blend Requirement. The Contractor may be required to provide FA 20 manufactured sand to meet the design requirements. For mixtures with Ndesign ≥ 90, at least 50 percent of the required fine aggregate fraction shall consist of either stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation.
- (b) Reclaimed Asphalt Pavement (RAP). If the Contractor is allowed to use more than 15 percent RAP, as specified in the plans, a softer performance-graded binder may be required as determined by the Engineer.

RAP shall meet the requirements of the special provision, "RAP for Use in Bituminous Concrete Mixtures".

RAP will not be permitted in mixtures containing polymer modifiers.

RAP containing steel slag will be permitted for use in top-lift surface mixtures only.

(c) Bituminous Material. The asphalt cement (AC) shall be performance-graded (PG) or polymer modified performance-graded (SBS-PG or SBR-PG) meeting the requirements of Article 1009.05 of the Standard Specifications for the grade specified on the plans.

The following additional guidelines shall be used if a polymer modified asphalt is specified:

- (1) The polymer modified asphalt cement shall be shipped, maintained, and stored at the mix plant according to the manufacturer's requirements. Polymer modified asphalt cement shall be placed in an empty tank and shall not be blended with other asphalt cements.
- (2) The mixture shall be designed using a mixing temperature of 163 ± 3 °C (325 ± 5 °F) and a gyratory compaction temperature of 152 ± 3 °C (305 ± 5 °F).
- (3) Pneumatic-tired rollers will not be allowed unless otherwise specified by the Engineer. A vibratory roller meeting the requirements of Article 406.16 of the Standard Specifications shall be required in the absence of the pneumatic-tired roller.

Laboratory Equipment.

- (a) Superpave Gyratory Compactor. The superpave gyratory compactor (SGC) shall be used for all QC/QA testing.
- (b) Ignition Oven. The ignition oven shall be used to determine the AC content. The ignition oven shall also be used to recover aggregates for all required washed gradations.

The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

<u>Mixture Design</u>. The Contractor shall submit mix designs, for approval, for each required mixture. Mix designs shall be developed by Level III personnel who have successfully completed the course, "Superpave Mix Design Upgrade". Articles 406.10 and 406.13 of the Standard Specifications shall not apply. The mixtures shall be designed according to the respective Illinois Modified AASHTO references listed below.

AASHTO MP 2	Standard Specification for Superpave Volumetric Mix Design
AASHTO R 30	Standard Practice for Mixture Conditioning of Hot-Mix Asphalt (HMA)
AASHTO PP 28	Standard Practice for Designing Superpave HMA
AASHTO T 209	Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
AASHTO T 312	Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the Superpave Gyratory Compactor

AASHTO T 308 Determining the Asphalt Content of Hot Mix Asphalt (HMA) by the Ignition Method

(a) Mixture Composition. The ingredients of the bituminous mixture shall be combined in such proportions as to produce a mixture conforming to the composition limits by weight. The gradation mixture specified on the plans shall produce a mixture falling within the limits specified in Table 1.

TABLE 1. MIXTURE COMPOSITION (% PASSING) ^{1/}								
Sieve IL-25.0 mm					IL-12.5 mm ^{4/}		IL-9.5 mm ^{4/}	
Size	min	max	min	max	Min	max	min	max
37.5 mm (1 1/2 in.)		100						
25 mm (1 in.)	90	100		100				
19 mm (3/4 in.)		90	82	100		100		
12.5 mm (1/2 in.)	45	75	50	85	90	100		100
9.5 mm (3/8 in.)						89	90	100
4.75 mm (#4)	24	42 ^{2/}	24	50 ^{2/}	28	65	28	65
2.36 mm (#8)	16	31	20	36	28	48 ^{3/}	28	48 ^{3/}
1.18 mm (#16)	10	22	10	25	10	32	10	32
600 μm (#30)								
300 μm (#50)	4	12	4	12	4	15	4	15
150 μm (#100)	3	9	3	9	3	10	3	10
75 μm (#200)	3	6	3	6	4	6	4	6

- 1/ Based on percent of total aggregate weight.
- 2/ The mixture composition shall not exceed 40 percent passing the 4.75 mm (#4) sieve for binder courses with Ndesign ≥ 90.
- 3/ The mixture composition shall not exceed 40 percent passing the 2.36 mm (#8) sieve for surface courses with Ndesign ≥ 90.
- 4/ The mixture composition for surface courses shall be according to IL-12.5 mm or IL-9.5 mm, unless otherwise specified by the Engineer.

One of the above gradations shall be used for leveling binder as specified in the plans and according to Article 406.04 of the Standard Specifications.

It is recommended that the selected combined aggregate gradation not pass through the restricted zones specified in Illinois Modified AASHTO MP 2.

- (b) Dust/AC Ratio for Superpave. The ratio of material passing the 75 μ m (#200) sieve to total asphalt cement shall not exceed 1.0 for mixture design (based on total weight of mixture).
- (c) Volumetric Requirements. The target value for the air voids of the hot mix asphalt (HMA) shall be 4.0 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix and shall conform to the requirements listed in Table 2.

	TAE	BLE 2. VOLU	METRIC RE	QUIREMENT	S
	Voids in the Mineral Aggregate (VMA), % minimum			Voids Filled with Asphalt (VFA),	
Ndesign	IL-25.0	IL-19.0	IL-12.5	IL-9.5	%
50					65 - 78
70	12.0	13.0	14.0	15	
90	12.0	13.0	14.0	15	65 - 75
105					

(d) Determination of Need for Anti-Stripping Additive. The mixture designer shall determine if an additive is needed in the mix to prevent stripping. The determination will be made on the basis of tests performed according to Illinois Modified T 283 using 4 in. Marshall bricks. To be considered acceptable by the Department as a mixture not susceptible to stripping, the ratio of conditioned to unconditioned split tensile strengths (TSRs) shall be equal to or greater than 0.75. Mixtures, either with or without an additive, with TSRs less than 0.75 will be considered unacceptable.

If it is determined that an additive is required, the additive may be hydrated lime, slaked quicklime, or a liquid additive, at the Contractor's option. The liquid additive shall be selected from the Department's list of approved additives and may be limited to those which have exhibited satisfactory performance in similar mixes.

Dry hydrated lime shall be added at a rate of 1.0 to 1.5 percent by weight of total dry aggregate. Slurry shall be added in such quantity as to provide the required amount of hydrated lime solids by weight of total dry aggregate. The exact rate of application for all anti-stripping additives will be determined by the Department. The method of application shall be according to Article 406.12 of the Standard Specifications.

<u>Personnel</u>. The QC Manager and Level I Technician shall have successfully completed the Department's "Superpave Field Control Course".

<u>Required Plant Tests</u>. Testing shall be conducted to control the production of the bituminous mixture. The Contractor shall use the test methods identified to perform the following mixture tests at a frequency not less than that indicated in Table 3.

	TABLE 3. REQUIRED PLANT TESTS for SUPERPAVE			
P	arameter	Frequency of Tests	Test Method	
Aggregate Gradation Hot bins for batch and continuous plants		dry gradation per day of production (either morning or afternoon sample). And	Illinois Procedure (See Manual of Test Procedures for Materials).	
con	vidual cold-feeds or abined belt-feed for r drum plants.	1 washed ignition oven test on the mix per day of production (conduct in afternoon if dry gradation is conducted in the morning or vice versa).		
12.5 mr 4.75 mr 2.36 mr 600 µm	sing sieves: n (1/2 in.), n (No. 4), n (No. 8), (No. 30), No. 200))	NOTE. The order in which the above tests are conducted shall alternate from the previous production day (example: a dry gradation conducted in the morning will be conducted in the afternoon on the next production day and so forth).		
		The dry gradation and washed ignition oven test results shall be plotted on the same control chart.		
	Content by Ignition Note 1.)	1 per half day of production	Illinois Modified AASHTO T 308	
Air Voids	Bulk Specific Gravity of Gyratory Sample	1 per half day of production for first 2 days and 1 per day thereafter (first sample of the day)	Illinois Modified AASHTO T 312	
	Maximum Specific Gravity of Mixture	, , , , , , , , , , , , , , , , , , , ,	Illinois Modified AASHTO T 209	

Note 1. The Engineer may waive the ignition oven requirement for AC content if the aggregates to be used are known to have ignition AC content calibration factors which exceed 1.5 percent. If the ignition oven requirement is waived, other Department approved methods shall be used to determine the AC content.

During production, the ratio of minus 75 μ m (#200) sieve material to total asphalt cement shall be not less than 0.6 nor more than 1.2 and the moisture content of the mixture at discharge from the mixer shall not exceed 0.5 percent. If at any time the ratio of minus 75 μ m (#200) material to asphalt or moisture content of the mixture falls outside the stated limits, production of the mix shall cease. The cause shall be determined and corrective action satisfactory to the Engineer shall be initiated prior to resuming production.

During production, mixtures containing an anti-stripping additive will be tested by the Department for stripping according to Illinois Modified T 283. If the mixture fails to meet the TSR criteria for acceptance, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria.

Construction Requirements

Lift Thickness.

(a) Binder and Surface Courses. The minimum compacted lift thickness for constructing bituminous concrete binder and surface courses shall be according to Table 4:

TABLE 4 – MINIMUM COMPACTED LIFT THICKNESS			
Mixture Thickness, mm (in.)			
IL-9.5	32 (1 1/4)		
IL-12.5	38 (1 1/2)		
IL-19.0	57 (2 1/4)		
IL-25.0	76 (3)		

(b) Leveling Binder. Mixtures used for leveling binder shall be as follows:

TABLE 5 – LEVELING BINDER		
Nominal, Compacted, Leveling	Mixture	
Binder Thickness, mm (in.)		
≤ 32 (1 1/4)	IL-9.5	
32 (1 1/4) to 50 (2)	IL 9.5 or IL-12.5	

Density requirements shall apply for leveling binder when the nominal, compacted thickness is 32 mm (1 1/4 in.) or greater for IL-9.5 mixtures and 38 mm (1 1/2 in.) or greater for IL-12.5 mixtures.

(c) Full-Depth Pavement. The compacted thickness of the initial lift of binder course shall be 100 mm (4 in.). The compacted thickness of succeeding lifts shall meet the minimums specified in Table 4 but not exceed 100 mm (4 in.).

If a vibratory roller is used for breakdown, the compacted thickness of the binder lifts, excluding the top lift, may be increased to 150 mm (6 in.) provided the required density is obtained.

(d) Bituminous Patching. The minimum compacted lift thickness for constructing bituminous patches shall be according to Table 4.

<u>Control Charts/Limits</u>. Control charts/limits shall be according to QC/QA Class I requirements, except density shall be plotted on the control charts within the following control limits:

TABLE 6. DENSITY CONTROL LIMITS			
Mixture	Parameter	Individual Test	
12.5 mm / 9.5 mm	Ndesign ≥ 90	92.0 - 96.0%	
12.5 mm / 9.5 mm	Ndesign < 90	92.5 – 97.4%	
19.0 mm / 25.0 mm	Ndesign ≥ 90	93.0 - 96.0%	
19.0 mm / 25.0 mm	Ndesign < 90	93.0 – 97.4%	

<u>Basis of Payment</u>. On resurfacing projects, this work will be paid for at the contract unit price per metric ton (ton) for BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On resurfacing projects in which polymer modifiers are required, this work will be paid for at the contract unit price per metric ton (ton) for POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, of the friction aggregate mixture and Ndesign specified, POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE, of the Ndesign specified, POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, of the Ndesign specified, and POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition and Ndesign specified.

On full-depth pavement projects, this work will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE PAVEMENT, (FULL-DEPTH), SUPERPAVE, of the thickness specified.

On projects where widening is constructed and the entire pavement is then resurfaced, the binder for the widening will be paid for at the contract unit price per square meter (square yard) for BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, of the mixture composition, Ndesign, and thickness specified. The surface and binder used to resurface the entire pavement will be paid for according to the paragraphs above for resurfacing projects.

80010

SURFACE TESTING OF PAVEMENTS (BDE)

Effective: April 1, 2002 Revised: July 1, 2004

Bituminous Concrete Overlays

Revise Article 406.03(k) of the Standard Specifications to read:

"(k) Pavement Surface Test Equipment1101.10"

Revise Article 406.21 of the Standard Specifications to read:

- "406.21 Surface Tests. The finished surface of the pavement shall be tested for smoothness within 24 hours and before the pavement is opened to traffic. All objects and debris shall be removed from the pavement surface prior to testing. Testing shall be performed in the presence of the Engineer.
 - (a) Test Sections/Equipment.

- (1) High-Speed Mainline Pavement. High-speed mainline pavement shall consist of pavements, ramps and loops with a posted speed greater than 75 km/hr (45 mph). These sections shall be tested using a California Profilograph or an approved equivalent.
- (2) Low-Speed Mainline Pavement. Low-speed mainline pavement shall consist of pavements, ramps and loops with a posted speed of 75 km/hr (45 mph) or less. These sections shall be tested using a California Profilograph or an approved equivalent.
- (3) Miscellaneous Pavement. Miscellaneous pavement shall consist of:
 - a. pavement on horizontal curves with a centerline radius of curvature of less than or equal to 300 m (1000 ft) and pavement within the superelevation transition of such curves;
 - b. the first or last 4.5 m (15 ft) of a pavement section where the Contractor is not responsible for the adjoining surface;
 - c. intersections;
 - d. variable width pavements;
 - e. side street returns:
 - f. crossovers;
 - g. connector pavement from mainline pavement expansion joint to the bridge approach pavement;
 - h. bridge approach pavement; and
 - i. other miscellaneous pavement surfaces (i.e. a turn lane) as determined by the Engineer.

Miscellaneous pavement shall be tested using a 5 m (16 ft) straightedge set to a 10 mm (3/8 in.) tolerance.

- (b) Lots/Sublots. Mainline pavement test sections will be divided into lots and sublots.
 - (1) Lots. A lot will be defined as a continuous strip of pavement 1600 m (1 mile) long and one lane wide. When the length of a continuous strip of pavement is less than 1600 m (1 mile), that pavement will be included in an adjacent lot. Structures will be omitted when measuring pavement length.
 - (2) Sublots. Lots will be divided into 160 m (0.1 mile) sublots. A partial sublot resulting from an interruption in the pavement will be subject to the same evaluation as a whole sublot.

(c) Testing Procedure. One wheel track shall be tested per lane. Testing shall be performed 1 m (3 ft) from and parallel to the edge of the lane away from traffic. A guide shall be used to maintain the proper distance.

The profile trace generated shall have stationing indicated every 150 m (500 ft) at a minimum. Both ends of the profile trace shall be labeled with the following information: contract number, beginning and ending stationing, which direction is up on the trace, which direction the profilograph was pushed, and the profilograph operator name(s). The top portion of the Department supplied form, "Profilograph Report of Pavement Smoothness" shall be completed and secured around the trace roll.

Although surface testing of intermediate lifts will not be required, they may be performed at the Contractor's option. When this option is chosen, the testing shall be performed and the profile traces shall be generated as described above.

The Engineer may perform his/her own testing at any time for monitoring and comparison purposes.

(d) Trace Reduction and Bump Locating Procedure. All traces shall be reduced. Traces produced by a mechanical recorder shall be reduced using an electronic scanner and computer software. This software shall calculate the profile index of each sublot in mm/km (in./mile) and indicate any high points (bumps) in excess of 8 mm (0.30 in.) with a line intersecting the profile on the printout. Computerized recorders shall provide the same information.

The profile index of each track, average profile index of each sublot, average profile index of the lot and locations of bumps shall be recorded on the form.

All traces and reports shall be provided to the Engineer for the project file.

The Engineer will use the results of the testing to evaluate paving methods and equipment. If the average profile index of a lot exceeds 635 mm/km (40.0 in./mile) for high-speed mainline pavement or 1025 mm/km (65.0 in./mile) for low-speed mainline pavement, the paving operation will be suspended until corrective action is taken by the Contractor.

- (e) Corrective Work. All bumps in excess of 8 mm (0.30 in.) in a length of 8 m (25 ft) or less shall be corrected. If the bump is greater than 13 mm (0.50 in.), the pavement shall be removed and replaced to the satisfaction of the Engineer at the Contractor's expense. The minimum length of pavement to be removed shall be 900 mm (3 ft).
 - (1) High-Speed Mainline Pavement. Any sublot having a profile index within the range of, greater than 475 (30.0) to 635 (40.0) mm/km (in./mile) including bumps, shall be corrected to reduce the profile index to 475 mm/km (30.0 in./mile) or less on each trace. Any sublot having a profile index greater than 635 mm/km (40.0 in./mile) including bumps, shall be corrected to reduce the profile index to 475 mm/km (30.0 in./mile) or less on each trace, or replaced at the Contractor's option.

- (2) Low-Speed Mainline Pavement. Any sublot having a profile index within the range of, greater than 710 (45.0) to 1025 (65.0) mm/km (in./mile) including bumps, shall be corrected to reduce the profile index to 710 mm/km (45.0 in./mile) or less on each trace. Any sublot having a profile index greater than 1025 mm/km (65.0 in./mile) including bumps, shall be corrected to reduce the profile index to 710 mm/km (45.0 in./mile) or less on each trace, or replaced at the Contractor's option.
- (3) Miscellaneous Pavement. Surface variations which exceed the 10 mm (3/8 in.) tolerance will be marked by the Engineer and shall be corrected by the Contractor.

Corrective work shall be completed using either an approved grinding device consisting of multiple saws or by removing and replacing the pavement. Corrective work shall be applied to the full lane width. When completed, the corrected area shall have uniform texture and appearance, with the beginning and ending of the corrected area squared normal to the centerline of the paved surface.

Upon completion of the corrective work, the surface of the sublot(s) shall be retested. The Contractor shall furnish the profilograph tracing(s) and the completed form(s) to the Engineer within two working days after corrections are made. If the profile index and/or bumps still do not meet the requirements, additional corrective work shall be performed.

Corrective work shall be at the Contractor's expense.

(f) Smoothness Assessments. Assessments will be paid to or deducted from the Contractor for each sublot of mainline pavement, per the Smoothness Assessment Schedule. Assessments will be based on the average profile index of each sublot prior to performing any corrective work unless the Contractor has chosen to remove and replace the sublot. For sublots that are replaced, assessments will be based on the profile index determined after replacement.

Assessments will not be paid or deducted until all other contract requirements for the pavement are satisfied. Pavement that is corrected or replaced for reasons other than smoothness, shall be retested as stated herein.

SMOOTHNESS ASSESSMENT SCHEDULE (Bituminous Concrete Overlays)			
High-Speed Mainline Pavement Average Profile Index mm/km (in./mile)	Assessment per sublot		
95 (6.0) or less	240 (15.0) or less	+\$150.00	
>95 (6.0) to 160 (10.0)	>240 (15.0) to 400 (25.0)	+\$80.00	
>160 (10.0) to 475 (30.0)	>400 (25.0) to 710 (45.0)	+\$0.00	
>475 (30.0) to 635 (40.0)	>710 (45.0) to 1025 (65.0)	+\$0.00	
Greater than 635 (40.0)	Greater than 1025 (65.0)	-\$300.00	

Smoothness assessments will not be applied to miscellaneous pavement sections."

Bituminous Concrete Pavement (Full-Depth)

Revise Article 407.09 of the Standard Specifications to read:

"407.09 Surface Tests. The finished surface of the pavement shall be tested for smoothness according to Article 406.21 except as follows:

Two wheel tracks shall be tested per lane. Testing shall be performed 1 m (3 ft) from and parallel to each lane edge."

SMOOTHNESS ASSESSMENT SCHEDULE (Full-Depth Bituminous)				
High-Speed Mainline Pavement Average Profile Index mm/km (in./mile)	Low-Speed Mainline Pavement Average Profile Index mm/km (in./mile)	Assessment per sublot		
95 (6.0) or less		+\$800.00		
>95 (6.0) to 175 (11.0)	240 (15.0) or less	+\$550.00		
>175 (11.0) to 270 (17.0)	>240 (15.0) to 400 (25.0)	+\$350.00		
>270 (17.0) to 475 (30.0)	>400 (25.0) to 710 (45.0)	+\$0.00		
>475 (30.0) to 635 (40.0)	>710 (45.0) to 1025 (65.0)	+\$0.00		
Greater than 635 (40.0)	Greater than 1025 (65.0)	-\$500.00		

Delete the fourth paragraph of Article 407.13 of the Standard Specifications.

Portland Cement Concrete Pavement

Revise Article 420.12 of the Standard Specifications to read:

"420.12 Surface Tests. The finished surface of the pavement shall be tested for smoothness according to Article 406.21 except as follows:

Two wheel tracks shall be tested per lane. Testing shall be performed 1 m (3 ft) from and parallel to each lane edge.

Membrane curing damaged during testing shall be repaired as directed by the Engineer at the Contractor's expense.

No further texturing for skid resistance will be required for areas corrected by grinding. Protective coat shall be reapplied to ground areas according to Article 420.21 at the Contractor's expense."

For pavement that is corrected by removal and replacement, the minimum length to be removed shall meet the requirements of either Class A or Class B patching.

SMOOTHNESS ASSESSMENT SCHEDULE (PCC)				
High-Speed Mainline Pavement Average Profile Index mm/km (in./mile)	Low-Speed Mainline Pavement Average Profile Index mm/km (in./mile)	Assessment per sublot		
95 (6.0) or less		+\$1200.00		
>95 (6.0) to 175 (11.0)	240 (15.0) or less	+\$950.00		
>175 (11.0) to 270 (17.0)	>240 (15.0) to 400 (25.0)	+\$600.00		
>270 (17.0) to 475 (30.0)	>400 (25.0) to 710 (45.0)	+\$0.00		
>475 (30.0) to 635 (40.0)	>710 (45.0) to 1025 (65.0)	+\$0.00		
Greater than 635 (40.0)	Greater than 1025 (65.0)	-\$750.00		

Delete the sixth paragraph of Article 420.23 of the Standard Specifications.

Testing Equipment

Revise Article 1101.10 of the Standard Specifications to read:

"1101.10 Pavement Surface Test Equipment. Required surface testing and analysis equipment and their jobsite transportation shall be provided by the Contractor.

- (a) 5 m (16 ft) Straightedge. The 5 m (16 ft) straightedge shall consist of a metal I-beam mounted between two wheels spaced 5 m (16 ft) between the axles. Scratcher bolts which can be easily and accurately adjusted, shall be set at the 1/4, 1/2, and 3/4 points between the axles. A handle suitable for pushing and guiding shall be attached to the straightedge. The straightedge shall meet the approval of the Engineer.
- (b) California Profilograph. The California Profilograph or approved equivalent shall consist of a frame 8 m (25 ft) in length supported upon multiple wheels at either end. The profile shall be recorded from the vertical movement of a wheel attached to the frame at mid point. All traces from pavement sections tested with a California Profilograph or approved equivalent shall be recorded on paper with scales of 300:1 longitudinally and 1:1 vertically. Data filters for an automated California Profilograph shall be set according to the parameters outlined in California Test 526, except the blanking band shall be set to 0.0 mm (0.00 in.).
 - (1) Calibration. The Contractor shall demonstrate to the Engineer that the testing equipment has proper tire pressure inflation, trueness of tire travel, and is calibrated for vertical displacement and horizontal distance. This calibration shall consist of the following:
 - a. A 150 to 300 m (500 to 1000 ft) long calibration test section shall be located on the project. This test section should be relatively straight and flat. The profilograph shall be calibrated for longitudinal distance on this test section to the satisfaction of the Engineer.

- b. Longitudinal calibration consists of pushing, at walking speed (approximately 5 km/hr (3 mph)), the profilograph over the pre-measured test section and determining the chart scale factor. To calculate the chart scale factor, divide the pre-measured test distance, in millimeters (inches), by the length of the profile trace from this test section, in millimeters (inches). This factor should be 300 ± 0.5 . If the profilograph produces charts with a different scale factor, adjustment of the profilograph shall be made to bring the scale factor to the tolerance specified above.
- c. Vertical calibration consists of placing the center recording wheel of the profilograph on a base plate and recording the base elevation. Two plates, 13 mm (0.5 in.) thick each, are added under the center wheel, one at a time, and the change in elevation noted. The two plates are removed, one at a time, and the change in elevation noted. Each step in the process shall show a change in height of 13 mm \pm 1.0 mm (0.5 in. \pm 0.01 in.). If the profilograph produces results not conforming to the above limits, it shall be adjusted to the tolerance specified.
- d. The automatic trace reduction capability of a machine so equipped shall be checked by comparing the machine's results to the results obtained through manual trace reduction using California Test 526 with a 0.0 mm (0.00 in.) blanking band. The comparison shall be made with the trace obtained on the pre-measured test section. The results of the comparison shall not differ by more than 30 mm/km (2.0 in./mile).
- e. All calibration traces and calculations shall be submitted to the Engineer for the project file.

The Engineer may retest the pavement at any time to verify the accuracy of the equipment.

(2) Trace Analysis. The Contractor shall reduce/evaluate these traces using a 0.0 mm (0.00 in.) blanking band and determine a profile index in mm/km (in./mile) for each section of finished pavement surface. If the Contractor's profilograph is equipped with a computerized recorder, the trace produced will be evaluated without further reduction. If the profilograph has a mechanical recorder, the Contractor shall provide an electronic scanner, a computer, and software to reduce the trace. All analysis equipment (electronic scanner, computerized recorder, etc.) shall be able to accept 0.0 mm (0.00 in.) for the blanking band."

80075

TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: April 1, 1992 Revised: January 1, 2005

To ensure a prompt response to incidents involving the integrity of work zone traffic control, the Contractor shall provide a telephone number where a responsible individual can be contacted 24 hours-a-day.

When the Engineer is notified, or determines a traffic control deficiency exists, he/she will notify and direct the Contractor to correct the deficiency within a specified time. The specified time, which begins upon notification to the Contractor, will be from 1/2 hour to 12 hours based upon the urgency of the situation and the nature of the deficiency. The Engineer shall be the sole judge.

A deficiency may be any lack of repair, maintenance, or non-compliance with the traffic control plan. A deficiency may also be applied to situations where corrective action is not an option such as the use of non-certified flaggers for short term operations; working with lane closures beyond the time allowed in the contract; or failure to perform required contract obligations such as traffic control surveillance.

If the Contractor fails to correct a deficiency within the specified time, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The calendar day(s) will begin with notification to the Contractor and end with the Engineer's acceptance of the correction. The daily monetary deduction will be either \$1,000 or 0.05 percent of the awarded contract value, whichever is greater. For those deficiencies where corrective action was not an option this monetary deduction will be immediate.

In addition, if the Contractor fails to respond, the Engineer may correct the deficiency and the cost thereof will be deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities.

57291

TRUCK BED RELEASE AGENT (BDE)

Effective: April 1, 2004

Add the following sentence after the third sentence of the first paragraph of Article 406.14 of the Standard Specifications.

"In addition to the release agent, the Contractor may use a light scatter of manufactured sand (FA 20 or FA 21) evenly distributed over the bed of the vehicle."

80123

WEIGHT CONTROL DEFICIENCY DEDUCTION

Effective: April 1, 2001 Revised: August 1, 2002

The Contractor shall provide accurate weights of materials delivered to the contract for incorporation into the work (whether temporary or permanent) and for which the basis of payment is by weight. These weights shall be documented on delivery tickets which shall identify the source of the material, type of material, the date and time the material was loaded, the contract number, the net weight, the tare weight when applicable and the identification of the transporting vehicle. For aggregates, the Contractor shall have the driver of the vehicle furnish or establish an acceptable alternative to provide the contract number and a copy of the material order to the source for each load. The source is defined as that facility that produces the final material product that is to be incorporated into the contract pay items.

The Department will conduct random, independent vehicle weight checks for material sources according to the procedures outlined in the Documentation Section Policy Statement of the Department's Construction Manual and hereby incorporated by reference. The results of the independent weight checks shall be applicable to all contracts containing this Special Provision. Should the vehicle weight check for a source result in the net weight of material on the vehicle exceeding the net weight of material shown on the delivery ticket by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. No adjustment in pay quantity will be made. Should the vehicle weight check for a source result in the net weight of material shown on the delivery ticket exceeding the net weight of material on the vehicle by 0.50% (0.70% for aggregates) or more, the Engineer will document the independent vehicle weight check and immediately furnish a copy of the results to the Contractor. The Engineer will adjust the net weight shown on the delivery ticket to the checked delivered net weight as determined by the independent vehicle weight check.

The Engineer will also adjust the method of measurement for all contracts for subsequent deliveries of all materials from the source based on the independent weight check. The net weight of all materials delivered to all contracts containing this Special Provision from this source, for which the basis of payment is by weight, will be adjusted by applying a correction factor "A" as determined by the following formula:

$$A = 1.0 - \left(\frac{B-C}{B}\right)$$
; Where $A \le 1.0$; $\left(\frac{B-C}{C}\right) > 0.50\%$ (0.70% for aggregates)

Where A = Adjustment factor

B = Net weight shown on delivery ticket

C = Net weight determined from independent weight check

The adjustment factor will be applied as follows:

Adjusted Net Weight = $A \times Delivery Ticket Net Weight$

FAP Route 595 Section D2 MRS 2005-6 Rock Island County

The adjustment factor will be imposed until the cause of the deficient weight is identified and corrected by the Contractor to the satisfaction of the Engineer. If the cause of the deficient weight is not identified and corrected within seven (7) calendar days, the source shall cease delivery of all materials to all contracts containing this Special Provision for which the basis of payment is by weight.

Should the Contractor elect to challenge the results of the independent weight check, the Engineer will continue to document the weight of material for which the adjustment factor would be applied. However, provided the Contractor furnishes the Engineer with written documentation that the source scale has been calibrated within seven (7) calendar days after the date of the independent weight check, adjustments in the weight of material paid for will not be applied unless the scale calibration demonstrates that the source scale was not within the specified Department of Agriculture tolerance.

At the Contractor's option, the vehicle may be weighed on a second independent Department of Agriculture certified scale to verify the accuracy of the scale used for the independent weight check.

80048

WORK ZONE TRAFFIC CONTROL DEVICES (BDE)

Effective: January 1, 2003 Revised: November 1, 2004

Add the following to Article 702.01 of the Standard Specifications:

"All devices and combinations of devices shall meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350 for their respective categories. The categories are as follows:

Category 1 includes small, lightweight, channelizing and delineating devices that have been in common use for many years and are known to be crashworthy by crash testing of similar devices or years of demonstrable safe performance. These include cones, tubular markers, flexible delineators and plastic drums with no attachments. Category 1 devices shall be crash tested and accepted or may be self-certified by the manufacturer.

Category 2 includes devices that are not expected to produce significant vehicular velocity change but may otherwise be hazardous. These include drums and vertical panels with lights, barricades and portable sign supports. Category 2 devices shall be crash tested and accepted for Test Level 3.

Category 3 includes devices that are expected to cause significant velocity changes or other potentially harmful reactions to impacting vehicles. These include crash cushions, truck mounted attenuators and other devices not meeting the definitions of Category 1 or 2. Category 3 devices shall be crash tested and accepted for either Test Level 3 or the test level specified.

FAP Route 595 Section D2 MRS 2005-6 Rock Island County

Category 4 includes portable or trailer-mounted devices such as arrow boards, changeable message signs, temporary traffic signals and area lighting supports. Currently, there is no implementation date set for this category and it is exempt from the NCHRP 350 compliance requirement.

The Contractor shall provide a manufacturer's self-certification letter for each Category 1 device and an FHWA acceptance letter for each Category 2 and Category 3 device used on the contract. The letters shall state the device meets the NCHRP 350 requirements for its respective category and test level, and shall include a detail drawing of the device."

Delete the third, fourth and fifth paragraphs of Article 702.03(b) of the Standard Specifications.

Delete the third sentence of the first paragraph of Article 702.03(c) of the Standard Specifications.

Revise the first sentence of the first paragraph of Article 702.03(e) of the Standard Specifications to read:

"Drums shall be nonmetallic and have alternating reflectorized Type AA or Type AP fluorescent orange and reflectorized white horizontal, circumferential stripes."

Add the following to Article 702.03 of the Standard Specifications:

"(h) Vertical Barricades. Vertical barricades may be used in lieu of cones, drums or Type II barricades to channelize traffic."

Delete the fourth paragraph of Article 702.05(a) of the Standard Specifications.

Revise the sixth paragraph of Article 702.05(a) of the Standard Specifications to read:

"When the work operations exceed four days, all signs shall be post mounted unless the signs are located on the pavement or define a moving or intermittent operation. When approved by the Engineer, a temporary sign stand may be used to support a sign at 1.2 m (5 ft) minimum where posts are impractical. Longitudinal dimensions shown on the plans for the placement of signs may be increased up to 30 m (100 ft) to avoid obstacles, hazards or to improve sight distance, when approved by the Engineer. "ROAD CONSTRUCTION AHEAD" signs will also be required on side roads located within the limits of the mainline "ROAD CONSTRUCTION AHEAD" signs."

Delete all references to "Type 1A barricades" and "wing barricades" throughout Section 702 of the Standard Specifications.

80097

WORKING DAYS (BDE)

Effective: January 1, 2002

The Contractor shall complete the work within 15 working days.

80071

SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: April 2, 2005

To account for the preparatory work and operations necessary for the movement of subcontractor personnel, equipment, supplies, and incidentals to the project site and for all other work or operations that must be performed or costs incurred when beginning work approved for subcontracting in accordance with Article 108.01 of the Standard Specifications, the Contractor shall make a mobilization payment to each subcontractor.

This mobilization payment shall be made at least 14 days prior to the subcontractor starting work. The amount paid shall be equal to 3 percent of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

This provision shall be incorporated directly or by reference into each subcontract approved by the Department.

80143

STATE OF ILLINOIS Sheet 1 of 14 INDEX OF SHEETS **DEPARTMENT OF TRANSPORTATION** PLANS FOR PROPOSED ROADWORK 1. **Cover Sheet** FAP 595 (IL 5) C-92-017-05 Index of Sheets D-92-026-05 D2 MRS 2005-6 2-3. **Summary of Quantities Rock Island County** General Notes **Typical Sections** 5-6. **R1W** 30th Ave 7-8. Schedule of Work 9. Paving Schedule **End Work** 10-14. District Standards Sta. 72+70 **STANDARDS** 42nd Ave A 40th Ave 701421-01 701426-02 45th Ave A 45th Ave 701446 702001-05 **Station Equation:** 780001-01 52nd Ave 781001-02 248+98.72 BK= 886001 N shore Dr 62+69.98 AH 886006 **Begin Work** ADT = 34,000Sta. 239+47 **DISTRICT 2 DIXON, ILLINOIS**

CONTRACT NUMBER 64A67 CALL J.U.L.I.E. BEFORE YOU DIG 800-892-0123

South Moline Township - Section 9, 16

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
SUBMITTED APA STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED APA STATE OF ILLINOIS
DISTRICT ENGINEER

FAP 595 D2 MRS 2005-6 Rock Island County Sheet 2 of 14

Contract Number: 64A67

SUMMARY OF QUANTITIES

100% STATE 1000

	100% SIATE		1000
CODE NUMBER	ITEM	UNIT	QUANTITY
40600200	BITUMINOUS MATERIALS (PRIME COAT)	TON	5
40600300	AGGREGATE (PRIME COAT)	TON	26
40600990	TEMPORARY RAMP	SQ. YD.	206
44000009	BITUMINOUS SURFACE REMOVAL 3 INCH	SQ YD	17182
67100100	MOBILIZATION	L. SUM	1
70100310	TRAFFIC CONTROL & PROTECTION STANDARD 701421	L SUM	1
70100815	TRAFFIC CONTROL & PROTECTION STANDARD 701446	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	3132
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ. FT.	348
78000100*	THERMOPLASTIC PAVEMENT MARKING – LETTERS AND SYMBOLS	SQ. FT.	265
78000200*	THERMOPLASTIC PAVEMENT MARKING – LINE 4 INCH	FOOT	10689
78000500*	THERMOPLASTIC PAVEMENT MARKING - LINE 8 INCH	FOOT	1799
78000600*	THERMOPLASTIC PAVEMENT MARKING - LINE 12 INCH	FOOT	360
78100100*	RAISED REFLECTIVE PAVEMENT MARKER	EACH	326
78300200*	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	276
88600600	DETECTOR LOOP REPLACEMENT	FOOT	315
X4066910	POLYMERIZED LEVELING BINDER, MACHINE METHOD, SUPERPAVE N70	TON	962

*Specialty Item

Sumqtymrs2005-6

FAP 595 D2 MRS 2005-6 Rock Island County Sheet 3 of 14 Contract Number: 64A67

100% STATE

1000

	100% STATE		1000
CODE NUMBER	ITEM	UNIT	QUANȚITY
X4066810	POLYMERIZED LEVELING BINDER (HAND METHOD), SUPERPAVE N70	TON	5
<u> </u>			
			·
<u> </u>			

*Specialty Item

Sumqtymrs2005-6

FAP 595 (IL 5)
D2 MRS 2005-6
Rock Island County
Sheet 4 of 14
Contract Number: 64A67

GENERAL NOTES

Milling machines on this project shall be capable of removing a layer of bituminous a minimum of 12' wide and 1-1/2 inches in a single pass, or using a 7' milling machine with electronic grade control.

The Contractor will be required to furnish 140mm (5-1/2") high brass stencils as approved by the Engineer and install stationing at 250' intervals. Stationing shall be placed on both lanes of 2-lane highways and on the outside lanes in both directions on 4-lane highways. The stations shall be placed 150 mm (6") inside the pavement marking edge so they can be read from the shoulder. This work shall be included in the cost of the final pavement surface.

The millings from Bituminous Surface Removal shall be used to build up the existing shoulders, as shown on the typical sections and/or as directed by the Engineer. The shoulder shall be rolled and compacted as directed by the Engineer. Excess grindings or large chunks shall be properly disposed of by the Contractor. No grindings will be allowed on the foreslopes. This work shall be included in the contract unit price for BITUMINOUS SURFACE REMOVAL – 3 INCHES.

The following Mixture Requirements are applicable for all locations in this project.

Mixture Uses	Surface	Level Binder	Binder
AC/PG:	SBS PG 70-22	SBS PG 70-22	SBS PG 70-22
RAP % (Max)	0	0	0
Design Air Voids:	4.2 @ N70	4.2 @ N70	4.2 @ N70
Mixture Composition (Gradation Mixture)	IL 9.5 OR 12.5	IL 9.5	IL 19.0
Friction Aggregate	D	N/A	N/A

Pavement Marking shall be done according to Standard 780001, except as follows:

- All words such as ONLY, shall be 2.4m (8 feet) high.
- All non-freeway arrows shall be the large size
- The distance between yellow no-passing lines shall be 200mm (8"), not 180mm (7") as shown in the detail of Typical Lane and Edge Lines.

Payement markings are to be applied to match existing conditions or as directed by the Engineer.

Estimated Quantities:


Type	White	Yellow
Thermoplastic Pavement Marking - Line 4 inch	5689	5000
Thermoplastic Pavement Marking - Line 8 inch	1799	9
Thermoplastic Pavement Marking - Line 12 inch		360
Project Total (For Both Applications)	7488	5360

Work on this project may be in progress at the same time as pavement patching work in the intersection of IL 5 and 16th Street. Work on these projects shall be scheduled to keep interference between all the projects to a minimum. The Contractors shall inform each other of progress of the projects and give fair warning to the other contractors when a problem might be encountered.

genotemrs2005-6

TYPICAL SECTION WESTBOUND

FAP 595 (IL 5) D2 MRS 2005-6 **ROCK ISLAND COUNTY** CONTRACT #64A67 SHEET 5 OF 14

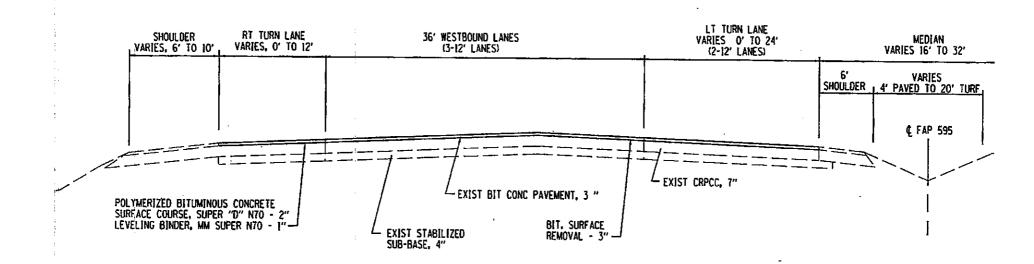


BITUMINOUS APPLICATION RATES:

BITUMINOUS SURFACE COURSE: 112#/SY/IN BITUMINOUS LEVELING BINDER: 112#/SY/IN

BITUMINOUS MATERIAL (PRIME COAT): 0.000286 TON/SY AGGREGATE (PRIME COAT): 3 LBS/SY

TYPICAL SECTION EASTBOUND

FAP 595 (IL 5) D2 MRS 2005-6 ROCK ISLAND COUNTY CONTRACT #64A67 SHEET 6 OF 14

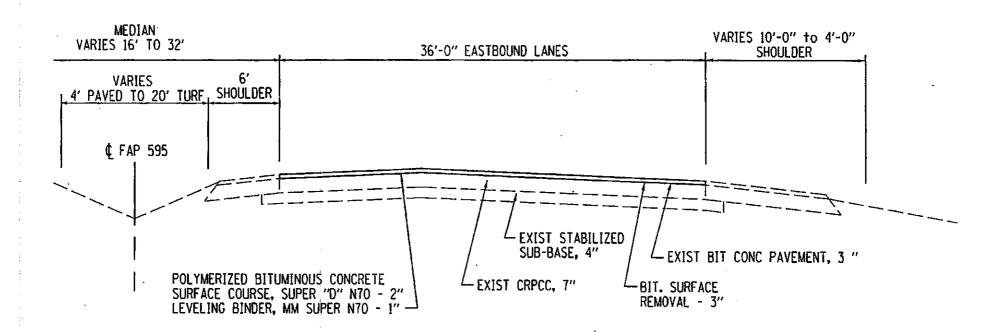

BITUMINOUS APPLICATION RATES:

BITUMINOUS SURFACE COURSE: 112#/SY/IN
BITUMINOUS LEVELING BINDER: 112#/SY/IN
BITUMINOUS MATERIAL (PRIME COAT): 0.000286 TON/SY

AGGREGATE (PRIME COAT): 3 LBS/SY

SCHEDULE OF WORK

40600990 TOTAL	TEMPORARY RAMP SQ YD LOCATION 40.0 Station 239+47 80.0 Station 239+47 43.3 Station 72+70 42.2 Station 72+70 205.6	DIRECTION EB through lanes WB through lanes EB through lanes WB through lanes
70300100	SHORT TERM PAVEMENT MARKING FOOT LOCATION	DIDECTION
	1044 1st Application 1044 2nd Application	DIRECTION Prime Coat Leveling Binder
TOTAL	1044 3rd Application 3132	Surface Course
70301000	WORK ZONE PAVEMENT MARKING F	
TOTAL	SQ FT LOCATION 14.07407 3rd Application 14.07407	DIRECTION Surface Course
78000100	THERMOPLASTIC PAVEMENT MARK SQ FT LOCATION 62.4 Station 65+00 to 70+00	ING - LETTERS & SYMBOLS DIRECTION EB Turn Arrows (4)
	156 Station 239+50 to 241+75 46.8 Station 239+50 to 243+60	WB Left Turn Arrows (10) WB Right Turn Arrows (3)
TOTAL	265.2	
78000500	THERMOPLASTIC PAVEMENT MARKI	ING - LINE 4 INCH DIRECTION
	952 Station 239+47 to 248+99 1000 Station 62+70 to 72+70 240 Station 239+47 to 248+99 250 Station 62+70 to 72+70 240 Station 239+47 to 248+99 70 Station 62+70 to 65+20 1096 Station 239+47 to 244+95 404 Station 244+95 to 248+99 1000 Station 62+70 to 72+70 1096 Station 239+47 to 244+95 404 Station 244+95 to 248+99 1000 Station 62+70 to 72+70 480 Station 239+47 to 248+99 500 Station 62+70 to 72+70 957 Station 239+47 to 248+99	EB edgeline - White EB edgeline - White EB skips - White EB skips - White EB skips - White EB skips - White EB edgeline - Double Yellow EB edgeline - Yellow EB edgeline - Yellow WB skips - White (both lanes) WB edgeline - White
TOTAL	1000 Station 62+70 to 72+70 10689	WB edgeline - White

78000600	THERMOPLASTIC PAVEMENT MARK FOOT LOCATION	ING - LINE 8 INCH DIRECTION
	750 Station 65+20 to 72+70 822 Station 239+47 to 243+58 227 Station 239+47 to 241+74	EB turnlane WB left turnlanes WB right turnlane
TOTAL	1799	·
78000600	THERMOPLASTIC PAVEMENT MARK FOOT LOCATION	ING - LINE 12 INCH DIRECTION
TOTAL	360 Station 239+47 to 244+95	Median Striping
78100100	RAISED REFLECTIVE PAVEMENT MA	
	EACH LOCATION	DIRECTION
	24 Station 239+47 to 248+99	EB skips - Crystal
	25 Station 62+70 to 72+70	EB skips - Crystal
	24 Station 239+47 to 248+99	EB skips - Crystal
	7 Station 62+70 to 65+20	EB skips - Crystal
	28 Station 239+47 to 244+95	EB edgeline - One Way Amber
	28 Station 239+47 to 244+95	WB edgeline - One Way Amber
	48 Station 239+47 to 248+99	WB skips - Crystal (both lanes)
	50 Station 62+70 to 72+70	WB skips - Crystal (both lanes)
	38 Station 65+20 to 72+70	EB turnlane - Crystal
	42 Station 239+47 to 243+58	WB left turnlanes - Crystal
	12 Station 239+47 to 241+74	WB right turnlane - Crystal
		WB right turmane - Orystal
TOTAL	326	
78300200	RAISED REFLECTIVE PAVEMENT MA	ARKER REMOVAL
	EACH LOCATION	DIRECTION
	24 Station 239+47 to 248+99	EB skips - Crystal
	25 Station 62+70 to 72+70	EB skips - Crystal
	24 Station 239+47 to 248+99	EB skips - Crystal
	7 Station 62+70 to 65+20	EB skips - Crystal
	20 Station 239+47 to 244+95	EB edgeline - One Way Amber
	20 Station 239+47 to 244+95	WB edgeline - One Way Amber
		WB skips - Crystal (both lanes)
	40 Station 239+47 to 248+99	
	42 Station 62+70 to 72+70	WB skips - Crystal (both lanes)
	31 Station 65+20 to 72+70	EB turnlane - Crystal
	33 Station 239+47 to 243+58	WB left turnlanes - Crystal
	10 Station 239+47 to 241+74	WB right turnlane - Crystal
TOTAL	276	
00000000	DETECTOR LOOP REPLACEMENT	
88600600		DIRECTION
		DI
	153 Station 240+25	WB mainline (3-6x6 loops)
	162 Station 240+75	WB turnianes (2-6x6 loops)
TOTAL	315	
		•

PAVING SCHEDULE

			<u></u> 1	AVING	SCHEDULE						
					40600200	44000009	40600300	X4066810	X4066910	X4066526	
STATION	REMARKS	LENGTH		OSED	BIT. MATERIAL (PRIME COAT)	BITUMINOUS REMOVAL - 3 INCHES	AGGREGATE (PRIME COAT)	POLY LB (HM) SUPER N70	POL LB (MM) SUPER N70	P BCSC SUPER "D" N70	
			WIDTH	AREA	•					ļ	
230+47 to 248+98 72		(ft)	(ft)	(sy)	(ton)	(sy)	(ton)	(ton)	(ton)	(ton)	
239+47 to 248+98.72	EB mainline	951.72	36	3806.9	1:1	3806.9	5.7	0.9	213.2	426.4	
62+69.98 to 71+75	EB mainline	901.02	36	3604.1	1,0	3604.1	5.4	0.9	201,8	403.7	
71+75 to 72+70	EB mainline	95	var.	395.8	0.1	395.8	0.6	0.1	22.2	44.3	
					ļ						
72+70 to 70+00	WB mainline	270		1110.0							
62+69.98 to 70+00	WB mainline	730.02	36	2920.1	0.8		4.4				
239+47 to 248+98.72	WB mainline	951.72		3806.9		3806.9					
243+58 to 245+00	WB mainline right turn lane	142		102.6							
239+47 to 243+58	WB mainline right turn lane	411		548.0						61.4	
241+74 to 243+58	WB mainline left turn lanes	216		300.0		300.0					
239+47 to 241+74	WB mainline left turn lanes	227	24	605.3	0.2	605.3	0.9	0.2	33.9	67.8	
	······································				·		-		 	 	
		 		,-						 	
						· · · ·			-		
	<u> </u>										
<u> </u>			ļ <u>.</u>						ļ		
			 -		<u> </u>						
		 				· · · · · · · · · · · · · · · · · · ·			 	ļ	
·····						 					
	<u> </u>	 								 -	
	· · · · · · · · · · · · · · · · · · ·					T				 	
		İ									
TOTALS	!				4.9	17199.6	25.8	4.6	963.2	1926.4	

Note: 112 #/sy/in used in calculations of bituminous mixtures
0.000286 ton/sy used in calculations of bituminous material (prime coat)
3 pounds/sy used in calculations of aggregate prime


FAP 595
- D2 MRS 2005-6
- ROCK ISLAND COUNTY
SHEET 10 OF 14
CONTRACT #64A67

TYPICAL PAVEMENT MARKINGS




100 (4) YELLON 200 (8)


MEDIAN PAVEMENT MARKING



TYPICAL ISLAND OFFSET SHOULDER WIDTH




TYPICAL PARKING SPACING




.. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS DIMERWISE HOTED.

STANDARD CROSSWALK MARKING See Schedules for Locations



 Distance to the necrest edge of the intersecting roadway in the obserce of a marked prosevals.

FAP 595 D2 MRS 2005-6 **ROCK ISLAND COUNTY**

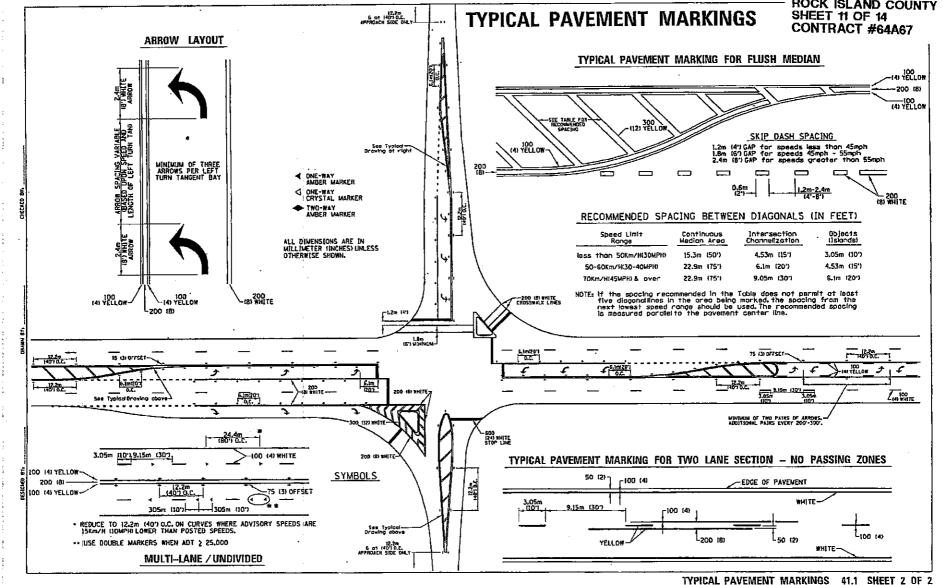

ROUGH GROOVED SURFACE SIGN

FAP 595 D2 MRS 2005-6 ROCK ISLAND COUNTY SHEET 12 OF 14 CONTRACT #64A67

SIGN PANEL TYPE 1



COLOR: LEGEND AND BORDER - BLACK NON-RELFLECTIVE BACKGROUND - ORANGE REFLECTORIZED

SIGN	DIMENSIONS											
SIZE	A	8	Ç	, D	E	F	G	Н				
1200×1200 (48×48)	1200 (48.0)	600 (24.))	75 (3.0)	850 (34.0)	825 (33.0)	150 (6.0)	325 (13.0)	88 (3.5)				

SIGN SIZE		SERIES LINES		MARGIN	BORDER	BLANK STD.	
3125	1	2	3				
1200×1200 (48×48)	7C	7C	7C	20 (0.8)	30 (1.2)	B4-48D	

ALL DIMENSIONS IN INCHES.

GENERAL NOTES


SIGN PANELS AND FACE MATERIALS SHALL BE ACCORDING TO SECTION 720 OF THE STANDARD SPECIFICATIONS METAL POSTS SHALL BE IN ACCORDANCE WITH STD. 720011.

ALL MOUNTING HARDWARE SHALL BE ALUMINUM, STAINLESS STEEL, ZINC OR CADMIUM PLATED STEEL AND SHALL BE INCIDENTAL TO THE COST OF THE INSTALLATION.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)

FAP 595 D2 MRS 2005-6 ROCK ISLAND COUNTY SHEET 13 OF 14 CONTRACT #64A67

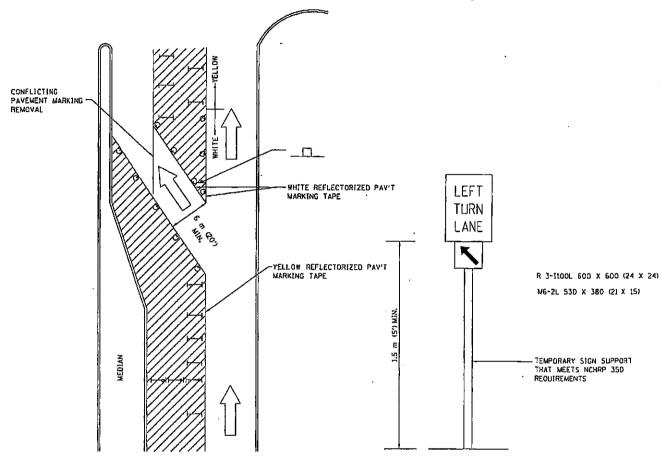

LEGEND

WORK

WORK AREA

LANE OPEN TO TRAFFIC

.

TYPE J OR II BARRICADE OR DRUM WITH FLASHING BURNING LIGHT

SIGN (SEE DETAIL)

DRUM OR BARRICADE WITH STEADY BURN LIGHT

TYPE I OR 11 CHECK BARRICADE WITH STEADY

GENERAL NOTES

CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRIMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 710 (28) IN HEIGHT.

SYEADY BURNING LIGHTS WILL NOT BE REQUIRED ON BARRICADES OR ORDERS FOR DAY OPERATIONS. ALL LIGHTS WILL BE MONODIRECTIONAL,

REFLECTORIZED TEMPORARY PAVEMENT MARKING TAPE SHALL BE PLACED THROUGHOUT THE BARRICADED AREA OF EACH BAY WHERE THE CLOSURE TIME IS GREATER THAN FOURTEEN DAYS.


THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANEIS) AND THE RIGHT TURN BAY IS TO REMAIN OPEN, UNDER THIS CONDITION, "RIGHT TURN LANE" R3-100 600 \times 600 (24 \times 24) AND MG-2R 530 \times 380 (2) \times 15) SHALL BE USED.

THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES.

LONGITUDINAL DINENSIONS MAY BE ADJUSTED TO FIT FIELD CONDITIONS.

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFICISHALL BE INCLUDED IN THE COST SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE SHOWN

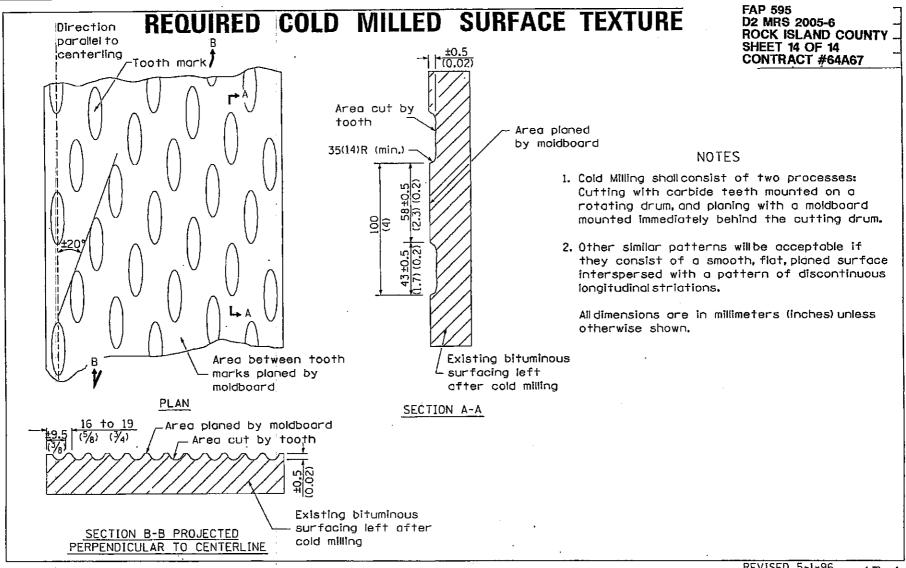

Nov D4 D9:28:08 2003 rojects@dZstnds8z43pf4.dgn

ILLINOIS DEPARTMENT OF LABOR

PREVAILING WAGES FOR ROCK ISLAND COUNTY EFFECTIVE JUNE 2005

The Prevailing rates of wages are included in the Contract proposals which are subject to Check Sheet #5 of the Supplemental Specifications and Recurring Special Provisions. The rates have been ascertained and certified by the Illinois Department of Labor for the locality in which the work is to be performed and for each craft or type of work or mechanic needed to execute the work of the Contract. As required by Prevailing Wage Act (820 ILCS 130/0.01, et seq.) and Check Sheet #5 of the Contract, not less than the rates of wages ascertained by the Illinois Department of Labor and as revised during the performance of a Contract shall be paid to all laborers, workers and mechanics performing work under the Contract. Post the scale of wages in a prominent and easily accessible place at the site of work.

If the Illinois Department of Labor revises the prevailing rates of wages to be paid as listed in the specification of rates, the contractor shall post the revised rates of wages and shall pay not less than the revised rates of wages. Current wage rate information shall be obtained by visiting the Illinois Department of Labor web site at http://www.state.il.us/agency/idol/ or by calling 312-793-2814. It is the responsibility of the contractor to review the rates applicable to the work of the contract at regular intervals in order to insure the timely payment of current rates. Provision of this information to the contractor by means of the Illinois Department of Labor web site satisfies the notification of revisions by the Department to the contractor pursuant to the Act, and the contractor agrees that no additional notice is required. The contractor shall notify each of its subcontractors of the revised rates of wages.

Rock Island County Prevailing Wage for June 2005

Trade Name	RG	TYP	С	Base	FRMAN	*M-F>8	OSA	OSH	H/W	Pensn	Vac	Trng
===========	==	===	=	=====	=====	=====	===	===	=====	=====	=====	=====
ASBESTOS ABT-GEN		BLD		21.710	22.210	1.5	1.5	2.0	4.600	3.750	0.000	0.500
ASBESTOS ABT-GEN		HWY		22.210	23.210	1.5	1.5	2.0	5.280	3.670	0.000	0.600
ASBESTOS ABT-MEC		BLD		18.260	19.010	1.5	1.5	2.0		1.650	0.000	0.000
BOILERMAKER		BLD		28.970		2.0	2.0	2.0	7.020	6.600	0.000	0.210
BRICK MASON		BLD		23.060		1.5	1.5	2.0	6.500	4.000	0.000	0.310
CARPENTER		BLD		24.000		1.5	1.5	2.0	5.140	4.470	0.000	
CARPENTER		HWY		24.920		1.5	1.5	2.0		4.510		0.400
CEMENT MASON		BLD		22.430		1.5	1.5	2.0	5.100	5.060		0.200
CEMENT MASON		HWY		22.110	23.110		1.5	2.0			0.000	
CERAMIC TILE FNSHER		BLD		16.130	0.000		1.5				0.000	
ELECTRIC PWR EQMT OP		ALL		22.510	0.000		1.5	2.0	4.500			0.110
ELECTRIC PWR GRNDMAN		ALL		18.810	0.000		1.5	2.0	4.500	5.070	0.000	
ELECTRIC PWR LINEMAN ELECTRICIAN		ALL		28.370 26.520	30.080 28.520	1.5	1.5 1.5	2.0	4.500 5.230	7.660 6.970	0.000	0.140
ELECTRONIC SYS TECH		BLD BLD		19.800	20.520		1.5	2.0	5.230	3.780		0.310
ELEVATOR CONSTRUCTOR		BLD		30.090		2.0	2.0	2.0		3.420	1.810	0.000
GLAZIER		BLD		22.470		1.5	1.5	2.0		3.450	0.000	0.000
HT/FROST INSULATOR		BLD		25.860	27.060		1.5	2.0	4.300			0.300
IRON WORKER		ALL		22.380	24.170		1.5		7.690			
LABORER		BLD	1	20.210	20.710		1.5	2.0	4.600	3.750		0.500
LABORER		BLD	2	21.710	22.210	1.5	1.5	2.0	4.600	3.750	0.000	0.500
LABORER		BLD	3	22.360	22.860	1.5	1.5	2.0	4.600	3.750	0.000	0.500
LABORER		HWY	1	21.710	22.710	1.5	1.5	2.0	5.280	3.670	0.000	0.600
LABORER		HWY	2	22.210	23.210	1.5	1.5	2.0	5.280	3.670	0.000	0.600
LABORER		HWY	3	22.840	23.840	1.5	1.5	2.0	5.280	3.670	0.000	0.600
LATHER		BLD		24.000	25.200	1.5	1.5	2.0	5.140	4.470	0.000	0.400
MACHINIST		BLD		34.540	36.290	2.0	2.0	2.0	3.200	4.100	2.380	0.000
MARBLE FINISHERS		BLD		16.130	0.000	1.5	1.5	2.0	6.500	3.070	0.000	
MARBLE MASON		BLD		20.470	20.970	1.5	1.5	2.0	6.500	3.070		0.170
MILLWRIGHT	N	BLD		30.820	33.900	1.5	1.5	2.0		8.930	0.000	
MILLWRIGHT	S	BLD	_	24.390		1.5	1.5	2.0	5.550	7.090		0.560
OPERATING ENGINEER				24.800		1.5	1.5	2.0	5.400	5.050		0.400
OPERATING ENGINEER		BLD	2			1.5	1.5	2.0	5.400	5.050	1.400	0.400
OPERATING ENGINEER OPERATING ENGINEER		BLD BLD	3 4	22.150 22.150		1.5 1.5	1.5	2.0	5.400		1.400	0.400
OPERATING ENGINEER OPERATING ENGINEER		BLD	5	21.100	0.000		1.5	2.0	5.400		1.400	
OPERATING ENGINEER						1.5					1.400	
OPERATING ENGINEER					25.800						1.400	
OPERATING ENGINEER					25.800						1.400	
OPERATING ENGINEER					25.800						1.400	
OPERATING ENGINEER					25.800						1.400	
PAINTER		ALL			23.570						0.000	
PAINTER OVER 30FT		ALL		23.820	24.820	1.5	1.5	1.5	3.900	4.850	0.000	0.600
PAINTER PWR EQMT		ALL		23.070	24.070	1.5	1.5	1.5	3.900	4.850	0.000	0.600
PILEDRIVER		BLD		24.000	25.200	1.5	1.5	2.0	5.140	4.470	0.000	0.400
PILEDRIVER		HWY			26.670		1.5	2.0	5.600	4.510	0.000	0.400
PIPEFITTER		ALL			32.690						0.000	
PLASTERER		BLD			26.870						0.000	
PLUMBER		ALL			32.690						0.000	
ROOFER		BLD			23.250						0.000	
SHEETMETAL WORKER		BLD			27.560						0.000	
SPRINKLER FITTER		BLD		29.390	30.890	1.5	1.5	2.0	6.100	4.950	0.000	0.250

STONE MASON	BLD	23.060	24.310	1.5	1.5 2.0	6.500	4.000	0.000	0.310
TERRAZZO FINISHER	BLD	16.130	0.000	1.5	1.5 2.0	6.500	3.070	0.000	0.170
TERRAZZO MASON	BLD	20.470	20.970	1.5	1.5 2.0	6.500	3.070	0.000	0.170
TILE LAYER	BLD	24.000	25.200	1.5	1.5 2.0	5.140	4.470	0.000	0.400
TILE MASON	BLD	20.470	20.970	1.5	1.5 2.0	6.500	3.070	0.000	0.170
TRUCK DRIVER	ALL 1	24.090	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	ALL 2	24.490	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	ALL 3	24.690	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	ALL 4	24.940	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	ALL 5	25.690	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	0&C 1	19.272	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	0&C 2	19.592	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	O&C 3	19.752	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	0&C 4	19.952	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TRUCK DRIVER	0&C 5	20.552	0.000	1.5	1.5 2.0	7.000	3.200	0.000	0.000
TUCKPOINTER	BLD	23.060	24.310	1.5	1.5 2.0	6.500	4.000	0.000	0.310

Legend:

M-F>8 (Overtime is required for any hour greater than 8 worked each day, Monday through Friday.

OSA (Overtime is required for every hour worked on Saturday)

OSH (Overtime is required for every hour worked on Sunday and Holidays)

H/W (Health & Welfare Insurance)

Pensn (Pension)

Vac (Vacation)

Trng (Training)

Explanations

ROCK ISLAND COUNTY

MILLWRIGHT (SOUTH) - South of Interstate 80.

The following list is considered as those days for which holiday rates of wages for work performed apply: New Years Day, Memorial/Decoration Day, Fourth of July, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration such as the day after Thanksgiving for Veterans Day. If in doubt, please check with IDOL.

Oil and chip resealing (O&C) means the application of road oils and liquid asphalt to coat an existing road surface, followed by application of aggregate chips or gravel to coated surface, and subsequent rolling of material to seal the surface.

EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

CERAMIC TILE FINISHER, MARBLE FINISHER, TERRAZZO FINISHER

Assisting, helping or supporting the tile, marble and terrazzo mechanic by performing their historic and traditional work assignments required to complete the proper installation of the work covered by said crafts. The term "Ceramic" is used for naming the classification only and is in no way a limitation of the product handled. Ceramic takes into consideration most hard tiles.

ELECTRONIC SYSTEMS TECHNICIAN

Installing, assembling and maintaining sound and intercom, protection alarm (security), master antenna television, closed circuit television, computer hardware and software programming and installation to the network's outlet and input (EXCLUDING all cabling, power and cable termination work historically performed by wiremen), door monitoring and control, nurse and emergency call programming and installation to the system's outlet and input (EXCLUDING all cabling, power and cable termination work historically performed by wiremen), clock and timing; and the installation and maintenance of transmit and receive antennas, transmitters, receivers, and associated apparatus which operates in conjunction with the above systems. All work associated with these system installations will be included EXCEPT (1) installation of protective metallic conduit, excluding less than ten-foot runs strictly for protection of cable, and (2) 120 volt AC (or higher) power wiring and associated hardware.

TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION

- Class 1. Drivers on 2 axle trucks hauling less than 9 ton. Air compressor and welding machines and brooms, including those pulled by separate units, truck driver helpers, warehouse employees, mechanic helpers, greasers and tiremen, pickup trucks when hauling materials, tools, or workers to and from and on-the-job site, and fork lifts up to 6,000 lb. capacity.
- Class 2. Two or three axle trucks hauling more than 9 ton but hauling less than 16 ton. A-frame winch trucks, hydrolift trucks, vactor trucks or similar equipment when used for transportation purposes. Fork lifts over 6,000 lb. capacity, winch trucks, four axle combination units, and ticket writers.
- Class 3. Two, three or four axle trucks hauling 16 ton or more.

Drivers on water pulls, articulated dump trucks, mechanics and working forepersons, and dispatchers. Five axle or more combination units.

Class 4. Low Boy and Oil Distributors.

Class 5. Drivers who require special protective clothing while employed on hazardous waste work.

TRUCK DRIVER - OIL AND CHIP RESEALING ONLY.

This shall encompass laborers, workers and mechanics who drive contractor or subcontractor owned, leased, or hired pickup, dump, service, or oil distributor trucks. The work includes transporting materials and equipment (including but not limited to, oils, aggregate supplies, parts, machinery and tools) to or from the job site; distributing oil or liquid asphalt and aggregate; stock piling material when in connection with the actual oil and chip contract. The Truck Driver (Oil & Chip Resealing) wage classification does not include supplier delivered materials.

OPERATING ENGINEERS - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION

Class 1. An engineer on Crane, Shovel, Clamshell, Dragline, Backhoe, Derrick, Tower Crane, Cable Way, Concrete Spreader (servicing two pavers), Asphalt Spreader, Asphalt Mixer, Plant Engineer, Dipper Dredge Operator, Dipper Dredge Craneman, Dual Purpose Truck (boom or winch), Leverman or Engineman (hydraulic dredge), Mechanic, Paving Mixer with tower attached, Pile Driver, Boom Tractor, Stationary, Portable or Floating Mixing Plant, Trenching Machine (over 40 H.P.), Building Hoist (two drums), Hot Paint Wrapping Machine, Cleaning and Priming Machine, Backfiller (throw bucket), Locomotive Engineer, Qualified Welder, Tow or Push Boat, Concrete Paver, Seaman Trav-L-Plant or similar machines, CMI Autograder or similar machines, Slip Form Paver, Caisson Augering Machine, Mucking Machine, Asphalt Heater-Planer Unit, Hydraulic Cranes, Mine Hoists.

Class 2. An engineer on Athey, Barber-Green, Euclid or Haiss Loader, Asphalt Pug Mill, Fireman and Drier, Concrete Pump, Concrete Spreader (servicing one paver) Bulldozer, Endloader, Log Chippers or similar machines, Elevating Grader, Group Equipment Greaser, LeTourneaupul and similar machines, off-road haul units, DW-10 Hyster Winch and similar machines, Motor Patrol, Power Blade, Push Cat, Tractor Pulling elevating Grader or Power Blade, Tractor Operating Scoop or Scraper, Tractor with Power Attachment, Roller on Asphalt or Blacktop, Single Drum Hoist, Jaeger Mix and Place Machine, Pipe Bending Machine, Flexaplane or similar machines, Automatic Curbing Machines, Automatic Cement and Gravel Batch Plants (one stop set-up), Seaman Pulvi-Mixer or similar machines, Blastholer Self-propelled Rotary Drill or similar machines, Work Boat, Combination Concrete Finishing Machine and Float, Self-propelled Sheep Foot Roller or Compactor (used in conjunction with a Grading Spread), Asphalt Spreader Screed Operator, Apsco spreader or similar machine, Slusher, Forklift (over 6000 lb. cap. or working at heights above 28 ft.) Concrete Conveyors, Chip Spreader, Underground Boring Machine (BUILDING ONLY), Straddle Carrier, Hydro-Hammer (BUILDING ONLY), Hydraulic Pumps or Power Units Driven by any power source (except manually), used to hoist or lift machinery or material.

- Class 3. An engineer on Asphalt Booster, Fireman and Pump Operator at Asphalt Plant, Mud Jack, Underground Boring Machine (HIGHWAY ONLY), Concrete Finishing Machine, Form Grader with Roller on Earth, Mixers (3 bag to 16E), Power Operated Bull Float, Tractor without Power attachment, Dope Pot (agitating motor), Dope Chop Machine, Distributor (back end), Straddle Carrier, Portable Machine Fireman, Hydro-Hammer (HIGHWAY ONLY), Power Winch on Paving Work, Self-propelled Roller or Compactor (other than provided for above), Pump Operator (more than one well-point pump), Portable Crusher Operator, Trench Machine (under 40 H.P.), Power Subgrader (on forms) or similar machines, Forklift (6000 or less cap.) Gypsum Pump, Conveyor over 20 H.P., Fuller Kenyon Cement Pump or similar machines.
- Class 4. An engineer on Air Compressor (400 c.f.m. or over HIGHWAY ONLY), Light Plant, Mixers (1 or 2 bag), Power Batching Machine (Cement Auger or Conveyor), Boiler (Engineer or Fireman), Water Pumps (HIGHWAY ONLY), Mechanical Broom, Automatic Cement and Gravel Batch Plants (two or three stop set-up), Small Rubber-tired Tractors (not including backhoes or endloaders), Self-propelled Curing Machine, Brush Chipper, Driver on Truck Crane or similar machines.
- Class 5. Oiler, Mechanic's Helper, Mechanical Heater (other than steam boiler), Belt Machine, Small Outboard Motor Boats (Safety Boat and Life Boat), Engine Driven Welding Machine, and Small Tractors (used to unroll or roll wire mesh), Water pumps (BUILDING ONLY), Air Compressors (BUILDING ONLY), Permanent Automatic Elevators.

LABORER - BUILDING

- Class 1: General laborer, carpenter tender, tool cribman, salamander tender, flagman, form handler, floor sweeper, material handler, fencing laborer, cleaning lumber, landscaper, unloading explosives, laying of sod, planting/removal of trees, wrecking laborer, unloading of Re-Bars, scaffold worker, signal man on crane.
- Class 2: Handling of materials treated with creosote, kettle men, prime mover or motorized unit used for wet concrete or handling of building materials, vibrator operator, motar mixer, power tools used under the jurisdiction of laborers, sand points, gunnite nozzle men, welders, cutters, burners and torchmen, chain saw operator, jackhammer and drill operators, paving breakers, air tamping hammerman, concrete saw operator, concrete burning machine operator, coring machine operator hod carrier and plasterer tender.
- Class 3: Caisson worker after 6 foot depth, dynamite man, asbestos abatement worker, tunnel miners mixerman (plaster only), pump man.

LABORER - HEAVY & HIGHWAY

- Class 1: Rod or chain man, flagman, dumpman, spotter, broom man, landscaper, planting and removal of trees, fencing laborers, dispatcher, ticket writer, scaleman, cleaning of forms or lumber (in bone yard), laying of sod, moving and/or maintenance of flares and barricades.
- Class 2: Operation of all hand, electric, air, hydraulic or mechanically powered tools under the jurisdiction of Laborers' including jackhammers, tempers, air spades, augers, concrete saws,

chain saws, utility saws, rock drills, vibrators, mortar mixer, power and hand saw (when clearing timber) general laborer (not elsewhere covered), craft-tender, material checker, material handler, form handler, concrete dumper, puddler, form setter helper, explosives handler, dynamite helper, center strip, reinforcing in concrete, wire mesh handler and installer, prime mover or any mechanical device taking the place of concrete buggy or wheelbarrow, sandpoint setter, asphalt kettleman. Sheeting hammer drivers, laying and jointing of telephone conduit, gas distribution men, pipe setter on laterals, drain tiles, culvert pipe, and storm sewer catch basin leads, catch basins, manholes, batch dumpers, tank cleaners, cofferdam workers, bankman on floating plant, jointman with pipelayers. Back-up man (corker, joint maker) with pipe setter on sewer and water mains, batterboard man or laser operator on sewer and water main, labor in ditch, or tunnel, on sewer or water mains and telephone conduit. Cutters, burners, torchman, gravel box man, asphalt plant laborers, concrete plant laborer, deck hand, unloading of steel and rebar, laser beam operator, wrecking laborers.

Class 3: Asphalt raker or luteman, head form setter, head dynamite man (powderman) head string or wireline man (on paving), pipe setter on sewer or water main, gunnite nozzle man, asphalt or concrete curb machine operator, head grade man, head tunnel miner, concrete burning machine operator, coring machine operator, welder.

Other Classifications of Work:

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classifications of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 618/993-7271 for wage rates or clarifications.

LANDSCAPING

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.