













F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
343	*	COOK	283	65
STA. 9+713.000		TO STA. 10+151.000		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				62897
* 70D-Y-B-R & 70HB-R-1				

LEGEND:


-  INLET AND PIPE PROTECTION
-  PERIMETER EROSION BARRIER
-  TEMPORARY DITCH CHECK
-  DITCH FLOW
-  SWALE
-  TEMPORARY FENCE
-  CONSTRUCTION ZONE
-  TEMPORARY PAVEMENT
-  TEMPORARY PAVEMENT (PREVIOUS STAGES)
-  COMPLETED CONSTRUCTION (PREVIOUS STAGES)

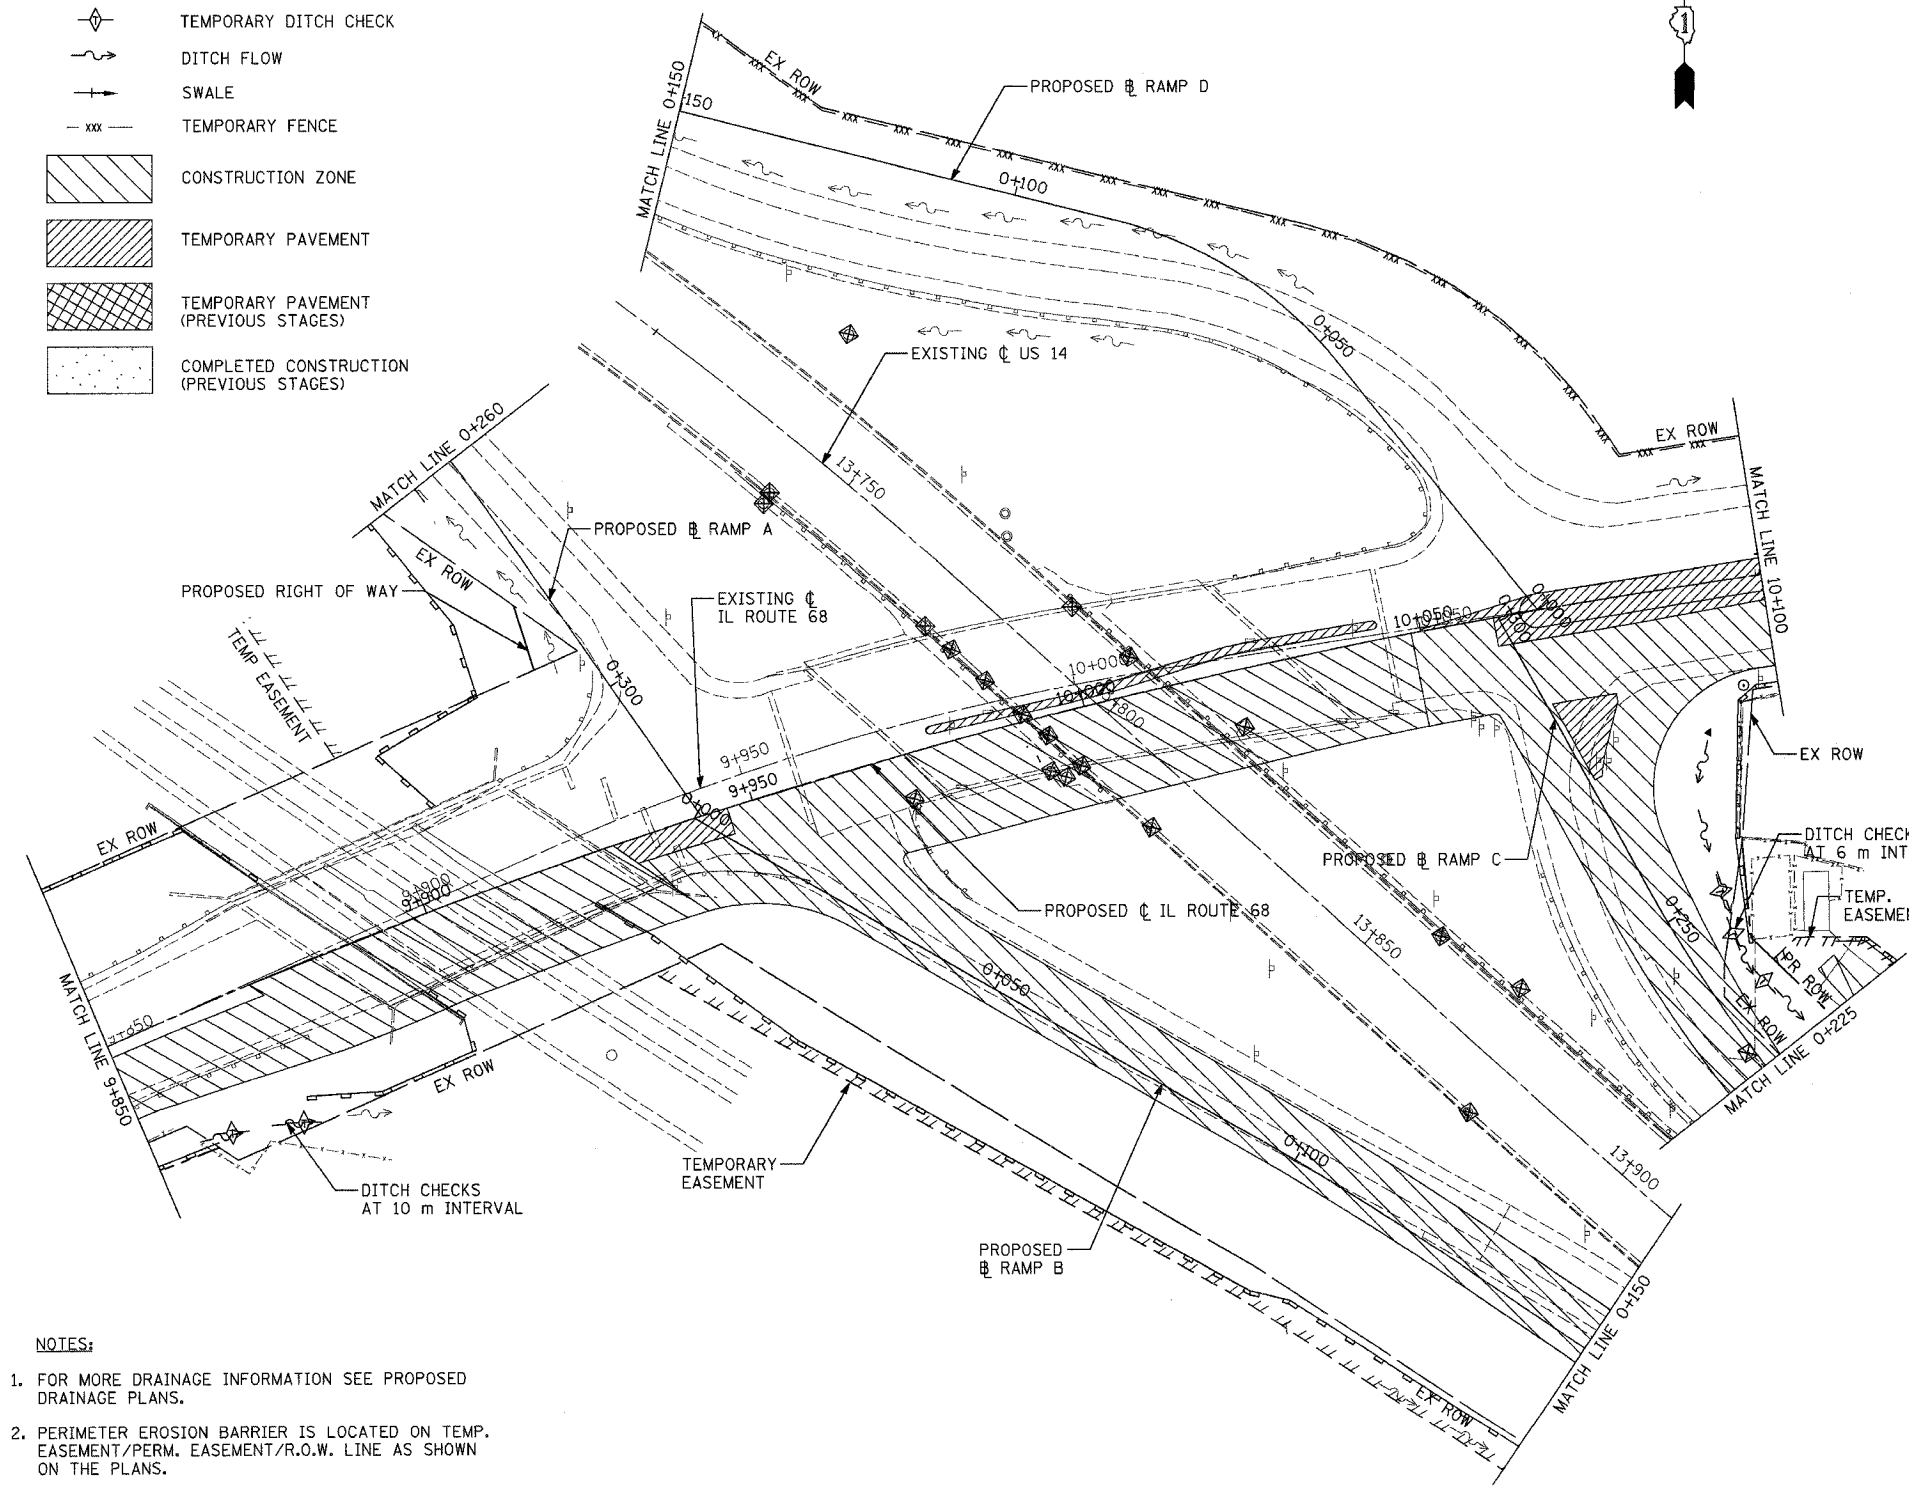

- TEMPORARY EROSION CONTROL NOTES:**
1. THE CONTRACTOR SHALL APPLY EROSION CONTROL MEASURES PRIOR TO ANY EARTH DISTURBING ACTIVITIES.
 2. EROSION CONTROL FEATURES SHALL REMAIN IN PLACE AND BE MAINTAINED FOR THE DURATION OF THE CONSTRUCTION PERIOD OR AS DIRECTED BY THE ENGINEER.
 3. POSITIVE DRAINAGE WILL BE MAINTAINED DURING ALL STAGES OF CONSTRUCTION.
 4. PERIMETER EROSION BARRIER OR SILT FENCE SHALL BE PLACED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER WHERE THE SLOPE IS SUCH THAT SOIL WILL WASH AWAY FROM THE PROJECT LIMITS.
 5. TEMPORARY DITCH CHECKS SHALL BE PLACED IN ALL EXISTING AND PROPOSED DITCHES, AT EVERY 0.3m DROP IN ELEVATION.
 6. PROPOSED INLETS AND PIPES SHOULD BE PROTECTED IMMEDIATELY AFTER THEY ARE CONSTRUCTED. THIS PROTECTION SHALL BE PLACED AS SHOWN ON THE PLANS OR AS DIRECTED BY ENGINEER.
 7. ALL EXISTING INLETS AND PIPES WITHIN LIMITS OF CONSTRUCTION OR WHO WILL RECEIVE RUNOFF FROM DISTURBED AREAS WILL BE PROTECTED AS SHOWN ON THE PLANS AND AS DIRECTED BY THE ENGINEER.
 8. INLET AND PIPE PROTECTIONS SHALL STAY IN PLACE UNTIL SURFACES THAT DRAIN TO THEM ARE PAVED OR REVEGETATED.
 9. THE CONTRACTOR SHALL ACQUIRE THE NPDES PERMIT BEFORE BEGINNING CONSTRUCTION.
 10. ALL ITEMS SHALL BE CONSTRUCTED AS SHOWN ON STANDARD 280001 AND AS DIRECTED BY THE ENGINEER. MAINTENANCE AND CLEANING OF THE EROSION CONTROL ITEMS SHALL BE INCLUDED IN THE RESPECTIVE EROSION CONTROL PAY ITEM.
 11. ALL CONSTRUCTION ACTIVITIES SHALL BE IN ACCORDANCE WITH THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM STORM WATER PERMIT.
 12. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO PREVENT POLLUTION OF STORM WATER AND SHALL FOLLOW IEPA & IDOT CONSTRUCTION MEMORANDUM NO. 00-60.
 13. EROSION CONTROL SHALL BE PROVIDED IN ACCORDANCE WITH THE SEQUENCE OF STAGE CONSTRUCTION.
 14. EXCAVATED AREAS AND EMBANKMENT SHALL BE PERMANENTLY SEEDED IMMEDIATELY AFTER FINAL GRADING. IF NOT, THEY SHALL BE TEMPORARILY SEEDED IF NO CONSTRUCTION ACTIVITY IN THE AREA IS PLANNED FOR 7 DAYS.
 15. TEMPORARY DRAINAGE SHALL BE CONDUCTED BY THE CONTRACTOR AND APPROVED BY THE ENGINEER.
 16. ADDITIONAL 500 m OF TEMPORARY FENCE (NOT SHOWN ON THE PLANS) HAS BEEN PROVIDED FOR PROTECTION OF THE PLANT MATERIAL INSIDE INFIELD AREAS. PLACEMENT OF THE ADDITIONAL TEMPORARY FENCE SHALL BE DIRECTED BY THE ENGINEER BEFORE START OF THE CONSTRUCTION.

NOTES:

1. FOR MORE DRAINAGE INFORMATION SEE PROPOSED DRAINAGE PLANS.
2. PERIMETER EROSION BARRIER IS LOCATED ON TEMP. EASEMENT/PERM. EASEMENT/R.O.W. LINE AS SHOWN ON THE PLANS.
3. FOR PERMANENT EROSION CONTROL INFORMATION SEE LANDSCAPING PLANS.
4. FOR MORE STAGE CONSTRUCTION INFORMATION SEE MOT PLANS.
5. TEMPORARY FENCE IS LOCATED ON R.O.W LINE AS SHOWN ON THE PLANS.



REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
ILLINOIS ROUTE 68
TEMPORARY EROSION CONTROL PLAN
ILLINOIS ROUTE 68 STAGE 1A AND 1B
STA. 9+850 TO STA. 10+100
SCALE 1:500
DATE OCTOBER, 2006
DRAWN BY GRH
CHECKED BY PK