


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*754	101M&TS	BOONE	95	45
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

\*(IL 76)

# TRAFFIC SIGNAL PLANS

## GENERAL NOTES

1. THE MOUNTING HEIGHT FOR THE LUMINAIRES ON THE COMBINATION MAST-ARM ASSEMBLIES SHALL BE 35'-0" HORIZONTAL MOUNTED WITH A 12' ARM
2. THE "SIGNAL AHEAD" SIGNS SHALL REPLACE THE EXISTING "INTERSECTION AHEAD" SIGNS ON THE EXISTING POST LOCATION ON ALL FOUR LEGS OF THE INTERSECTION. THE CONTRACTOR SHALL CONTACT KURT GLAZIER, 815-284-5478, AT THE ILLINOIS DEPARTMENT OF TRANSPORTATION TWO (2) WEEKS PRIOR TO THE SIGNAL TURN-ON FOR THIS SIGN REPLACEMENT.
3. THE PAY ITEM "REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT" SHALL BE PERFORMED BY THE CONTRACTOR AND SHALL INCLUDE ALL MATERIAL AND LABOR TO COMPLETE. THE FOLLOWING ITEMS SHALL REMAIN THE PROPERTY OF THE ILLINOIS DEPARTMENT OF TRANSPORTATION AND SHALL BE REMOVED AND DELIVERED TO A LOCATION DETERMINED BY CHRIS DARASKA 815-284-5918.
  - 4 - EACH SINGLE FACE FLASHING BEACON
  - 1 - EACH TRAFFIC SIGNAL POST ASSEMBLY
  - 3 - EACH FLASHER CONTROLLER
 ALL OTHER UNMENTIONED EQUIPMENT SHALL REMAIN THE PROPERTY OF THE CONTRACTOR FOR SALVAGE.

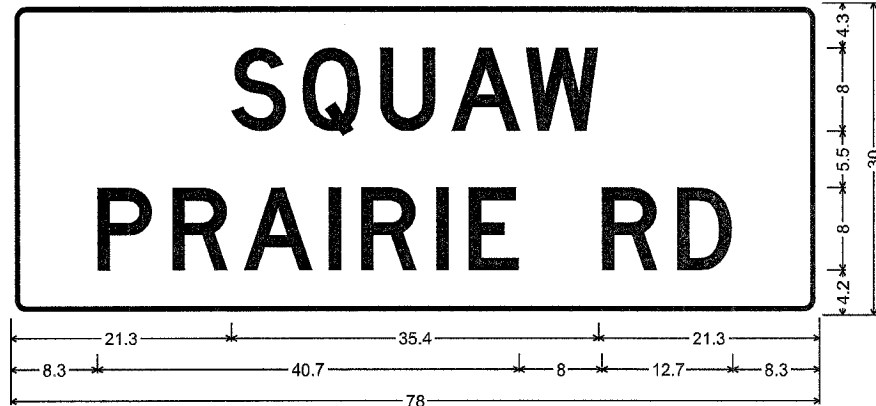


1.5" Radius, 0.5" Border, 0.4" Indent, White on Green;

[SQUAW] D; [PRAIRIE RD] D;

Table of letter and object lefts.

S	Q	U	A	W				
21.3	28.2	35.7	42.5	49.7				
P	R	A	I	R	I	E	R	D
8.3	15.6	22.5	30.7	33.8	41.0	44.2	57.0	64.3

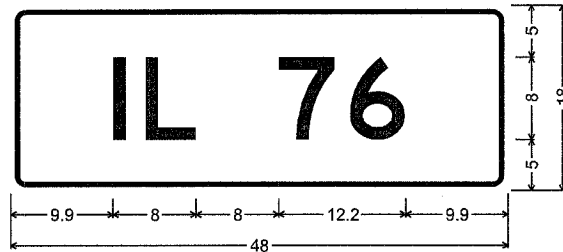

1.5" Radius, 0.5" Border, 0.4" Indent, White on Green;

[IL 76] D;

Table of letter and object lefts.

I	L	7	6
9.9	13.0	25.9	32.8

PLOT DATE = Fri Dec 08 11:59:11 2005  
 FILE NAME = c:\projects\12200105\480106\traf.dgn  
 USER = jplanning

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**F.A.P. ROUTE 754 (IL 76)**

**SECTION 101M&TS**

**BOONE COUNTY**

SCALE: VERT.      DRAWN BY  
 HORIZ.              CHECKED BY  
 DATE