
ROUTE NO.	SECTION	COUNTY		YOTAL SHEETS	SHEET NO.	SHEET NO. 7
FAS 55	*	WINNEBAGO		18	52	13 SHEETS
EED, BOAD, CLST, NO. 7		ILLINOIS	FED. ALO PROJECT-			


* (102 BR-1, 102 BR-2, 102 BR-3)D Contract # 64C93

- @ Roadway 18'-0'' 18'-0" 21'-0'' Stage II Removal East Abutment 15'-0'' Stage I Removal 15'-0'' Stage I Removal West Abutment 21'-0'' Stage II Removal

ELEVATION



SECTION A-A

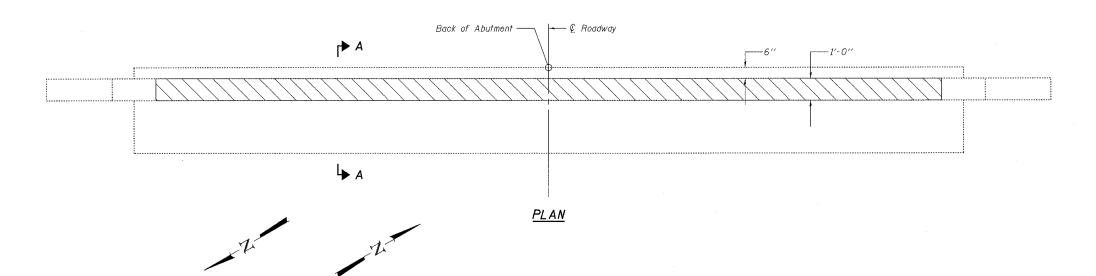

BILL OF MATERIAL

Item	Unit	Total
Concrete Removal	Cu. Yd.	5.1

<u>NOTES</u>

Care shall be taken not to damage existing approach slab during concrete removal.

Hatched areas indicate Concrete Removal.

Existing reinforcement extending into new construction shall be cut off flush except where shown on Typical Section Thru Abutments on sheet 8 of 13. Cost included with Concrete Removal.



200 West Front Street Wheaton, II 60187

CONCRETE REMOVAL

IL-70 OVER TRIBUTARY TO PECATONICA RIVER
FAS RTE 55

SECTION (102 BR-1, 102 BR-2, 102 BR-3)D
WINNEBAGO COUNTY

STATION 302+76.80 STRUCTURE NO. 101-0146

ILLINOIS DEPARTMENT OF TRANSPORTATION

DRAWN BY LCM CHECKED BY BLB DATE: 12/15/2006

East Abutment

West Abutment