

 ROUTE NO.	sec7ton	COUNTY		TOTAL SHEETS	BHEET NO.	SHEET NO. 7
FAS 55	*	WINNEBAGO		31	52	12 SHEETS
FED. RGAD DIST	NO. 7	ILLINOIS FED. AID PRO		JECT-		


* (102 BR-1, 102 BR-2, 102 BR-3)D

Contract # 64C93

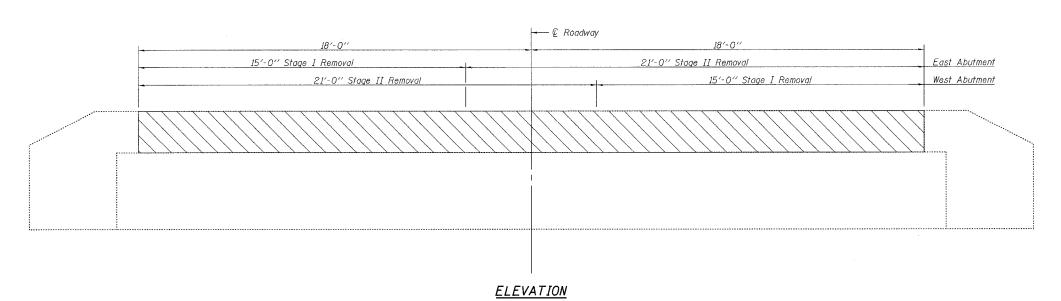



SECTION A-A

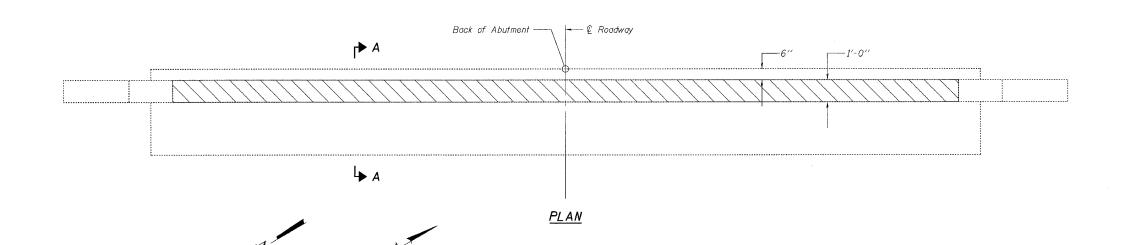

BILL OF MATERIAL

<i>Item</i>	Unit	Tota
Concrete Removal	Cu. Yd.	5.1

<u>NOTES</u>

Care shall be taken not to damage existing approach slab during concrete removal.

Hatched areas indicate Concrete Removal.
Existing reinforcement extending into new construction
shall be cut off flush except where shown on Typical Section
Thru Abutments on sheet 8 of 12. Cost included with
Concrete Removal.



200 West Front Street Wheaton, II 60187

ILLINOIS DEPARTMENT OF TRANSPORTATION CONCRETE REMOVAL
IL-70 OVER TRIBUTARY TO PECATONICA RIVER

FAS RTE 55
SECTION (102 BR-1, 102 BR-2, 102 BR-3)D
WINNEBAGO COUNTY STATION 308+27.00 STRUCTURE NO. 101-0147

DRAWN BY LCM CHECKED BY BLB DATE: 12/15/2006

East Abutment

West Abutment