CONTRACT NO. 76904

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
592	28BR-2,3	ST. CLAIR	51	6
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		



ALL THREE TIES ARE CUT "X" IN MAST ARM FOUNDATION

STA. 441+11.84
SET MAG NAIL

PAVEMENT MARKING SCHEDULE				CANAL NO. 1				HARDING DITCH			
				PAVEMENT		BRIDGE		PAVEMENT		BRIDGE	
STATION				WHITE LINE 4"	YELLOW SOLID LINE 4"	WHITE LINE 4"	YELLOW SOLID LINE 4"	WHITE LINE 4"	YELLOW SOLID LINE 4"	WHITE LINE 4"	YELLOW SOLID LINE 4"
427+06.34	TO	429+49.91	℄			488	488				
426+56.34	TO	427+06.34	RT/LT	100	100						
429+49.91	TO	429+99.91	RT/LT	100	100						
436+73.16	TO	437+90.56	℄							234	234
435+93.16	TO	436+73.16	RT/LT					160	160		
437+90.56	TO	438+70.56	RT/LT					160	160		
	TO										
			SUB TOTALS	200	200	488	488	320	320	234	234
			TOTAL	400		976		640		468	

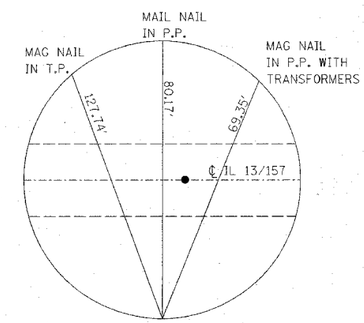

STA. 430+82.00
SET 1/2" I.P.

RESURFACING SCHEDULE					
			HOT MIX ASPHALT SURFACE COURSE SUPERPAVE MIX "D", N70	BITUMINOUS MATERIALS (PRIME COAT)	BITUMINOUS SHOULDERS SUPERPAVE
STATION	TO	STATION	TON	TON	TON
426+56.34	TO	427+06.34	11	.1	33
427+06.34	TO	429+49.91	11	.1	163
429+49.91	TO	429+99.91	11	.1	33
435+93.16	TO	436+43.16	11	.1	
438+40.56	TO	438+70.56	11	.1	
		TOTALS	55	.5	229

ROW MARKERS

STATION	OFFSET
431+75.00	49.69 LT
431+75.00	55.00 LT
430+12.01	75.74 LT
430+35.63	50.29 RT

LOCATION	EARTH EXCAVATION	EARTH EXCAVATION ADJUSTED FOR SHRINKAGE	EMBANKMENT	EARTHWORK BALANCE WASTE (+) OR SHORTAGE (-)
	CU. YD.	CU. YD.	CU. YD.	CU. YD.
STA 424+25 TO 431+35	30	22.5	12,860	-12,837.5

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TIE POINTS AND SCHEDULE
FAP ROUTE 592 (IL 13/157)
SECTION 28BR-2,3
ST CLAIR COUNTY

SCALE: VERT. HORIZ.
DATE
DRAWN BY
CHECKED BY

PLOT DATE = 12/14/2006
FILE NAME = c:\projects\ed04405\plan\pln04405a.dgn
PLOT SCALE = 50.0000 ' / IN.
USER NAME = alfordb