

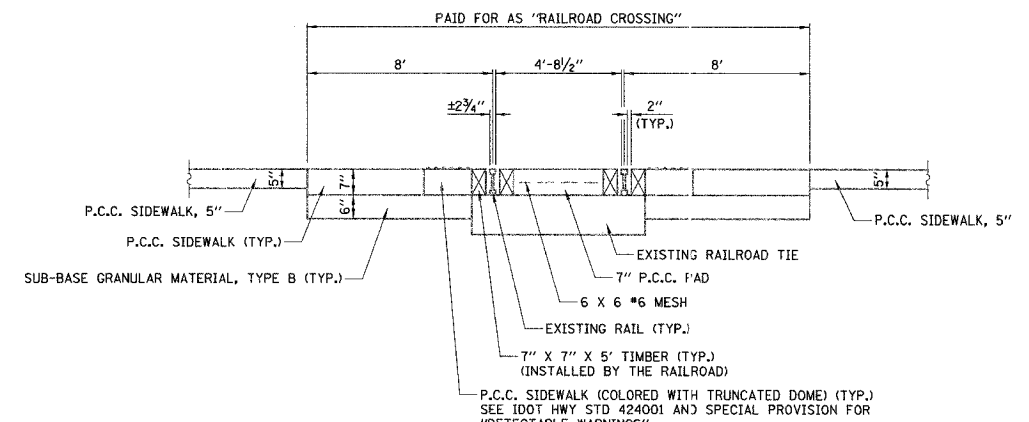


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1700	05-00045-02-PV	COOK/DUPAGE	103	62
DETAILS				
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT I-80035441				



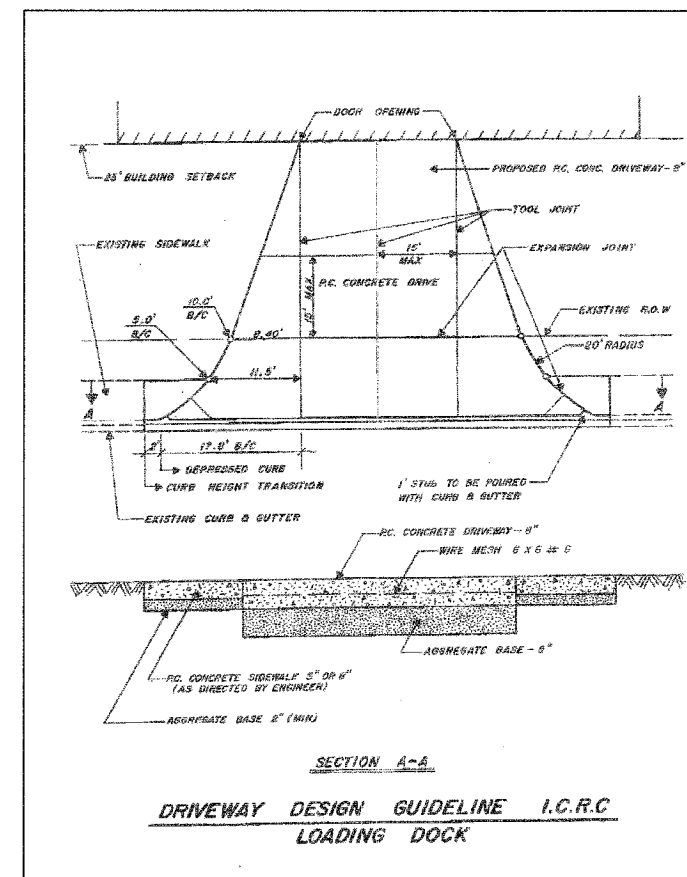


- NOTES:**
1. ALL SURFACES SHALL BE FLUSH WITH EXISTING RAILS.
  2. THE PAY ITEM "SIDEWALK RAILROAD CROSSING" SHALL INCLUDE THE CONSTRUCTION OF THE 7" P.C.C. PAD BETWEEN THE RAILS AND THE CONSTRUCTION OF THE 7" P.C.C. SIDEWALK, DETECTABLE WARNINGS, AND 6" SUB-BASE GRANULAR MATERIAL AS SHOWN ABOVE.
  3. ANY BALLAST REMOVAL REQUIRED TO CONSTRUCT THE RAILROAD CROSSING SHALL BE INCLUDED IN THE COST OF THE PAY ITEM "SIDEWALK RAILROAD CROSSING".
  4. ALL MATERIAL SHALL BE APPROVED BY THE ENGINEER PRIOR TO THEIR INSTALLATION.
  5. THE CONTRACTOR SHALL COORDINATE ALL CONSTRUCTION ACTIVITIES RELATED TO THE CONSTRUCTION OF THE RAILROAD CROSSING WITH THE CENTRAL ILLINOIS RAILROAD COMPANY.

**SIDEWALK RAILROAD CROSSING DETAIL**

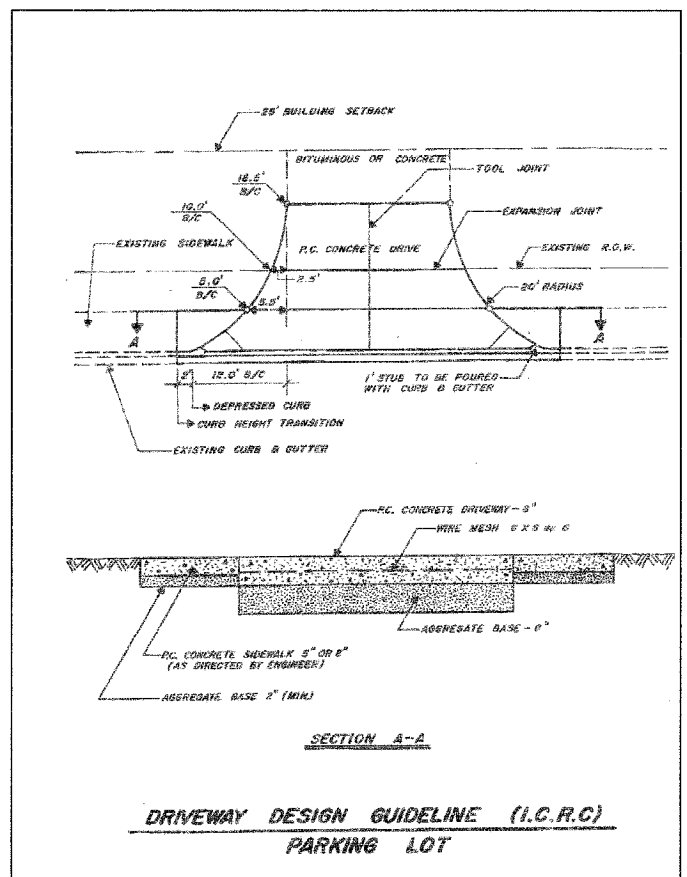

**ICRC DRIVEWAY DETAILS**

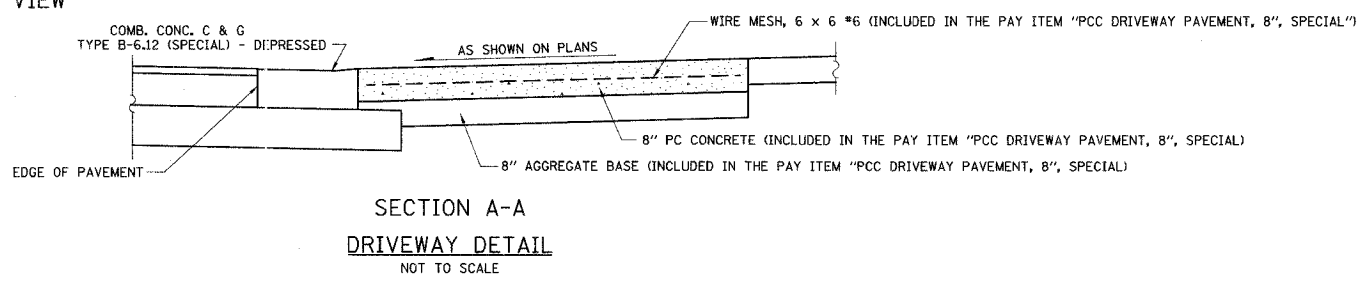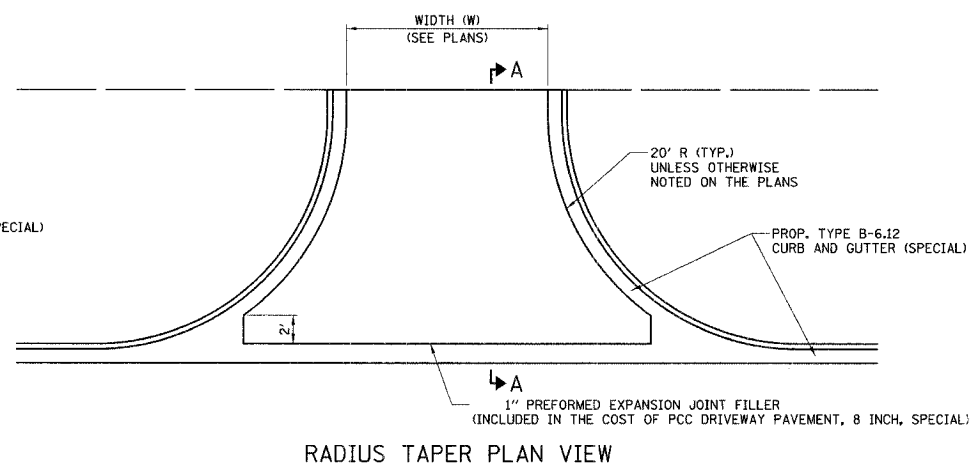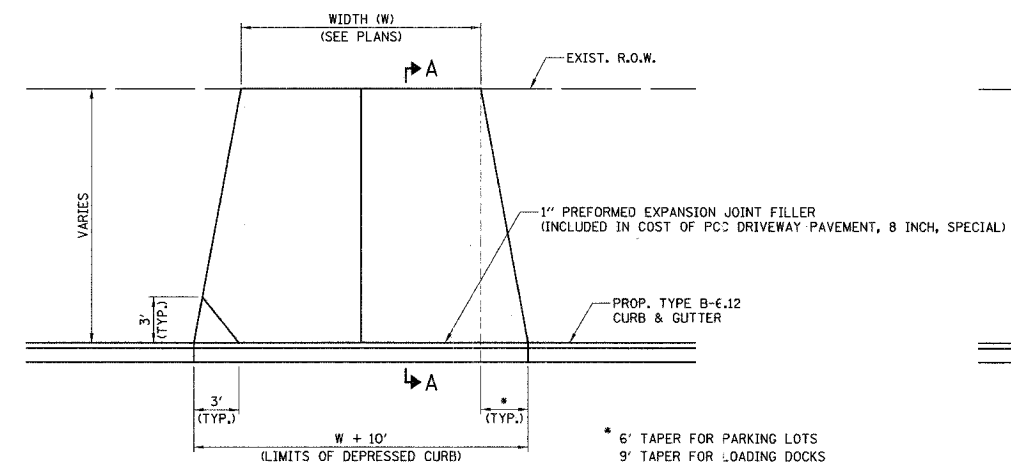

ILLINOIS DEPARTMENT OF TRANSPORTATION

**DETAILS**

DATE: 10/18/06  
DESIGNED BY: DJK  
CHECKED BY: JRV