

CALL J.U.L.I.E.
BEFORE DIGGING
800-892-0123

QC/QA BITUMINOUS
SUPERPAVE PROJECT

FAU 6793

ENGINEERING DIVISION
CITY OF GALESBURG, ILLINOIS

PLANS FOR PROPOSED NORTH BROAD STREET BRICK RECONSTRUCTION

FED PROJ # TE-00D4(097)

PROJECT LIMITS: NORTH BROAD STREET FROM LOSEY STREET TO FREMONT STREET

SECTION NUMBER: 06-00447-12-PV

T 11N, R 1E, S 10 OF THE 4th P.M.


SECTION #	TOTAL SHEETS	SHEET NO.
06-00447-12-PV	50	1

SUMMARY OF QUANTITIES

* SEE SHEET 2

HIGHWAY STANDARDS

STD. NO.	DESCRIPTION
000001-04	STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
424001-04	CURB RAMPS FOR SIDEWALKS
602301-01	INLET TYPE A
602306-01	INLET TYPE B
602401-01	MANHOLE TYPE A
602406-02	MANHOLE TYPE A 6' DIAMETER
602601-01	PRECAST REINF. CONC. FLAT SLAB TOP
604001-02	FRAMES & LIDS TYPE 1
604006-02	FRAME & GRATE TYPE 3
606001-03	COMB. CONC. CURB AND GUTTER
701606-04	URBAN LANE CLOSURE, MULTILINE, 2W WITH MOUNTABLE MEDIAN
701801-03	LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
702001-04	TRAFFIC CONTROL DEVICES
780001-01	TYPICAL PAVEMENT MARKINGS
886001	DETECTOR LOOP INSTALLATIONS
886006	TYPICAL LAYOUTS FOR DETECTION LOOPS
BLR 10-5	PCC PAVEMENT SPECIAL (NON-REINFORCED)

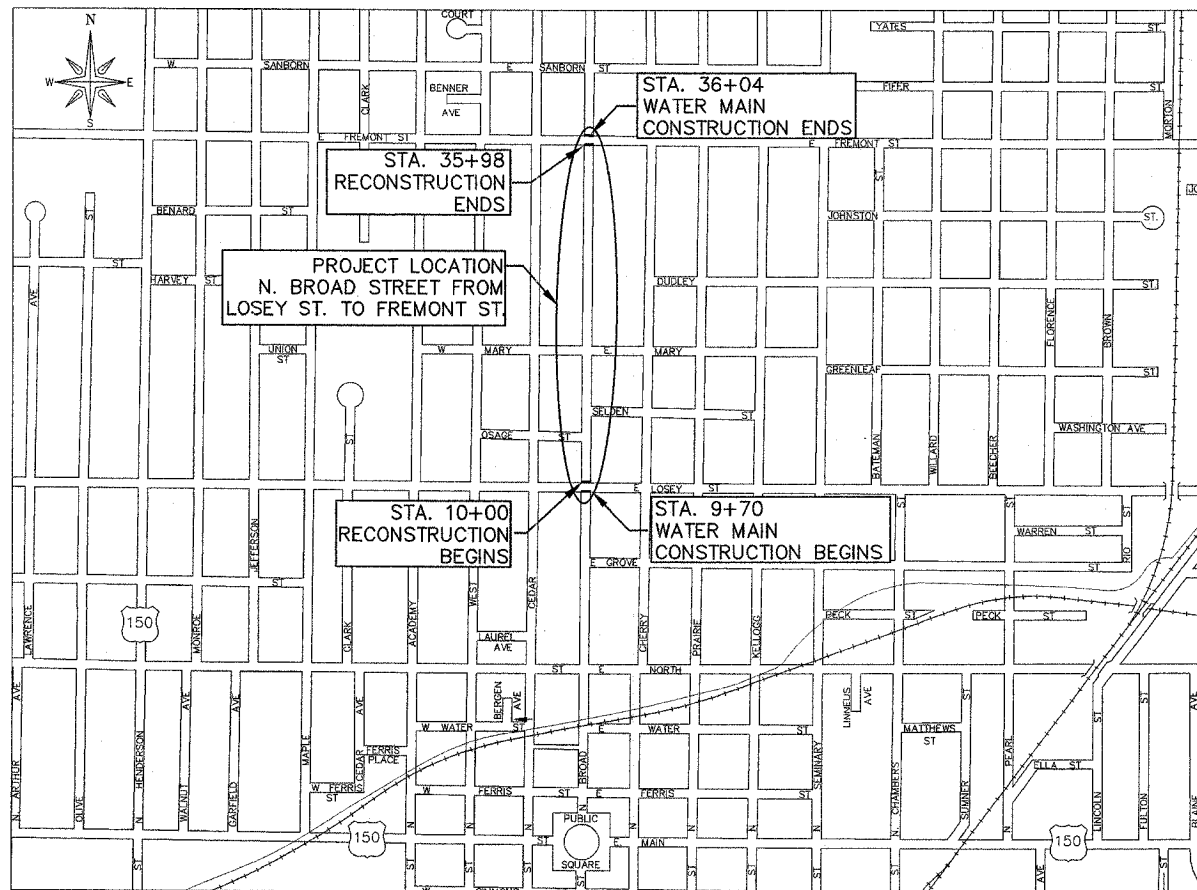

GENERAL LOCATION MAP
NOT TO SCALE

LENGTH OF PROJECT FOR WATER MAIN CONSTRUCTION = 2,634.0 FT = 0.499 MILE
LENGTH OF PROJECT FOR BRICK PAVEMENT RECONSTRUCTION = 2,598.0 FT = 0.492 MILE

PROJECT DESCRIPTION

THIS PROJECT INCLUDES REMOVAL OF THE EXISTING BRICK PAVEMENT ALONG WITH THE PCC BASE COURSE AND CURB AND GUTTER, AND REPLACEMENT WITH 18" CURB AND GUTTER, 4" TYPE B AGGREGATE SUBBASE, 8" PCC BASE COURSE, AND A BRICK WEARING SURFACE UTILIZING THE SALVAGED BRICK PAVERS. ALSO INCLUDED IN THIS PROJECT IS THE REPLACEMENT OF ALL DRIVEWAY APPROACHES, REPLACEMENT OF THE WATER MAIN AND LEAD WATER SERVICE LINES, INSTALLATION OF STORM SEWER AND LATERALS IN VARIOUS LOCATIONS, AND SIDEWALK REPLACEMENTS AS NEEDED.

INDEX OF SHEETS

SHEET 1	TITLE SHEET
SHEET 2	SUMMARY OF QUANTITIES
SHEET 3	SCHEDULE OF QUANTITIES, PAVEMENT DESIGN & BIT. MIX REQ'TS
SHEET 4	SCHEDULE OF QUANTITIES (CONT.)
SHEET 5	TYPICAL SECTIONS
SHEET 6	DETAILS
SHEETS 7-9	REMOVALS AND EXISTING UTILITIES
SHEETS 10-19	PLAN AND PROFILE SHEETS
SHEET 20	STRIPING DETAILS
SHEET 21	TRAFFIC CONTROL & STAGING
SHEETS 22-42	CROSS-SECTIONS
SHEET 43	WATER MAIN GENERAL NOTES
SHEETS 44-50	WATER MAIN PLANS



ENGINEERING DIVISION
CITY OF GALESBURG ILLINOIS

APPROVED WEC 2007

Wayne E. Carl
LOCAL AGENCY REPRESENTATIVE

PASSED 1/12 2007

John LaSalle
DISTRICT 4 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID
BASED ON LIMITED
REVIEW 1/12 2007

J.E. Ames
DEPUTY DIRECTOR OF HIGHWAYS, REGION 4 ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TITLE SHEET

N. BROAD ST. BRICK RECONSTRUCTION
SECTION # 06-00447-12-PV
FAU ROUTE 6793
FEDERAL PROJECT # TE-00D4(097)
JOB # C-94-029-07
CONTRACT # 89456



JOB # C-94-029-07
CONTRACT # 89456