

SUMMARY OF QUANTITIES


5000-2A

CODE NO.	ITEM	UNIT	TOTAL QUANTITY
20200100	EARTH EXCAVATION	CU YD	4,803
20800150	TRENCH BACKFILL	CU YD	440
21001000	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	SQ YD	1,330
25000100	SEEDING, CLASS 1	ACRE	1
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	90
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	90
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	90
25100630	EROSION CONTROL BLANKET	SQ YD	2,950
28000400	PERIMETER EROSION BARRIER	FOOT	1,300
31100100	SUB-BASE GRANULAR MATERIAL, TYPE A	TON	4,735
31102800	SUB-BASE GRANULAR MATERIAL (SPECIAL)	TON	4,210
40201000	AGGREGATE FOR TEMPORARY ACCESS	SQ YD	300
44000100	PAVEMENT REMOVAL	FOOT	8,790
44000500	COMBINATION CURB AND GUTTER REMOVAL	SQ FT	3,710
44003100	MEDIAN REMOVAL	SQ YD	18,460
44004250	PAVED SHOULDER REMOVAL	TON	4,550
48101200	AGGREGATE SHOULDERS, TYPE B	TON	450
48203100	HOT-MIX ASPHALT SHOULDERS	TON	2,085
54213445	END SECTIONS 10"	EACH	10
60100060	CONCRETE HEADWALL FOR PIPE DRAINS	EACH	8
60100085	GEOTECHNICAL FABRIC FOR FRENCH DRAINS	SQ YD	435
60107700	PIPE UNDERDRAINS 6"	FOOT	3,930
60107900	PIPE UNDERDRAINS 10"	FOOT	535
60108200	PIPE UNDERDRAINS 6" (SPECIAL)	FOOT	240
60255500	MANHOLES TO BE ADJUSTED	EACH	2
60618300	CONCRETE MEDIAN SURFACE, 4 INCH	SQ FT	17,200
60624600	CORRUGATED MEDIAN	SQ FT	1,060
* 63000000	STEEL PLATE BEAM GUARD RAIL, TYPE A	FOOT	225
63200310	GUARDRAIL REMOVAL	FOOT	350
66700205	PERMANENT SURVEY MARKERS, TYPE 1	EACH	2
67100100	MOBILIZATION	L SUM	1
70103700	TRAFFIC CONTROL COMPLETE	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	1,290
70300210	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	95
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	6,350
70300280	TEMPORARY PAVEMENT MARKING - LINE 24"	FOOT	410
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	430
* 78001100	PAINT PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	100
* 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	5,175
* 78001140	PAINT PAVEMENT MARKING - LINE 8"	FOOT	530
* 78001180	PAINT PAVEMENT MARKING - LINE 24"	FOOT	120
78300100	PAVEMENT MARKING REMOVAL	SQ FT	2,230
* 89000200	TEMPORARY TRAFFIC SIGNAL INSTALLATION	L SUM	1
Z0013798	CONSTRUCTION LAYOUT	L SUM	1
LR420033	PORTLAND CEMENT CONCRETE PAVEMENT 9" (SPECIAL)	SQ YD	8,850
* LR631020	TRAFFIC BARRIER TERMINAL, TYPE 1	EACH	2
X6064201	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.06	FOOT	3,710
XX006782	TEMPORARY HOT-MIX ASPHALT BASE COURSE, 8"	SQ YD	1,155


* SPECIALTY ITEMS

Added 2-28-07

LEGEND
EXISTING

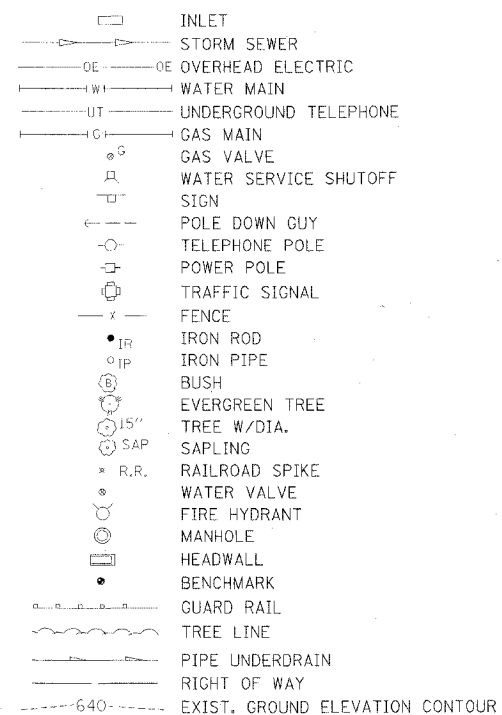

PROPOSED



McLEAN COUNTY, ILLINOIS
MFT SECTION 05-00046-12-RP

**SUMMARY OF QUANTITIES
& LEGEND**

DESIGNED BY MAL		FILE NO. 24-7687
CHECKED BY RGD		BOOK NO. 2416
DATE 12/06/06	2700 McGraw Drive Bloomington, Illinois 61704 800.999.9466 / Fax 800.999.1871	SHEET NO. 2 OF 32

PIPE UNDERDRAINS		
LOCATION	PIPE UNDERDRAINS 6" SPECIAL FOOT	CONCRETE HEADWALL FOR PIPE DRAINS EACH
WBL STA 40+33 LT.	25	1
WBL STA 44+50 LT.	33	1
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51		
WBL STA 55+85 LT.	29	1
WBL STA 62+50 LT.	24	1
EBL STA 40+33 RT.	25	1
EBL STA 44+50 RT.	28	1
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51		
EBL STA 55+94 RT.	51	1
EBL STA 62+48 RT.	25	1
TOTAL	240	8

PIPE UNDERDRAINS 6"	
LOCATION	FOOT
WBL STA 36+74.14 TO STA 42+36	562
WBL STA 44+50 TO STA 48+66.95	417
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
WBL STA 51+32.51 TO STA 55+85	453
WBL STA 57+13 TO STA 62+50	537
EBL STA 36+74.14 TO STA 42+76	602
EBL STA 44+50 TO STA 48+66.95	417
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
EBL STA 51+32.51 TO STA 55+94	461
EBL STA 57+67 TO STA 62+48	481
TOTAL	3930

GEOTECHNICAL FABRIC FOR FRENCH DRAINS	
LOCATION	SO.FT.
STA 40+25	88
STA 44+25	100
STA 55+50	95
STA 61+00	92
STA 63+90	60
TOTAL	435

PIPE UNDERDRAINS, 10"		
LOCATION	PIPE UNDERDRAINS 10" FOOT	END SECTIONS, 10" EACH
STA 40+25 - 56' LT TO 57' RT	108	2
STA 44+25 - 63' LT TO 60' RT	124	2
STA 55+50 - 66' LT TO 50' RT	117	2
STA 61+00 - 53' LT TO 59' RT	113	2
STA 63+90 - 35' LT TO 38' RT	73	2
TOTAL	535	10

MANHOLES TO BE ADJUSTED	
LOCATION	EACH
STA 51+50/30' LT.	1
STA 51+32.5/30' RT.	1
TOTAL	2

CONCRETE MEDIAN SURFACE, 4"	
LOCATION	SO. FT.
STA 38+81 TO STA 42+25	3440
STA 42+25 TO STA 43+33	1728
STA 43+33 TO STA 43+82.65	497
STA 44+42.81 TO STA 46+59.81	868
STA 46+59.81 TO STA 48+66.95	2072
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
STA 51+32.51 TO STA 53+39.58	2071
STA 53+39.58 TO STA 53+56.58	868
STA 56+17.03 TO STA 56+65.93	489
STA 56+65.93 TO STA 57+72	1697
STA 57+72 TO STA 61+19	3470
TOTAL	17200

CORRUGATED MEDIAN	
LOCATION	SO.FT.
STA 37+72 TO STA 38+81	491
STA 38+81 TO STA 39+00	39
STA 61+00 TO STA 61+19	39
STA 61+19 TO STA 62+28	491
TOTAL	1060

GUARDRAIL TABLE			
LOCATION	GUARDRAIL REMOVAL FOOT	STEEL PLATE BEAM GUARDRAIL, TYPE A FOOT	TRAFFIC BARRIER TERMINAL, TYPE 1 EACH
NE QUADRANT	87	112.5	1
NW QUADRANT	101		
SE QUADRANT	75		
SW QUADRANT	87	112.5	1
TOTAL	350	225	2

PERMANENT SURVEY MARKERS, TYPE 1	
LOCATION	EACH
P.O.T. STA 48+00	1
P.O.T. STA 52+00	1
TOTAL	2

TEMPORARY TRAFFIC SIGNALS	
LOCATION	L SUM
EBL 42+20/RT.	0.125
EBL 44+35/RT.	0.125
EBL 56+00/RT.	0.125
EBL 56+90/RT.	0.125
WBL 43+05/LT.	0.125
WBL 43+55/LT.	0.125
WBL 56+00/LT.	0.125
WBL 57+50/LT.	0.125
TOTAL	1

PAINT PAVEMENT MARKING - LETTERS & SYMBOLS	
LOCATION	SO.FT.
WBL LTL STA 44+62 LEFT TURN ARROW	15.6
WBL LTL STA 45+54 LEFT TURN ARROW	15.6
WBL LTL STA 46+45 LEFT TURN ARROW	15.6
EBL LTL STA 53+65 LEFT TURN ARROW	15.6
EBL LTL STA 54+52 LEFT TURN ARROW	15.6
EBL LTL STA 55+38 LEFT TURN ARROW	15.6
TOTAL	93.6

PAINT PAVEMENT MARKING - LINE 4"	
LOCATION	FOOT
WBL STA 36+74.14 TO STA 42+36	562
WBL STA 44+12 TO STA 48+66.95	456
WBL STA 51+32.51 TO STA 55+85	453
WBL STA 57+13 TO STA 63+99.57	688
EBL STA 36+74.14 TO STA 42+76	602
EBL STA 44+17 TO STA 48+66.95	451
EBL STA 51+32.51 TO STA 55+94	462
EBL STA 57+67 TO STA 62+48	482
CENTERLINE STA 36+74.14 TO STA 38+83 (WBL)	210
CENTERLINE STA 36+74.14 TO STA 39+00 (EBL)	225
CENTERLINE STA 61+00 TO STA 63+99.57 (WBL)	300
CENTERLINE STA 61+17 TO STA 63+99.57 (EBL)	284
TOTAL	5175

PAINT PAVEMENT MARKING - LINE 8"	
STATION TO STATION	FOOT
WBL STA 44+62 TO STA 46+65	224
WBL STA 46+65 TO STA 48+45	46
EBL STA 53+45 TO STA 55+58	214
EBL STA 57+65 TO STA 53+45	46
TOTAL	350


PAINT PAVEMENT MARKING-LINE 24"	
LOCATION	FOOT
WBL I-55 SBL EXIT RAMP STA 43+30	58
EBL I-55 NBL EXIT RAMP STA 56+74	62
TOTAL	120

PC CONCRETE PAVEMENT 9" (SPECIAL)	
LOCATION	SO.YD.
WBL STA 36+74.14 TO STA 48+66.95	1856
WBL STA 43+32.59 TO STA 43+79.65	32
WBL STA 43+79.65 TO STA 46+59.81	374
WBL STA 46+59.81 TO STA 48+66.95	138
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
WBL STA 51+32.51 TO STA 61+18	1533
WBL STA 61+18 TO STA 62+28	177
WBL STA 62+28 TO STA 63+99.57	277
EBL STA 36+74.14 TO STA 37+72	158
EBL STA 37+72 TO STA 38+81	176
EBL STA 38+81 TO STA 41+00	341
EBL STA 41+00 TO STA 48+66.95	1193
EBL STA 43+82.65 TO STA 44+42.81	40
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
EBL STA 51+32.51 TO STA 63+99.57	1971
EBL STA 51+32.51 TO STA 53+39.58	138
EBL STA 53+39.58 TO STA 56+20.03	374
EBL STA 56+20.03 TO STA 56+65.93	31
EBL STA 53+56.58 TO STA 56+18.03	41
TOTAL	8850

COMBINATION CONCRETE CURB & GUTTER, TYPE M-4.06	
STATION TO STATION	FOOT
STA 38+81 TO STA 43+82.65	1005
STA 44+42.81 TO STA 48+66.95	850
BRIDGE OMISSION STA 48+66.95 TO STA 51+32.51	
STA 51+32.51 TO STA 55+56.58	850
STA 56+17.03 TO STA 61+19	1005
TOTAL	3710

McLEAN COUNTY, ILLINOIS
MFT SECTION 05-00046-12-RP

SCHEDULE OF QUANTITIES

DRAWN BY JJ		FILE NO. 24-7687
DATE 12/06/06		BOOK NO. 2416
CHECKED BY RGD		SHEET NO. 6 OF 32

3700 Weber Drive
Stoughton, Illinois 61784
309.889-8456 / Fax 309.889-1671