


Removal of Unsuitable Material
 Undercut Limits - 15' LT to 15' RT
 Undercut Depth - 5'
 Undercut Width - 19' (proposed culvert
 outside width = 9' + 5' on either side))

US 150 CL 214+10.76 =
 CULVERT CL 0+33.91
 CULVERT SKEW = 28 DEG

Type 1 Tan Spl LT 212+67.5 to LT 213+17.5
 SPBGR LT 213+17.5 to LT 215+17.5
 Type 1 Tan Spl LT 215+17.5 to LT 215+67.5

Type 1 Tan Spl RT 212+72.5 to RT 213+22.5
 SPBGR RT 213+22.5 to RT 215+47.5
 Type 1 Tan Spl RT 215+47.5 to RT 215+97.5

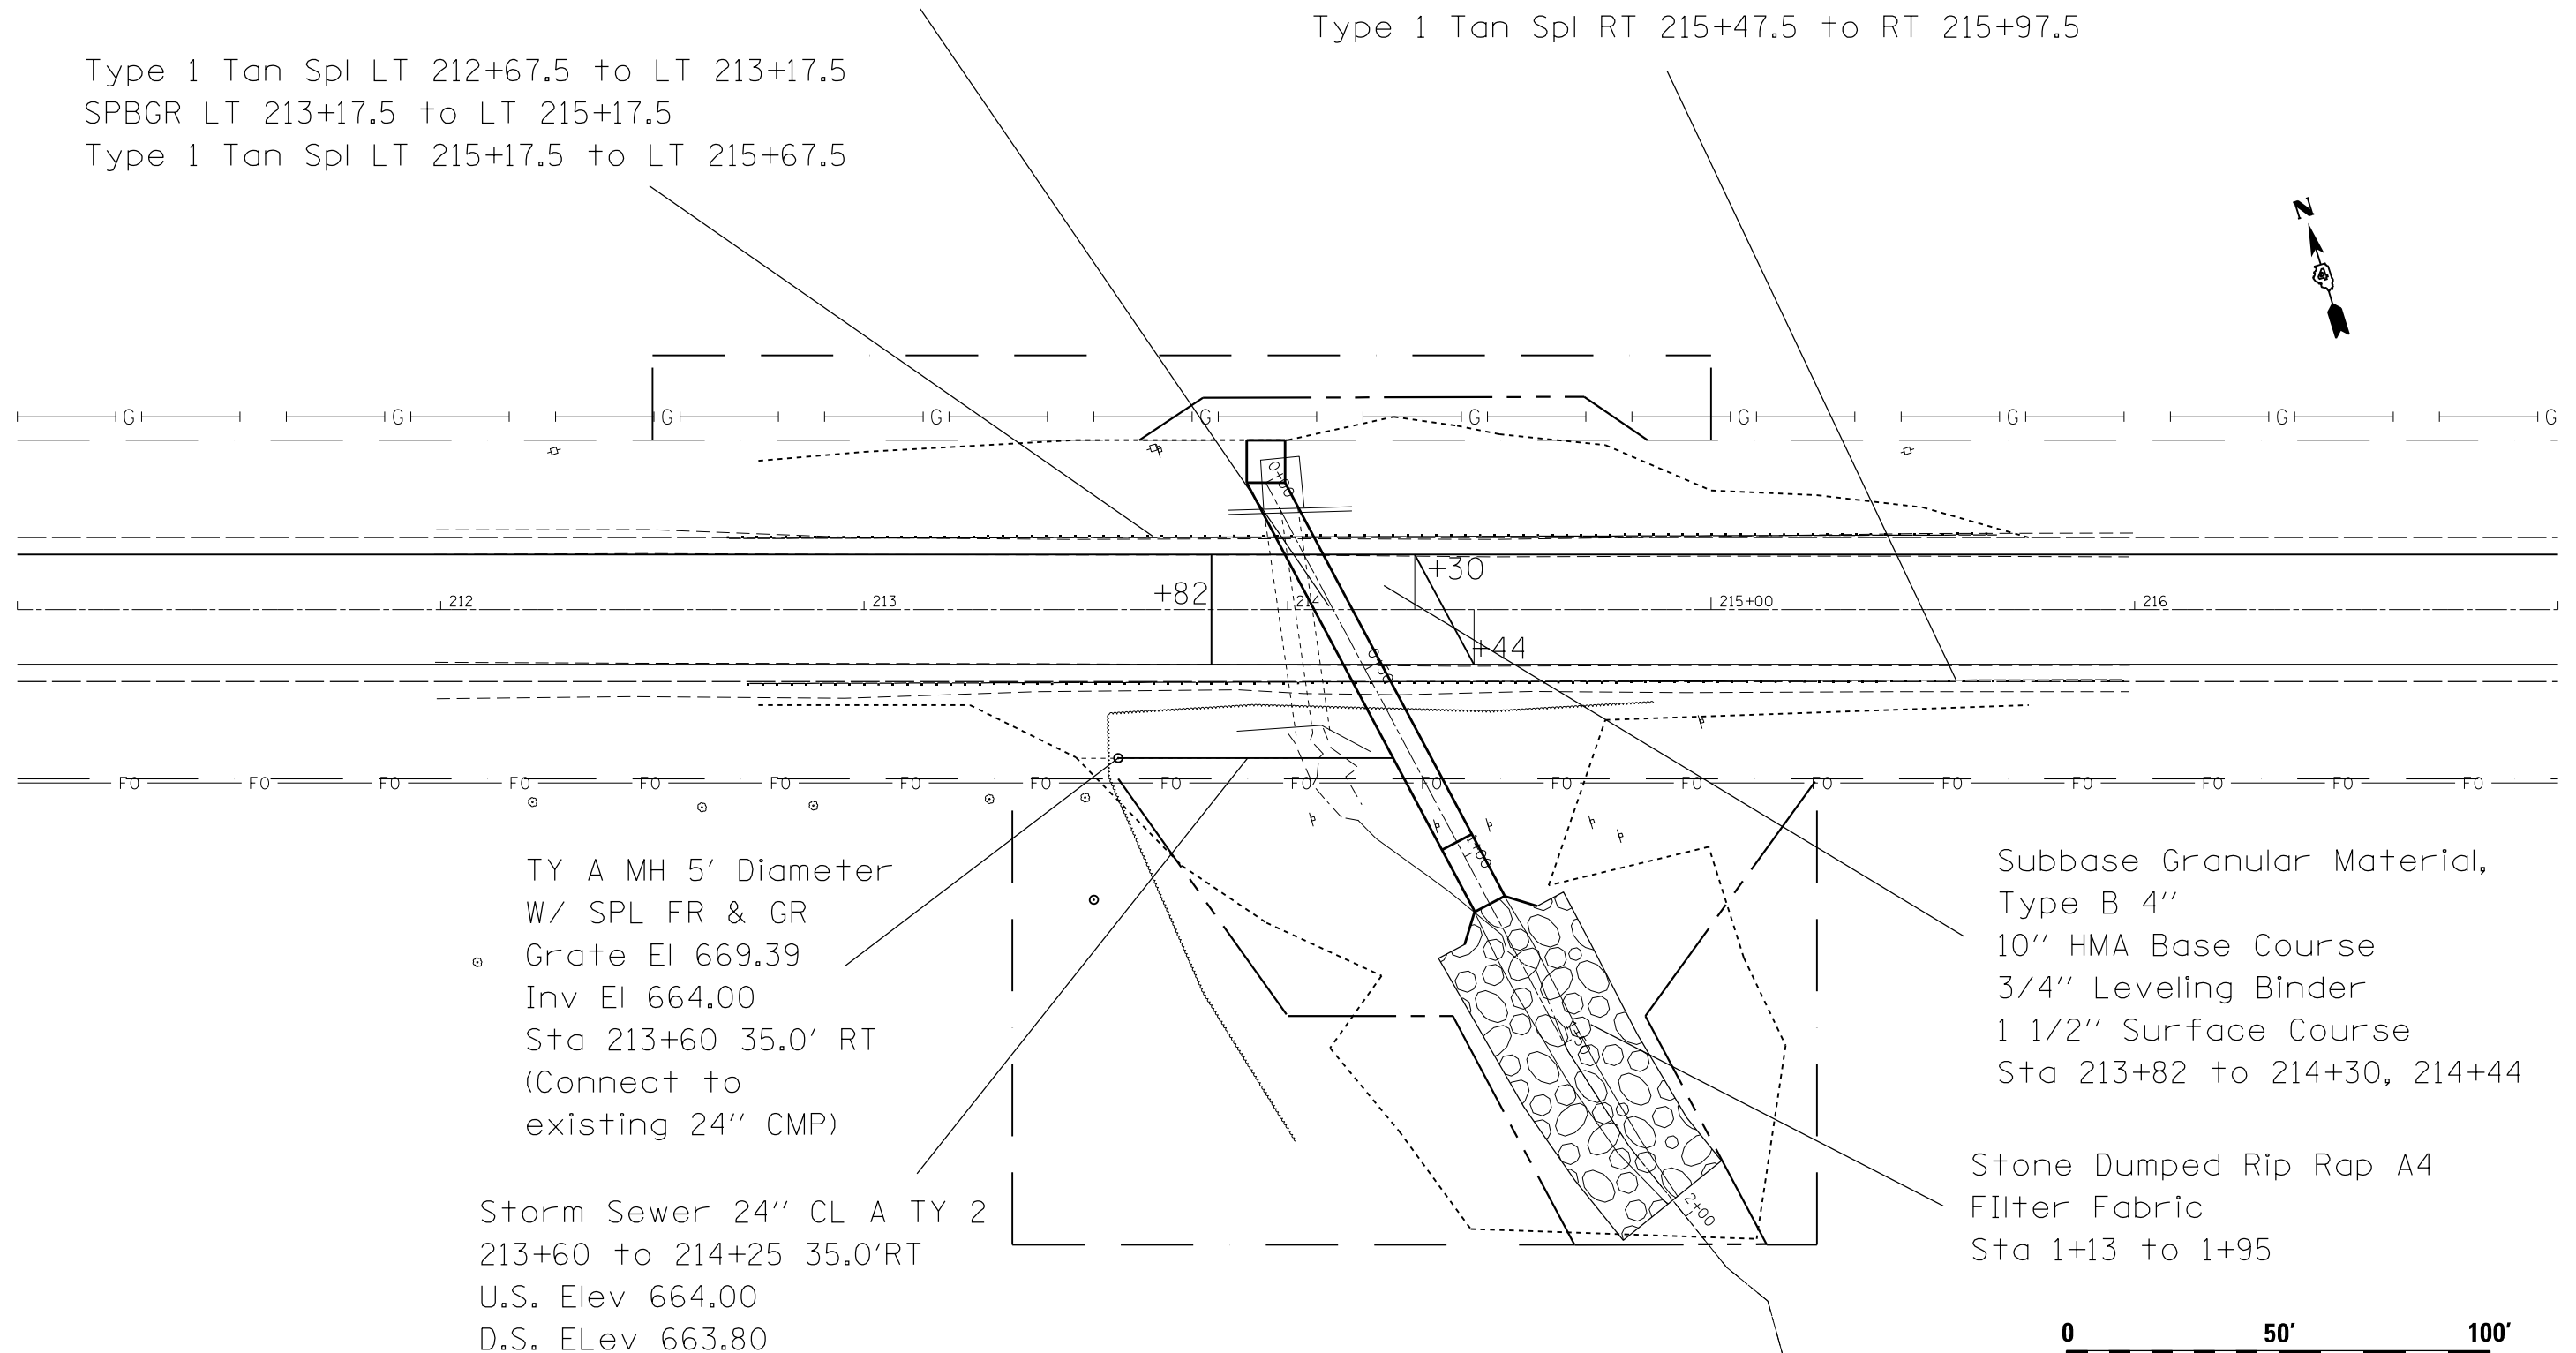

TY A MH 5' Diameter
 W/ SPL FR & GR
 Grate El 669.39
 Inv El 664.00
 Sta 213+60 35.0' RT
 (Connect to
 existing 24" CMP)

Subbase Granular Material,
 Type B 4"
 10" HMA Base Course
 3/4" Leveling Binder
 1 1/2" Surface Course
 Sta 213+82 to 214+30, 214+44

Storm Sewer 24" CL A TY 2
 213+60 to 214+25 35.0' RT
 U.S. Elev 664.00
 D.S. Elev 663.80

Stone Dumped Rip Rap A4
 Filter Fabric
 Sta 1+13 to 1+95



FILE NAME	USER NAME	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

Proposed Items

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2402	.	PEORIA	76	28
CONTRACT NO. 68614				

ILLINOIS FED. AID PROJECT

(110,111,112,113)RS-3; 114RS-4; 112C-2