



PLAN


(EXISTING LONG TERM TRANSVERSE CONSTRUCTION JOINT)

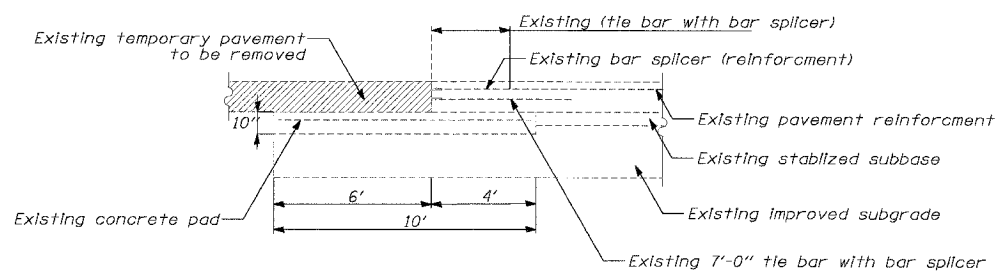

LONG TERM TRANSVERSE CONSTRUCTION JOINT SECTION A-A

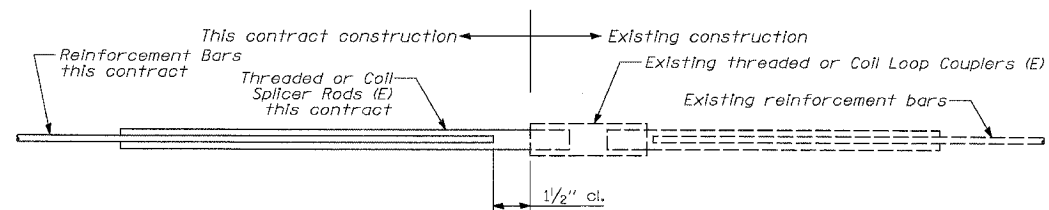


BAR SPLICER ASSEMBLY DETAIL
(E) : Indicates epoxy coating.

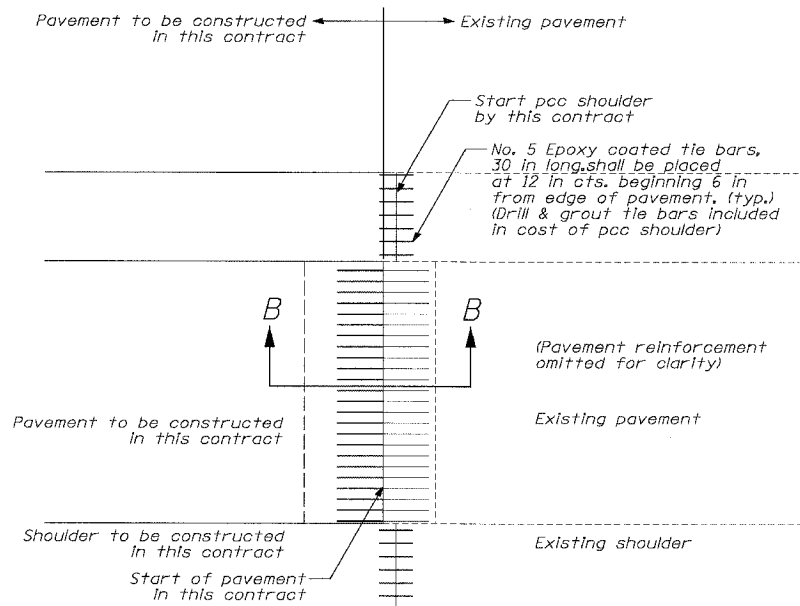

PLAN

(CONNECTION TO EXISTING LONG TERM TRANSVERSE CONSTRUCTION JOINT)

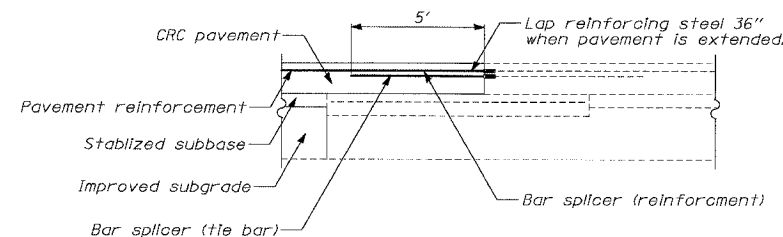

LONG TERM TRANSVERSE CONSTRUCTION JOINT SECTION B-B



ROLLED THREAD DOWEL BAR

NOTES

- This detail shows connection of proposed CRC pavement to existing pavement at an existing long term transverse construction joint.
- Bar splicer assemblies shall be of an IDOT approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.
- Bar splicers shall be of the "coupler" type, and shall not have flanges.
- Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length.
- All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars.
- Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.
- Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:
 - Minimum Capacity (Tension in ksi) = $1.25 \times f_y \times A(t)$
 - Minimum Pull-out Strength (Tension in ksi) = $1.25 \times f_s(\text{allow}) \times A(t)$
 Where:
 f_y = Yield strength of lapped reinforcement bars in ksi.
 $f_s(\text{allow})$ = Allowable tensile stress in lapped reinforcement bars in ksi (Service Load)
 $A(t)$ = Tensile stress area of lapped reinforcement bars (in^2).
 * = 28 day concrete

BAR SPLICER ASSEMBLIES			
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	STRENGTH REQUIREMENTS	
		Min. Capacity (kips) tension	Min. Pull-Out Strength (kips) tension
#5	2'-0"	23.0	9.2
#6	2'-7"	33.1	13.3
#7	3'-5"	45.1	18.0
#8	4'-6"	58.9	23.6
#9	5'-9"	75.0	30.0

- Bar splicer assemblies shall be according to Section 508 of the Standard Specifications, except as noted.
- Reinforcement shall not be paid for separately but included in the cost of CONTINUOUSLY REINFORCED PORTLAND CEMENT PAVEMENT, of the thickness specified.
- Connection to long term transverse construction joint work includes the installation of the bar splicers, payment for this work will be included in the cost of CONTINUOUSLY REINFORCED PORTLAND CEMENT PAVEMENT of the thickness specified. Tie bars to be drilled and grouted shall not be paid for separately but included in the cost of PORTLAND CEMENT CONCRETE SHOULDERS, of the thickness specified.

I:\030019\035\Con 148\5\CADD\A\4001-2.dwg
 06/24/2005 01:30:30 PM