


SIGN SCHEDULE

ALIGNMENT	STATION	LOCATION	SIGN CODE	DESCRIPTION	PANEL WIDTH W	PANEL DEPTH H	WOOD SIGN SUPPORT	SIGN PANEL TYPE 1	SIGN PANEL TYPE 2	SIGN PANEL TYPE 3	STEEL SIGN SUPPORT - BREAKAWAY							
											STUB POST LENGTH	POST 1 LENGTH P1	POST 2 LENGTH P2	WIDE FLANGE SIZE FOR STEEL POST	REINFORCEMENT BARS, EPOXY COATED	STRUCTURAL STEEL SIGN SUPPORT - BREAKAWAY	CONCRETE FOUNDATION	
							73000100	72000100	72000200	72000300					50800205	72700100	73400100	
					FEET	FEET	FOOT	SQ.FT	SQ.FT	SQ.FT	FEET	LF	LF		POUND	POUND	CU. YD	
US 20	467+00	WB RT	WARNING	W6-1	4	4	20	-	16	-				-	-	-	-	
	471+75	EB LT	REGULATORY	R4-7	3	4	20	-	12	-				-	-	-	-	
	471+75	EB RT	REGULATORY	R5-1	4	4	20	-	16	-				-	-	-	-	
	485+00	WB RT	WARNING	W4-2R	4	4	20	-	16	-				-	-	-	-	
	490+00	WB RT	WARNING	W9-1	4	4	20	-	16	-				-	-	-	-	
	529+80	WB RT	WARNING	W9-1	4	4	20	-	16	-				-	-	-	-	-
				W16-3a	3	1	-	3	-	-				-	-	-	-	-
	596+00	EB RT	SERVICE	"ATTRACTIONS"	20	10	-	-	-	200.0	3.5	28.5	31.5	W14X38	244	2280	4.18	
	604+00	EB RT	SERVICE	"LODGING"	20	10	-	-	-	200.0	3.5	30.7	35.8	W14X38	244	2527	4.18	
	612+00	EB RT	SERVICE	"FOOD"	20	10	-	-	-	200.0	3	27.1	23.6	W14X30	226	1521	3.8	
620+00	EB RT	GUIDE	"IL 26 Freeport Monroe 1 mtle"	11.5	12.5	-	-	-	143.75	3.5	31.7	37.3	W14X38	244	2622	4.18		
625+00	WB RT	GUIDE	"Illnois 72 11 Stockton 20 Galena 47"	14	7.5	-	-	-	105.0	3	24.6	26.4	W10X22	184	1122	2.36		
628+00	EB RT	SERVICE	"GAS"	15	10	-	-	-	150.0	3.5	20.5	33.4	W14X38	244	2048.2	4.18		
US20 EB EXIT RAMP		EB EXIT RAMP	SERVICE	"ATTRACTIONS"	10.5	8	-	-	-	84.0	2.5	24.5	24.5	W8X18	156	882	1.4	
US20 EB EXIT RAMP		EB EXIT RAMP	SERVICE	"LODGING"	10.5	8	-	-	-	84.0	2.5	24.5	24.5	W8X18	156	882	1.4	
US20 EB EXIT RAMP		EB EXIT RAMP	SERVICE	"FOOD"	10.5	8	-	-	-	84.0	2.5	24.5	24.5	W8X18	156	882	1.4	
US20 EB EXIT RAMP		EB EXIT RAMP	SERVICE	"GAS"	10.5	8	-	-	-	84.0	2.5	24.5	24.5	W8X18	156	882	1.4	
TOTAL:							120	3	92	1334.75				2010	15648.2	28.5		

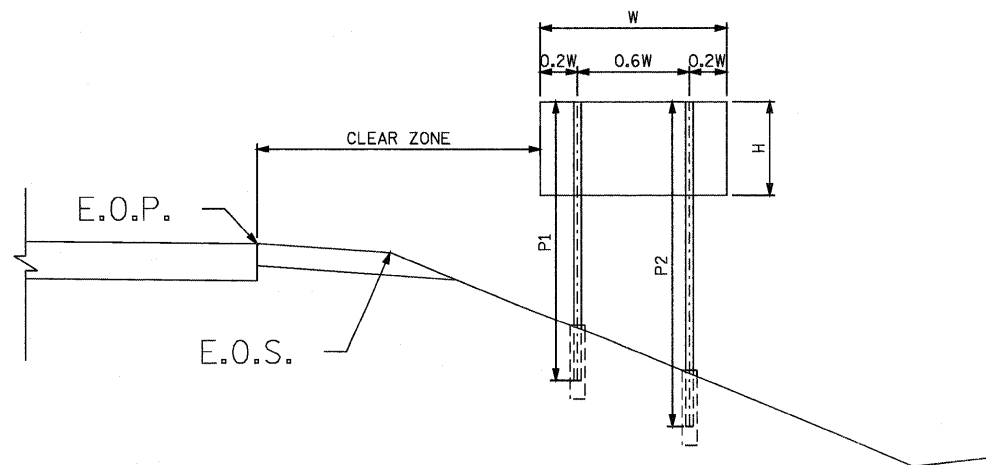

**PARSONS
BRINCKERHOFF**
380 West Monroe St., Suite 900
Chicago, IL 60604, (312) 781-5150

USER NAME = MMS	DESIGNED - MS	REVISED -
DRAWN - MS	CHECKED - RH	REVISED -
PLOT SCALE = 50.0000' / 1" IN.	DATE - 12/02/2011	REVISED -
PLOT DATE = 9/28/11		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SIGN SCHEDULE

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
301	177-2-1	STEPHENSON	211	94
FINAL SUBMITTAL				CONTRACT NO. 64860
[ILLINOIS] FED. AID PROJECT P-92-014-03				