

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 9 47 SHEETS
FAP 301	177-2	STEPHENSON	211	96	
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT			



NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+39.36	-34.42	774.25
A	536+49.36	-34.42	774.38
B	536+59.57	-34.00	774.51
E. End of West Appr. Slab	536+69.57	-34.00	774.64

NORTH EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+44.78	-24.00	774.54
A	536+54.78	-24.00	774.66
B	536+64.78	-24.00	774.79
E. End of West Appr. Slab	536+74.78	-24.00	774.91

℄ ROADWAY (WB)

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+51.03	-12.00	774.80
A	536+61.03	-12.00	774.93
B	536+71.03	-12.00	775.05
E. End of West Appr. Slab	536+81.03	-12.00	775.18

SOUTH EDGE OF PAVEMENT & P.G. (WB)

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+57.27	0.00	774.69
A	536+67.27	0.00	774.82
B	536+77.27	0.00	774.94
E. End of West Appr. Slab	536+87.27	0.00	775.07

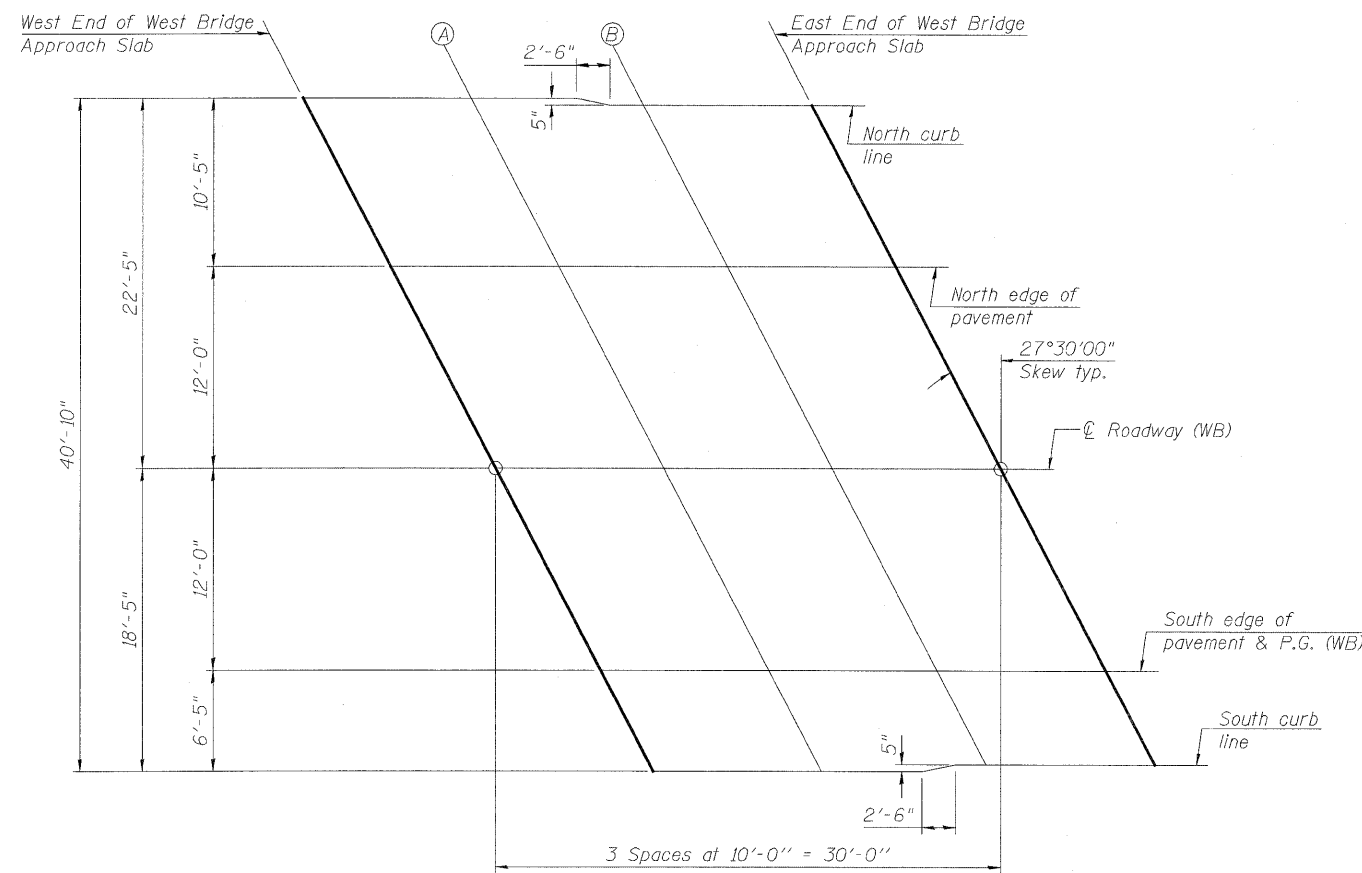

PLAN

(West Bridge Approach Slab)

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+60.64	6.42	774.60
A	536+70.64	6.42	774.73
B	536+80.42	6.00	774.86
E. End of West Appr. Slab	536+90.42	6.00	774.98

DESIGNED	H.ALKHATIB
CHECKED	S.CHELBIAN
DRAWN	H.ALKHATIB
CHECKED	J.GRAINAWI

PARSONS BRINCKERHOFF
280 West Monroe St.
Suite 900
Chicago, IL 60606
(312) 782-8160

**TOP OF WEST APPROACH
SLAB ELEVATIONS
F.A.P. ROUTE 301 SECTION 177-2B-1
STEPHENSON COUNTY
STATION 540+65.71
STRUCTURE NO. 089-0082**

CONTRACT 64860