

EXISTING LEGEND

- ① EXISTING CONCRETE PAVEMENT, 9'-6'-9"
- ② EXISTING BITUMINOUS OVERLAY (SEE TABLE 1)
- ③ EXISTING LEVELING BINDER (MACHINE METHOD), MIXTURE 'C', 1"
- ③A EXISTING LEVELING BINDER (MACHINE METHOD), MIXTURE 'C', 2"
- ④ EXISTING BITUMINOUS CONCRETE SURFACE COURSE, MIXTURE 'D' (1 1/2")
- ⑤ EXISTING BITUMINOUS CONCRETE BASE COURSE WIDENING 9"
- ⑥ EXISTING BITUMINOUS SHOULDERS, 8"
- ⑦ EXISTING CONCRETE GUTTER, TYPE A
- ⑧ EXISTING AGGREGATE SHOULDERS


STA 759+20 TO STA 801+45
 STA 806+54 TO STA 870+72
 STA 873+00 TO STA 1030+41

LIMITS FOR ③A
 STA 757+00 TO 765+00
 STA 820+00 TO 855+00

STA EQU: 773+28.93(BK) = 773+37+00(AH)
 STA EQU: 930+11.66(BK) = 930+20.00(AH)

PROPOSED LEGEND

- ⑨ PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH
- ⑩ PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX C, N50, 1 1/2"
- ⑪ PROPOSED LEVELING BINDER (MACHINE METHOD), N50, 3/4"
- ⑫ PROPOSED PAVEMENT MARKING LINE - 5"
- ⑬ PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B
- ⑭ PROPOSED HMA SHOULDERS, 6 1/2"
- ⑮ PROPOSED EXCAVATING & GRADING SHOULDERS

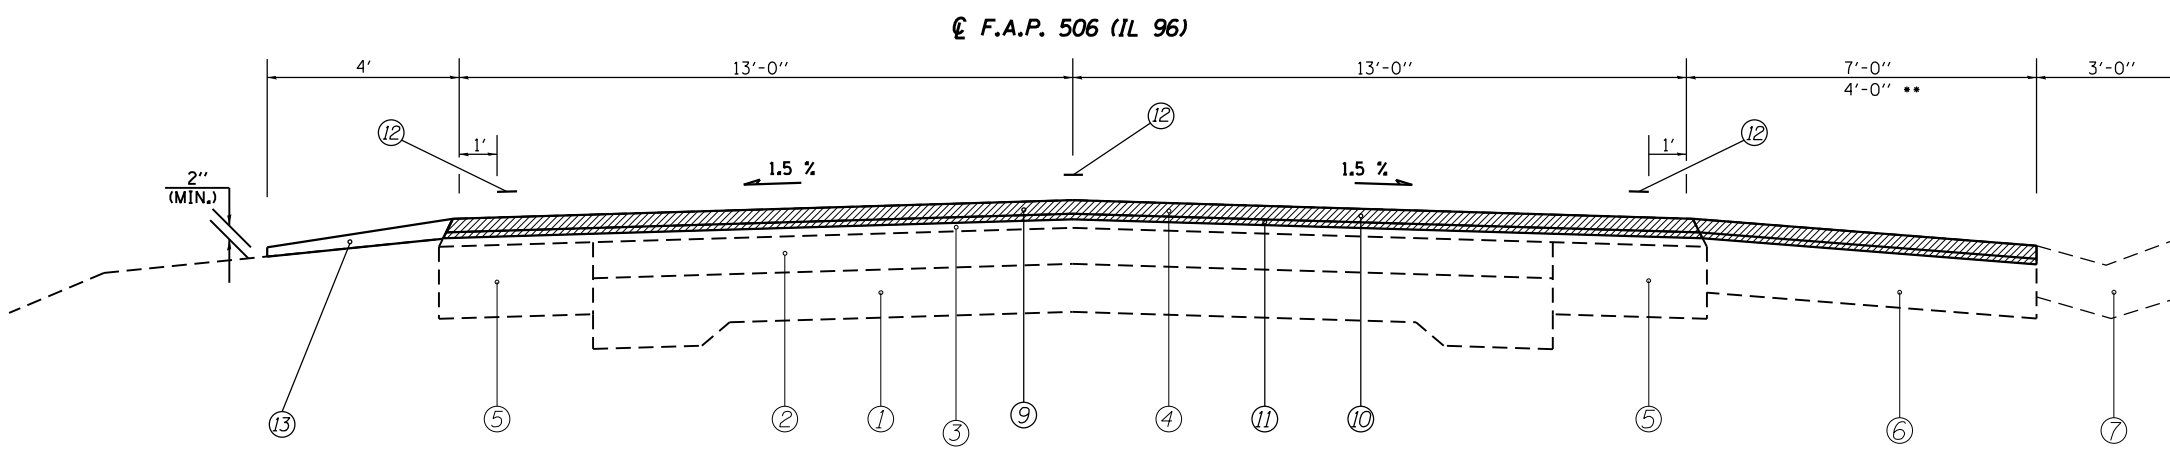


STA 801+45 TO STA 806+54 RT **
 STA 870+80 TO STA 872+78 RT
 STA 1030+41 TO STA 1031+78 LT

2 1/4" MILLING THROUGH GUTTER SECTIONS

PIPE UNDERDRAINS,
 FABRIC LINED TRENCH, 4"
 (PERFORATED)

| STA TO STA | THICKNESS |
|-------------------|------------|
| 743+50 - 861+00 | 2.5" |
| 861+00 - 914+00 | 2.5" TO 3" |
| 914+00 - 918+00 | 3" TO 4" |
| 918+00 - 1014+00 | 4" TO 5" |
| 1014+00 - 1020+00 | 5" TO 6" |
| 1020+00 - 1033+00 | 6" TO 5" |
| 1030+00 - 1037+00 | 5" TO 2.5" |
| 1037+00 - 1041+00 | 2.5" |

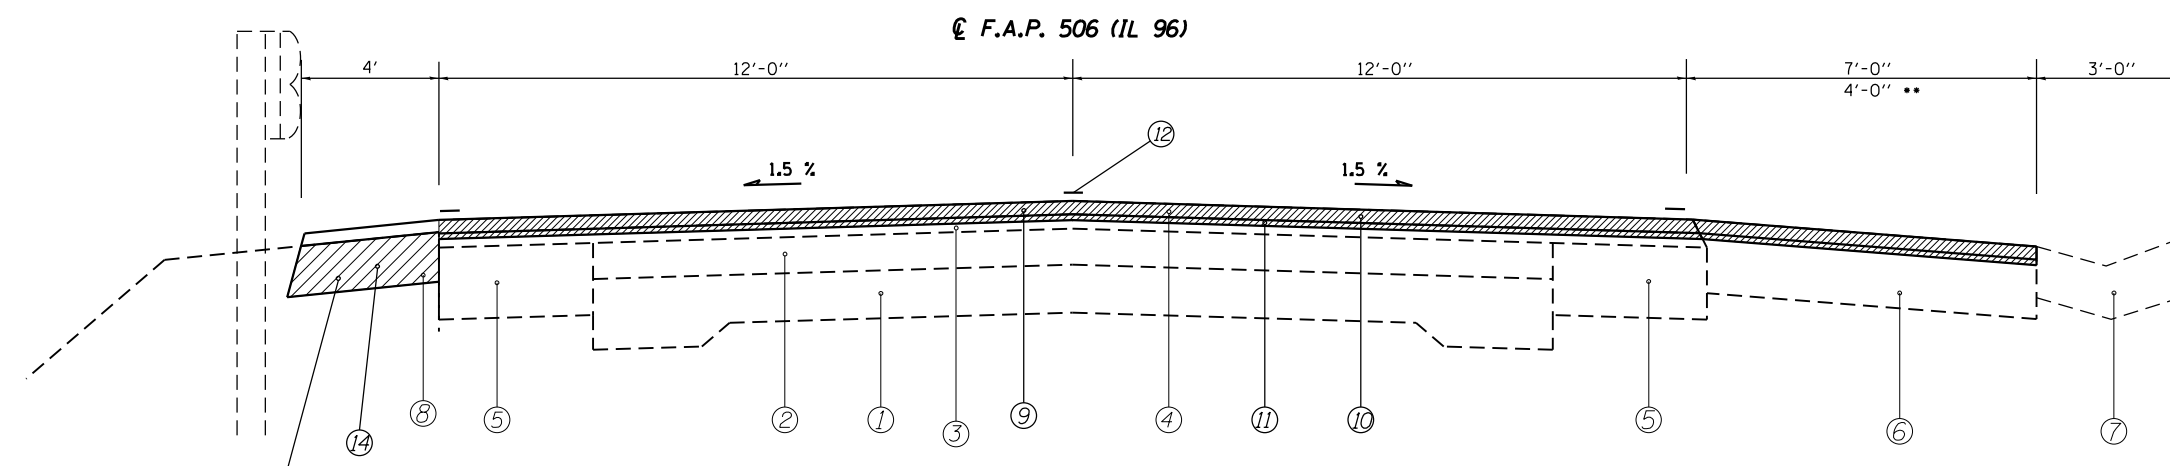

STA 1031+78 TO 1032+81 RT
 2 1/4" MILLING THROUGH GUTTER SECTIONS

PIPE UNDERDRAINS,
 FABRIC LINED TRENCH, 4"
 (PERFORATED)