


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2004-120-BB	COOK	29	11
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		


"TOP OF ORIGINAL DECK"
AS REFERRED TO IN SPECIAL
PROVISION "DECK SLAB REPAIR"

COST OF BITUMINOUS REMOVAL INCLUDED
IN THE COST OF DECK SLAB REPAIR

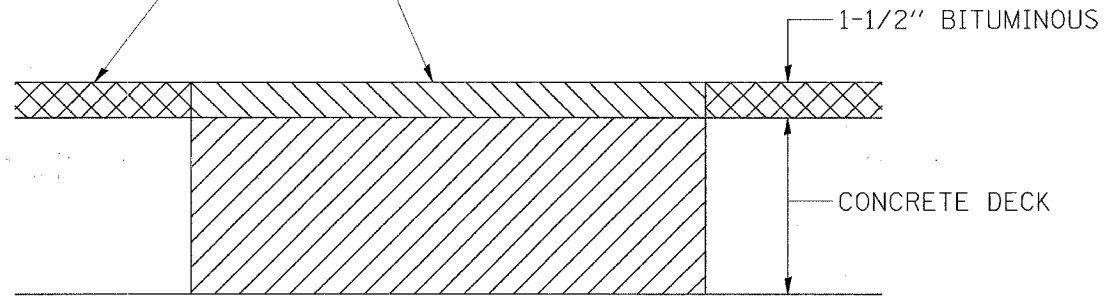

REMOVAL

CONCRETE PATCHES TO BE POURED TO
THE TOP OF THE ADJACENT BITUMINOUS

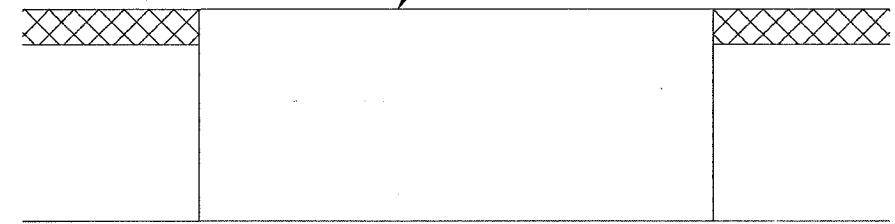

REPLACEMENT

DECK SLAB REPAIR

NOTE: IF NO DECK PATCH IS DEEMED NECESSARY AFTER
BITUMINOUS IS REMOVED, REPLACE BITUMINOUS WITH
"BITUMINOUS CONCRETE SURFACE COURSE, MIX D, N 70"

BITUMINOUS MIXTURE REQUIREMENTS

MIXTURE	AC TYPE	% AIR VOIDS	MAX % RAP
BITUM. CONC. SURF. CRSE, SUPERPAVE, MIX D, N70	PG 64-22	4% @70 GYR	10% RAP

THE UNIT WEIGHT USED TO CALCULATE BITUMINOUS
SURFACE MIXTURES IS 112 LBS/SQ YD/IN

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
		DECK SLAB REPAIR DETAILS
SCALE:	VERT. DATE	HORIZ.
DRAWN BY	CHECKED BY	