



Remove and Replace
2-3 Section Traffic
Signal Heads-Mast Arm
Mounted & 2 Pedestrian
Signals-Bracket Mounted
Add 2 Accessible Pedestrian
Signals (Special)

11TH STREET

Remove and Replace
2-3 Section Traffic
Signal Heads-Mast Arm
Mounted & 2 Pedestrian
Signals-Bracket Mounted
Add 2 Accessible Pedestrian
Signals (Special)

BILL OF MATERIALS 11TH STREET & STATE STREET		
ITEM	UNIT	QUANTITY
SIGNAL HEAD, POLYCARBONAE, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED	EACH	8.0
PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 2-FACE, BRACKET MOUNTED WITH COUNT DOWN TIMER	EACH	4.0
TRAFFIC SIGNAL BACKPLATE, LOUVERED, FORMED PLASTIC	EACH	8.0
MODIFY EXISTING CONTROLLER CABINET	EACH	1.0
REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT	EACH	1.0
ACCESSIBLE PEDESTRIAN SIGNAL (SPECIAL)	EACH	8.0


MODIFY EXISTING CONTROLLER CABINET:
REMOVE AND INSTALL NEW LOAD SWITCHES
8+2 SPARES = 10 TOTAL
REMOVE AND INSTALL NEW FLASHER LOAD SWITCH

REMOVE EXISTING TRAFFIC SIGNAL
EQUIPMENT:
8 EACH 1-FACE, 3-SECTION MAST ARM
MOUNT TRAFFIC SIGNAL HEADS
4 EACH 2-FACE, PEDESTRIAN SIGNAL HEADS

Remove and Replace
2-3 Section Traffic
Signal Heads-Mast Arm
Mounted & 2 Pedestrian
Signals-Bracket Mounted
Add 2 Accessible Pedestrian
Signals (Special)

STATE STREET

Remove and Replace
2-3 Section Traffic
Signal Heads-Mast Arm
Mounted & 2 Pedestrian
Signals-Bracket Mounted
Add 2 Accessible Pedestrian
Signals (Special)

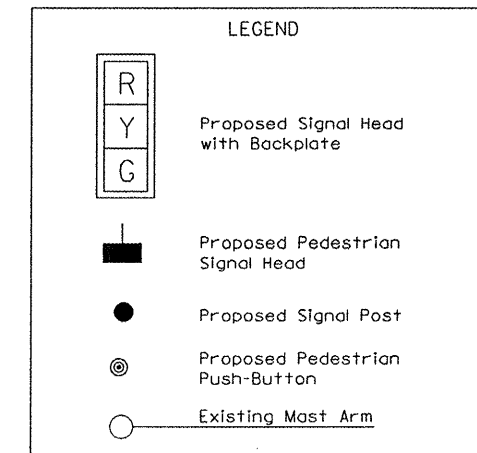

FILE NAME =	USER NAME = mcelleanla	DESIGNED -	REVISED -
cr:\pwork\pwidot\mcelleanla\d0272652\774538-sh1-TS.dgn		DRAWN -	REVISED -
	PLOT SCALE = 20.0000' / 1"	CHECKED -	REVISED -
	PLOT DATE = 2/16/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNAL MODERNIZATION			
INTERSECTION OF 11TH ST & STATE ST			
SCALE:	SHEET	OF SHEETS	STA. TO STA.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1807	*	Lawrence	6	6
CONTRACT NO. 74538			ILLINOIS FED. AID PROJECT	