

## STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4			
3, 4	1'-5''	1'-11''	2'-1''	2'-4"			
5	1'-9''	2'-5"	2'-7''	2'-11''			
6	2'-1"	2'-11''	3'-1''	3'-6''			
7	2'-9''	3'-10''	4'-2"	4'-8''			
8	3'-8''	5′-1′′	5′-5′′	6'-2"			
9	4'-7''	6'-5"	6'-10''	7'-9''			

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C


Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Threaded splicer bar length = min. lap length +  $1_2''$  + thread length

\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

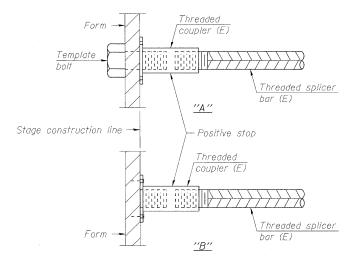

## INSTALLATION AND SETTING METHODS

"A" : Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

Location	Bar		Table for minimum
	size	required	lap length
Superstructure	#5	213	Table 3
Approach	#4	50	Table 3
Approach	#5	92	Table 3
Approach Footing	#5	80	Table 3
E. & W. Abutments	#5	36	Table 3
E. & W. Abutments	#6	8	Table 3

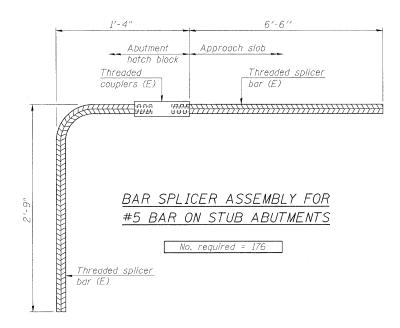

## NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

> BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS STRUCTURE NO. 016-0581

INS 123 N. WACKER DR., SUITE 300 CHICAGO, IL 60606 ILLINOIS PROFESSIONAL DESIGN FIRM LICENSE NO. 184-000993

SHEET NO.S25 OF	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	339	116-Y-2-BR-1	COOK	74	45
S27 SHEETS			CONTRACT	NO. 60	J00
		ILLINOIS FED.	. AID PROJECT		

DESIGNED MAH CHECKED JMH DRAWN DR CHECKED JMH BSD-1

11-1-09