

PATCHING SCHEDULE



LOCATION	EB/NB	LENGTH	WIDTH	PAVEMENT PATCHING 12"				COMMENTS
				TYPE 1	TYPE 2	TYPE 3	TYPE 4	
MILE PT.		(FEET)	(FEET)	(SQ YDS)	(SQ YDS)	(SQ YDS)	(SQ YDS)	
US 40								
0.20	EB	6	12		8			PAV. JOINT
0.50	EB	6	12		8			
0.50	WB	6	12		8			
0.52	EB	6	12		8			
0.52	WB	6	12		8			
0.60	EB	6	12		8			
0.60	WB	6	12		8			
0.80	EB	6	12		8			
0.80	WB	6	12		8			
1.00	EB	6	12		8			
1.00	WB	6	12		8			
1.40	EB	6	12		8			
1.40	WB	6	12		8			
1.50	EB	6	12		8			
1.50	WB	6	12		8			
1.60	EB	10	12		14			
1.60	WB	10	12		14			
2.10	EB	6	12		8			
2.10	WB	6	12		8			
2.30	EB	6	12		8			
2.30	WB	6	12		8			
2.40	EB	6	12		8			
2.40	WB	6	12		8			
2.45	EB	6	12		8			
2.45	WB	6	12		8			
2.50	EB	10	12		14			
2.50	WB	10	12		14			
2.60	EB	12	12			16		PAV. JOINT (RIDGE ST.)
2.60	WB	12	12			16		
2.62	EB	14	12			19		
2.62	WB	14	12			19		
2.64	EB	6	12		8			
2.64	WB	6	12		8			
2.65	EB	6	12		8			
2.65	WB	6	12		8			
2.68	EB	6	12		8			
2.70	EB	6	12		8			
2.71	EB	6	12		8			
2.71	WB	6	12		8			
2.73	EB	6	12		8			
2.76	EB	6	12		8			
2.76	WB	6	12		8			
SUB-TOTALS					328	70		
15% FOR ANTICIPATED FAILURES					49	11		
TOTALS					377	81		

PATCHING SCHEDULE

LOCATION	SB/NB	LENGTH	WIDTH	PAVEMENT PATCHING 12"				COMMENTS
				TYPE 1	TYPE 2	TYPE 3	TYPE 4	
STATION		(FEET)	(FEET)	(SQ YDS)	(SQ YDS)	(SQ YDS)	(SQ YDS)	
IL 127								
118+50	SB	40	12				53	
118+50	NB	20	12				27	
SUB-TOTALS							80	
15% FOR ANTICIPATED FAILURES							12	
TOTALS							92	
GRAND TOTALS					377	81	92	

PAVMENT MARKING SCHEDULE

LOCATION	THERMOPLASTIC PAVEMENT MARKING										RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	RAISED REFLECTIVE PAVEMENT MARKERS
	4"					8"	12"	24"	LETTERS & SYMBOLS			
	SOLID WHITE EDGE LINE	SOLID WHITE LANE LINE	SKIP-DASH YELLOW CENTERLINE	SOLID YELLOW LINE	SOLID YELLOW DOUBLE LINE	SOLID YELLOW LINE	CROSS HATCH	CROSS WALKS		STOP BARS		
LOCATION 1 (US 40)	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	SQ FT	EACH	EACH
M.P.	to	M.P.										
0.00	to	1.00	10560		1320						66	66
1.00	to	2.00	10560		1320						66	66
2.00	to	2.70	7392		924	80					46	46
2.70	to	2.83	1410	120		210	1984		115	31.2	30	30
LOCATION 2 (IL 127)												
STA.	to	STA.										
117+50	to	121+03	467		60		79	26	480	144	3	3
SUB-TOTALS			30389	120	3624	210	2064		141	480		
TOTAL					36407			79	621	144	31.2	211

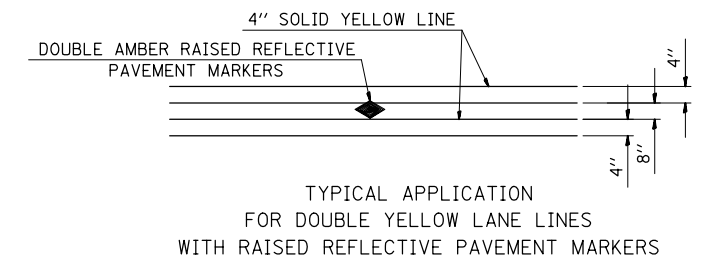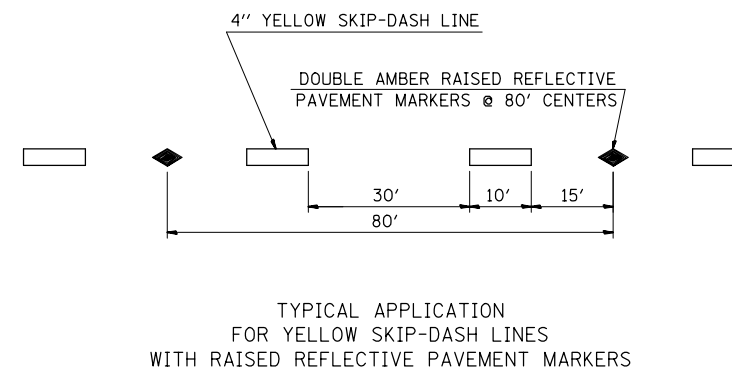

FILE NAME =	USER NAME = dntelmonjn	DESIGNED -	REVISED -
et:\pw\work\p\dot\dntelmonjn\d0260347	d076e95-sh-t-plan.dgn	DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 12/14/2011	DATE -	REVISED -

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SCHEDULES

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
779/42	(36-2)RS-3,139-IRS-2	BOND	16	10
CONTRACT NO. 76E95				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				