


PLAN

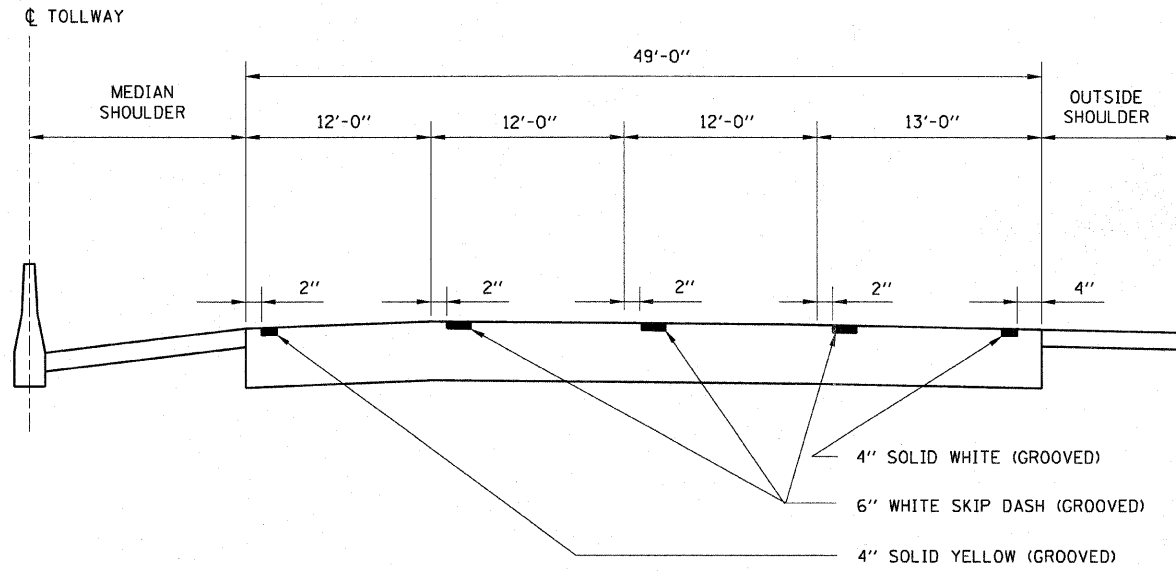

SECTION A-A

**GENERAL NOTES:**

1. DIAGONAL SHOULDER STRIPING REQUIRED WHERE HMA SHOULDER WIDTH IS LESS THAN 10'.
2. ROADWAY MARKING MATERIALS TO BE USED ON FINISHED CONCRETE SURFACE AND HOT-MIX ASPHALT SURFACE SHALL BE AS SHOWN ON THE PLANS.
3. WHERE THE GUARDRAIL ENCROACHES ON THE SHOULDER THE DIAGONAL MARKINGS SHALL EXTEND AS CLOSE TO THE FACE OF THE RAIL AS POSSIBLE.
4. ALL LANE LINES AND EDGE LINES SHALL BE GROOVED.
5. DIAGONAL STRIPING SHALL BE SURFACE APPLIED.
6. GORE STRIPING (CHEVRON) SHALL BE SURFACED APPLIED.

**ROADWAY AND SHOULDER STRIPING - NEW CONSTRUCTION**

APPROVED *Paul Kovacs* CHIEF ENGINEER DATE 7-1-2009

DATE	REVISIONS
9-19-2007	STRIPING LOCATION @ OUTSIDE LANE
7-1-2009	ADDED LINE GROOVING NOTES

**Illinois Tollway**  
Open Roads for a Faster Future

PERMANENT PAVEMENT MARKINGS

STANDARD D5-02