


PERMANENT PAVEMENT MARKINGS

STATION / LOCATION			THERMOPLASTIC PAVEMENT MARKING						PAINT PAVEMENT MARKING		PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID							GROOVING FOR RECESSED PAVEMENT MARKING,					RAISED REFLECTIVE PAVEMENT MARKER (EACH)	RAISED REFLECTIVE PAVEMENT MARKER (BRIDGE) (EACH)			
			LETTERS AND SYMBOLS (SQ FT)	LINE 5" WHITE (FOOT)	LINE 5" YELLOW (FOOT)	LINE 6" WHITE (FOOT)	LINE 12" YELLOW (FOOT)	LINE 24" WHITE (FOOT)	LETTERS AND SYMBOLS (SQ FT)	LINE - 24" (FOOT)	LETTERS AND SYMBOLS (SQ FT)	LINE 4" WHITE (FOOT)	LINE 4" YELLOW (FOOT)	LINE 5" YELLOW (FOOT)	LINE 6" WHITE (FOOT)	LINE 12" WHITE (FOOT)	LINE 24" WHITE (FOOT)	LETTERS, NUMBERS AND SYMBOLS (SQ FT)	5" (FOOT)	6" (FOOT)	7" (FOOT)	13" (FOOT)			25" (FOOT)		
IL RTE 13																											
1729+56.07	-	1743+00.00									444	5,752	2,441				121	444	8,193					121	123		
1743+00.00	-	1756+00.00										3,900	2,600					6,500						52	16		
1756+00.00	-	1768+34.63									111	4,511	2,315			81	120	111	6,826			81	120	87	8		
FRONTAGE ROAD																											
461+37.67	-	462+20.86												169	85		39			169	85			39			
471+74.29	-	476+50.00	161		1,208	95	90	77	124	60																	
476+50.00	-	476+65.00			30	15																					
SKYLINE DRIVE (SOUTH)																											
0+00.00	-	4+00.00									111	1,077				151	60	111	1,077				151	60			
4+00.00	-	9+46.39									74	890	1,244			129		74	2,134				129				
SKYLINE DRIVE (NORTH)																											
10+00.00	-	12+00.00									32	790	274			171	60	32	1,064				171	60			
12+00.00	-	17+35.56									79	112	1,761			150		79	1,873				150				
MARATHON DRIVE																											
8+00.00	-	10+00.00		100	425																						
10+00.00	-	15+64.91	170	261	1,840	73	143	30																			
SINCLAIR DRIVE																											
10+00.00	-	11+74.66									148	666	111			280	48	148	777				280	48			
TOTALS			331	361	3,503	183	233	107	124	60	999	17,698	10,746	169	85	962	448	999	28,444	169	85	962	448	262	24		

PAVEMENT MARKING DETAILS

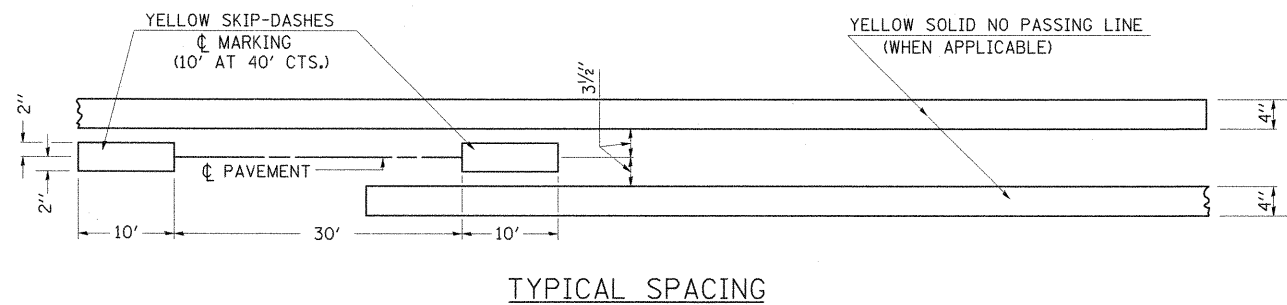

FILE NAME =	USER NAME = Matt Overbey	DESIGNED - MJO	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
3:\dot\0906603\draw\cadd\sheet\099885	9-sht-Schedules.dgn	DRAWN - MJO	REVISED -			331	(1X-1) VB-1, B-1, N-4, R-3	WILLIAMSON	367	39	
	PLOT SCALE = 50.0000' / IN.	CHECKED - BMB	REVISED -			CONTRACT NO. 98859					
	PLOT DATE = 12/14/2011	DATE - 12/9/11	REVISED -			ILLINOIS FED. AID PROJECT					