

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
309	16R-2	WHITESIDE	647	210
STA.	TO STA.			
FED. ROAD DIST. NO. 2	ILLINOIS	FED. AID PROJECT		

TREE REPLACEMENT SCHEDULE

CODE NO.	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	QUANTITY
A2001714	TREE, ACER SACCHARUM	SUGAR MAPLE	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	9
A2006514	TREE, QUERCUS BICOLOR	SWAMP WHITE OAK	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	9
A2007814	TREE, TILIA AMERICANA	AMERICAN LINDEN/ BASSWOOD	1-3/4" CALIPER, BALLED AND BURLAPPED	EACH	9
B2002716	TREE, MALUS ADIRONDACK	ADIRONDACK CRAB APPLE	2" CALIPER, TREE FORM, BALLED AND BURLAPPED	EACH	9
B2004814	TREE, MALUS SARGENTII	SARGENT CRABAPPLE	1-3/4" CALIPER, TREE FORM, BALLED AND BURLAPPED	EACH	10
B2005214	TREE, MALUS SUTYZAM	SUGAR TYME CRAB APPLE	1-3/4" CALIPER, TREE FORM, BALLED AND BURLAPPED	EACH	10

LAYOUT SHALL BE PERFORMED BY THE DISTRICT LANDSCAPE ARCHITECT

MULCH SHALL BE HARDWOOD CHIPS, 5 FOOT WIDTH, 4 INCHES THICK WITH WEED BARRIER FABRIC


ALTERNATE PLANTING SITE, I-88/ IL. 78 INTERCHANGE

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

TREE REPLACEMENT SCHEDULE 90.4

REVISED 8-10-05

DRAIN FOR AGGREGATE BASES IN URBAN AREAS

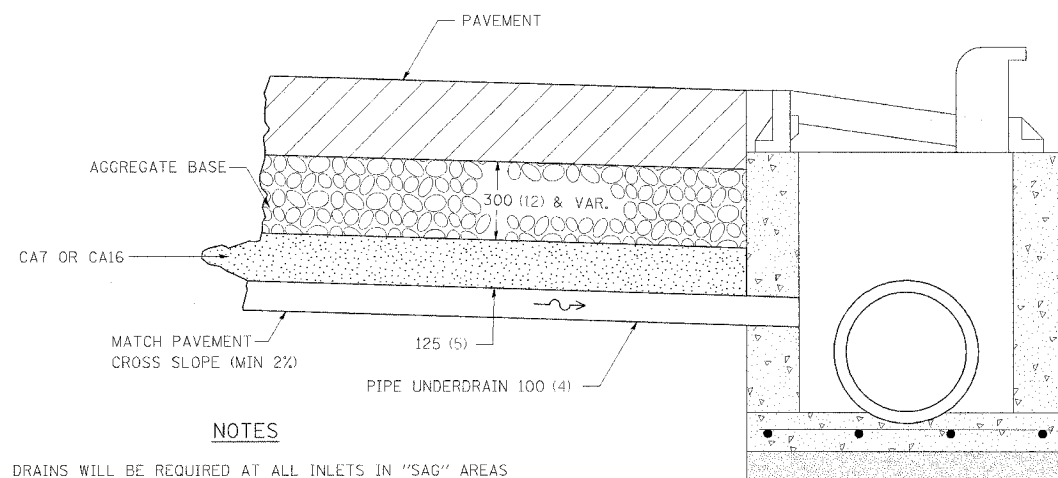

NOTES

DRAINS WILL BE REQUIRED AT ALL INLETS IN "SAG" AREAS AND AS INDICATED IN THE PLANS.

THIS WORK SHALL BE COMPLETED ACCORDING TO SECTION 601 OF THE STANDARD SPECIFICATIONS.


THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER METER (FOOT) FOR PIPE UNDERDRAINS OF THE DIAMETER SPECIFIED WHICH PRICE SHALL INCLUDE THE CA7 OR CA16 AND THE CONNECTION TO THE INLET.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

DRAIN FOR AGGREGATE BASES IN URBAN AREAS 88.4

REVISED 4-7-99

DRAIN FOR AGGREGATE BASE COURSE

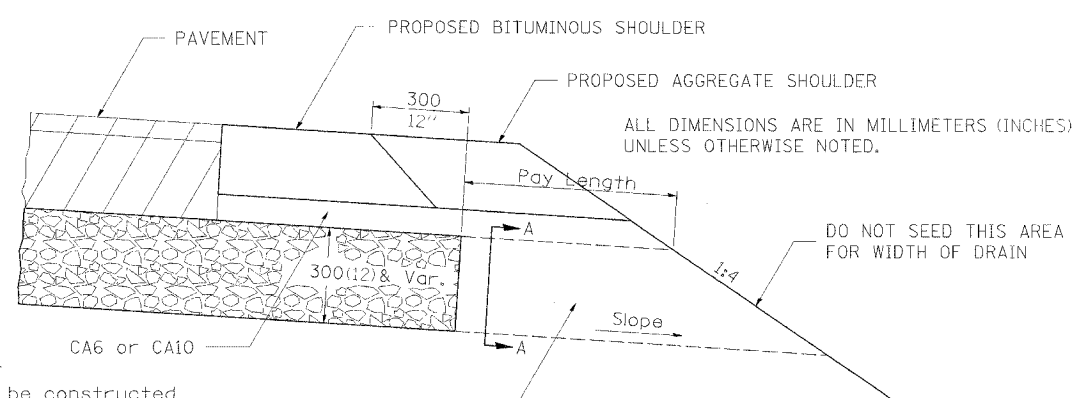

NOTES:

The rock outlets shall be constructed using CA7 and will be paid for at the contract unit price per m² (SQ. YD.) for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified which includes the filter fabric. The Rock outlets will be measured in m² (SQ. YD.), the width being 900 (36) by the length shown above. The cost of the CA6 or CA10 under the shoulder shall be included in the contract unit price per m² (SQ. YD.) for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified. The filter fabric to be used shall conform to the filter fabric used for Riprap.



SECTION A-A

NOTE: Slope same as shoulder with 2% min.

DRAIN FOR AGGREGATE BASE COURSE 96.4

REVISED 7-13-95

DATE = *DATES
FILE NAME = #FILES
PLOT SCALE = #SCALE
REFERENCE = #REFS

3/23/2005 10:27:31 AM