


CIRCUIT	POLE NUMBER	PHASE 1 (BLACK) AMP	PHASE 2 (RED) AMP
1	P1,P3,P5	10.0 A	-
2	P6,P8,P10,P12	-	13.4 A
3	P2,P4	6.6 A	-
4	P7,P9,P11	-	10.0 A
5	P13, P15	6.6 A	-
6	P19,P21,P23	-	10.0 A
7	P14,P16,P17	10.0 A	-
8	P18,P20,P22	-	10.0 A
9	T1,T3,T5	1.0 A	-
10		-	-
11	T2,T4,T6	-	1.0 A
SUB-TOTAL		34.2 A	43.4 A
		TOTAL 77.6 A	

- LEGEND**
- LIGHTING CONTROLLER
 - 400W HPS LUMINARE ON LIGHT POLE OR COMBINATION MAST ARM
 - PEDESTRIAN PATH LUMINARE, 70 WATT
 - ILLUMINATED STREET NAME SIGN, x' INDICATES SIGN LENGTH IN FEET
6' STREET SIGNS WILL USE 90 WATTS; 8' STREET SIGNS WILL USE 120W
 - HAND HOLE

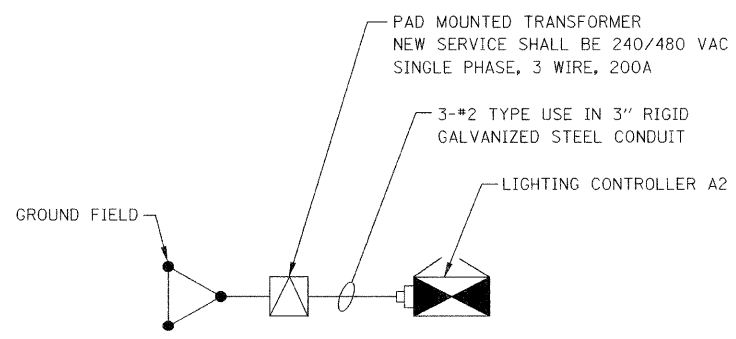

REVISIONS	
NAME	DATE
ADDENDUM 1 - NEW SHEET	8/28/08

INTERSECTION IMPROVEMENT
WASHINGTON STREET - 75th STREET
PROPOSED
LIGHTING CONTROLLER "A2"
ONE-LINE DIAGRAM
75th STREET/WASHINGTON

CONSULTANT
TYLIN INTERNATIONAL

City of **Naperville**

DRAWN: JRH
CHECKED: FO
APPROVED: DEM
DATE: 04/11/08
SCALE:
JOB NO.: P-91-494-00
PROJECT NO.: CMM-7003 (983)

SHEET NO.