
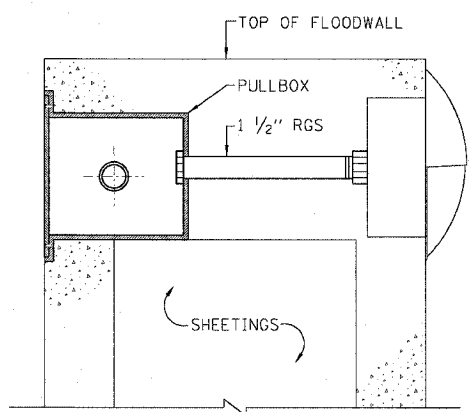


NOTES:

1. SEE SHEET NUMBER E-1 FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES.
2. 12" x 8" x 8" PULLBOX EMBEDDED IN FLOODWALL ABOVE SHEET PILE.
3. 1-1/2" RGS CONDUIT EMBEDDED IN FLOODWALL. INSTALL CONDUIT FOR MOUNTING FLOOD WALL LUMINAIRE 9'-5" ABOVE THE BIKE TRAIL PAVEMENT. SEE DETAIL ON SHEET E-2.
4. 18" x 18" x 8" JUNCTION BOX FOR UNDERPASS LIGHTING MOUNTED ON FLOODWALL. MOUNT JUNCTION BOX AT ELEV. 638.00
5. UNDERPASS LIGHTING FIXTURE SEE DETAIL ON SHEET E-12.

CABLE GROUPINGS SCHEDULE

- (A) 6-1/2" #6 & 1-1/2" #8 GROUND IN 2" PVC CONDUIT EMBEDDED IN FLOOD WALL
- (C) 2-1/2" #10 & 1-1/2" #10 GROUND IN 1" RGS CONDUIT ATTACHED TO STRUCTURE



**WALL MOUNTED FIXTURE
INSTALLATION DETAIL**
NO SCALE

REVISION	
DATE	DESCRIPTION

DESIGNED BY: D.E.S.
 CHECKED BY: H.A.R.
 DRAWN BY: H.A.R.
 CHECKED BY:

PLANS PREPARED BY:
CTE | AECOM

CTE
303 East Wacker Drive, Suite 600, Chicago, Illinois 60601-5276
T 312.938.0300 F 312.938.1109 www.cte.aecom.com

FR-416

01/20/2006 07:39:55 PM p:\p60003332\elect\shf\06E-02.sht