


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A.P. Rt. 305	28R-2-RS-1	McHenry	53	39
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

CONTRACT NUMBER: 60756

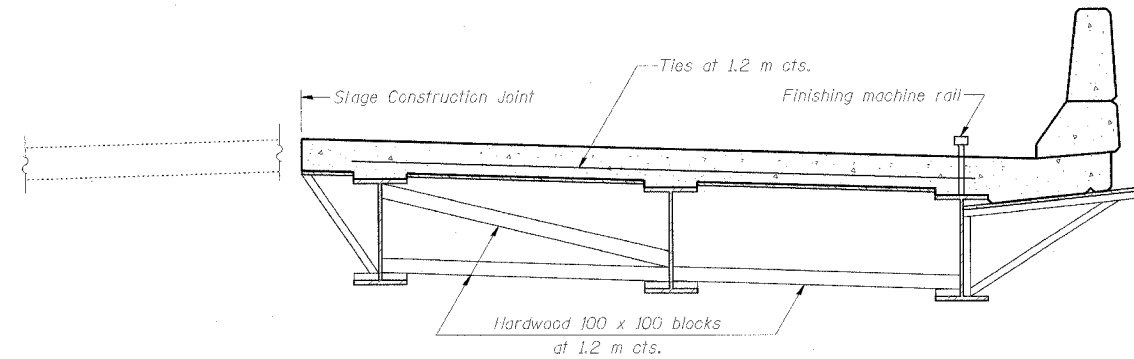

**FORM BRACES FOR
STAGE CONSTRUCTION**


When cantilever forming brackets are used, the work shall be done according to Article 503.06, except as modified below and in the details shown on this sheet.

The finishing machine rails shall be placed on the top flange of the exterior beams.

The beams or girders supporting cantilever forming brackets shall be tied together at 1.2 m intervals.

For Standard construction, or Stage Construction the Hardwood bracing materials shall be placed as shown between webs of beams in each bay.

FORM BRACES FOR STAGE CONSTRUCTION

Date	Designed MR	SOUTH ST. OVER US 14 FAP ROUTE NO. 305 SECTION 28R-2-RS-1 STATION 29+999.897 COUNTY McHENRY STRUCTURE NO. 056-3015	Sheet No.
Revisions	Drawn MR		26
	Checked KSM		
	Approved KSM		
 HARRY O. HEFTER ASSOCIATES, INC. DESIGN AND CONSULTING ENGINEERS 55 West Jackson Blvd. Chicago, Illinois 60604 312/648-8121		File Name: 1962S26.DGN	Job No. 1962

10:31:05 AM

12/27/2004