


*13-Bar Splicers for #6 m₁₀₂(E) and m₁₀₇(E) bars (Stage I)
 13-Bar Splicers for #6 m₁₀₃(E) and m₁₀₈(E) bars (Stage II)
 **13-Bar Splicers for #6 m₁₁₀(E) and m₁₁₃(E) bars (Stage I)
 13-Bar Splicers for #6 m₁₁₁(E) and m₁₁₄(E) bars (Stage II)

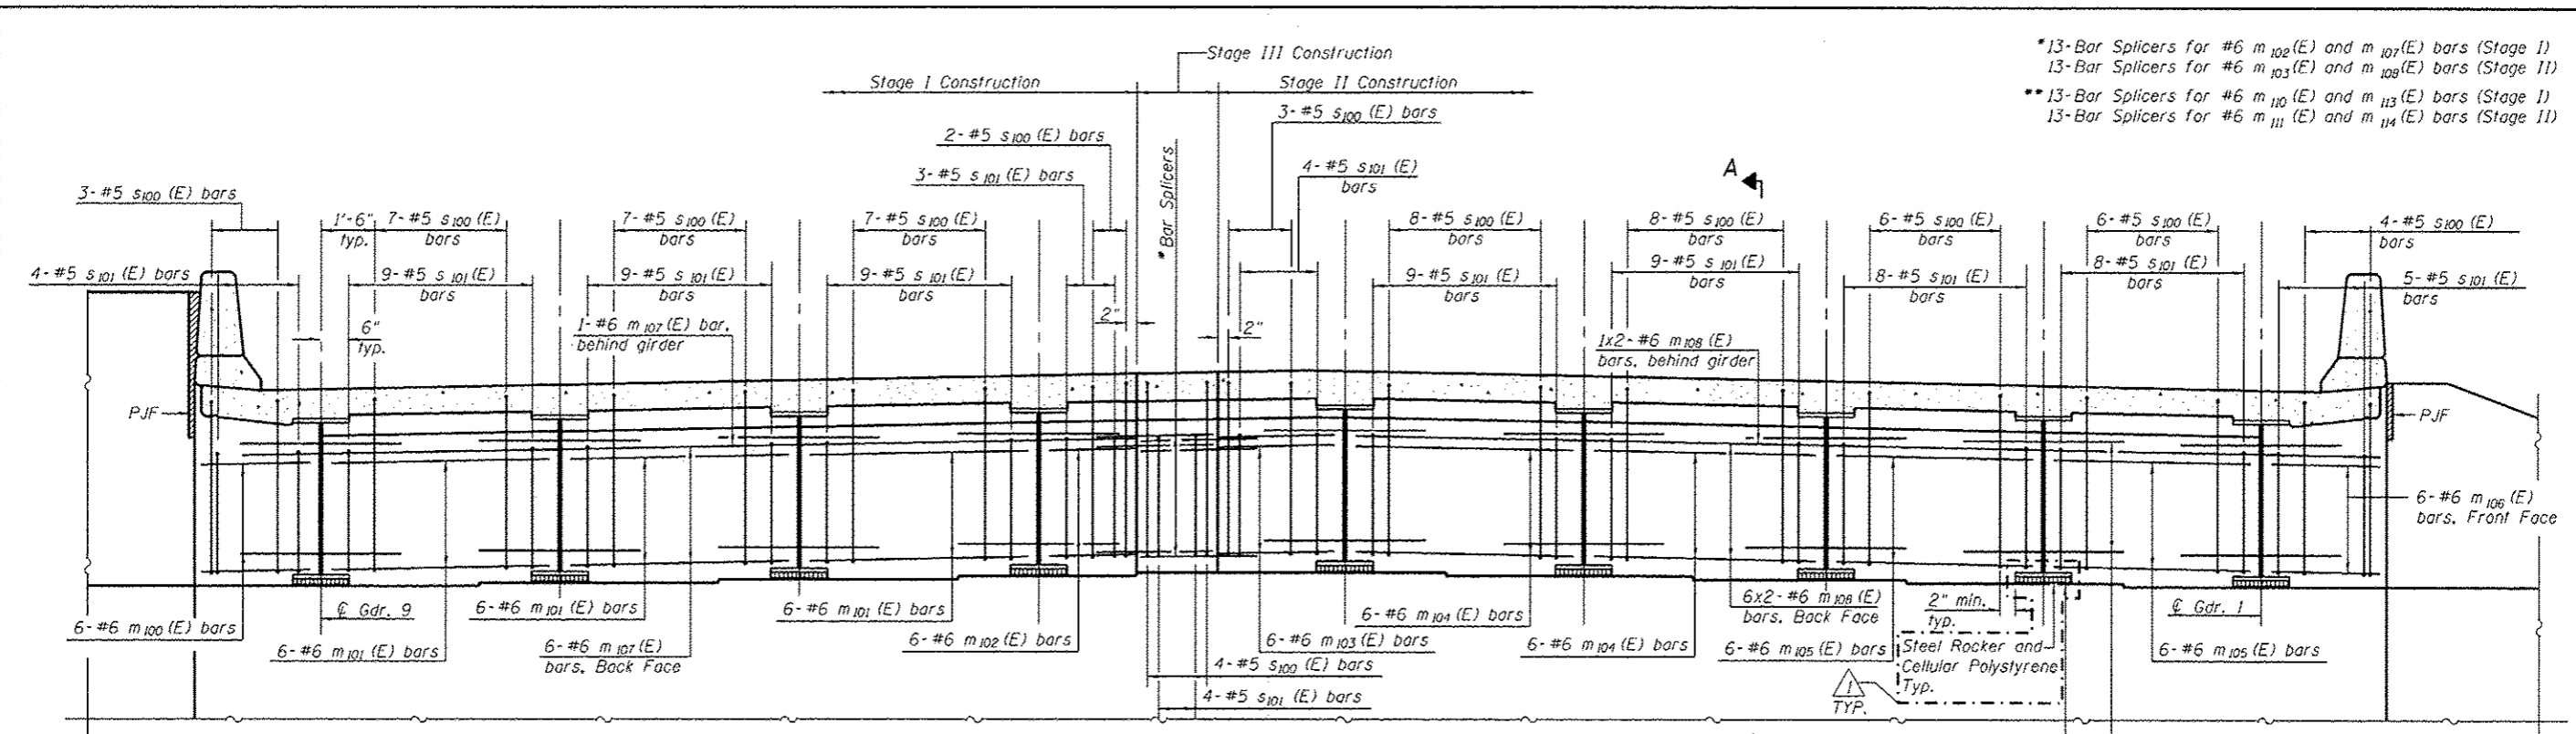


MINIMUM BAR LAP
 #6 bar = 3'-4"

DIAPHRAGM ELEVATION AT WEST ABUTMENT

6-#5 m₁₀₉(E) bars.
 Typ. thru Each Beam.
 (Secure bars such that
 they remain centered and level
 during pouring of the concrete)

Notes:
 Dimensions taken perpendicular to Beams.
 For Section A-A see sheet 33 of 79.
 Bars indicated thus 1x2-#6 etc. indicates
 1 line of bars with 2 lengths per line.
 Space s₁₀₀(E) & s₁₀₁(E) bars at ±1'-0"
 cts. b/wn. girders, placed parallel to girder.
 Space m₁₀₀(E) thru m₁₀₆(E) and m₁₁₀(E) thru
 m₁₁₂(E) bars at ±1'-0" cts., Front Face.
 Space m₁₀₇(E), m₁₀₈(E), m₁₁₃(E) and m₁₁₄(E)
 bars at ±1'-0" cts., Back Face.

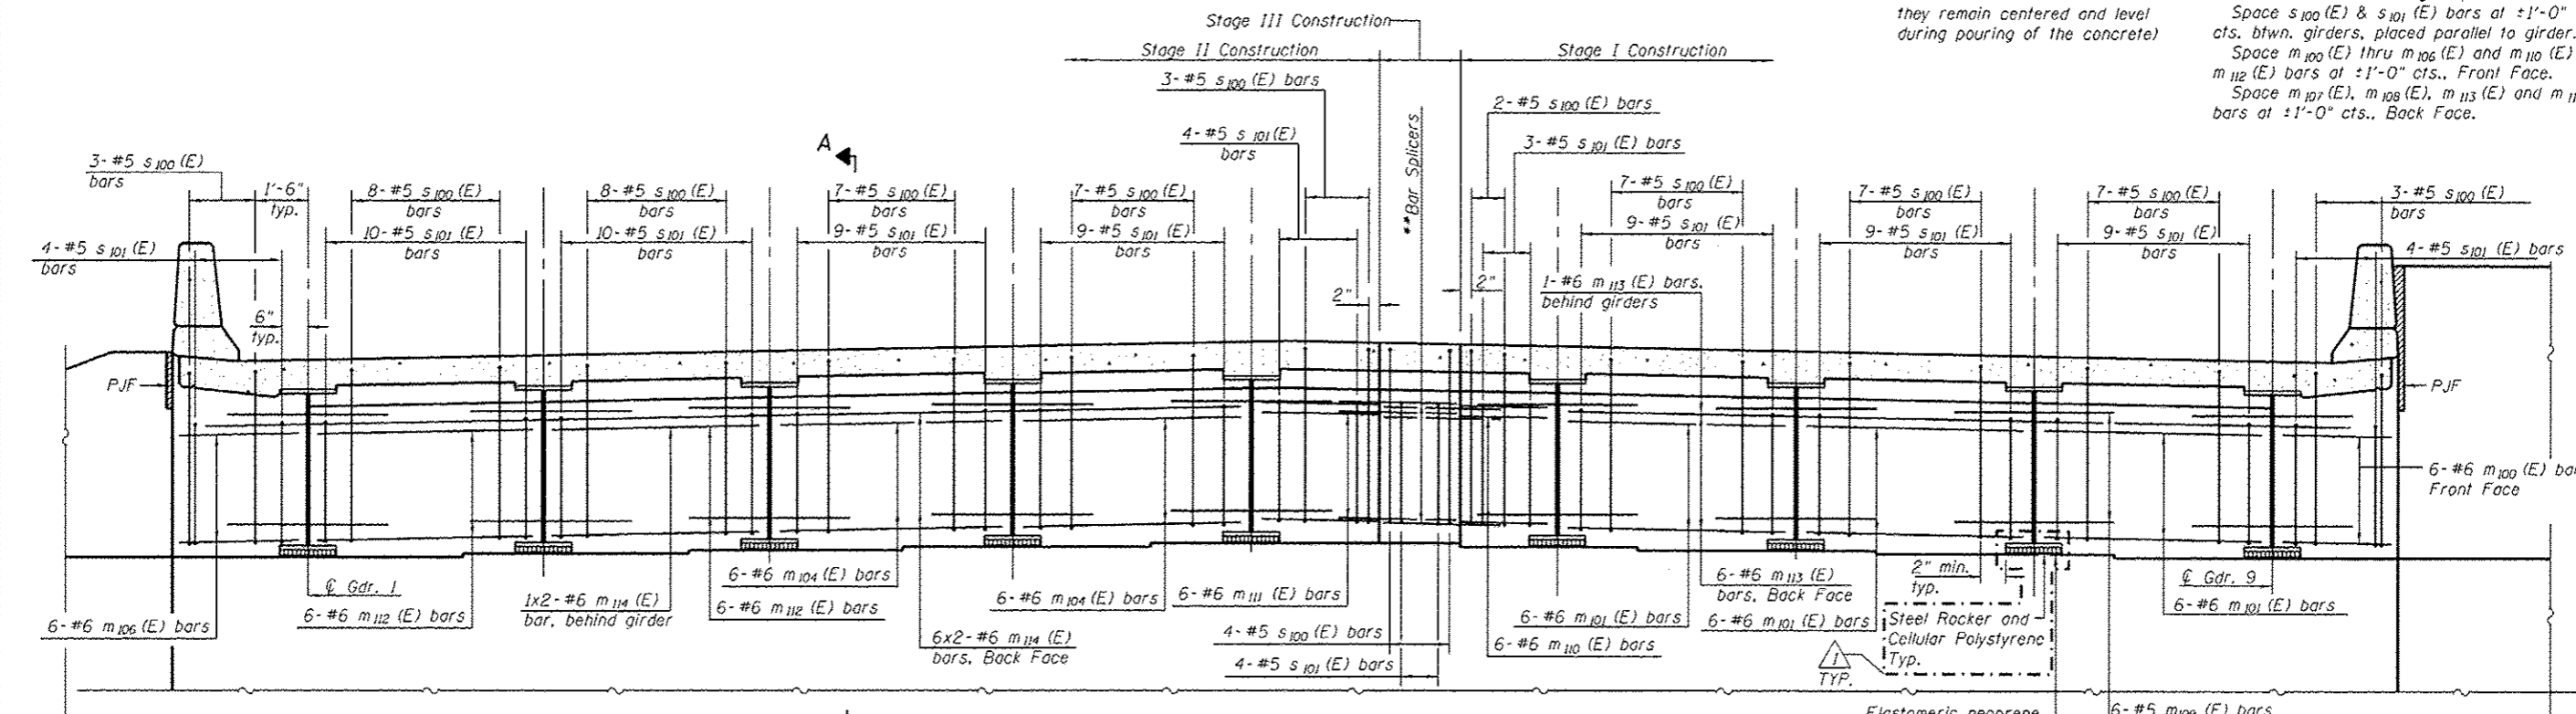

DIAPHRAGM ELEVATION AT EAST ABUTMENT

6-#5 m₁₀₉(E) bars.
 Typ. thru Each Beam.
 (Secure bars such that
 they remain centered and level
 during pouring of the concrete)