

FRAMING PLAN


**** TOP OF WEB ELEVATIONS**

Location	€ Brg. W. Abut.	€ Splice 1	€ Brg. Pier	€ Splice 2	€ Brg. E. Abut.
Girder 1	630.74	630.81	630.68	630.79	630.01
Girder 2	630.88	630.98	630.86	630.99	630.23
Girder 3	630.99	631.10	630.99	631.13	630.41
Girder 4	631.16	631.28	631.16	631.27	630.58
Girder 5	631.21	631.38	631.26	631.38	630.71
Girder 6	631.05	631.24	631.12	631.25	630.60
Girder 7	630.90	631.11	630.99	631.11	630.49
Girder 8	630.72	630.94	630.83	630.96	630.35
Girder 9	630.51	630.76	630.64	630.77	630.19

** "For Fabrication Only"



Notes:
 All web and flanges of the girders, bearing stiffeners, web and flange splice plates and bearing plates shall be AASHTO Grade 50 unless noted otherwise.
 All cross frames shall be installed as steel is erected and secured with erection pins and bolts except as otherwise noted. Individual cross frames at supports may be temporarily disconnected to install bearing anchor rods.
 For Girder Dimension Tables, see sheet 54 of 79.
 For cross frame details and dimensions, see sheet 55 of 79.

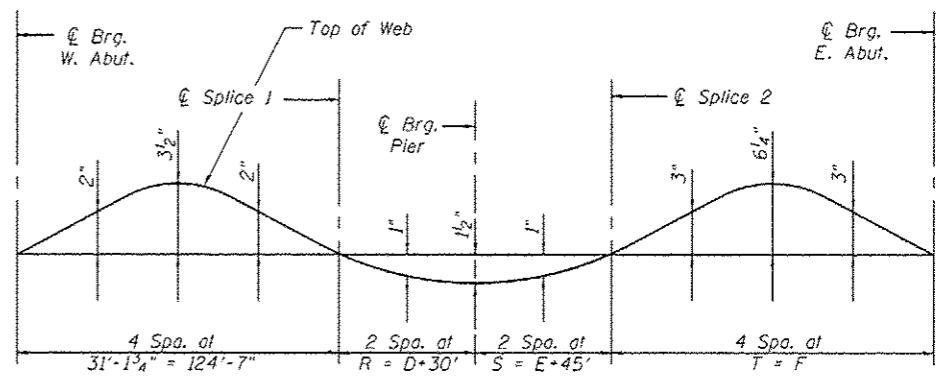

CAMBER DIAGRAM

*** DIMENSION "aa"**

* measured along web.

Girder	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	D16	D17	D18	D19	D20	D21
2	4'-7 3/4"	4'-7 3/4"	4'-7 3/4"	4'-7 3/4"	4'-7 3/4"	4'-7 3/4"	5'-2 7/8"	5'-2 7/8"	5'-2 7/8"	5'-2 7/8"	5'-2 7/8"	5'-2 7/8"	5'-2 7/8"	5'-10 1/2"	5'-10 1/2"	5'-10 1/2"	5'-10 1/2"	5'-10 1/2"	5'-10 1/2"		
3	4'-7 1/4"	4'-7 1/4"	4'-7 1/4"	4'-7 1/4"	4'-7 1/4"	4'-7 1/4"	5'-5"	5'-5"	5'-5"	5'-5"	5'-5"	5'-5"	5'-5"	5'-7 3/8"	5'-7 3/8"	5'-7 3/8"	5'-7 3/8"	5'-7 3/8"	5'-7 3/8"		
4																				5'-7 3/8"	
5																					5'-6 1/8"
6																					5'-6 1/8"
7																					5'-6 1/8"
8																					5'-6 1/8"

DIMENSION "a"

Girder	Dimension "a"
1	4'-4 5/8"
2-4	4'-4 1/2"
5-8	4'-5 5/8"
9	9'-11 7/8"