


BILL OF MATERIALS			
PAY ITEM	DESCRIPTION	UNIT	QUANTITY
81400200	HEAVY DUTY HANDHOLE	EACH	1
81018500	CONDUIT PUSHED, 2" DIA., GALVANIZED STEEL	FOOT	57
87900200	DRILL EXISTING HANDHOLE	EACH	1
88600600	DETECTOR LOOP REPLACEMENT	FOOT	291
89502300	REMOVE ELECTRIC CABLE FROM CONDUIT	FOOT	80
89502380	REMOVE EXISTING HANDHOLE	EACH	1
XX002104	ELECTRIC CABLE IN CONDUIT NO. 14 2/C, TWISTED, SHIELDED	FOOT	100

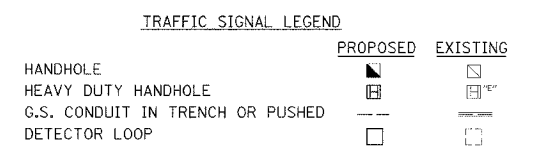

RDY-3A

ILLINOIS DEPARTMENT OF TRANSPORTATION

MILWAUKEE AVE. PLAN DETAIL

WILLOW ROAD OVER US 45/IL 21 (MILWAUKEE AVE) AND OVER DES PLAINES RIVER

DATE JANUARY 2005

DRAWN BY CADD

CHECKED BY PJM

01/12/2005 03:48:49 PM