


SIGN DETAIL
1:50

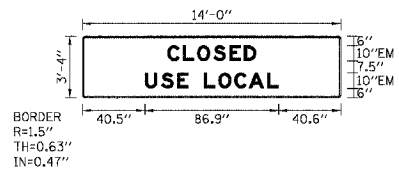

| | |
|---------------|-----------------------------------|
| SIGN NUMBER | TS8-01 & TS4-01 |
| WIDTH x HGHT. | 14'-0" x 3'-4" |
| BORDER WIDTH | 0.63" |
| CORNER RADIUS | 1.5" |
| MOUNTING | Ground |
| BACKGROUND | TYPE: Reflective COLOR: Orange |
| LEGEND BORDER | TYPE: Reflective COLOR: Black |


| SYMBOL | X | Y | WID | HT |
|--------|---|---|-----|----|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Panel Style: construction_guide.asi
Dimensions are in inches, tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | LENGTH | SERIESIZE | |
|----------------------|------|------|----|------|-------|------|-------|-------|--|--|--------|-----------|----|
| C | L | O | S | E | D | | | | | | | EM | |
| 55.2 | 65.2 | 74.7 | 85 | 95.5 | 104.9 | | | | | | | 57.8 | 10 |
| U | S | E | | L | O | C | A | L | | | | EM | |
| 40.5 | 51.1 | 61.6 | 69 | 79 | 88.4 | 98.7 | 108.1 | 120.1 | | | | 86.9 | 10 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

SIGN DETAIL
1:50



| | |
|---------------|-----------------------------------|
| SIGN NUMBER | TS8-02 |
| WIDTH x HGHT. | 4'-11" x 2'-6" |
| BORDER WIDTH | 0.63" |
| CORNER RADIUS | 1.5" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: Reflective COLOR: Orange |
| LEGEND BORDER | TYPE: Reflective COLOR: Black |


| SYMBOL | X | Y | WID | HT |
|--------|---|---|-----|----|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Panel Style: construction_guide.asi
Dimensions are in inches, tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | LENGTH | SERIESIZE | |
|----------------------|------|------|------|--|--|--|--|--|--|--|--------|-----------|----|
| O | P | E | N | | | | | | | | | EM | |
| 10 | 20.9 | 31.4 | 40.8 | | | | | | | | | 38.8 | 10 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

SIGN DETAIL
1:50



| | |
|---------------|-----------------------------------|
| SIGN NUMBER | TS10-04 |
| WIDTH x HGHT. | 1'-8" x 2'-0" |
| BORDER WIDTH | 0.63" |
| CORNER RADIUS | 1.6" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: Reflective COLOR: Orange |
| LEGEND BORDER | TYPE: Reflective COLOR: Black |


| SYMBOL | X | Y | WID | HT |
|---------|-----|------|-----|----|
| ARDDOWN | 810 | 29.4 | 32 | 22 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Panel Style: construction_guide.asi
Dimensions are in inches, tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | LENGTH | SERIESIZE | |
|----------------------|-------|-------|-------|-----|------|------|------|------|--|--|--------|-----------|----|
| C | L | O | S | E | D | | | | | | | EM | |
| -17.3 | -7.3 | 2.1 | 12.4 | 23 | 32.4 | | | | | | | 57.8 | 10 |
| O | P | E | N | | | | | | | | | EM | |
| 690.6 | 701.5 | 712 | 721.4 | | | | | | | | | 38.8 | 10 |
| U | S | E | | L | O | C | A | L | | | | EM | |
| -32 | -21.5 | -10.9 | -3.0 | 6.4 | 15.8 | 26.2 | 35.5 | 47.6 | | | | 86.9 | 10 |
| 1 | | | | | | | | | | | | EM | |
| 7.8 | | | | | | | | | | | | 4.4 | 15 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

SIGN DETAIL
1:50



| | |
|---------------|-----------------------------------|
| SIGN NUMBER | TS10-05 |
| WIDTH x HGHT. | 14'-0" x 2'-5" |
| BORDER WIDTH | 0.63" |
| CORNER RADIUS | 1.5" |
| MOUNTING | Overhead |
| BACKGROUND | TYPE: Reflective COLOR: Orange |
| LEGEND BORDER | TYPE: Reflective COLOR: Black |

| SYMBOL | X | Y | WID | HT |
|---------|----|-----|-----|----|
| ARDDOWN | 68 | 2.9 | 32 | 22 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Panel Style: construction_guide.asi
Dimensions are in inches, tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | LENGTH | SERIESIZE | |
|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--|--|--------|-----------|----|
| C | L | O | S | E | D | | | | | | | EM | |
| -759.3 | -749.3 | -739.8 | -729.5 | -719 | -709.5 | | | | | | | 57.8 | 10 |
| O | P | E | N | | | | | | | | | EM | |
| -513 | -40.5 | -30 | -20.6 | | | | | | | | | 38.8 | 10 |
| U | S | E | | L | O | C | A | L | | | | EM | |
| -774 | -763.5 | -752.9 | -745.6 | -735.6 | -726.2 | -715.8 | -706.5 | -694.4 | | | | 86.9 | 10 |
| 1 | | | | | | | | | | | | EM | |
| -782.7 | | | | | | | | | | | | 4.4 | 15 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

BOWMAN, BARRETT & ASSOCIATES INC.
CONSULTING ENGINEERS
Chicago, Illinois
312 228 0100
www.bbainc.com

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 94/90 (DAN RYAN EXPRESSWAY)
NB DAN RYAN ELEVATED BRIDGE
REPAIR FROM 15TH TO 28TH STREETS
TEMPORARY INFORMATION SIGNING

SCALE: =NTS
DATE: 7/22/2005

DRAWN BY: RA
CHECKED BY: RS

TIS03
9-8613 AM
7/27/2005