1552	2 04-00029-00-PV	DUPAGE	25	21		
RTE.	SECTION	COUNTY	SHEETS	NO.		
F.A.L	SECTION	COLINITY	TOTAL	SHEE		

CONTRACT NO: 83814

Improvements

Street


83rd

NONE

04-00-02-900PV/08-04


**DETAIL** 


F. A. SECTION			COUNTY	TOTAL SHEKTS	SEET
STA,		70	STA		
PEB. ROAD DIST. NO.		21.9408 R		D. AND PROJECT	




# DETAIL "A"

LATERAL CONNECTION TO EXIS ING SEWER OF 675 (27) OR SMALLER






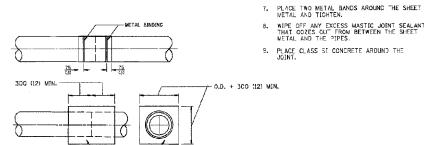

DETAIL "B"

CLASS SI CONCRETE COLLAR



DETAIL "C"

PROPOSED LATERAL CONNECTION TO EXISTING SEWER OF 750 (30) OR LARGER

NOTES

MATERIAL USED FOR THE TEE OR WYE SECTION SHALL BE COMPATIBLE WITH THE EXISTING STORM SEWER OR THE PROFOSED STORM SEWER.

## CONSTRUCTION METHODS

- I THIS WORK SHALL BE CONSTRUCTED IN CONFORMANCE WITH THE APPLICABLE PORTIONS OF SECTION 55C OF THE STANDARD SPECIFICATIONS.
- II CONNECTION IC AN EXISTING STORM SEWER SHALL BE BY LITHER OF THE FOLLOWING METHODS: A) PROPOSED STORM SEWER CONNECTION TO EXISTING SEWER OF 675 (27) OR SMALLER SEE DETAIL "A" AND "B".
- B) PROPOSED STORM SEWER CONNECTION TO EXISTING SEWER OF 750 (30) OR LARGER SEE DETAIL "C".

IF THE EXISTING SEWER PIPE IS CRACKED, BROKEN OR OTHERWISE DAMAGED BY THE CONTRACTOR IN MAKING THE CIRCULAR OPENING, THE CONTRACTOR SHALL REPLACE THAT SECTION OF PIPE WITH PIPE ECULA AND SIMILAR IN ALL RESPECTS TO THE PIPE IN THE EXISTING SEWER, IN A CAREFUL WORKMANLIKE MANNER, WITHOLT EXTRA COMPENSATION.

CARE MUST BE TAKEN TO PREVENT DEBRIS FROM ENTERING THE SEWER

CONSTRUCTION SEQUENCE

CUT THE EXISTING END OF THE PIPE SO AS TO PRESENT A FLUSH BUTT JOINT, BRUSH AND CLEAN ALL PIPES. 2. APPLY THE MASTIC JOINT SEALANT TO THE FIRST 150 (6) OF EACH PIPE.

BUTT THE PIPES TOGETHER LEAVING A MINIMUM OF 300  $\times$  150 °C2  $\times$  6) DEEP EXCAVATION UNDER AND AROUND EACH PIPE END.

5. WRAP THE SHEET METAL AROUND THE PIPES, 225 (9) ON EACH SIDE OF THE JOINT, STARTING AT THE TOP OF THE PIPE.

6. LAP THE SHEET METAL AT LEAST 75 (3) AT THE TOP OF THE PIPE AND PLACE THE MASTIC JOINT SEALANT BETWEEN THE LAP.

4. CUIT A PIECE OF SHEET METAL GAGE NO. 19 1.1 (0.0418) 450 GB WIDE BY THE OUTSIDE CIRCUMFERANCE OF THE PIPE PLUS (5 (3) LONG.

THE OR WYE CONNECTIONS SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR STORM SEWER TEE OR WYE OF THE TYPE AND SIZE SPECIFIED IN THE PLANS, THIS PRICE SHALL INCLUDE ALL EXCAVATION OF THE TRENCH, REMOVAL OF THE EXISTING STORM SEWER, FURNISHING AND INSTALLING THE SPECIFIED THE OR WYE SECTION, FLRNISHING AND INSTALLING THE REDUIRED CONCRETE COLLAR, AND ALL OTHER MATERIAL NECESSARY TO COMPLETE THIS WORK AS SHOWN AND SPECIFIED.

REMOVAL AND REINSTALLATION OF EXISTING STORM SEWER ADJACENT TO THE PROPOSED ILL UN MY. SLCIION, FOR THE PURPOSE. OF FACILITATING THE UNSTALLATION OF THE ILL OR MYE SECTION, MILL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLIDED IN THE UNIT PRICE BID FOR THE WORK.

TRENCH BACKFILL, EXCAVATION IN ROCK AND REWOVA. AND REPLACEMENT OF UNSUITABLE WATERIA. BELOW PLAN BEDDING GRADE WILL BE PAID FOR SEPARATELY.

CONCRETE COLLAR FOR CONNECTING A PROPOSED STORM SEWER TO AN EXISTING STORM SEWER WILL NOT BE PAID PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE COST OF THE PROPOSED

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS CTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

DETAIL OF STORM SEWER CONNECTION TO EXISTING SEWER

SCALE: NONE

Village of Burr Ridge, IL Engineering Department 451 Commerce St. Burr Ridge, IL 60527 Phone: (630) 323-4733 DRAWN BY CADD CHECKED BY BD500-01 (80-7) REVISION DATE: 06/12/96

ALL DEBRIS WHICH ENTERS THE SEWER MUST BE REMOVED. THE SEWER MUST BE LEFT CLEAN AND UNOBSTRUCTED UPON COMPLETION OF THE CONTRACT.

CARE MUST BE TAKEN TO PREVENT ANY PART OF THE NEW PIPE CONNECTION FROM PROJECTING INTO THE EXISTING SEWER.

ID/I8/2002 a\projects\diststd\bd07.dgn VI-BD7