

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION






ROLLED THREAD DOWEL BAR




BAR SPLICER ASSEMBLY ALTERNATIVES

** Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

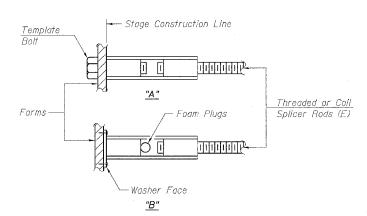

INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.



FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

	Bar	- 5	plicer	fo	r #!	5 bar		
Min.	Capacity	=	23.0	kip	s -	tensi	on	
	Pull-out							tension
	Required				J = £	NIPO		10/10/1

DESIGNED	JBF
CHECKED	JBF
DRAWN	RAP
CHECKED	JBF
RSD-1	9-01-03

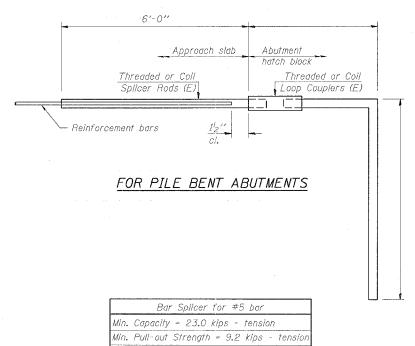

No. Required = 0

NOTES

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:


Minimum Capacity (Tension in kips) = 1.25 x fy x A_t

(Tension in Kips) Minimum *Pull-out Strength = 1.25 x fs_{allow} x A_t

Where fy = Yield strength of lapped reinforcement bars in ksi. fs_{allow}= Allowable tensile stress in lapped reinforcement bars in ksi (Service Load) A_t = Tensile stress area of lapped reinforcement bars. * = 28 day concrete

	BAR SPLIC	ER ASSEMBLI	ES
5 6: 1		Strengt	h Requirements
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length		Min. Pull-Out Strength kips - tension
#4	1'-8''	14.7	5.9
#5	2'-0''	23.0	9.2
#6	2'-7''	33.1	13.3
#7	3′-5′′	45.1	18.0
#8	4'-6''	58.9	23.6
#9	5′-9″	75.0	30.0
#10	7'-3"	95.0	38.0
#11	9'-0''	117.4	46.8

Bar splicer assemblies shall be according to Section 508 of the Standard Specifications, except as noted. The furnishing and installation of bar splicer assemblies will be measured and paid for at the contract unit price each for "BAR SPLICERS."

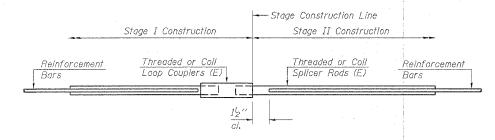

STANDARD

Bar Size	No. Assemblies Required	Location		
N/A	0	N/A		
		:		

BAR SPLICER ASSEMBLY DETAILS

52nd AVE. OVER MILAN BELTWAY FAU ROUTE 5822 SECTION 1-3 ROCK ISLAND COUNTY STATION 1159+12.92 STRUCTURE NO. 081-0156