


FAP REL.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
327	(4-2)RS-3	LAWRENCE	12	6
FED. ROAD DIST. NO. 1		ILLINOIS	FED. AID PROJECT NO.	

CONTRACT NO. 74047

PAVING SCHEDULE

STATION TO STATION	LENGTH	EXISTING PAVEMENT WIDTH	AREA	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N90	POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N90	AGGREGATE SHOULDERS, TYPE B	BITUMINOUS SHOULDERS SUPERPAVE	SHORT-TERM PAVEMENT MARKING	TEMPORARY PAVEMENT MARKING - LINE 4"	WORK ZONE PAVEMENT MARKING REMOVAL	PAINT PAVEMENT MARKING - LINE 4"	RAISED REFLECTIVE PAVEMENT MARKER	TEMPORARY RAMP	BITUMINOUS SURFACE REMOVAL 1"	BITUMINOUS SURFACE REMOVAL 2"	BITUMINOUS SURFACE REMOVAL 3 1/4"	BITUMINOUS SURFACE REMOVAL 4 1/4"
	LIN FT	FEET	SQ YD	GALLON	TON	TON	TON	TON	TON	LIN FT	LIN FT	SQ FT	LIN FT	EACH	SO YD	SQ YD	SQ YD	SO YD	SO YD
556+70.00 TO 581+00.00	2430	24	58320	810	16	819	545	192	136	729	5968	81	5968	31	27				
581+00.00 TO 657+93.20	7693	24	184637	2564	52	2585	1723	609	431	2308	17158	257	17158	97		5129		20516	
STA EQ 657+93.20BK=37+75.90AH 37+75.90 TO 42+30.00	424	24	10178	151	3	151	102	36	26	137	1546	15	1546	6	13	303		1211	
TOTAL QUANTITIES	10547			3525	71	3555	2370	837	593	3174	24672	353	24672	134	40	5432	1620	21727	6480

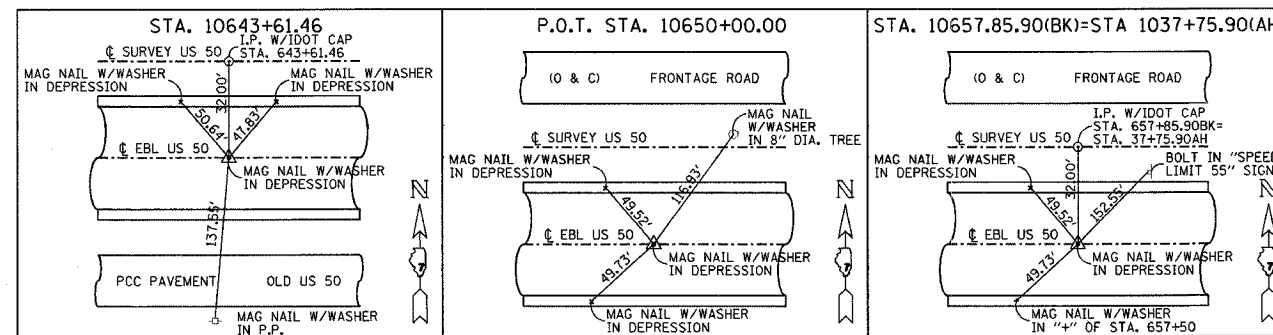

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**PAVING SCHEDULE  
&  
ALIGNMENT TIES**

SCALE: VERT.  
HORIZ.  
DATE

DRAWN BY  
CHECKED BY