FAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
312	71BR	RANDOLPH	7	73
STA.		TO STA.		
CONTRACT NO.: 76125				

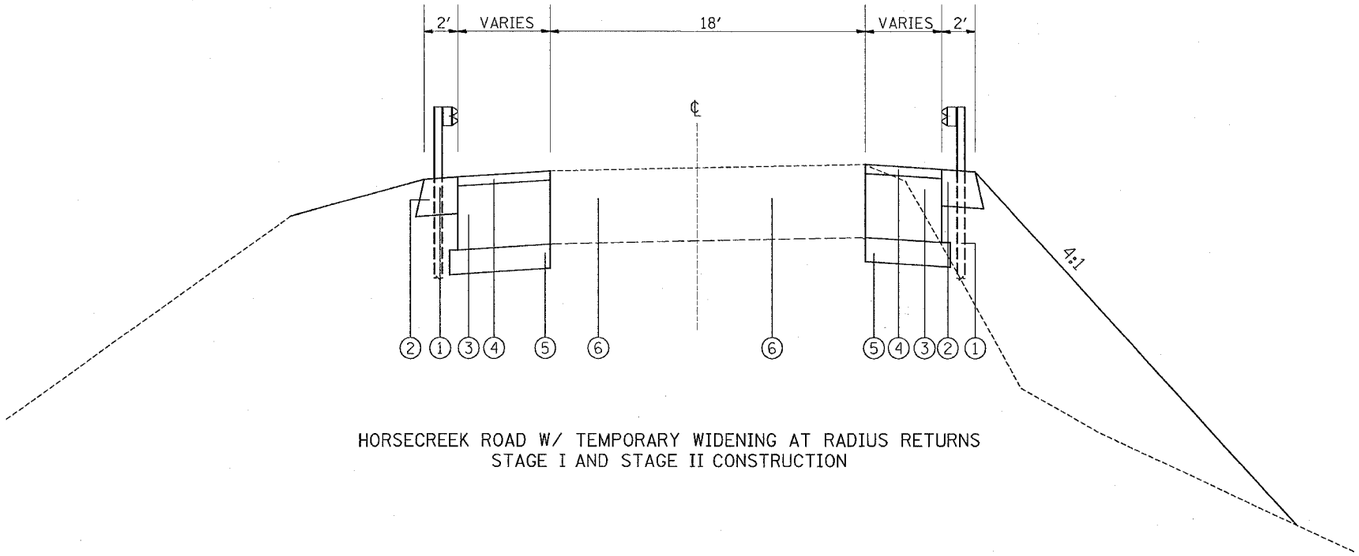

HORSECREEK ROAD W/ TEMPORARY WIDENING AT RADIUS RETURNS
STAGE I AND STAGE II CONSTRUCTION

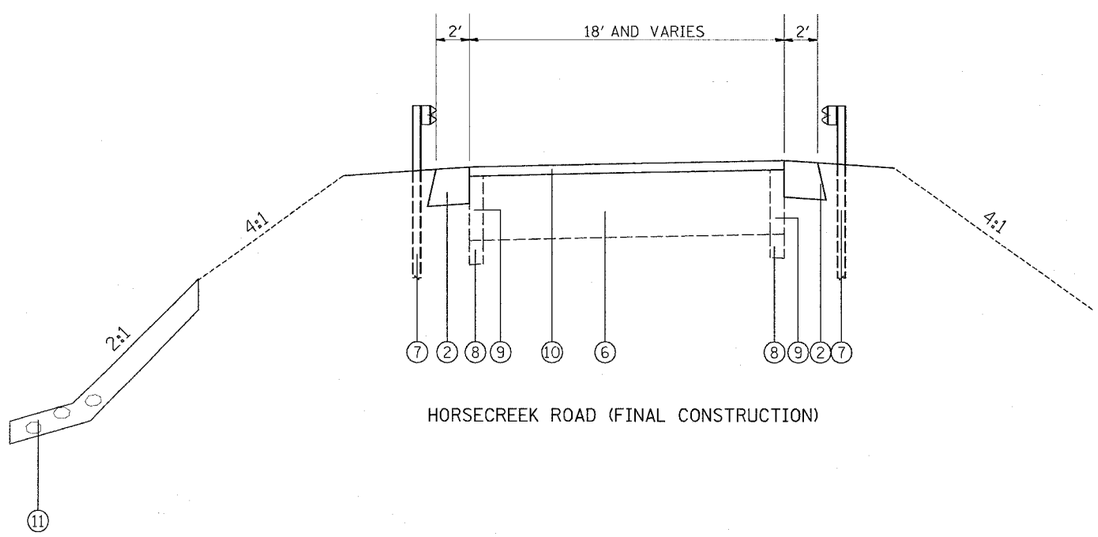

HORSECREEK ROAD (FINAL CONSTRUCTION)

LEGEND

1. PROPOSED TEMPORARY GUARDRAIL
2. PROPOSED AGGREGATE SHOULDER - 6"
3. PROPOSED PCC BASE COURSE - 10½"
4. PROPOSED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N70- 1½"*
5. PROPOSED SUBBASE GRANULAR MATERIAL TYPE B-4"
6. EXISTING OIL AND CHIP PAVEMENT
7. PROPOSED SPBGR TYPE A
8. EXISTING SUBBASE GRANULAR MATERIAL, TYPE B-4"
9. EXISTING PCC BASE COURSE - 10½"
10. PROPOSED INCIDENTAL BITUMINOUS SURFACING - 1½"
11. PROPOSED STONE RIPRAP, CLASS A3

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

FAP ROUTE 312
SECTION 71BR
RANDOLPH COUNTY
SN 079-0048

DRAWN BY:

PLOT DATE: Thursday December 16, 2004 @ 1:59:13 PM

PLAN
NOTE BOOK NO.
SURVEYED
PLOTTED
ALIGNMENT CHECKED
RT. OF WAY CHECKED
CADD FILE NAME
BY
DATE

12/16/2004
Thursday December 16, 2004 @ 1:59:13 PM
c:\projects\ed0110\plan\plnd44a.dgn LV=1:16.18-63