


## EXISTING TYPICAL SECTION ROM STA 51+00 TO STA 65+70 DOLIGIAS ROAD

FROM STA 51+00 TO STA 65+70, DOUGLAS ROAD N.T.S.

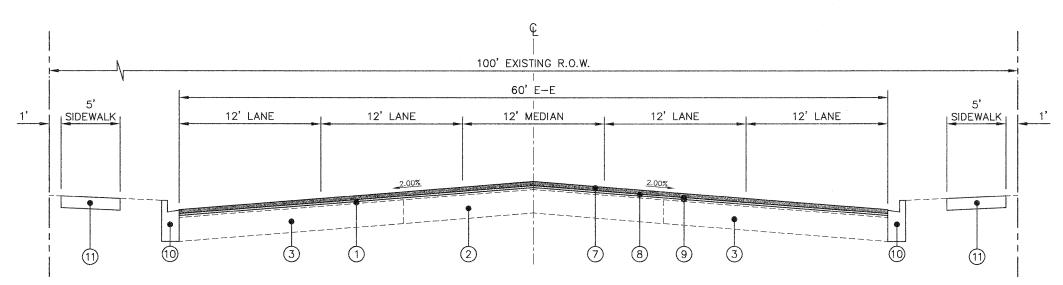

## PROPOSED TYPICAL SECTION

FROM STA 51+00 TO STA 65+70, DOUGLAS ROAD

## LEGEND

- 1 EXISTING 2.75" TO 5.75" ASPHALT SURFACE COURSE\*\*
- (2) EXISTING 8" TO 12" AGGREGATE BASE COURSE
- (3) EXISTING 7" TO 9" ASPHALT BASE COURSE
- EXISTING B-6.12 COMBINATION CONCRETE CURB AND GUTTER
- 5) EXISTING PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- HOT-MIX ASPHALT SURFACE REMOVAL, 3"

- (7) HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 2.0"
- 8 LEVELING BINDER (MACHINE METHOD), N70, 1.0"
- 9) BITUMINOUS MATERIALS (PRIME COAT) AND AGGREGATE (PRIME COAT)
- O COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT (AT VARIOUS LOCATIONS)
- 11) PORTLAND CEMENT CONCRETE SIDEWALK REMOVAL AND REPLACEMENT (AT VARIOUS LOCATIONS)

YRIGHT © 2009 ENGINEERING ENTERPRISES, INC.

Engineering Enterprises, Inc.
CONSULTING ENGINEERS
52 Wheeler Road
Sugar Grove, Illinois 60554
630.466.6700 / www.eeiweb.com

VILLAGE OF MONTGOMERY
Kane & Kendall Counties, Illinois

NO. DATE REVISIONS

DOUGLAS ROAD
LAPP IMPROVEMENTS

TYPICAL EXISTING AND PROPOSED CROSS SECTIONS

DATE:	AUGUST		2009
PROJECT	NO:		M00762
FILE:		M007	62-CVF
aueee	5	0.5	17

<sup>\*\*</sup> ASPHALT SURFACE COURSE THICKNESS IS 5.75" OVER AREAS OF AGGREGATE BASE COURSE AND 2.75" OVER AREAS OF ASPHALT BASE COURSE.