


NOTE:
1. GUARDRAIL LIMITS
STRUCTURE 052-0078
STA. 66+76.73 TO STA. 69+95.48, LT
STA. 66+86.61 TO STA. 70+67.86, RT
STRUCTURE 052-0079
STA. 115+46.31 TO STA. 118+65.06, LT
STA. 115+56.19 TO STA. 119+37.44, RT
2. THE CONVERSION FACTOR FOR THE LEVELING BINDER (MACHINE METHOD) AND THE HOT-MIX ASPHALT SURFACE COURSE IS 112 LBS/SY/INCH.

REMOVAL LEGEND

	PAVEMENT REMOVAL
	PAVED SHOULDER REMOVAL
	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH

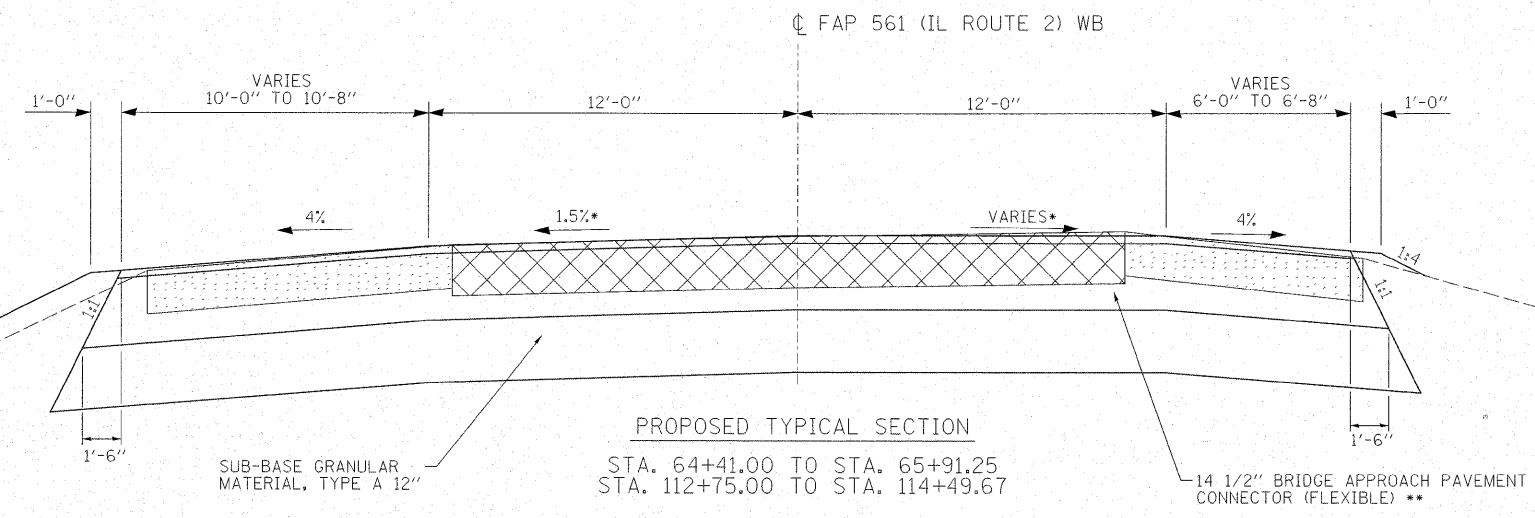

**CONSISTS OF 13" HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50 AND 1 1/2" HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50

APPLICATION RATES	
DESCRIPTION	RATES
BITUMINOUS MATERIALS (PRIME COAT)	
ON GRANULAR BASE	0.5 GAL/SQ YD
ON EXISTING PAVEMENT	0.05 GAL/SQ YD
ON COLD MILLED SURFACE	0.1 GAL/SQ YD
FOG COAT ON NEW BINDER	0.03 GAL/SQ YD
AGGREGATE (PRIME COAT)	
ON EXISTING PAVEMENT	4 LB/SQ YD
ON COLD MILLED SURFACE	4 LB/SQ YD
FOG COAT ON NEW BINDER	2 LB/SQ YD