

**PERIMETER EROSION CONTROL BARRIER**


Station	To	Station	Quantity
139+50, 40' Lt.		144+50, 40' Lt.	500.0
139+50, 40' Rt.		144+50, 40' Rt.	500.0

Page Total = 1000.0 ft.

**TEMPOPARY DITCH CHECKS**

Station	o/s	Quantity
141+00	28' Rt.	1.0
141+00	28' Lt.	1.0

Page Total = 2.0 ea.

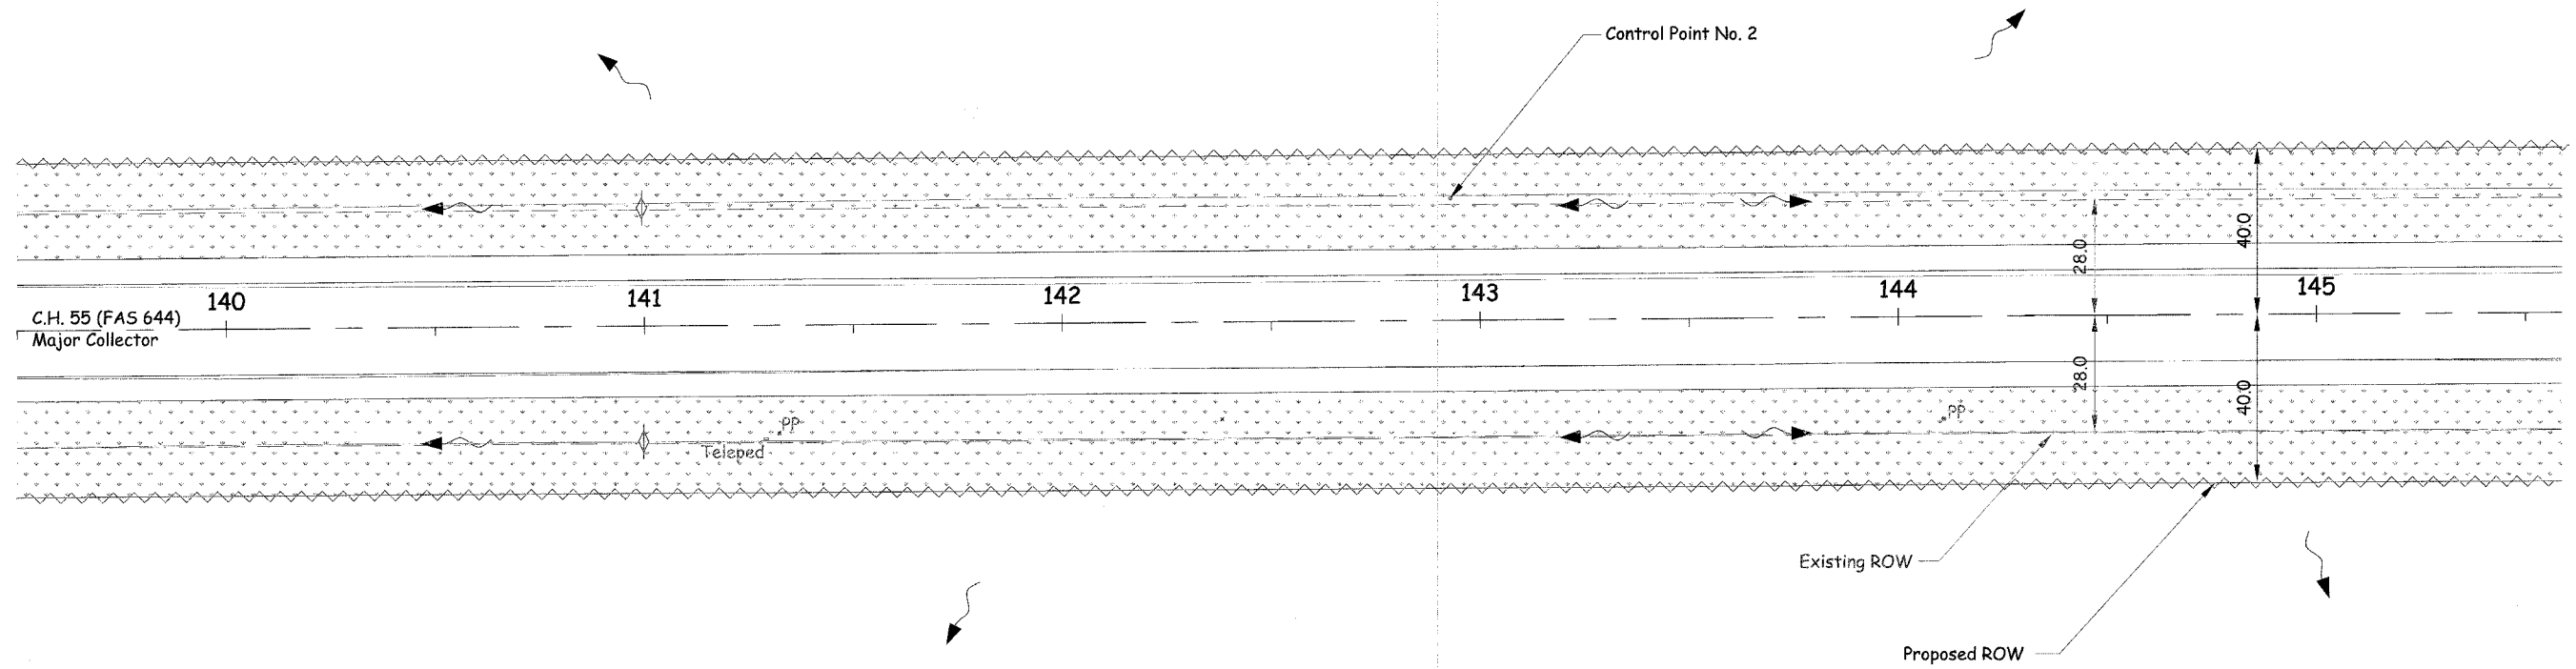


**EROSION CONTROL LEGEND**

- Permanent Seeding
- Temporary Ditch Check
- Inlet and Pipe Protection
- Perimeter Erosion Control Barrier
- Flow Direction

**NOTES:**

1. The Construction limits will be staked by the engineer prior to commencing construction. The construction limits may be adjusted by the engineer to preserve trees and no additional compensation will be paid th the contractor for the change in limits.
2. The Engineer shall have final determination of the placement and location of all erosion control pay items.

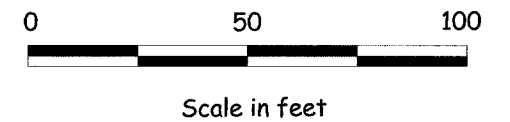

	<b>Erosion Control Plan View</b>		Design by: RAJ	Approved by: <b>XXX</b>
	Section 03-00176-00-PV		CAD by: RAJ	Date: <b>09/13/04</b>
	County Highway 55 (FAS 631)		Checked by: XXX	CAD Reference: XXXXXXXX
	MACON COUNTY - ENGINEERING DIVISION		Sheet 10 of 25	